




**DETAIL 1**

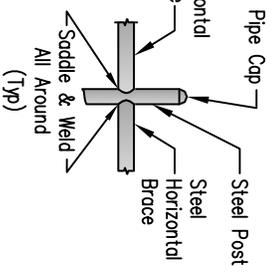


**DETAIL 2**

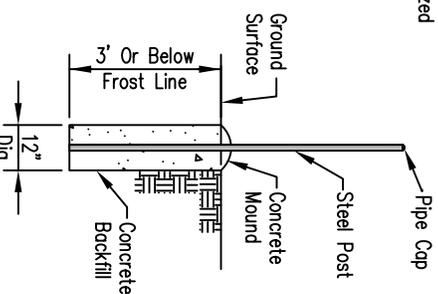

**DETAIL 3**

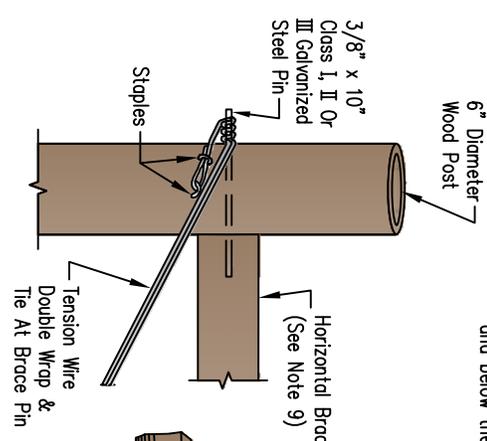

**DETAIL 4**

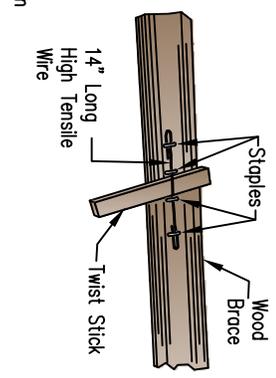

**DETAIL 5**

- NOTES:**
1. Wood posts and braces must be new redwood, red cedar, blueberry juniper, black locust, osage orange, pressure treated pine, treated hardwood, or steel. If using red cedar or redwood, at least one half of the diameter of the post shall be heartwood. No landscape timbers are allowed.
  2. Do not notch posts.
  3. All wooden posts shall be backfilled with either earth or IDOT GRAD NO CA 6 and thoroughly tamped.
  4. See Drawing IL-ENG-800 for joining methods for hi-tensile wire
  5. If steel pipe is used, all steel pipe must be a minimum of 2 1/2 inch diameter Schedule 40 steel pipe either galvanized or primed and painted. Tops of all steel posts are to be capped. Saddle and weld all connections instead of using pins. (See Detail 2).
  6. If steel pipe is used, post hole must be backfilled with concrete. Mound concrete to prevent standing water around post. (See Detail 3).
  7. To prevent wire from slipping on steel posts, double wrap all wire around steel posts or weld chain link loops.
  8. Twist stick shall be 1 inch diameter or 2"x2", 18 to 24 inch long treated hardwood or 1/2 inch diameter 18 to 24 inch long galvanized primed and painted pipe.
  10. Place horizontal brace within the top 1/3 of the posts and below the top fence wire.

Not To Scale