

STEEL SCHEDULE

MARK	SIZE	QUANTITY	TYPE	A	B	C	LENGTH	TOTAL LENGTH
①	#4		STR	---	---	---	7'-1"	
②	#4		STR	---	---	---		
③	#5	2		0'-10"	3'-2"	---	4'-0"	
④	#5		STR	---	---	---	6'-11"	
⑤	#5		STR	---	---	---		
⑥	#5	20		---	1'-0"	4'-0"	5'-0"	
⑦	#4	20		---	2'-0"	2'-0"	4'-0"	
⑧	#4		STR	---	---	---	3'-0"	

#4 Bars Total Length _____
#5 Bars Total Length _____

STEEL DETAILS

BAR SIZE	INSIDE BEND DIAMETER (D) INCHES	LONGITUDINAL STEEL LAP SPLICE LENGTH, INCHES (MIN.)	
		Wall bars	Footing bars
#4	3	-	16
#5	3-3/4	24	-

Total length of wall (measured along ϕ wall) = _____ ft.

ESTIMATED QUANTITIES

CONCRETE (0.525 CU.YD./FT OF WALL)=_____ CU.YD.
STEEL #4 BARS (0.668 LB./FT.)=_____ LB.
STEEL #5 BARS (1.043 LB./FT.)=_____ LB.

Steel quantity include splice lengths? Y__ N__

CONDITIONS OF USE

Allowable backfill height = 0 to 8 ft
Soil backfill type = gravel-sand mix, or coarse sands, with less than 50% fines
Water table below footing
Machinery surcharge load allowed on soil or concrete pavement slab
Not designed to support buildings or roofs

MATERIALS

Concrete compressive strength = 4,000 psi
Reinforcing steel shall be Grade 60.
Concrete and reinforcing steel shall meet requirements of Construction Specification IA-31.

WALL DESIGN LOADINGS

Manure load inside = 65 psf/ft EFP (Equivalent Fluid Pressure)
Soil backfill density = 110 pcf
Soil backfill load = 60 psf/ft EFP
Design surcharge load = 120 psf horizontal pressure (modeling machinery on soil)

WALL SLIDING RESTRAINT REQUIREMENTS

Assumptions:
5-inch thick floor slab, factor of safety against sliding 1.5.
Coefficient of friction (soil/concrete) = 0.4 (well-graded, angular gravel/sand base)




Backfill Height,ft.	Min. Floor Slab Length,ft.*	Backfill Height,ft.	Min. Floor Slab Length,ft.*
8	123	3**	2
7	90	2**	4
6	61	1**	6
5	35	0**	7
4	13		

* Min. floor slab length for restraint is not required if T-wall forms a tank with opposing wall having approximately the same backfill height.

**When backfill height is 3 ft or less, floor slab shall be tied to wall footing with tension steel (deformed bar reinforcement). Provide minimum 0.07 sq.in./ft (equiv. #3 @ 18") as 36 in. long tie bars, or extend slab steel into footing a minimum of 18 inches.

GENERAL DESIGN NOTES

- Design loadings and soil pressures based upon criteria found in Conservation Practice Standard 313 (Waste Storage Facility).
- Drainage shall be away from the wall.
- Minimum width of backfill against the wall shall be equal to or greater than the backfill height, but not less than 4 ft.
- Backfill height of 4 ft or more is recommended for frost protection.
- Minimum required subgrade bearing capacity = 2000 psf.
- Mark ② and ⑤ bars shall extend to 2-3 inches from edge of concrete at ends of straight wall sections.
- Mark ③ and ④ bars shall be placed a maximum of 3 inches from wall end or inside face of corner.
- Footing slab reinforcement at corners: for Inside Corner Region (see detail), extend Mark ① (transverse) bars into this region from both sides of corner. Extend Mark ② (longitudinal) bars into Inside Corner to inside face of wall. For Outside Corner Region, discontinue Mark ① bars. Extend Mark ② bars into Outside Corner Region from both sides of corner, to 2-3 inches from edge of slab.
- Construction joint shall be completed as described in Const. Spec. IA-31. Surface of construction joint shall be roughened to approximately 1/4" depth.
- Important: steel location (clear distance from face of wall or slab) must be carefully maintained as shown on the drawings in order for structure to achieve its design load-carrying capacity.

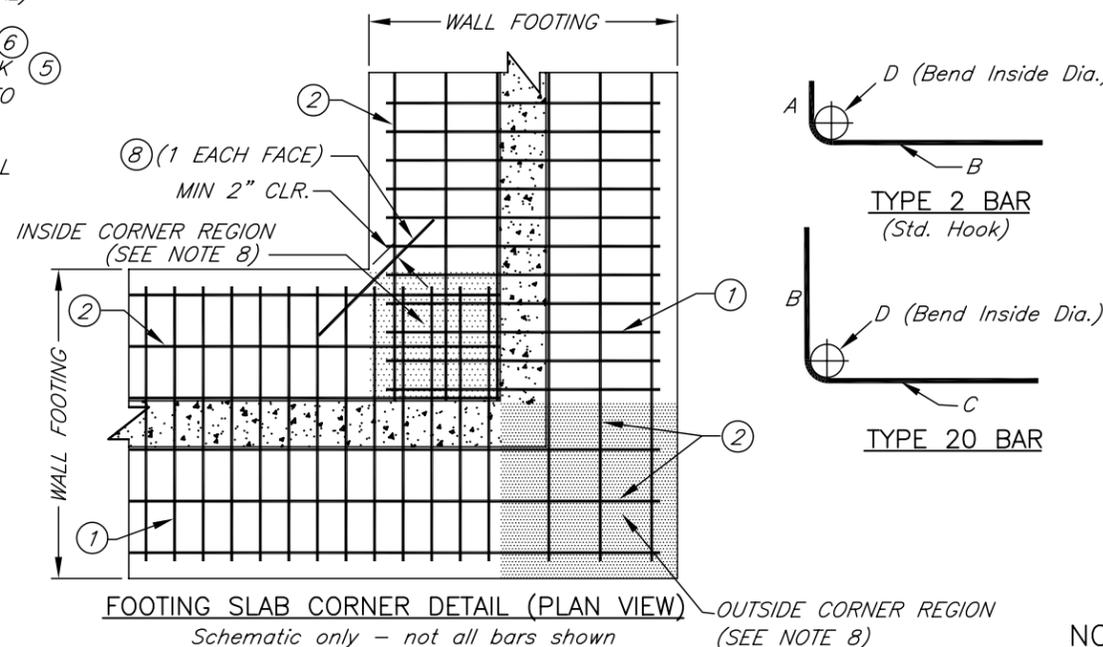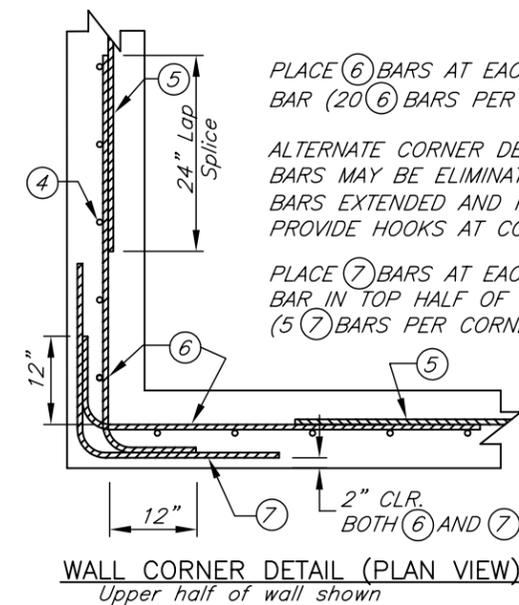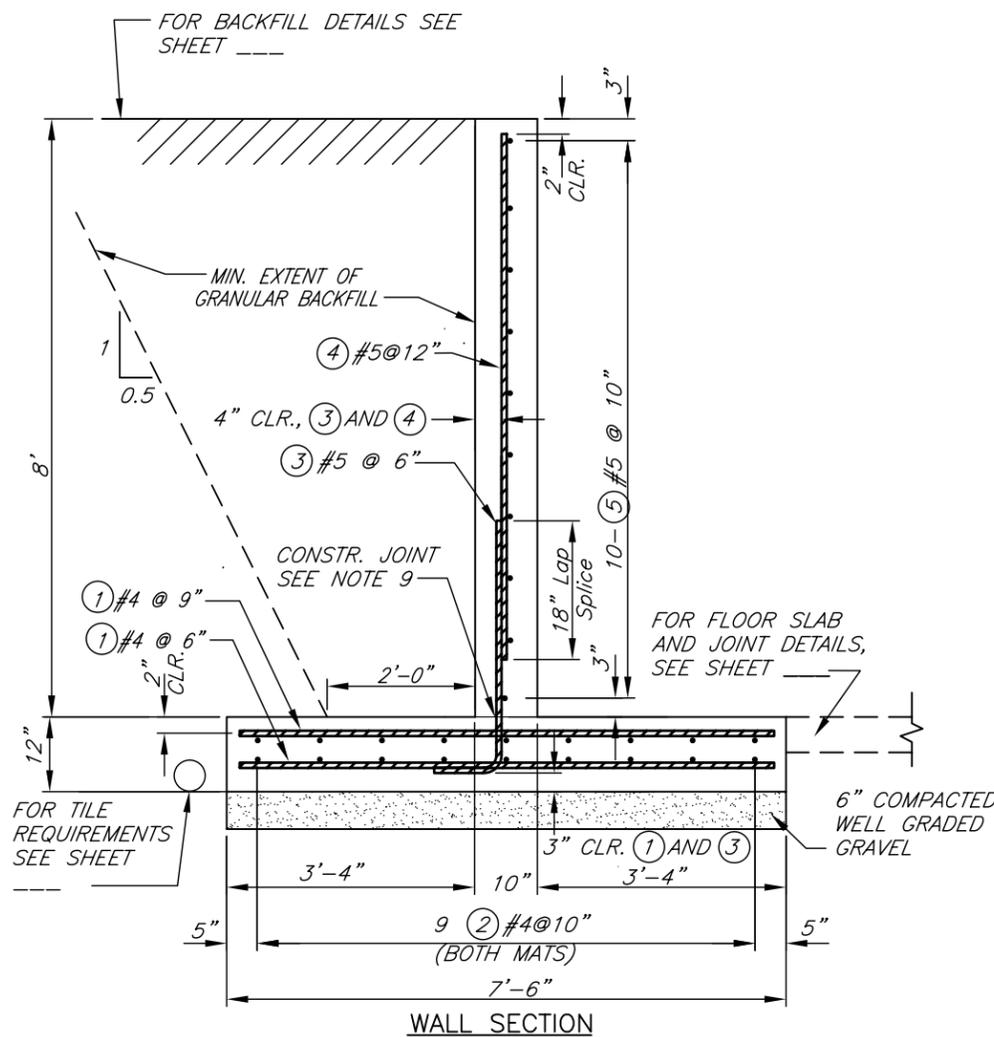

NOT TO SCALE