CANOPY INLET DIMENSIONS

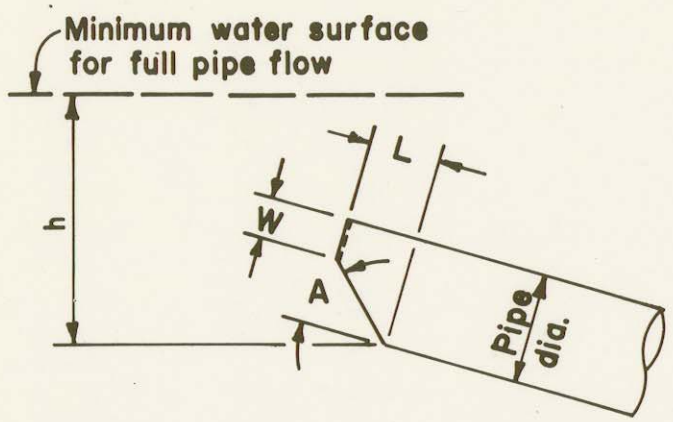

PIPE DIA. IN.	PIPE GRADE %	W IN.	L IN.	A DEG.	h FT.
6	0-5	1 1/8	3 1/4	56	0.7
	5.1-15	1 1/4	4 7/8	45	0.8
	15.1-25	1 5/8	6 5/8	33	0.8
8	0-5	1 1/2	4 3/8	56	1.0
	5.1-15	1 5/8	6 3/8	45	1.0
	15.1-25	2 1/8	8 3/4	33	1.1
10	0-5	1 7/8	5 3/8	56	1.2
	5.1-15	2	8	45	1.3
	15.1-25	2 5/8	11	33	1.4
12	0-5	2 1/4	6 1/2	56	1.4
	5.1-15	2 3/8	9 5/8	45	1.5
	15.1-25	3 1/4	13 1/4	33	1.6
15	0-5	2 7/8	8 1/8	56	1.8
	5.1-15	3	12	45	1.9
	15.1-25	4	16 1/2	33	2.0
18	0-5	3 3/8	9 3/4	56	2.1
	5.1-15	3 5/8	14 3/8	45	2.3
	15.1-25	4 7/8	19 3/4	33	2.4
	25.1-32	6 1/4	23 3/8	27	2.6
24	0-5	4 1/2	13	56	2.8
	5.1-15	4 3/4	19 1/4	45	3.0
	15.1-25	6 1/2	26 3/8	33	3.2

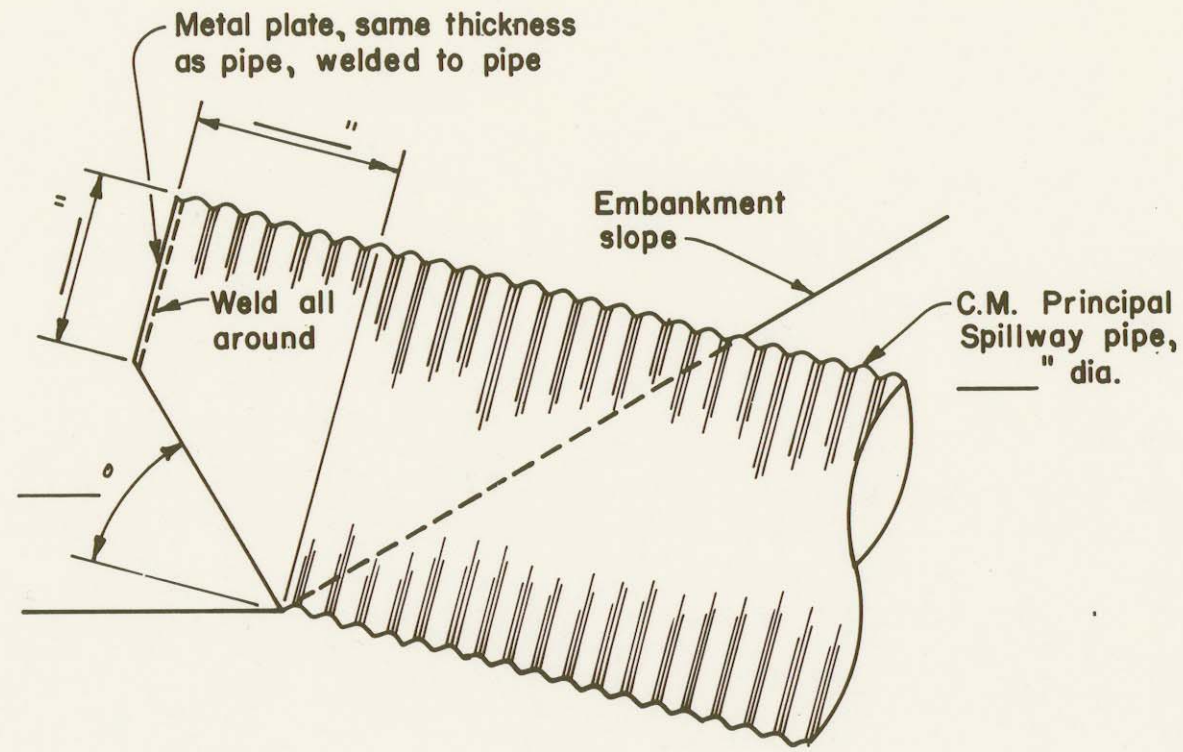

DETAIL OF CANOPY INLET

NOTE:

1. ALL WELDS AND HEAT DAMAGED AREAS TO BE THOROUGHLY WIRE BRUSHED AND PAINTED WITH TWO COATS OF ZINC DUST-ZINC OXIDE PRIMER CONFORMING TO FED. SPEC. TT-P-641, TYPE III.

JOB PLAN NO. 5.5

CANOPY INLET

OPERATOR: _____

CONSERVATION DISTRICT: _____

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE

	Date		
Designed		Approved by	
Drawn		Title	
Traced		Title	
Checked		Sheet No of	Drawing No.