


PA-022D 6' high, T-wall (without surcharge)
Standard Drawings Folder

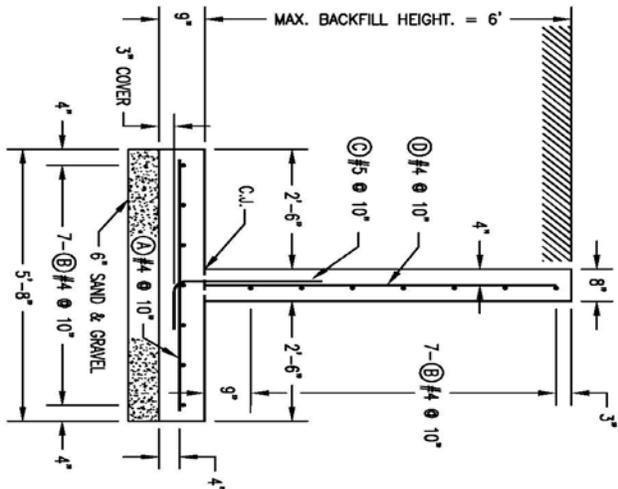

STEEL SCHEDULE

MARK	SIZE	QUAN	TYPE	R	S	LENGTH	TOTAL LENGTH
A	4	4	STR	---	---	5'-3"	
B	4	4	STR	---	---	5'-3"	
C	5	2	2-3"	1-0"	3'-3"		
D	4	2	STR	---	---	5'-9"	
L	4	2	2-0"	9"	2'-9"		
LI	4	4	STR	---	---	5'-9"	
						#4 BARS, TOTAL LENGTH	
						#5 BARS, TOTAL LENGTH	

ESTIMATED QUANTITIES

CONCRETE (0.31 CU. YDS./LIN. FT.)	_____	CU. YDS.
STEEL #4 (28.2 FT./LIN. FT.)	_____	FT.
STEEL #5 (3.9 FT./LIN. FT.)	_____	FT.
STEEL (61.3 FT./CORNER)	_____	FT.

- CONCRETE SHALL MEET PA 313 OR 361 SPECIFICATION REQUIREMENTS.
- MINIMUM SPlice LENGTH FOR ALL #4 BARS IS 16".
- MINIMUM SPlice LENGTH FOR ALL #5 BARS IS 17".
- STEEL QUANTITY DOES NOT INCLUDE SPlice LENGTHS.
- SUBSTITUTION OF GRADE 60 BARS IS PERMITTED.


TOTAL LENGTH OF WALL _____ FT.

C.J. = CONSTRUCTION JOINT

LIQUID-TIGHT JOINT YES NO

LIQUID-TIGHT JOINT OPTIONS

- 1) NON-METALLIC WATERSTOP (PVC)
- 2) HYDROPHILIC WATERSTOP



CONSTRUCTION JOINT OPTIONS

1. IF SLAB AND WALL ARE POURED SEPARATELY, THE SLAB SURFACE MUST BE THOROUGHLY CLEANED WITH WATER AND A WIRE BRUSH. THE SURFACE OF THE JOINT SHALL BE KEPT MOST FOR AT LEAST 1 HOUR PRIOR TO PLACEMENT OF NEW CONCRETE.
2. THE SLAB AND WALL MAY BE POURED AT THE SAME TIME ELIMINATING THE NEED FOR A CONSTRUCTION JOINT.

6-FOOT WALL CORNER DETAILS
SLAB CORNER DETAILS
RESTRAINING SLAB OPTIONS
SEE PA-027A
SEE PA-023
SEE PA-024

GENERAL DESIGN NOTES:

- DRAINAGE SHALL BE AWAY FROM THE WALL.
- THE MINIMUM TOP WIDTH OF THE BACKFILL AGAINST THE WALL SHALL BE EQUAL TO OR GREATER THAN THE BACKFILL HEIGHT.
- MAXIMUM FOOTING CONTACT PRESSURE IS 1220 psf/ft.
- DESIGN STRENGTHS: WORKING STRESS DESIGN
- CONCRETE $f_c = 4,000$ psi STEEL $f_s = 20,000$ psi (GRADE 40)
- WALL DESIGN LOADING: 313 STANDARD - LATERAL EARTH PRESSURE VALUES. SEE SECTION IV OF THE FIELD OFFICE TECHNICAL GUIDE.
- MANURE LOAD INSIDE = 65 psf/ft.
- SOIL BACKFILL LOAD OUTSIDE = 60 psf/ft.
- NO HORIZONTAL SURCHARGE ADDED.
- SOIL BACKFILL DENSITY = 110 pcf.
- WATER TABLE MUST BE BELOW THE FOOTING ELEVATION
- WALL RESTRAINT REQUIREMENTS:
- 5" THICK SLAB, SAFETY FACTOR AGAINST SLIDING 1.5 MIN.

BACKFILL HEIGHT (OUTSIDE LOAD)	SLAB LENGTH NO INSIDE LOAD	SLAB LENGTH FULL INSIDE LOAD
6 FEET	20 FEET	NO SLAB
5 FEET	6 FEET	NO SLAB
4 FEET	NO SLAB	5 FEET **
3 FEET	NO SLAB	5 FEET **
2 FEET	NO SLAB	5 FEET **
1 FOOT	NO SLAB	5 FEET **
0 FEET	NO SLAB	5 FEET **

**MINIMUM SLAB LENGTH OF 5 FEET REQUIRED AND MUST BE TIED INTO THE WALL FOOTING.

- SLAB POURED WITH WALL FOOTING:
- #3 BARS @ 18" SPACING (MINIMUM REINFORCEMENT)
- SLAB NOT POURED WITH WALL FOOTING:
- #3 DOWEL BARS - 3'-0" LENGTH @ 20" SPACING.
- #4 DOWEL BARS - 3'-0" LENGTH @ 40" SPACING.

THIS STANDARD DESIGN MUST BE ADAPTED TO THE SPECIFIC SITE. IT WAS DEVELOPED IN COOPERATION WITH THE WISCONSIN DEPARTMENT OF AGRICULTURE, TRADE AND CONSUMER PROTECTION. THE DESIGN FOLDER IS FILED AT THE NRC'S STATE OFFICE, 6515 WATTS ROAD, MADISON, WISCONSIN 53719-2726.

(ADAPTED FROM WI-563, APRIL 2005)



_____ COUNTY, PENNSYLVANIA
6' HIGH, 8" T-WALL (W/O SURCHARGE)

Designed _____ Date 06/23/05
Drawn TJA
Checked _____
Approved by _____

PA-022

06/21/05 1248

PA-022