


TOP VIEW

Not to Scale

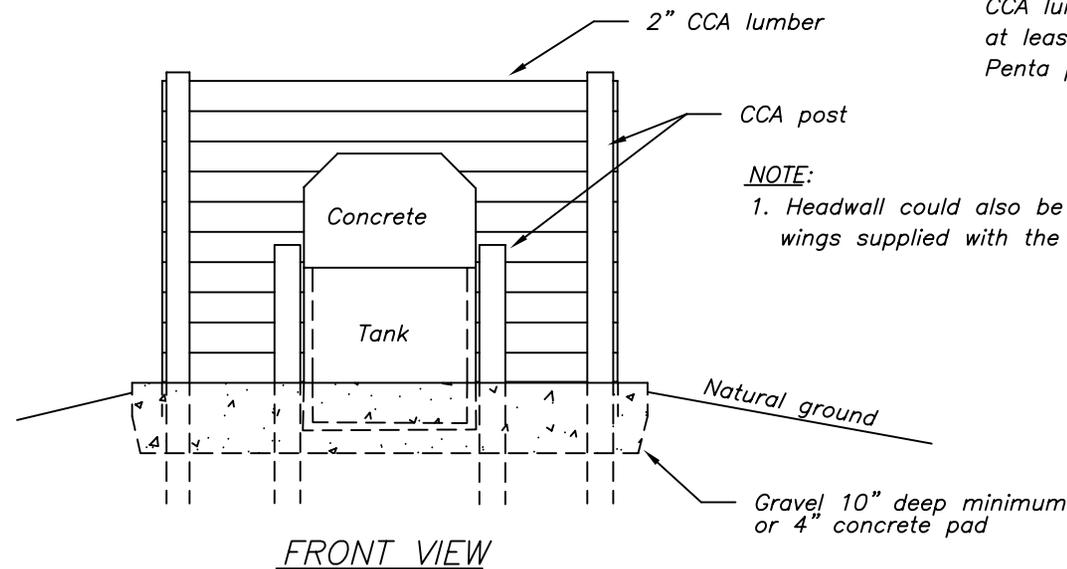

CCA lumber is to be ground contact treated with at least .4 lb preservative per cubic foot wood. Penta pressure treated oak maybe substituted for CCA.

NOTE:

1. Headwall could also be concrete wings supplied with the tank.

Landowner:

CONCRETE LIVESTOCK TANK
FREEZE PROOF INSTALLATION
HEADWALL & PAD OPTIONAL DETAILS

U.S. DEPARTMENT OF AGRICULTURE
NATURAL RESOURCES CONSERVATION SERVICE

Designed _____	Date _____	Approved by _____	Date _____
Drawn _____		Title _____	
Traced _____		Title _____	
Checked _____		Sheet No. _____ of _____	Standard Drawing No. 602