


DITCH PLUG PLAN VIEW

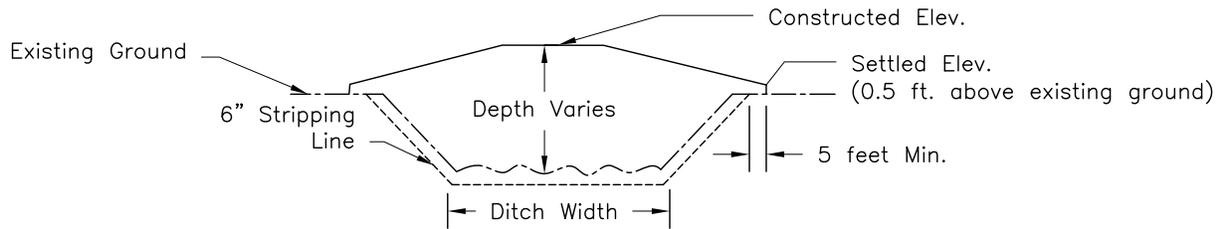

TYPICAL CROSS SECTION A-A

Ditch Plug	Length	Height Above Ground or Const. Elev.
1		
2		
3		
4		

Soil Texture \_\_\_\_\_

% Settlement \_\_\_\_\_

See Sheet \_\_\_\_\_ for the location of the ditch plugs

Notes:

1. Ditch Plugs will be constructed at location and as flagged by the technician.
2. Wisconsin Construction Specification 2, Excavation, and 3, Earthfill, will be followed.
3. Strip minimum 6" of topsoil and stockpile it for spreading, if needed, after the ditch plug is completed.
4. Before topsoil is spread, the depth of fill and slopes must be checked by the technician.
5. Seeding shall be done as per Job Sheet 134 for Introduced Species or Job Sheet 135 for Native Species or WI Drawings WI-710 or WI-711.



United States Department of Agriculture

Natural Resources Conservation Service

DITCH PLUG

CLIENT: \_\_\_\_\_  
 COUNTY: \_\_\_\_\_

Date \_\_\_\_\_  
 Designed \_\_\_\_\_  
 Drawn \_\_\_\_\_  
 Checked \_\_\_\_\_  
 Approved \_\_\_\_\_

File Name  
 WI-950B  
 Date  
 08/14  
 Sheet of