



PLAN VIEW
NOT TO SCALE


ESTIMATED QUANTITIES		
BLOCKS.....	_____	Total
GRAVEL.....	_____	Cu. Yds.
WCS-13, GEOTEXTILE CLASS I NONWOVEN	_____	Sq. Yds.

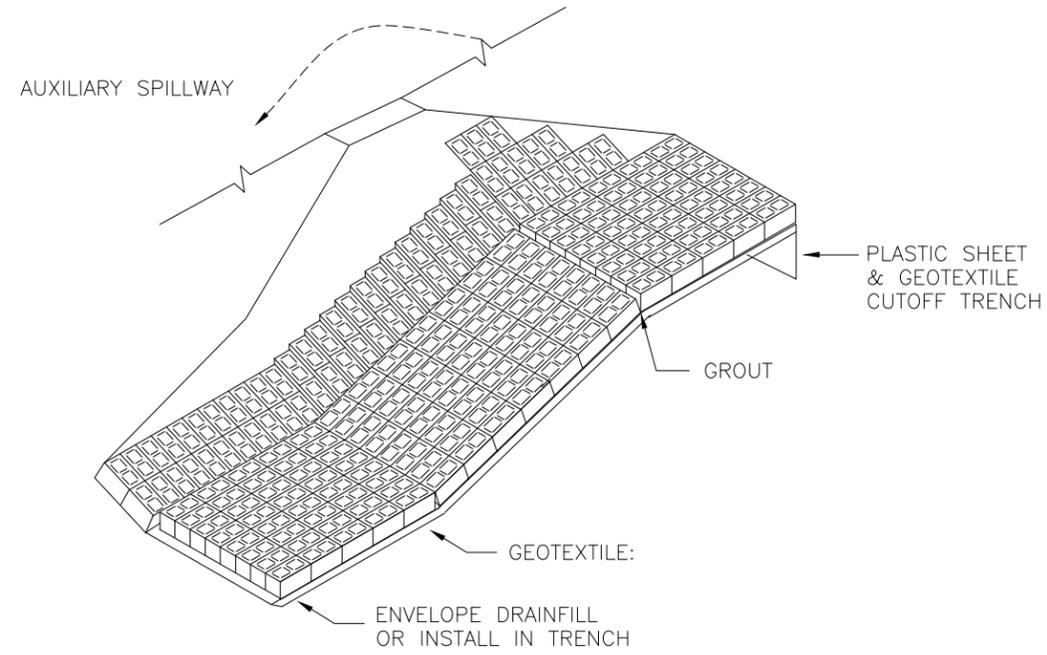

ISOMETRIC VIEW—HALF PROFILE
NOT TO SCALE

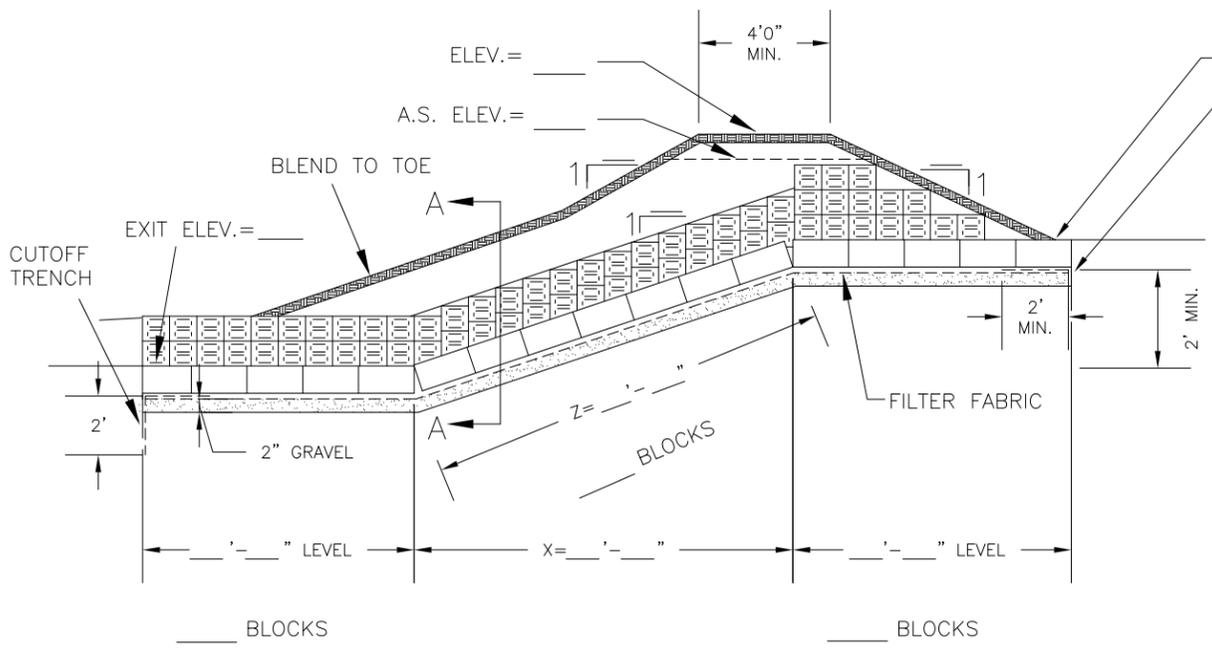

PROFILE ALONG CENTERLINE OF CHUTE
NOT TO SCALE

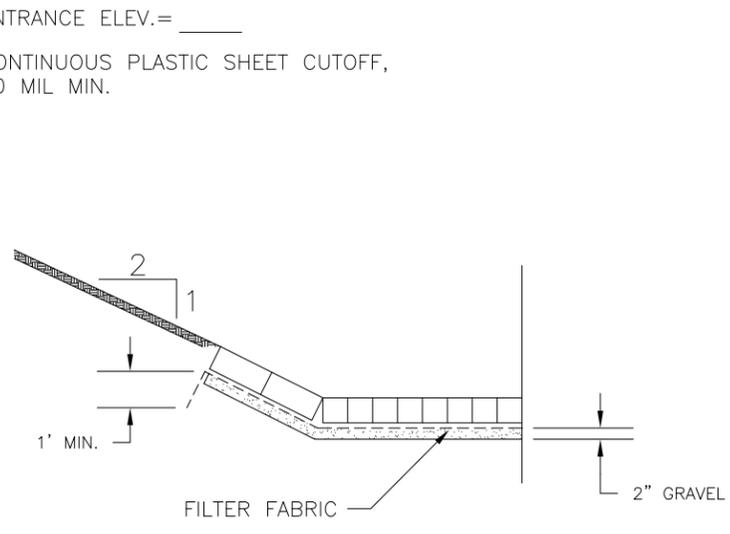

SECTION A-A
NOT TO SCALE

CONSTRUCTION NOTES

- STANDARDIZED DESIGN: Must be adapted to specific site.
- The design folder is filed in the NRCS State Office, 8030 Excelsior Drive, Suite 200 Madison, WI 53717-2906.
- Concrete blocks shall be 8" x 8" x 16" long, in good condition and free of excess mortar.
- Concrete blocks shall be placed with holes up.
- Concrete blocks in floor shall be placed with length parallel to direction of flow.
- Filter fabric shall be installed as recommended by manufacturer's instruction.
- Blocks on side slopes shall be placed with length perpendicular (90°) to direction of flow.
- No materials shall be placed between the concrete blocks and the filter fabric.
- Extend cutoff trench (es), plastic, and fabric to the total bottom and side slope widths.
- Holes in concrete blocks may be filled with soil and seeded to waterway seeding mixtures.
- Concrete blocks shall not be driven on by any machinery during or after placement.
- Seed all disturbed areas according to seeding specifications.
- Gravel, shall be ASTM Designation Specification C-33, size 67 or 467.

Date _____

Designed _____

Drawn _____

Checked _____

Approved _____

CONCRETE BLOCK LINED CHUTE

OWNER: _____

COUNTY: _____



Drawing No. WI-305

Date 07/14

Sheet of _____