Clear Form

Print Form

TEMPORARY SLOPE DRAIN PLAN

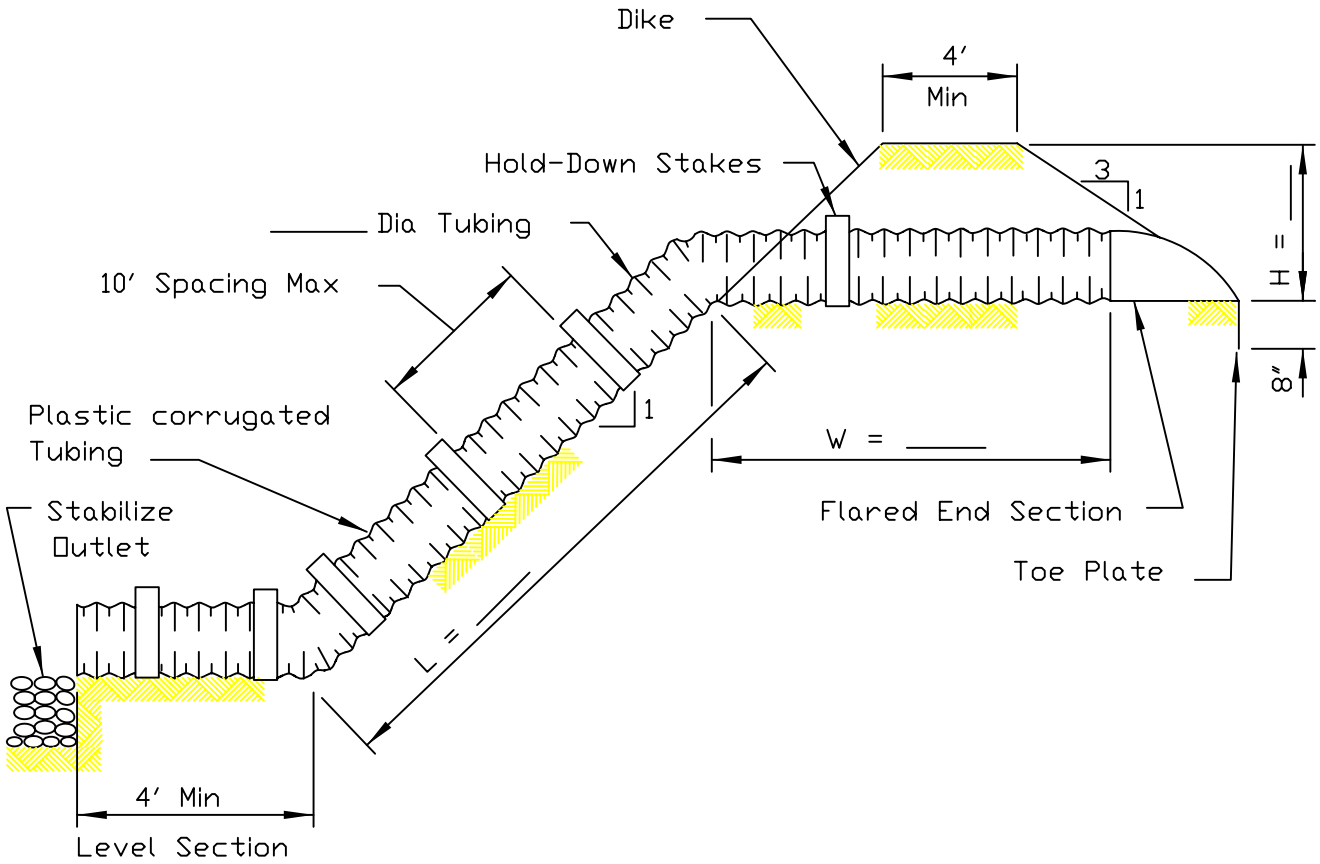

SECTION

NOTES:

1. Conduit material shall be heavy duty flexible material such as non-perforated corrugated plastic tubing or specially designed flexible tubing.
2. The flared end section shall meet the requirements as shown on standard drawing AR-ENG-203.
3. The soil material around the pipe shall be hand compacted in 6″ lifts to fill all voids in the tubing corrugations.

Rev.3-19-96

CAD FILE = AR-720.2D

REFERENCE				STANDARD DWG. NO.
Project			U.S. DEPARTMENT OF AGRICULTURE NATURAL RESOURCES CONSERVATION SERVICE ENGINEERING DESIGN SECTION LITTLE ROCK, ARKANSAS (ADOPTED FROM ILLINOIS IL-670)	AR-ENG-720
Designed		Date		SHEET 1 OF 1
Checked		Date		DATE 9-29-93
Approved		Date		