Clear Form Print Form

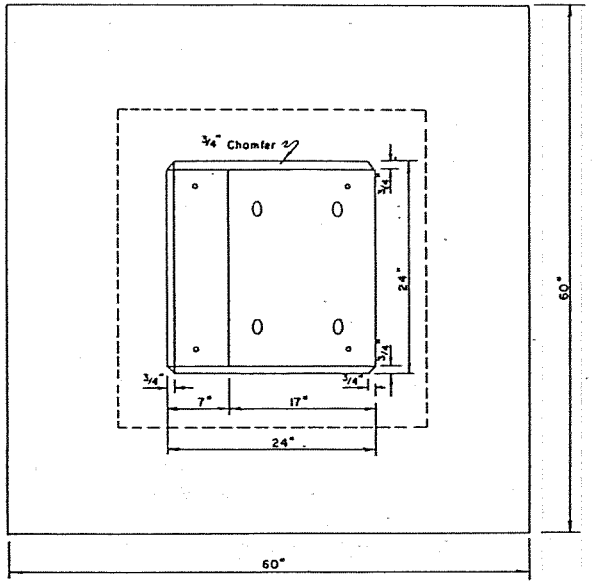

PLAN

Note: Location of concrete, monument will be made by Construction Engineer on the site.

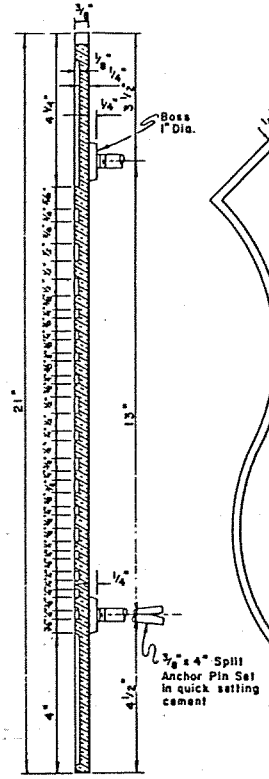

SECTION ON ℄

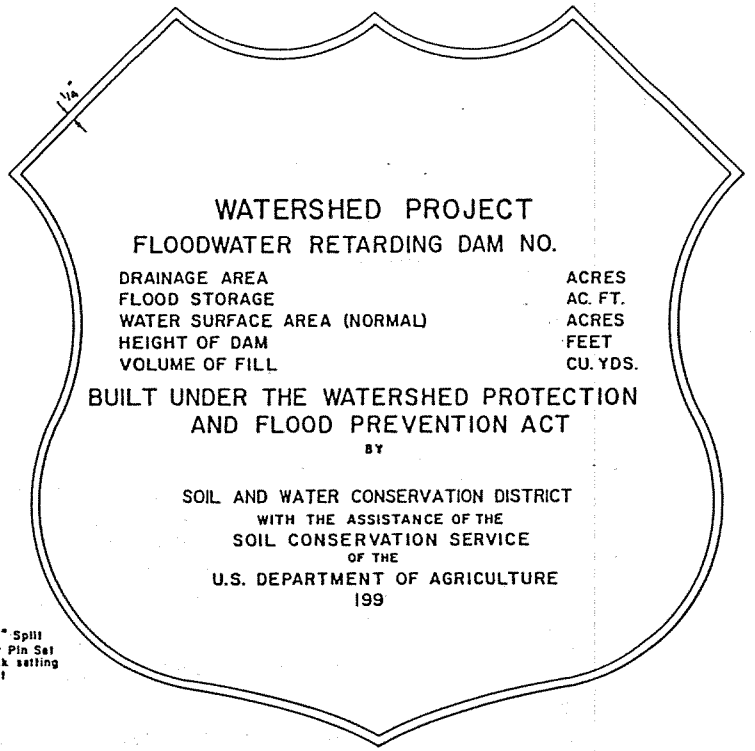

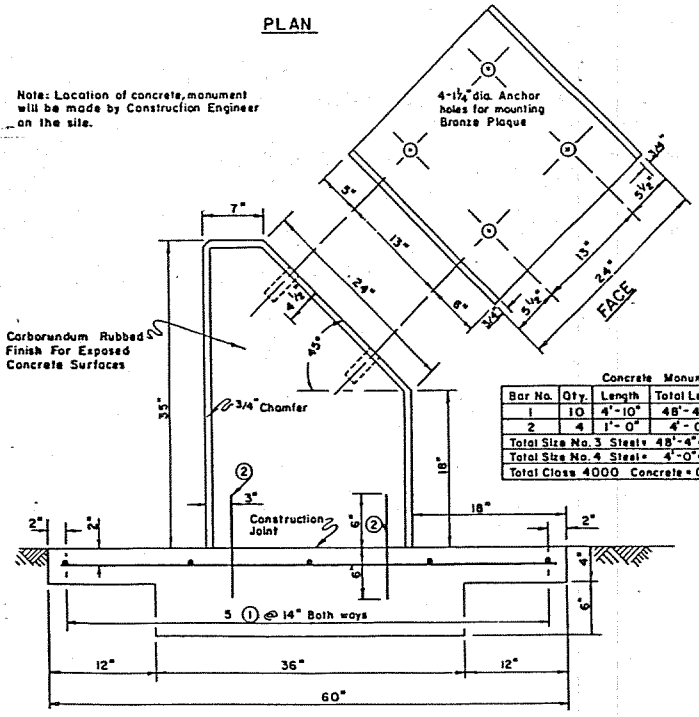

LEFT ELEVATION

CONCRETE MONUMENT

Concrete Monument

Bar No.	Qty.	Length	Total Length	Size	Type
1	10	4'-10"	48'-4"	3	Str.
2	4	1'-0"	4'-0"	4	Str.
Total Size No. 3 Steel = 48'-4" = 18.17 lbs.					
Total Size No. 4 Steel = 4'-0" = 2.67 lbs.					
Total Class 4000 Concrete = 0.84 Cu. Yds.					

Cast Bronze Plaque
Block and Condensed Block Style Letters, 1/4" Border.
All letters, borders, and blank areas raised and having a satin finish background, textured and oxidized a dark brown.
Four (4) boss cast on back to receive split pins for blind type mount.
The bronze plaque to be mounted flush with concrete monument face.



REAR VIEW

Location of Split Pins for Blindmount

BRONZE PLAQUE AND MONUMENT

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE

Designed ____ Date ____ Approved by ____
Drawn ____ Title ____
Traced ____ Title ____
Checked ____ Sheet No. ____ of ____ Drawing No. ____

AR-ENG-603