



5" CONCRETE SLAB REINFORCEMENT

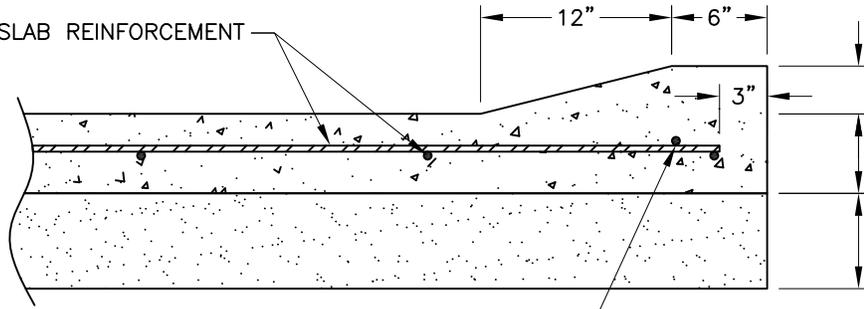

3" LIP
5" CONCRETE
6" SAND & GRAVEL

ADDITIONAL #4 REBAR (MIN. SPLICE LENGTH - 12")


5" CONCRETE SLAB REINFORCEMENT

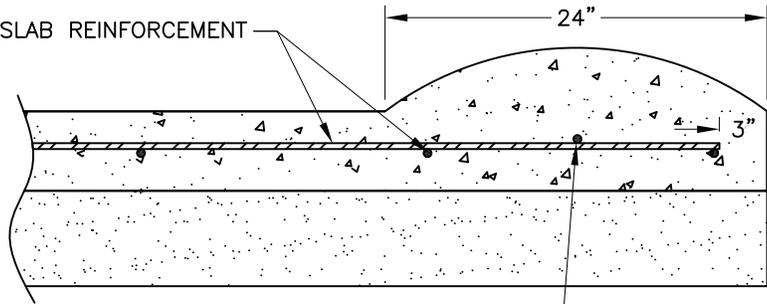

4" SPEED BUMP
5" CONCRETE
6" SAND & GRAVEL

ADDITIONAL #4 REBAR (MIN. SPLICE LENGTH = 12")

5" CONCRETE SLAB REINFORCEMENT

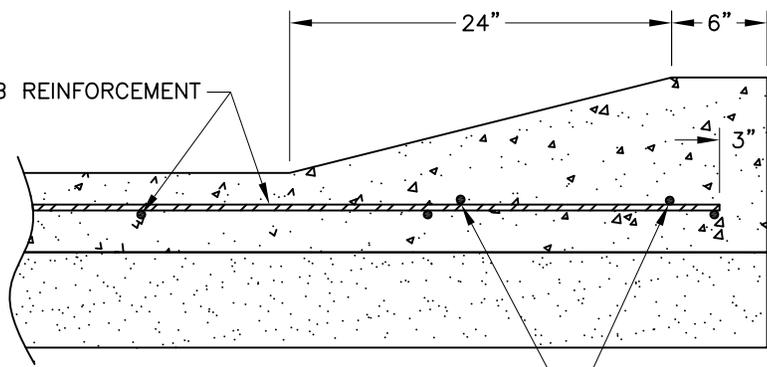

6" LIP
5" CONCRETE
6" SAND & GRAVEL

ADDITIONAL #4 REBAR 12" O.C. (MIN. SPLICE LENGTH = 12")

GENERAL CONSTRUCTION NOTES:

1. LIP OR SPEED BUMP POURED CONTINUOUS WITH CONCRETE SLAB.
2. BARNYARD SLABS ARE TO BE GROOVED.
3. SEE SHEET ___ OF ___ FOR CONCRETE SLAB AND BEDDING DETAILS.

QUANTITIES

LENGTH OF 3" CONCRETE LIP _____ LIN. FT. (0.009 cy/lin.ft. IN LIP)
 LENGTH OF 4" SPEED BUMP _____ LIN. FT. (0.017 cy/lin.ft. IN BUMP)
 LENGTH OF 6" CONCRETE LIP _____ LIN. FT. (0.028 cy/lin.ft. IN LIP)



CONCRETE LIPS/BUMPS

CLIENT: _____
 COUNTY: _____

Date _____
 Designed _____
 Drawn _____
 Checked _____
 Approved _____

File Name
 WI-515
 Date
 07/14
 Sheet of