



TYPICAL CROSS-SECTION LOOKING DOWNSTREAM

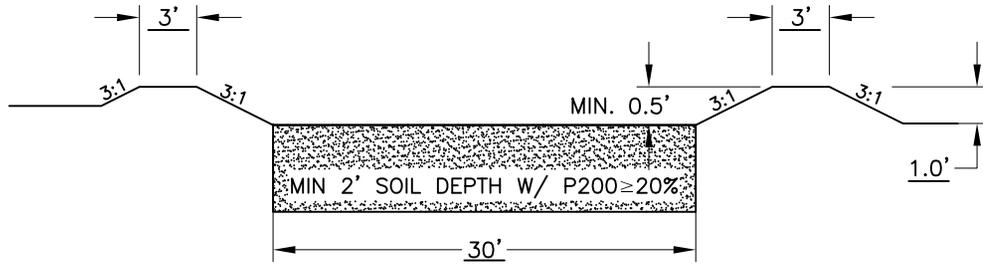

NOTES:

1. STRIP TOPSOIL FROM VEGETATED TREATMENT AREA (VTA) AND RE-SREAD AFTER CONSTRUCTION
2. GRADE VTA TO TOLERANCE OF 0.1 FT. MAXIMUM ACROSS THE SLOPE
3. SEED IMMEDIATELY AFTER CONSTRUCTION IS COMPLETED
4. DIVERT BARNYARD RUNOFF FROM VTA UNTIL VEGETATION IS ESTABLISHED

DISTRIBUTION PIPE SPREADER

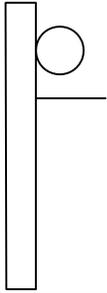


NOTE: SEE STANDARD DRAWING WI-910 FOR DETAILS

QUANTITIES:

| | |
|---------|-----------------------|
| GRADING | JOB |
| SEEDING | <u> X </u> ACRES |
| FENCING | <u> X </u> LIN. FT. |

PROFILE OF TREATMENT STRIP

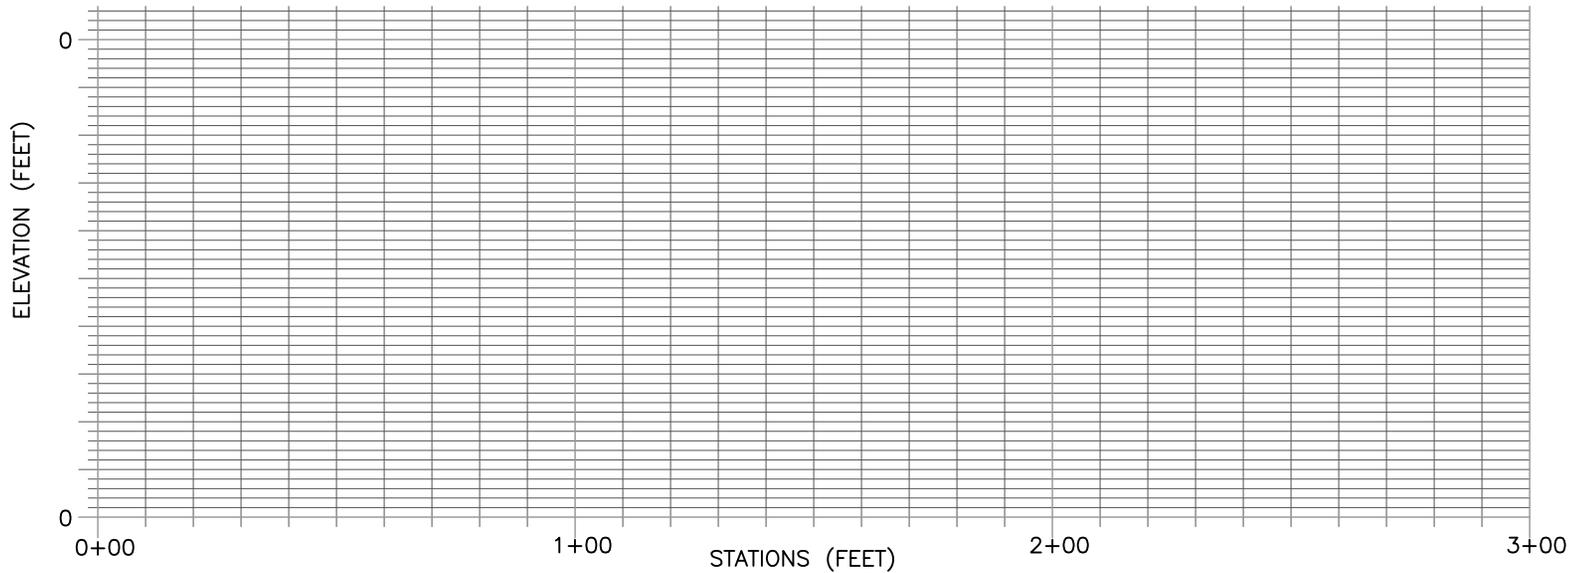

| | | | |
|---|--|-------------|--|
| File Name WI-912C | Date 08/14 | Sheet of | |
| Designed _____ Drawn _____ Checked _____ Approved _____ | OVERLAND FLOW WASTE TREATMENT STRIP W/ DISTRIBUTION PIPE SPREADER CLIENT: _____ COUNTY: _____ | | |
| United States Department of Agriculture USDA Natural Resources Conservation Service | | | |