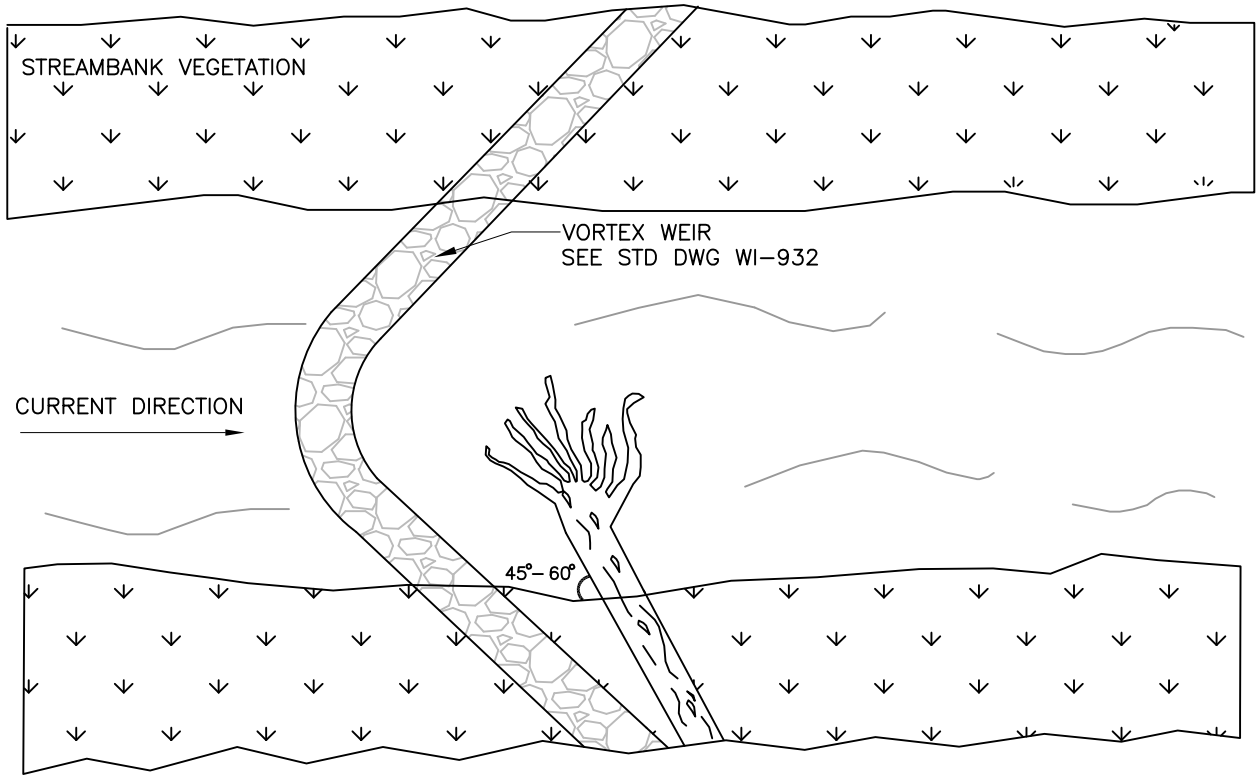

PLAN

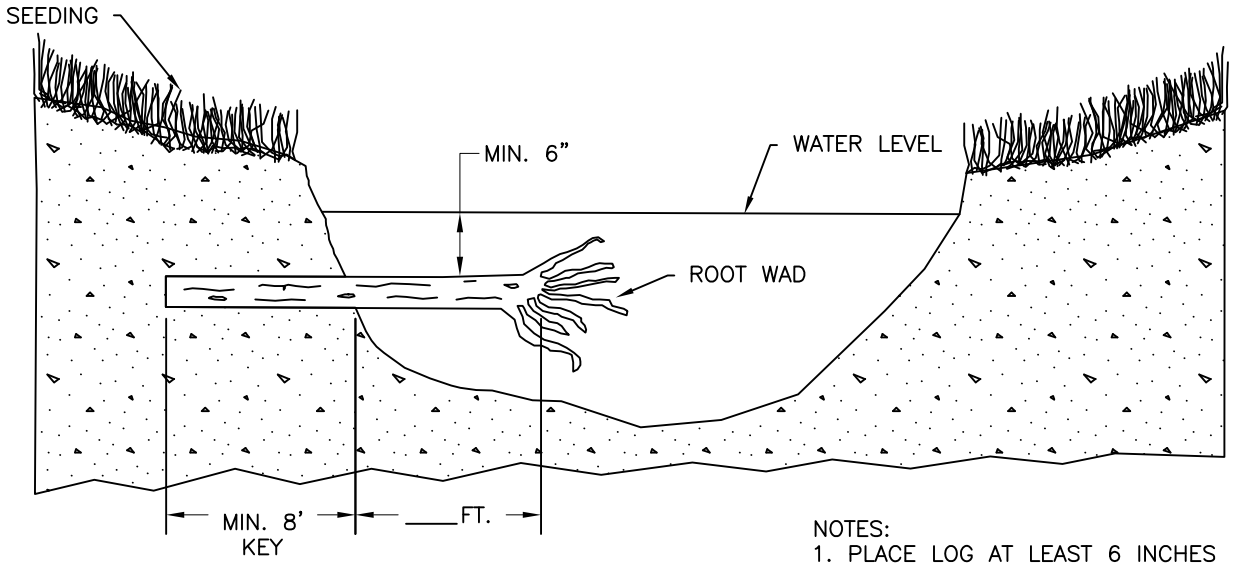

CROSS SECTION

NOTES:
1. PLACE LOG AT LEAST 6 INCHES BELOW THE WATERLINE.
2. PLACE LOG AT A 45-60 DEGREE ANGLE UPSTREAM FROM BANK.
3. REFERENCE WI STD DWG 932 FOR DETAILS ON VORTEX WEIR CONSTRUCTION.

USDA United States Department of Agriculture Natural Resources Conservation Service	ROOT WAD CLIENT: COUNTY:	Date Designed Drawn Checked Approved	File Name WI-936 Date 08/14 Sheet of