


UPSTREAM ELEVATION

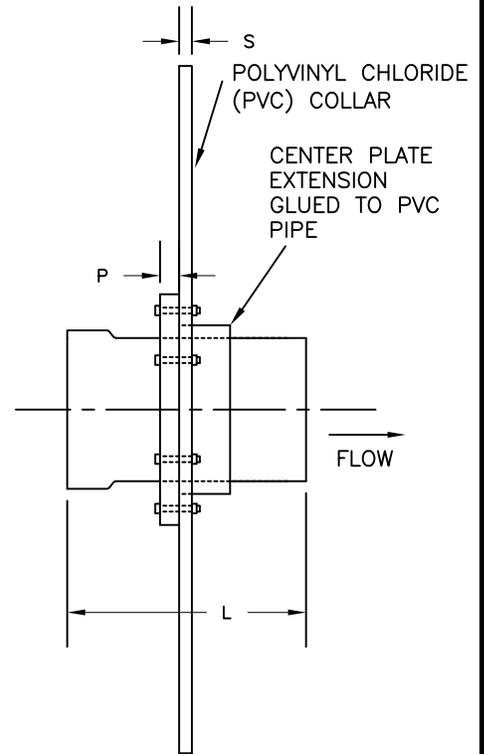

SECTION A-A

PIPE DIAM. (D) (INCHES)	SHEET HEIGHT (H) (INCHES)	SHEET WIDTH (W) (INCHES)	SHEET THICKNESS (S) (INCHES)	PIPE LENGTH (L) (INCHES)	PLATE THICKNESS (P) (INCHES)
6	48	48	3/16	12	1/4
8	48	48	3/16	15	1/4
10	48	48	1/4	17	1/4
12	48	48	1/4	17	1/4

NOTES:

1. THE BELL END OF THE PVC PIPE IN THE COLLAR SHALL POINT UPSTREAM
2. MAKE PIPE CONNECTIONS AS NEEDED TO ASSURE A WATERTIGHT SYSTEM.
3. APPLY SILICON CAULK ON THE SEAMS AS NEEDED TO INSURE A GOOD SEAL SO THAT THE COMPLETED INSTALLATION IS WATERTIGHT.

NUMBER OF ANTISEEP COLLARS REQUIRED = _____



United States
Department of
Agriculture

Natural Resources
Conservation Service

PVC ANTISEEP COLLAR
FOR 6"-12" DIAMETER PIPE

CLIENT: _____
COUNTY: _____

Date _____
Designed _____
Drawn _____
Checked _____
Approved _____

File Name:
WI-246C

Date:
07/14

Sheet of _____