


CONSTRUCTION NOTES:

1. PVC PIPES MUST BE ASTM D-2241 (SDR 21) OR ASTM D-1785 (SCH. 40 OR 80).
2. A WOVEN WIRE, CATTLE PANEL, OR BARBED WIRE FENCE IS REQUIRED ALONG THE DISTRIBUTION LATERAL IF CATTLE ARE ALLOWED NEARBY.
3. POSTS SHALL BE PRESSURE TREATED AND MUST CONFORM TO WI CONSTRUCTION SPECIFICATION 14.
4. SCOUR PROTECTION SUCH AS CONCRETE BRICKS, BLOCKS, OR ROCKS SHALL BE PLACED UNDER EACH WEEP HOLE.

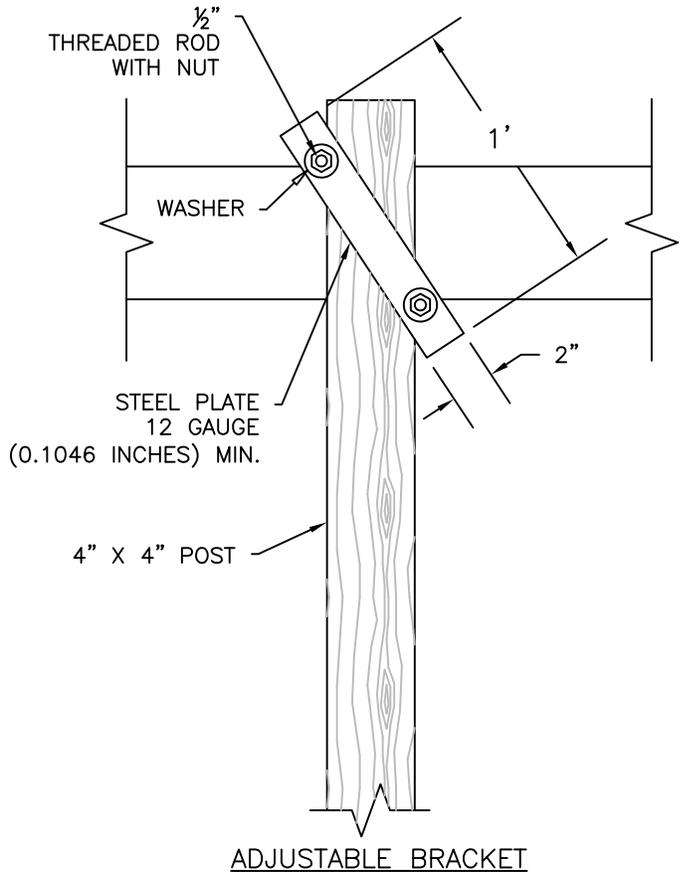

ESTIMATED QUANTITIES

ITEM	UNIT	QUANTITY
___" PVC PIPE	LIN FT	
___" COUPLERS	EACH	
___" PVC TEE	EACH	
___" 90 ELBOW	EACH	
___" THREADED END CAP	EACH	
4" X 4" X 6' TREATED POST	EACH	
2" X 12" STEEL PLATE	EACH	
1/2" X 36" THREADED ROD	EACH	
1/2" NUT	EACH	
1/2" WASHER	EACH	
SCOUR PROTECTION	EACH	