


PLAN

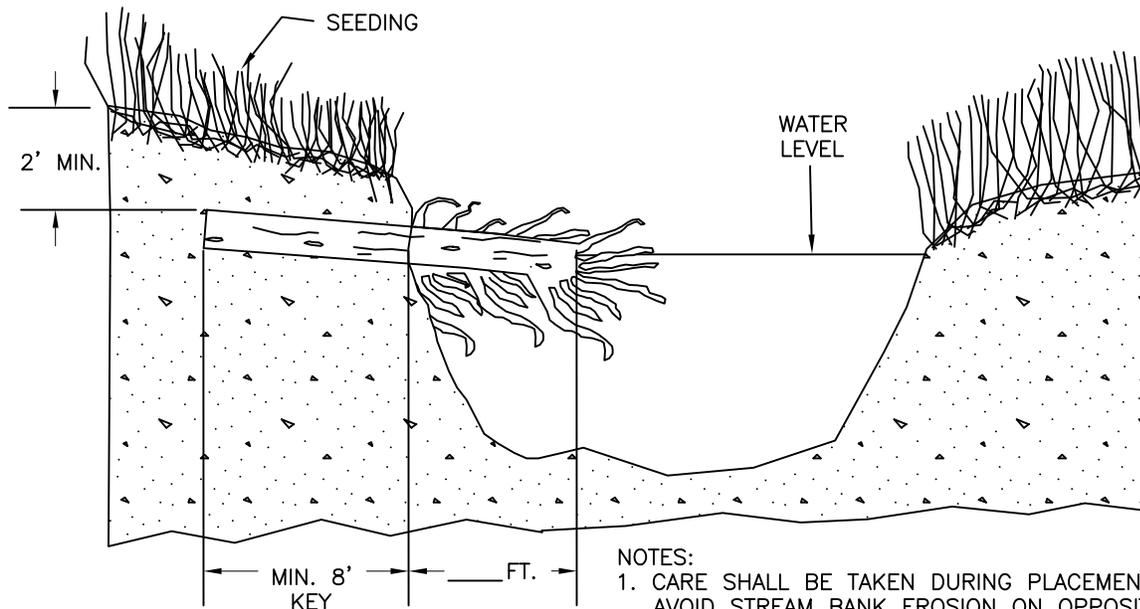

CROSS SECTION

NOTES:

1. CARE SHALL BE TAKEN DURING PLACEMENT TO AVOID STREAM BANK EROSION ON OPPOSITE BANK.
2. ROOT WADS MUST BE PRESENT ON EACH LOG.
3. THE LOG DEFLECTOR SHALL CONSIST OF THREE LOGS AT A MIN 24" DIAMETER AT BREAST HEIGHT (DBH) OR FIVE LOGS OF APPROX. 16" DBH.
4. THE MAJORITY OF THE LOG SHALL BE SUBMERGED WITH APPROX. 15% OF THE LOG EMERGED. CARE SHALL BE TAKEN TO KEEP THE LOG BELOW THE ORDINARY HIGH WATER MARK (OHWM).



United States Department of Agriculture

Natural Resources Conservation Service

LOG DEFLECTOR

CLIENT: _____
 COUNTY: _____

Date _____
 Designed _____
 Drawn _____
 Checked _____
 Approved _____

File Name
 WI-934
 Date
 08/14
 Sheet of