


WETLAND SCRAPE PLAN VIEW

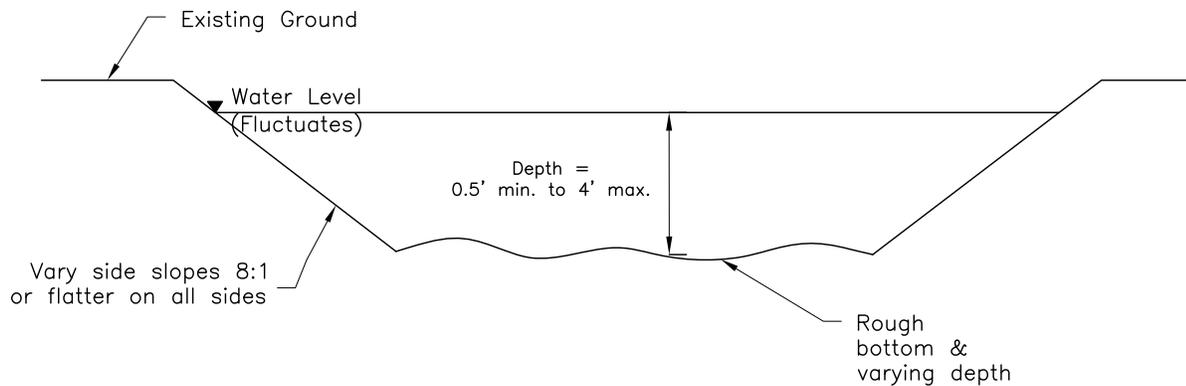

TYPICAL WETLAND SCRAPE CROSS SECTION

See Sheet _____ for the
location of the scrapes

Notes:

1. Scrapes/borrow areas will be constructed at locations and as flagged by the technician.
2. Scrapes are to be irregular in shape when completed. Wheel ruts are allowed and desired.
3. Wisconsin Construction Specification 2, Excavation, shall be followed.
4. Strip minimum 6" of topsoil and stockpile it for spreading, if needed, after the excavation is completed.
5. Before topsoil is spread, the depth and slopes must be checked by the technician. Seeding shall be done as per Job Sheet 134 for Introduced Species or Job Sheet 135 for Native Species or WI Drawings WI-710 or WI-711.
6. Spoil shall be disposed of at locations approved by the technician.



United States
Department of
Agriculture

Natural Resources
Conservation Service

Wetland Scrape/Borrow Areas

CLIENT: _____
COUNTY: _____

	Date
Designed _____	
Drawn _____	
Checked _____	
Approved _____	

File Name WI-950A
Date 08/14
Sheet _____ of _____