



NEOPRENE GASKET OR MASTIC
BETWEEN COUPLING BAND
AND PIPE

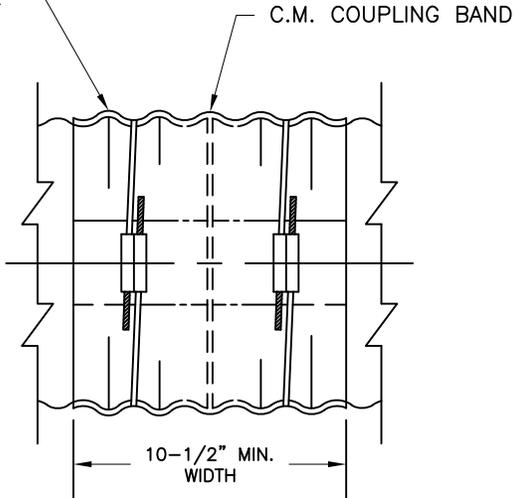

COUPLING BAND DETAIL

USE WITH PIPE 12" TO 18" DIAMETER


24" MINIMUM WIDTH
9 CORRUGATIONS (MIN.)

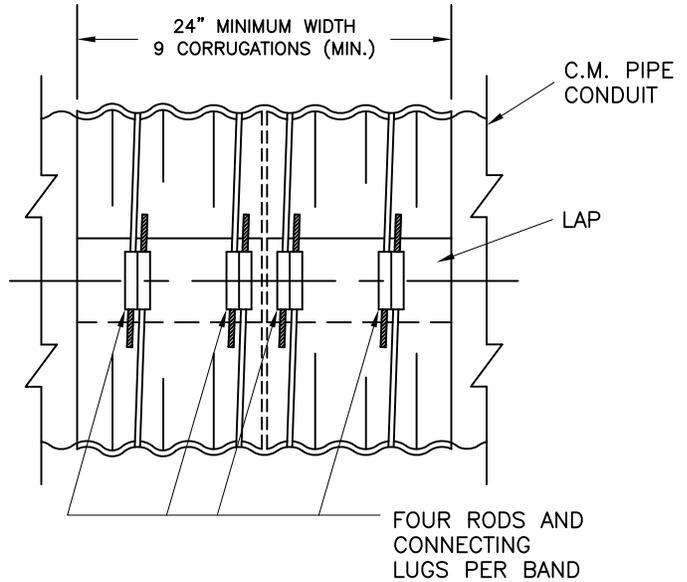

COUPLING BAND DETAIL

USE WITH PIPE OVER 18" DIAMETER


CORRUGATED METAL COUPLING BAND TO
BE FABRICATED FROM ONE SHEET OR TWO
SHEETS WITH EQUAL MINIMUM LAP LENGTHS.

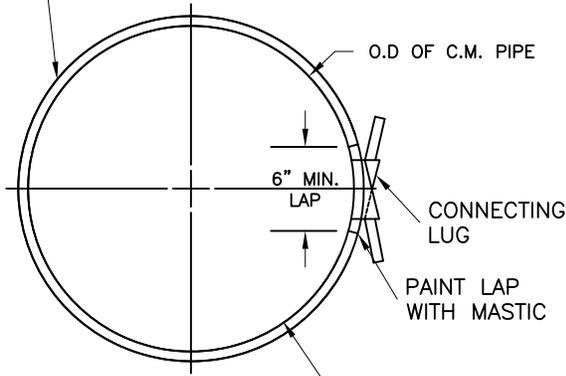

NEOPRENE GASKET OR MASTIC
BETWEEN COUPLING BAND AND PIPE

TYPICAL BAND CROSS SECTION

7/16" DIAM. (MIN.) GALV. STEEL ROD
WITH 1/2" DIAMETER (MIN.) UPSET
THREAD (THREAD APPROXIMATELY 8")

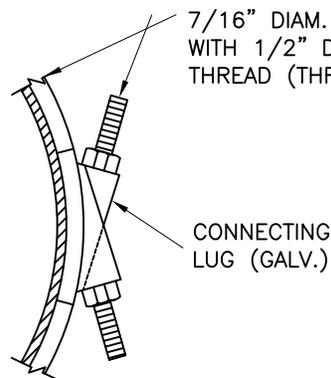

CONNECTING
LUG (GALV.)

CONNECTING LUG DETAILS



United States
Department of
Agriculture

Natural Resources
Conservation Service

**COUPLING BAND DETAILS FOR
ANNULAR OR HELICAL C.M. PIPE**

CLIENT: _____
COUNTY: _____

	Date
Designed _____	
Drawn _____	
Checked _____	
Approved _____	

File Name WI-231
Date 07/14
Sheet of