


- NOTES: 1) SHORE THE WALLS ON THE INSIDE, AT THE TOP, UNTIL THE SLATS AND BUILDING FLOOR ARE IN PLACE.
 2) EXTRA STEEL TO BE EVENLY SPACED IN TOP 12" OF WALL.
 3) (I) BARS TO BE EVENLY SPACED IN BEAM NOTCH DEPTH.
 4) ALL STEEL REQUIRES 2" COVER.


DESIGN LID LOADING (Circle one)
 I LIVESTOCK
 II SKID-STEER LOADER
 III TRACTOR

CONDITIONS OF USE
 CONCRETE 4000 psi
 BACKFILL TO TOP
 SURCHARGE (Y or N)
 SOIL EFP = 60

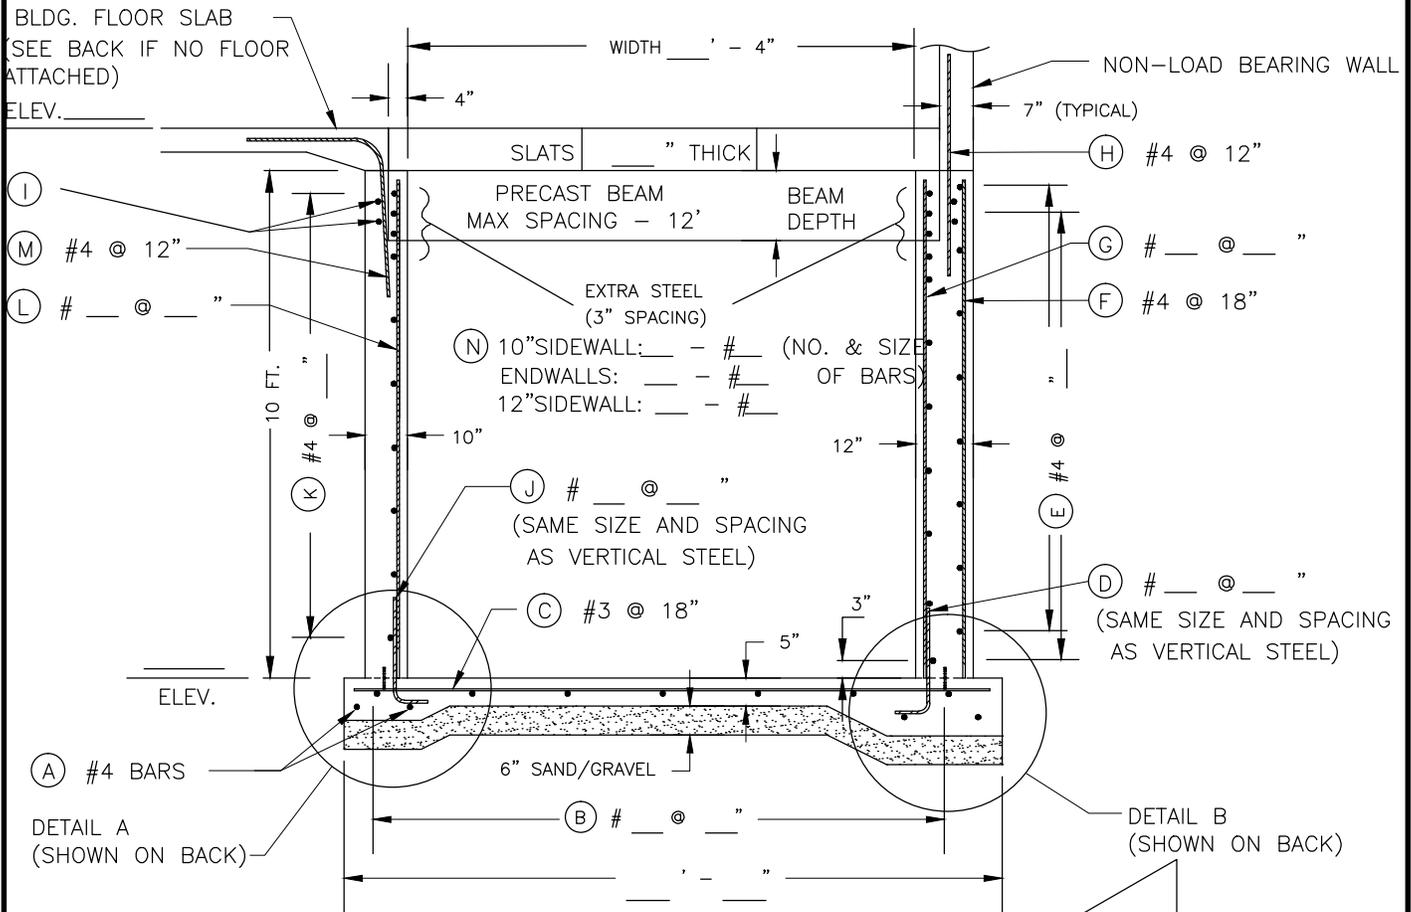

STEEL SCHEDULE (GRADE 40 OR 60) (CIRCLE ONE)

MARK	SIZE	TYPE	R	S	T	U	LENGTH
A	4	STR	--	--	--	--	
B		STR	--	--	--	--	
C	3	STR	--	--	--	--	
D	21		0'-10"	1'-8"	--	--	2'-6"
E	4	STR	--	--	--	--	
F	4	STR	--	--	--	--	
G		STR	--	--	--	--	
H	4	STR	--	--	--	--	4'-0"
I**	3		12"				
J	21		0'-10"	1'-8"	--	--	2'-6"
K	4	STR	--	--	--	--	
L		STR	--	--	--	--	
M	4	21	2'-0"	2'-0"	--	--	4'-0"
N		STR	--	--	--	--	

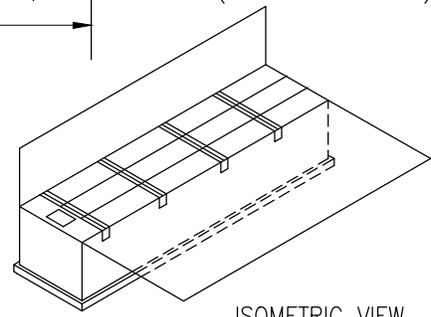

ISOMETRIC VIEW

TYPICAL BEAM SECTION 11" x 14" DEEP

SEE SHEET ____ FOR CORNER STEEL DETAIL.

MINIMUM SPLICE LENGTHS:

- #3 - 12", #4 - 16"
- #5 - 20", #6 - 24"
- #7 - 34", #8 - 38"