



NOTES:

1. DOUBLE 90° ELBOW CONNECTION ALLOWS FOR THE ADJUSTMENT OF RISER OR INLET, AND OUTLET TO ANY DESIRED ANGLE.
2. DEVICE CAN BE USED FOR TILE INLETS (606 AND 620), SEDIMENT BASIN INLETS (350), WATER AND CONTROL BASIN INLETS (638) AND STRUCTURE INLETS (378 AND 410).
3. SYSTEM SUITABLE FOR USE WITH ANY PLASTIC PIPE. SPECIFY ACCEPTABLE PIPE STANDARD, SIZE AND SCHEDULE FOR THE INTENDED USE.
4. SEE OUTLET CONDUIT AND RISER DETAILS ON ATTACHED SHEETS.
5. SUPPORT RISER WITH TWO (2) 6-FOOT LONG STEEL FENCE POSTS ON EITHER SIDE.

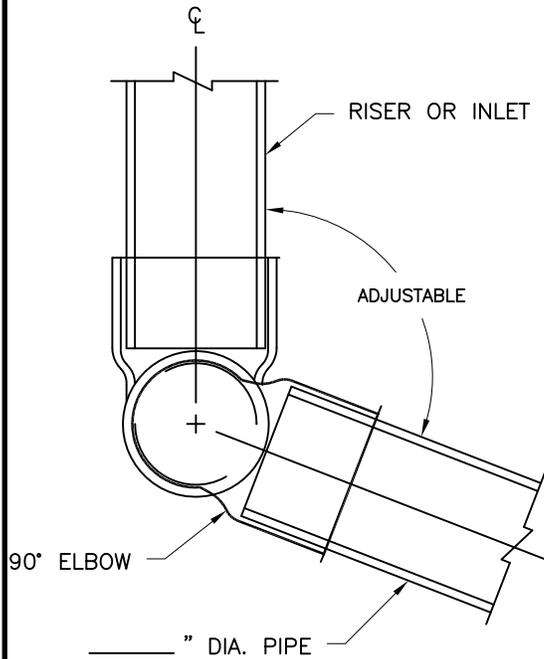

SIDE VIEW

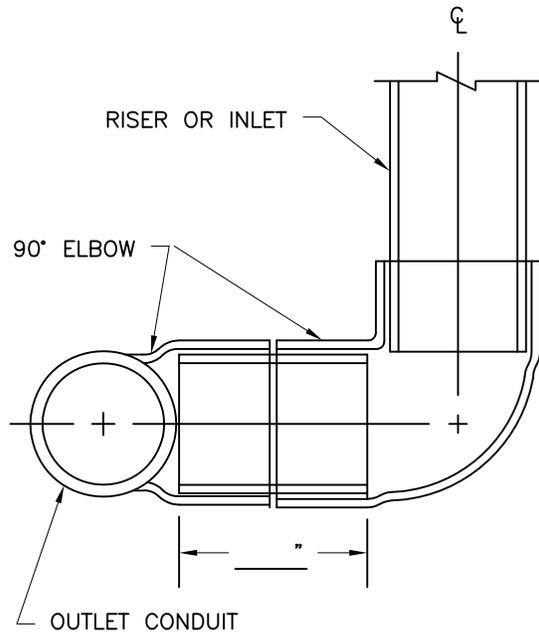

FRONT VIEW

BILL OF MATERIALS

ITEMS	QUANTITY
90° ELBOW ___ INCH DIA. ASTM DESIGNATION _____	2
CONNECTING PIPE ___ INCH DIA. LENGTH = ___ INCH ASTM DESIGNATION _____	1



United States
Department of
Agriculture

Natural Resources
Conservation Service

DOUBLE 90° ELBOW CONNECTION
___ DIA. CONDUIT

CLIENT: _____
COUNTY: _____

Date _____
Designed _____
Drawn _____
Checked _____
Approved _____

File Number
WI-414
Date
07/14
Sheet of