



PLAN VIEW

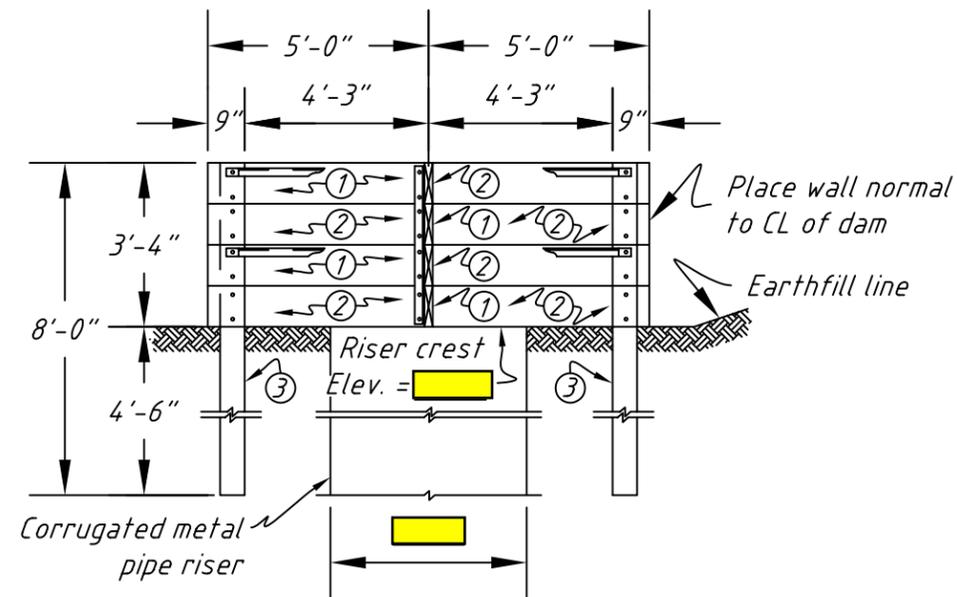

SECTIONAL ELEVATION A-A

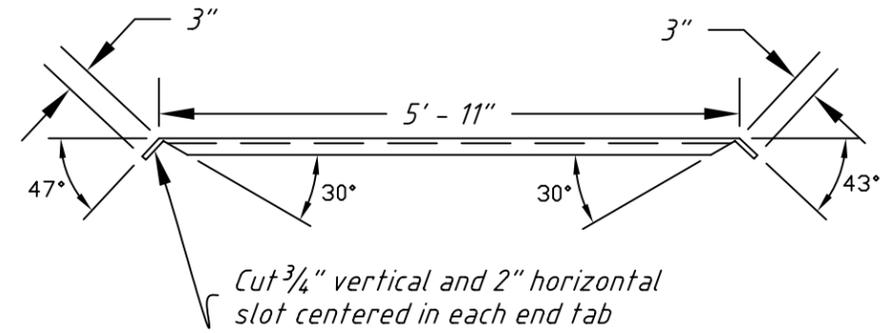

PLAN VIEW OF BRACE ANGLE

TABLE OF QUANTITIES

ITEM	MARK	NO. REQ'D.	QUANTITY
2" x 10" x 10" Pressure Treated Lumber	1	4	67 BD. FT.
2" x 10" x 4'-11" Pressure Treated Lumber	2	8	66 BD. FT.
4" x 16" x 8" Pressure Treated Post	3	4	64 BD. FT.
2" x 2" x 1/4" x 6'-5" Steel Angle		8	164 LBS.
2" x 2" x 1/4" x 3'-2" Steel Angle		2	20 LBS.
5/8" x 8" Steel Bolts, Nuts, 2 Washers		32	32 SETS
1/2" x 3" Steel Bolts, Nuts, 2 Washers		32	32 SETS

NOTES:

1. Bolt 4" x 6" posts (4 required) to 2" x 10" boards using two 5/8" x 8" bolts per 2" x 10" board. do not place bolts closer than 1/2" from edge of board.
2. For center brace angles, drill 8 - 9/16" holes 5/8" from outer edge of each leg of each angle and centered 5 1/4" apart along the leg.
3. Attach brace angles to top bolt on top 2" x 10" board and to top bolt on next to bottom board.

Date [redacted]
Designed [redacted]
Drawn [redacted]
Checked [redacted]
Approved [redacted]

Cooperator: [redacted]

Trash Rack & Baffle for Riser Dia. 36"-60"

[redacted] County Conservation District [redacted] County, Wyoming



File No. [redacted]

Drawing No. 378-05

Sheet [redacted] of [redacted]