


FOREST ROAD CLOSURE—HIGH LEVEL

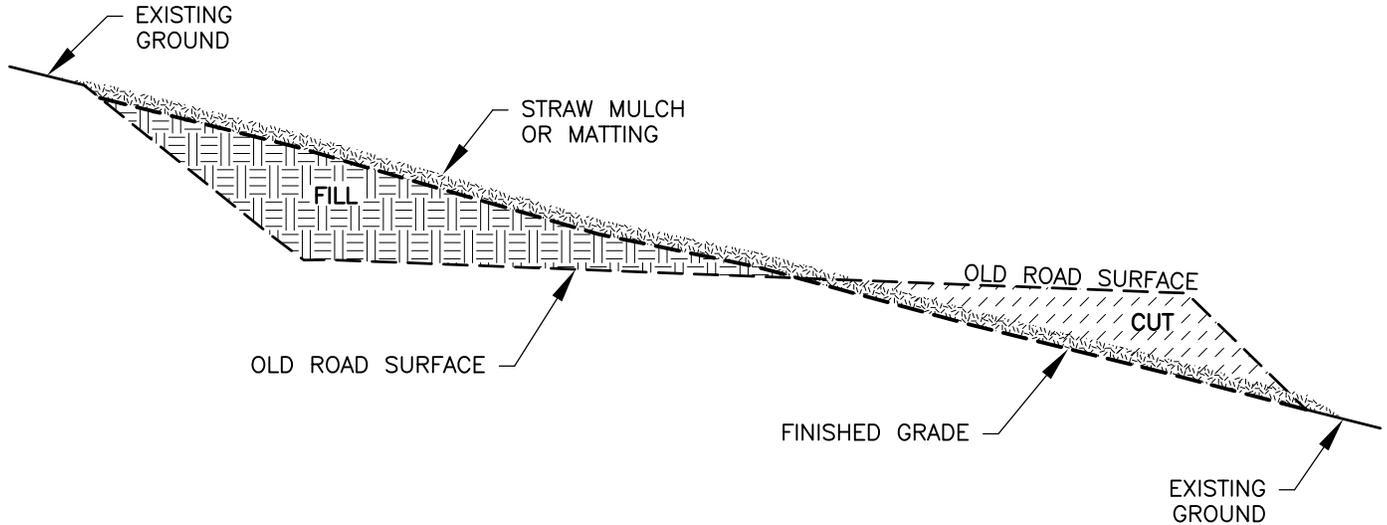

DRAWING  
NOT TO SCALE

CONSTRUCTION NOTES:

1. Road closure treatment to be done by using excavator to remove existing road and form new finished grade.
2. Shape new finished grade to follow contours and natural features.
3. If quantities are needed work with local technical representative to determine site specific cut – fill volumes.
4. Seed all disturbed areas with approved seed mix.
5. Cover all seeded areas with straw.
  - a) Straw Bales can be broken up and spread as mulch.
  - b) If Straw matting is used overlap matting a minimum of 6 inches. Use 6 inch ground staples to hold matting in place.
6. Place other debris, such as logs and boulders, along closed road to discourage potential vehicular traffic and to hold mulch in place.

Mulch Rate: \_\_\_\_\_ lbs./acre

Seeding Mix: \_\_\_\_\_

Straw Matting: \_\_\_\_\_ yards

Seeding Rate: \_\_\_\_\_ lbs. PLS/Acre

<b>U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE</b>	JOB CLASS	Date
	CAD FILE NO. FOR-0018.dwg	Designed _____
	SHEET OF	Drawn _____
		Checked _____
	Approved _____	