


| | |
|----------|--|
| Date | |
| Designed | |
| Drawn | |
| Checked | |
| Approved | |

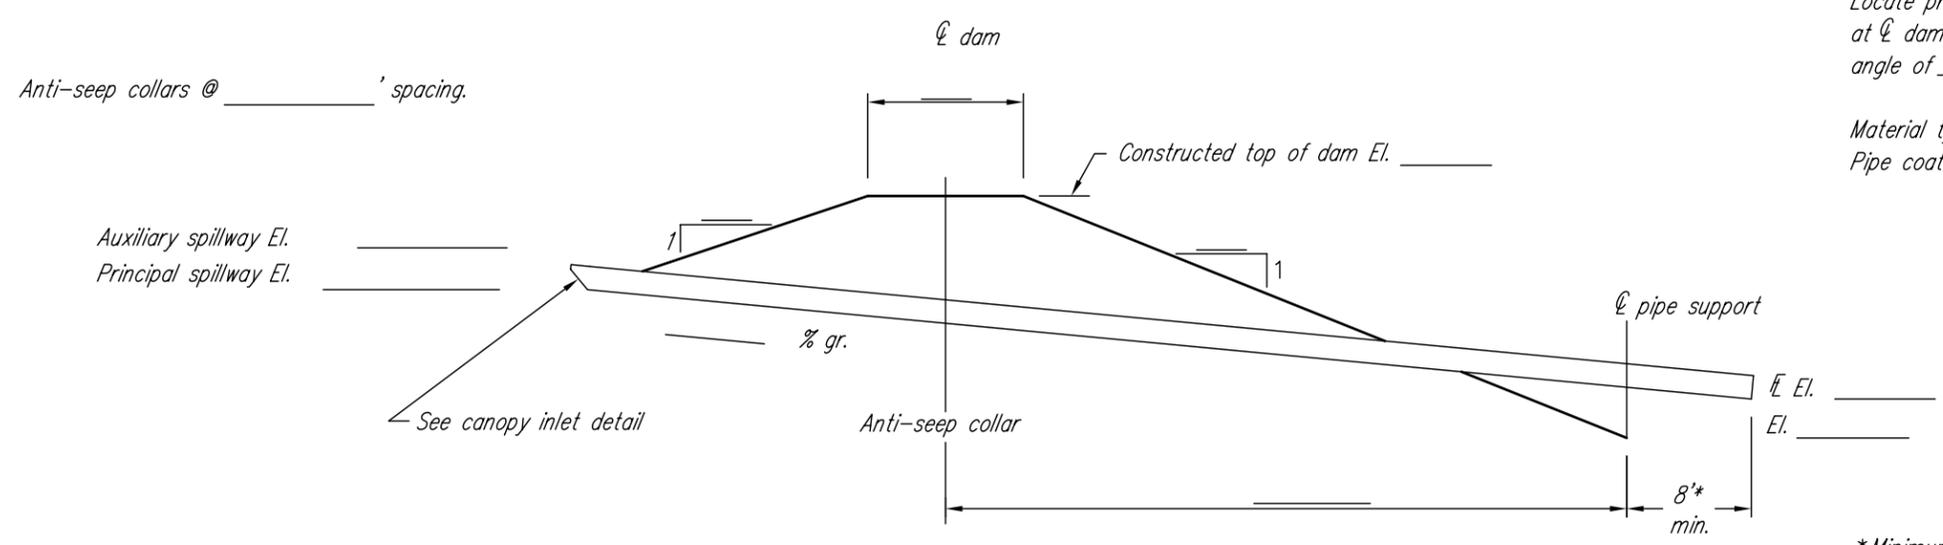


Locate principal spillway pipe at \varnothing dam station. _____ + _____ at an angle of _____ :

Material type: _____
Pipe coating: _____

CROSS SECTION OF DAM ALONG \varnothing OF PRINCIPAL SPILLWAY

*Minimum distance from back toe to end of pipe is 5' for pipes 12" or smaller. Minimum distance from back toe to end of pipe is 8' for pipes larger than 12".

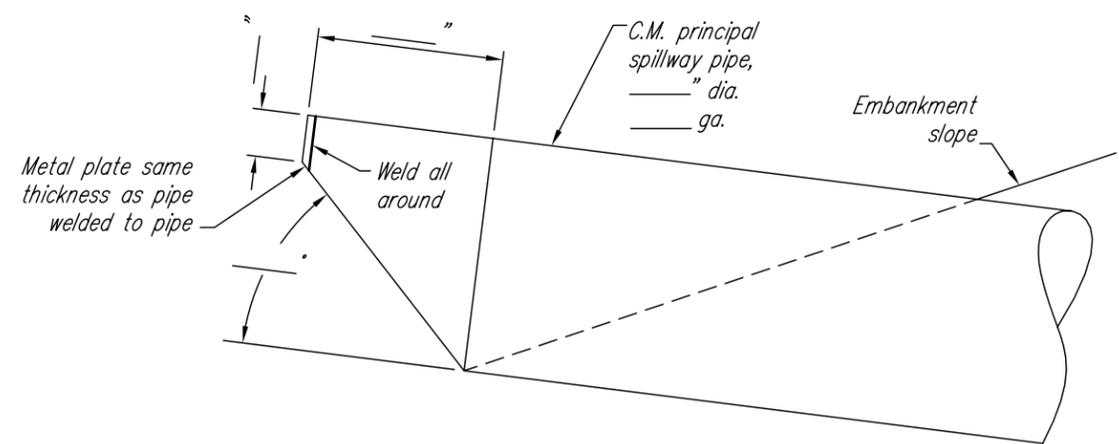

DETAIL OF CANOPY INLET

- NOTES:
1. The pipe shall be firmly and uniformly bedded so the lower one-sixth of the circumference will bear against original ground or compacted fill.
 2. All welds and heat-damaged areas on galvanized steel are to be thoroughly wire-brushed and painted with two coats of zinc-rich paint conforming to ASTM A 780.

BEFORE ANY INVESTIGATION OR CONSTRUCTION ACTIVITY, THE EXCAVATOR IS RESPONSIBLE FOR CALLING KANSAS ONE-CALL AT 800-344-7233 (800-DIG-SAFE)

C.M. Canopy Inlet

COUNTY, KANSAS



| | |
|--------------|----|
| File Name | |
| Drawing Name | |
| Sheet | of |