



ROCK JACK - PLAN

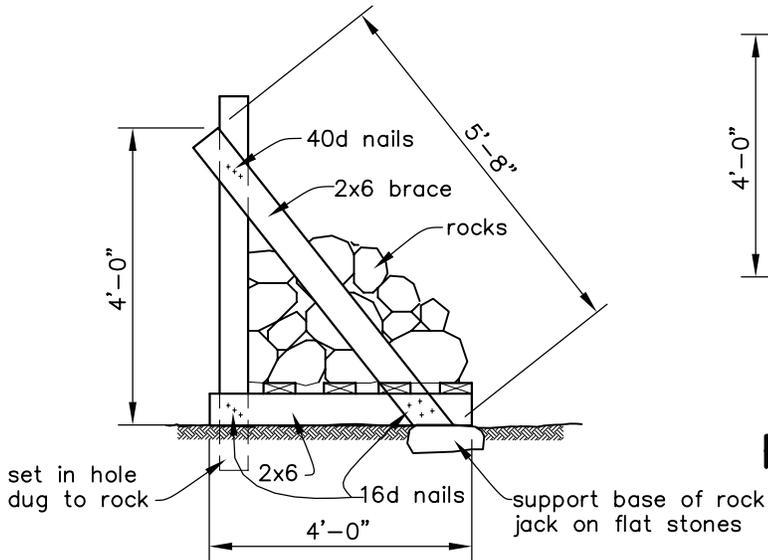

ROCK JACK - SIDE

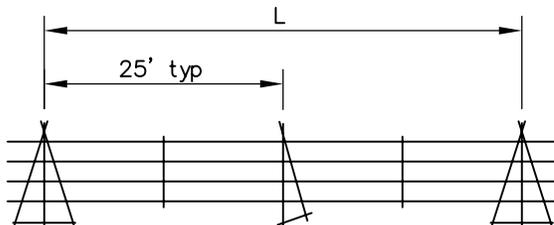

Place additional jacks at all abrupt breaks in topography.

Drive nails at binding angle.

Do not nail rock platform down.

Scoop shallow holes in ground, for posts and braces, to prevent excess slipping on hillsides.

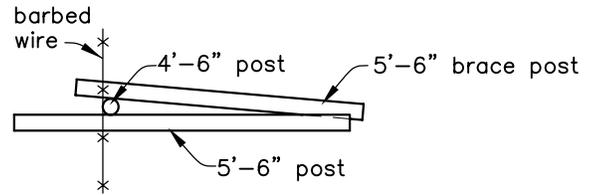


FIGURE FOUR - PLAN

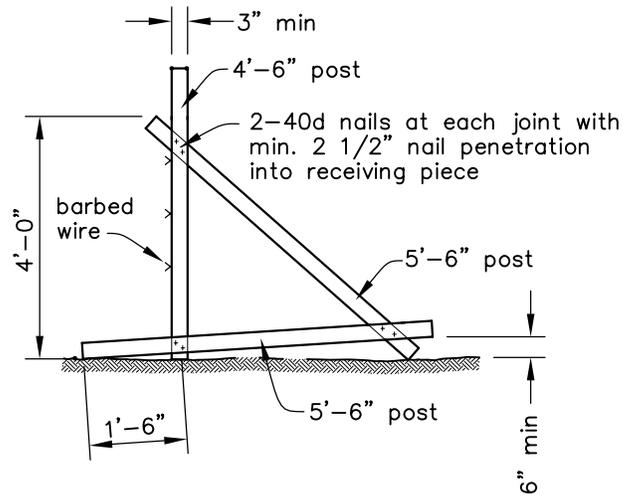


FIGURE FOUR - SIDE

L=100'	for level topography, light snow
L= 75'	for moderately steep topography, moderate snow
L= 50'	for steep topography, heavy snow

Drawing not to scale.

FIGURE 4 AND ROCK JACK

Designed _____	Date _____	CAD FILE NAME OR_ROCKJACK.DWG
Drawn _____	2/2005	DRAWING NO.
Checked _____		SHEET OF
Approved _____		

LIVESTOCK FACILITIES