

red osier dogwood cuttings (or equivalent), 3.5 - 4.5 ft. @ 1-2" dia. spacing 1 ft o.c.

willow cuttings, 3.5 - 4.5 ft. @ 1-2" dia. spacing 1 ft o.c.


Coconut erosion control blanket shall be 'geocoir 700' or approved equal, able to withstand 10 fps water velocities and 4.46 psf shear stress. Fabric embedment 3.0 ft.

CONSTRUCTION NOTES:

1. Attach with wooden (dead stout stakes) at least 18" in length (2x4 cut at an angle) or metal pins.
2. Position stakes approximately 3' apart (3 per sq. Yard of fabric), domino pattern.
3. Overlap fabric at least 18" in water flow direction.
4. Overlap edges at least 8", staking both edges securely.
5. Check slots with fabric buried at least 6" deep should be used every 25' in waterways or ditches.
6. The fabric should be buried in anchor trenches at least 10" deep at the top and bottom ends of an installation to prevent undercutting of the fabric.

TYPICAL STAKE DETAIL

Saw a 2 x 4 diagonally to produce 2 stakes.

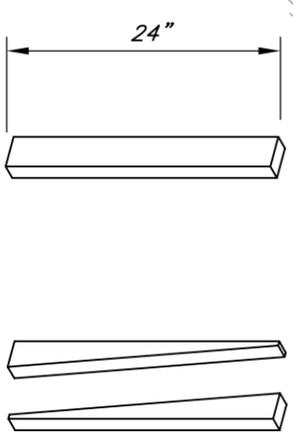

SECTION



OVERLAP DETAIL

