



Panels of woven wire or board can be used. Panels built separate and tied to fence with light wire, then during floods ends can break loose and not disturb main fencelines.

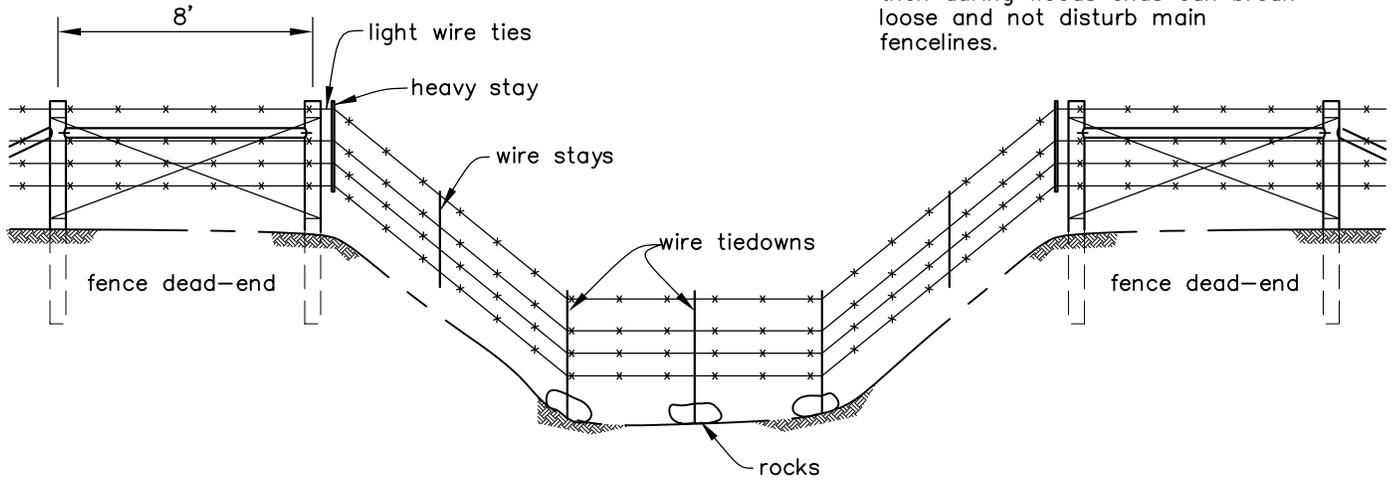

**DETACHABLE WIRE PANEL W/ROCK ANCHORS FOR DEEP WASHES AND LIVE STREAMS**

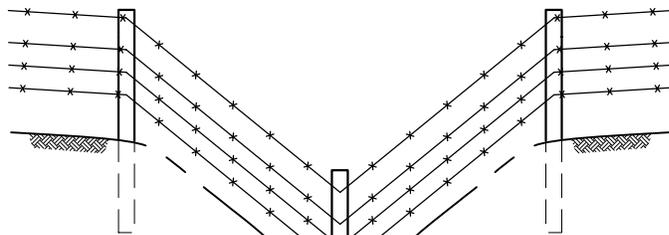


Treated diagonally pointed 2x4's, 12' to 16' long, bolt to post and wedged tightly into sides of posthole.


1/2" carriage bolt

**FENCE POST ANCHOR**

1. All corner and brace posts shall be 7' long and 3' embedment.
2. Line posts shall have a minimum length of 6'-6" and 2'-6" embedment.

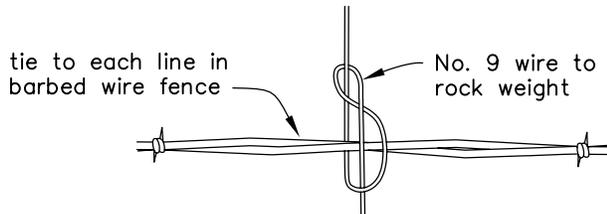

**TIEDOWN DETAIL**

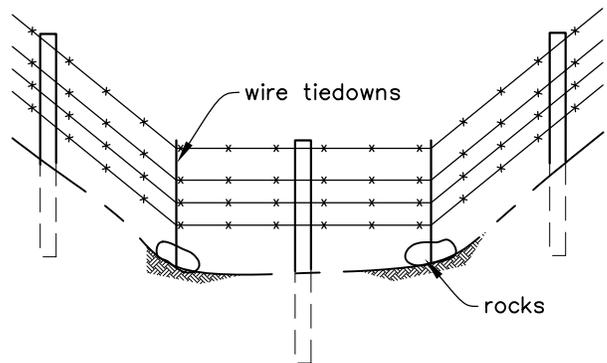

**ROCK ANCHORS IN DRY DRAWS SQUARE ROCK CRIBS ALSO USEFUL**

This drawing requires supporting technical documentation prior to use and must be adapted to the specific site.

Drawing not to scale.

Designed _____	Date _____	CAD FILE NAME OR_BARBED_XING.DWG
Drawn _____	2/2005	DRAWING NO.
Checked _____		SHEET OF
Approved _____		

**BARBED WIRE FENCE CROSSING**

LIVESTOCK FACILITIES