

APPENDIX E

Table of Contents

Appendix E-1: Principles, Requirements, and Guidelines Analysis Table and Report

- Proposed Santa Clara Watershed Project Efficiency Project, Santa Clara Watershed Principles, Requirements, and Guidelines Analysis Report
- Principles, Requirements, and Guidelines Report

Appendix E-2: Economic Analysis

- Economic Investigation and Analysis Report

Appendix E-3: Biological Documents

- Santa Clara Project Rare Species Evaluation

Appendix E-4a: Technical Documents

- Technical Memo Draft: Santa Clara Watershed EA Dammeron Valley and Diamond Valley Alternatives
- Hydraulic and Freeboard Report - Preliminary

Appendix E-4b: Technical Documents, continued

- Appendix A. Exhibits (Hydraulics and Fetch Length Exhibits)

Appendix E-4c: Technical Documents, continued

- Appendix A. Exhibits, continued (Inundation Maps)
- Appendix B. Calculations
- Appendix C. Model Output

Appendix E-5: Technical Documents, continued

- Preliminary Hydrology Report - Draft

Appendix E-6: Technical Documents, continued

- Plan of Development: Geotechnical Investigations Reclamation

Appendix E-7a: Technical Documents, continued

- Geotechnical Investigation Report for Preliminary Design
 - o Report

Appendix E-7b: Technical Documents, continued

- Geotechnical Investigation Report for Preliminary Design, continued
 - o Figures
 - o Appendix A, Conceptual Design
 - o Appendix B, Boring Logs and Photos

Appendix E-7c: Technical Documents, continued

- Geotechnical Investigation Report for Preliminary Design
 - o Appendix B, Boring Logs and Photos, continued
 - o Appendix C, Laboratory Testing
 - o Appendix D, Sedimentation Calculations

Appendix E-8: Cultural Resources Documents

- Cultural Resources Inventory Report, NRCS's Santa Clara Watershed Plan-EA Project-Phase I: Borehole and Test Pit Locations, Washington County, Utah
- Summary Report of Cultural Resources Inspection
- UDSA NRCS's Santa Clara Watershed Plan-EA Project-Supplemental Cultural Resources Desktop Review Memo
- Agreement letter from Shivwits Band of Paiutes to be a cooperating agency

Appendix E-9a: Aquatic Resources

- Preliminary Aquatic Resource Delineation Report
 - o Report
 - o Appendix A, Aquatic Resources Maps

Appendix E-9b: Aquatic Resources, continued

- Preliminary Aquatic Resource Delineation Report
 - o Appendix B, Field Photographs
 - o OHWM and Wetland Delineation Datasheets

Appendix E-9c: Aquatic Resources, continued

- Preliminary Aquatic Resource Delineation Report
 - o Appendix D, NRCS Custom Soil Resource Report

Appendix E-10: Public Involvement

- Scoping Summary Report

Appendix E-11: BLM Environmental Documents

- Categorical Exclusion: Diamond & Dammeron Valley Soil Testing Land Use Permit

APPENDIX E-1

PRINCIPLES, REQUIREMENTS, AND GUIDELINES ANALYSIS TABLE
AND REPORT

Santa Clara Watershed Project

PR&G Framework and Trade-Off Analysis Table (Dammeron Valley)

Alternatives Considered ¹			
Future Without Federal Investment (FWOFI): No Action Alternative Implementation of the No Action Alternative would not improve flood management. Losses associated with flooding would continue.			
Future With Federal Investment (FWFI) Alternative 1: Three detention basins would be constructed. Flow in one other drainage would be re-routed to an adjacent channel.			
Summary and Comparison			
Item	FWOFI (No Action Alternative)	FWFI (Action Alternative)	Comments
Locally Preferred		XX	Washington County and local stakeholders support the Action Alternative.
Nonstructural	N/A	N/A	A nonstructural alternative would not meet the purpose and need and is not considered in detail in the Plan-EA.
Environmentally Preferred		XX	The Action Alternative would provide for enhanced flood management.
Socially Preferred		XX	The Action Alternative would reduce the potential for infrastructure damage to approximately 27 residences, 4 acres of agricultural land, and 12 roadways. Scour and sediment deposition would be reduced approximately 90 acres. ²
National Economic Efficiency		XX	The Action Alternative would minimize environmental impacts and maximize social, environmental, and economic benefits by reducing potential damages from \$1,106,619 to \$32,209 annually.
Guiding Principles			
Healthy and Resilient Ecosystems		XX	Action Alternative would support a healthy and resilient ecosystem through enhanced flood management measures (construction of three

			detention basins and the reroute of flood water in one drainage). Human safety and infrastructure protection would be enhanced by reducing potential flood related damages as discussed above.
Sustainable Economic Development		XX	The Action Alternative would improve economic well-being by reducing the potential for loss due to flooding by reducing potential damages from \$1,106,619 to \$32,209 annually.
Floodplains		XX	While not a designated floodplain, the Action Alternative would reduce the potential for damaging flood events on approximately 95 acres of residential and agricultural land. ²
Public Safety		XX	Action Alternative would enhance public safety in the community of Dammeron Valley by reducing the potential of damaging flooding to 27 residences, 4 acres of agricultural land, and highways and roadways.
Environmental Justice		N/A	There would be no adverse impacts to subject populations.
Watershed Approach		XX	Action Alternative addresses watershed problems resulting from flooding events.
Evaluation Framework and Tradeoffs			
Item	FWOFI (No Action)		FWIFI (Action Alternative)
Provisioning Services			
Ecosystem Productivity	Ecosystem productivity would not be improved due to continued flooding potential	Detention basin construction would improve ecosystem productivity by reducing flooding potential on 95 acres of residential and agricultural land ²	
Food (agricultural yield)	No change	Improves agricultural production on 4 acres through flood management	
Regulating Services			
Climate	No change	No change	

Water Regulation (quantity and quality)	No change	The Action Alternative would not alter water quantity and quality.
Biological Regulation (plants and animals)	Flooding would continue to affect local ecosystems	Ecosystems would benefit from reduced flooding potential on approximately 95 acres. ²
Cultural Services		
Peace and Sustainability (Tribal, agricultural, and rural communities)	Flooding would continue to affect local infrastructure and agriculture and potentially affect long-term sustainability on 95 acres. ²	Reduction in flooding potential on approximately 95 acres ² would improve local infrastructure and agriculture and improve long-term sustainability within Dammeron Valley.
Community Well-Being (Tribal, agricultural, and rural communities)	Crop yield and infrastructure would continue to be affected by flooding events.	Dammeron Valley infrastructure would be protected by detention basin development. Potential for damage to 27 residences, 4 acres of agricultural land, and highways and roadways would be reduced. Scour and sediment deposition would be reduced on approximately 95 acres ² .
Cultural/Historical Identity and Heritage	No known cultural/historical values would be affected.	No known cultural/historical values would be affected
Supporting Services		
Water Cycling	No change	Potential for severe flooding events would be reduced on approximately 95 acres ² .
Habitat and Biomass	No change	No change
Nutrient Cycling	No change	No change
Economic Analysis¹		
Costs		
Installation Federal PL 83-566	N/A	\$7,724,290
Installation Sponsor	N/A	\$72,400
Annual Installation Costs	N/A	\$281,800
Annual O&M Costs	N/A	\$76,869
Total Annual Costs	N/A	\$358,669
Annual Benefits		
Agriculture	N/A	\$356
Non-Agricultural	N/A	\$1,074,054
Total Annual Benefits	N/A	\$1,074,410
Cost-Benefit Ratio and Net Benefits		
Cost-Benefit Ratio	N/A	3.00

Net Benefit	N/A	\$715,740
Decision-Making Conclusion	This Alternative is provided for comparison purposes and is not selected as the National Economic Efficiency (NEE) Alternative. It does not meet the purpose and need of the Project nor result in benefits to ecosystem services.	Selected as the NEE Alternative. The Action Alternative provides the highest benefit to ecosystem services, has the greatest cost-benefit, and is the locally/socially/environmentally preferred alternative that meets the project goals and objectives.

¹Economic Investigation and Analysis Report, Santa Clara Watershed Plan, Proposed Floodwater Retarding Structures. Prepared by Hal Gordon, Economist. December 2024

²Personal communication with Todd Gardner, Alpha Engineering, December 17, 2024

PR&G Framework and Trade-Off Analysis Table (Diamond Valley)¹

Alternatives Considered			
FWOFI: No Action Alternative Implementation of the No Action Alternative would not improve flood management. Losses associated with flooding would continue.			
FWFI: Alternative 1 Three detention basins would be repaired. Rock Hollow Wash in Diamond Valley would be repaired and armored.			
Summary and Comparison			
Item	FWOFI (No Action Alternative)	FWFI (Action Alternative)	Comments
Locally Preferred		XX	Washington County and local stakeholders support the Action Alternative.
Nonstructural	N/A	N/A	A nonstructural alternative would not meet the purpose and need and is not considered in detail in the Plan-EA.
Environmentally Preferred		XX	The Action Alternative would provide for enhanced flood management.
Socially Preferred		XX	The Action Alternative would reduce the potential for infrastructure damage and provide for additional agricultural land to 42 residences and highways and roadways. Scour and sediment deposition would be reduced on approximately 180 acres ² .

National Economic Efficiency		XX	The Action Alternative would minimize environmental impacts and maximize environmental and economic benefits by reducing potential damages from \$1,966,845 to \$48,881 annually.
Guiding Principles			
Healthy and Resilient Ecosystems		XX	Action Alternative would support a healthy and resilient ecosystem through enhanced flood management measures (repair of three detention basins and armoring of Rock Hollow Wash). Human safety and infrastructure protection would be enhanced by reducing potential flood related damages as discussed above.
Sustainable Economic Development		XX	The Action Alternative would improve economic well-being by reducing the potential for loss due to flooding by reducing potential damages from \$1,966,845 to \$48,881 annually.
Floodplains		XX	Action Alternative would reduce the potential for damaging flood events on 180 acres of residential land ² .
Public Safety		XX	Action Alternative would enhance public safety in the community of Dammeron Valley by reducing the potential of damaging flooding as described above.
Environmental Justice		N/A	There would be no adverse impacts to subject populations.
Watershed Approach		XX	Action Alternative addresses watershed problems resulting from flooding events.
Evaluation Framework and Tradeoffs			
Item	FWOFI (No Action)		FWIFI (Action Alternative)
Provisioning Services			
Ecosystem Productivity	Ecosystem productivity would not be improved due to continued flooding potential.		Detention basin repair and wash armoring would improve ecosystem productivity by reducing flooding potential on 180 acres of residential and agricultural land. ²
Food (agricultural yield)	No change		There would be no change in agricultural production.
Regulating Services			
Climate	No Change		No change

Water Regulation (quantity and quality)	No change	The Action Alternative would not alter water quantity or quality
Biological Regulation (plants and animals)	Flooding would continue to affect local ecosystems	Ecosystems would benefit from reduced flooding potential on 180 acres.
Cultural Services		
Peace and Sustainability (Tribal, agricultural, and rural communities)	Flooding would continue to affect local infrastructure, potentially affecting long-term sustainability on 180 acres. ²	Reduction in flooding potential would improve local infrastructure and improve long-term sustainability on 180 acres. ²
Community Well-Being (Tribal, agricultural, and rural communities)	Infrastructure would continue to be affected by flooding events.	Diamond Valley infrastructure would be protected by detention basin development. Potential for damage to 42 residences and six roadways would be reduced. Scour and sediment deposition would be reduced on approximately 180 acres. ²
Cultural/Historical Identity and Heritage	No known cultural/historical values would be affected.	No known cultural/historical values would be affected.
Supporting Services		
Water Cycling	No change	Potential for severe flooding events would be reduced on approximately 180 acres. ²
Habitat and Biomass	No change	No change
Nutrient Cycling	No change	No change
Economic Analysis		
Costs		
Installation Federal PL 83-566	N/A	\$6,130,328
Installation Sponsor	N/A	\$22,500
Annual Installation Costs	N/A	\$222,300
Annual O&M Costs	N/A	\$84,783
Total Annual Costs	N/A	\$307,083
Annual Benefits		
Agriculture	N/A	\$0
Non-Agricultural	N/A	\$1,917,963
Total Annual Benefits	N/A	\$1,917,963

Cost-Benefit Ratio and Net Benefits		
Cost-Benefit Ratio	N/A	6.25
Net Benefit	N/A	\$1,610,880
Decision-Making Conclusion	This Alternative is provided for comparison purposes and is not selected as the NEE Alternative. It does not meet the purpose and need of the project nor result in benefits to ecosystem services.	Selected as the NEE Alternative. The Action Alternative provides the highest benefit to ecosystem services, has the greatest cost-benefit, and is the locally/socially/environmentally preferred alternative that meets the project goals and objectives.

¹Economic Investigation and Analysis Report, Santa Clara Watershed Plan, Proposed Floodwater Retarding Structures. Prepared by Hal Gordon, Economist. December 2024

²Personal communication with Todd Gardner, Alpha Engineering, December 17, 2024

PR&G Framework and Trade-Off Analysis Table (Shivwits Site)¹

Alternatives Considered			
FWOFI: No Action Alternative Implementation of the No Action Alternative would not improve flood management. Losses associated with flooding would continue.			
FWFI: Alternative 1 The south bank of the Santa Clara River would be armored, two stormwater ditches would be repaired, and an 8-inch water pipeline would be installed, replacing an existing pipeline.			
Summary and Comparison			
Item	FWOFI (No Action Alternative)	FWFI (Action Alternative)	Comments
Locally Preferred		XX	Washington County and local stakeholders including the Shivwits Band of Paiutes support the Action Alternative.
Nonstructural	N/A	N/A	There is not a nonstructural alternative that would meet the purpose and need and is not considered in detail in the Plan-EA.
Environmentally Preferred		XX	The Action Alternative would provide for enhanced flood management, irrigation on 30 acres, drainage system restoration, and stream bank protection on 0.53 acre.

Socially Preferred		XX	The Action Alternative would reduce the potential for infrastructure damage and provide for approximately 30 acres of additional agricultural land.
National Economic Efficiency		XX	The Action Alternative would minimize environmental impacts and maximize social, environmental, economic, and Tribal benefits.
Guiding Principles			
Healthy and Resilient Ecosystems		XX	Action Alternative measures would support a healthy and resilient ecosystem through enhanced flood management measures (repair of two stormwater drainage ditches, installation of an irrigation pipeline, and armoring of the Santa Clara River). Infrastructure protection would be enhanced by reducing potential flood-related damages discussed above.
Sustainable Economic Development		XX	The Action Alternative would improve economic well-being by making approximately 30 acres available for agricultural use.
Floodplains		XX	Action Alternative would reduce the potential for damaging flood on approximately 63 acres adjacent to the Santa Clara River.
Public Safety		XX	Stream erosion would be reduced on 0.53 mile along the Santa Clara River.
Environmental Justice		N/A	Tribal members could face disruptions to cultural practices and land-based activities in the Shivwits portion of the project area during the 7-month construction time. Environmental Justice populations would benefit from traditional agricultural and improved cultural, traditional, and social opportunities.
Watershed Approach		XX	Action Alternative addresses watershed problems resulting from flooding events
Evaluation Framework and Tradeoffs			
Item	FWOFI (No Action)		FWIFI (Action Alternative)

Provisioning Services		
Ecosystem Productivity	Ecosystem productivity would not be improved due to continued unavailability of 30 acres for traditional agricultural use.	Armoring of the Santa Clara River and irrigation water pipeline installation would improve ecosystem productivity on 30 acres of agricultural land and reduce streambank erosion.
Food (agricultural yield)	No change	Action Alternative would provide agricultural production potential on 30 acres through flood management.
Regulating Services		
Climate	No change	No change
Water Regulation (quantity and quality)	No change	The Action Alternative would not alter water quantity or quality.
Biological Regulation (plants and animals)	Flooding would continue to affect the local ecosystem.	The local ecosystem would benefit from reduced flooding potential.
Cultural Services		
Peace and Sustainability (Tribal, agricultural, and rural communities)	Approximately 30 acres of land would continue to be unavailable for agricultural and other uses.	Reduction in flooding potential and pipeline installation would improve local infrastructure and agriculture on 30 acres and improve long-term sustainability.
Community Well-Being (Tribal, agricultural, and rural communities)	Approximately 30 acres of land would continue to remain unavailable.	Infrastructure would be protected and enhanced by river armoring and pipeline installation. Approximately 30 acres would be made available for agricultural use.
Cultural/Historical Identity and Heritage	Traditional agriculture and improved cultural and traditional social opportunities along the Santa Clara River in the Shivwits area would continue to be foregone.	Floodplain management would provide traditional agriculture, improve cultural and traditional social opportunities along the Santa Clara River within the Shivwits portion of the Project Area.
Supporting Services		
Water Cycling	No change	Potential for flooding would be reduced.
Habitat and Biomass	No change	Agriculture on approximately 30 acres would increase biomass production.
Nutrient Cycling	No change	Agriculture on approximately 30 acres would increase nutrient cycling.
Economic Analysis		

Costs		
Installation Federal PL 83-566	N/A	\$749,800
Installation Sponsor	N/A	\$262,600
Annual Installation Costs	N/A	\$36,600
Annual O&M Costs	N/A	\$490
Total Annual Costs	A/A	\$37,090
Annual Benefits		
Agriculture	N/A	\$160
Non-Agricultural	N/A	\$0
Total Annual Benefits	N/A	\$160
Cost-Benefit Ratio and Net Benefits		
Cost-Benefit Ratio	N/A	0.0043
Net Benefit	N/A	-\$36,930
Decision-Making Conclusion	This Alternative is provided for comparison purposes and is not selected as the NEE Alternative. It does not meet the purpose and need of the Project nor result in benefits to ecosystem services.	Selected as the NEE Alternative. The Action Alternative provides the highest benefit to ecosystem services and is the locally/socially/environmentally preferred alternative that meets the project goals and objectives.

¹Investigation and Analysis Report, Sanat Clara Watershed Plan, Proposed Floodwater Retarding Structures. Prepared by Hal Gordon, Economist. December 2024

APPENDIX E-2

ECONOMIC ANALYSIS

Economic Investigation and Analysis Report

Santa Clara Watershed Plan

Proposed Floodwater Retarding Structures

Washington County, Utah

Prepared for:



June 2025

Prepared by:

Hal Gordon, Economist

Table of Contents

1.0	SUMMARY OF REQUIREMENTS AND GUIDELINES	3
2.0	ALTERNATIVES EVALUATED.....	4
3.0	ENVIRONMENTAL AND SOCIAL BENEFITS	8
4.0	PERIOD OF ANALYSIS	10
5.0	ECONOMIC ANALYSIS AND DOCUMENTATION	10
6.0	RURAL COMMUNITY AND AGRICULTURAL DAMAGES	10
6.1	STRUCTURE, CONTENT & VEHICLE DAMAGES	11
6.2	ROAD DAMAGES	11
6.3	BRIDGE & CULVERT DAMAGES	11
6.4	OTHER DAMAGES	11
6.5	CROP DAMAGES.....	12
6.6	OTHER AGRICULTURAL DAMAGES.....	13
6.7	RECREATION.....	13
6.8	SCOUR & SEDIMENT DAMAGES	14
7.0	WATERSHED PROJECT COSTS.....	15
8.0	WATERSHED PROJECT BENEFITS AND COSTS	16
9.0	FINAL TABLES	17

1.0 SUMMARY OF REQUIREMENTS AND GUIDELINES

The NRCS National Watershed Program Manual (NWPM) was used as a reference for the economic analysis along with three other documents: the National Resource Economics Handbook, Part 611 Water Resources Handbook for Economics, USDA/Natural Resources Conservation Service, July 1998; Principles and Guidelines for Water and Land Related Resources Implementation Studies (P&G), December 1983; and Guidance for Conducting Analyses Under the Principles, Requirements, and Guidelines for Water and Land Related Resources Implementation Studies and Federal Water Resource Investments (PR&G), DM 9500-013. The latter includes requirements set forth in the Council on Environmental Quality (CEQ) Principles and Requirements for Federal Investments in Water Resources (P&R) and Interagency Guidelines (IAG). DM 9500-013 provides guidance on completing a PR&G analysis, including steps in the planning and evaluation process, differences between project- and programmatic-level evaluations, direction on incorporating an ecosystem services framework, and techniques for economic analysis. NRCS's Nine Steps of Conservation Planning were broadly followed while developing the watershed plan, as described in the National Planning Procedures Handbook (180-VI-NPPH, Amend. 4, March 2003).

According to the P&G, the alternative that maximizes net economic benefits is referred to as the National Efficiency Evaluation (NEE) alternative and will be the preferred alternative. In addition to P&G requirements, PR&G requires that public benefits (monetary and non-monetary) be maximized relative to cost. Furthermore, there is not a hierarchical relationship among the economic, social, or environmental goals regardless of whether they can be monetized. Agency policy allows for the use of social effect goals to make the case for flood control activities, even if the associated benefit-cost (B/C) ratio is less than 1:1. This is due to the difficulty in monetizing the value of life and quality of life, which is laden with subjective value judgments. Threat to human life and quality factors can therefore be used to outweigh purely economic considerations when appropriate. PR&G allows a wide range of alternatives to illustrate the range of potential tradeoffs among environmental, economic, and social goals.

The Federal Objective, as set forth in the Water Resources Development Act of 2007, specifies that Federal water resources investments shall reflect national priorities, encourage economic development, and protect the environment by: (1) seeking to maximize sustainable economic development; (2) seeking to avoid the unwise use of floodplains and flood-prone areas and minimizing adverse impacts and vulnerabilities in any case in which a floodplain or flood-prone area must be used; and (3) protecting and restoring the functions of natural systems and mitigating any unavoidable damage to natural systems.

The guiding principles in P&G and PR&G constitute the concepts that should consider when analyzing Federal investments in water resources and the P&G and PR&G General Requirements are topics that agencies must consider when analyzing Federal investments in water resources. The following Principles constitute the overarching concepts the Federal government seeks to promote through Federal investments in water resources now and into the foreseeable future.

A. Healthy and Resilient Ecosystems. Federal investments in water resources should protect and restore the functions of ecosystems and mitigate any unavoidable damage to these natural systems.

B. Sustainable Economic Development. Federal investments in water resources should encourage sustainable economic development.

C. Floodplains. Federal investments in water resources should avoid the unwise use of floodplains and flood-prone areas and minimize adverse impacts and vulnerabilities in any case in which a floodplain or flood-prone area must be used.

D. Public Safety. Threats to people, including both loss of life and injury from natural events, should be assessed in the determination of existing and future conditions and, ultimately, in the decision-making process.

E. Environmental Justice. Environmental justice is the fair treatment and meaningful involvement of all people regardless of race, color, national origin, or income with respect to the development, implementation, and enforcement of environmental laws, regulations, and policies. Agencies should ensure that Federal actions identify any disproportionately high and adverse public safety, human health, or environmental burdens of projects on minority, Tribal, and low-income populations.

F. Watershed Approach. A watershed approach to analysis and decision-making facilitates evaluation of a more complete range of potential solutions and is more likely to identify the best means to achieve multiple goals over the entire watershed.

2.0 ALTERNATIVES EVALUATED

According to the P&G and the NWPM, “Flood Prevention” was the purpose analyzed for the Santa Clara Watershed Plan-EA. Table 6, Comparison of NED Benefits and Costs, contains a summary of the average

annual project costs and benefits. The Excel Workbook “SantaClaraFloodDamagesBenefitsData.xml”, with associated sheets within the workbook, provide the detail for the complete economic analysis. The project area contained two sub-basins: Dammeron Valley and Diamond Valley. Incremental analysis was conducted considering each sub-basin. There were no increments within each sub-basin. The first increment was Dammeron Valley, the second increment was Diamond Valley and the third increment was Shivwits area. The Dammeron Valley Alternative includes three new detention basins and one channel intended to route a fourth drainage area. The Diamond Valley Alternative includes the rehabilitation of three existing detention basins and the armoring of an existing channel. In both Dammeron and Diamond Valley, the alternatives work in conjunction with each other and the omission of any item within the alternative (i.e. omitting any one of the three detention basins in each area) would render the remaining options ineffective. As such, the alternatives for Dammeron Valley and Diamond Valley are inclusive of all items as a single alternative for each area (Jared Madsen, PE, 09/07/2022).

As described in the General Plan EA, the main purpose of the watershed plan is to reduce the average annual flood damages within the watershed. Additional purposes considered include reducing erosion and sediment damages, and protecting recreation opportunities and wildlife. While only flood-damage related benefits were quantified, other types of benefits serving the project purposes were still considered qualitatively when evaluating the costs and benefits of project alternatives.

According to PR&G, after preliminary consideration, agencies may remove from detailed study those alternatives that do not achieve the Federal Objective and Guiding Principles. In addition, alternatives that may at first appear reasonable but clearly become unreasonable because of cost, logistics, existing technology, social, or environmental reasons may also be eliminated from further analysis. These alternatives should be briefly discussed to indicate that they were considered, and the analysis should document the reason(s) why they were eliminated (e.g., they do not achieve the Federal Objective and Guiding Principles).

In general, the NEE alternative was developed in accordance with PR&G by evaluating economic, social, and environmental impacts from flood damage reduction in the rural community. Given the emphasis placed on the construction of flood control structures by the local steering committee to provide flood mitigation, the geographic extents of evaluated alternatives are limited to the area in which one or more of the proposed structural alternatives would have an estimated impact to the 500-year flood depth. The annual benefits of the project alternatives are based on the estimated reduction in average annual

floodwater damages with proposed flood control measures in place compared to future conditions without mitigative action (No Action Alternative).

Alternatives considered included the No Action Alternative, nonstructural alternatives, the locally preferred alternative, and the NEE Alternative. Alternatives were compared against the No Action Alternative which involved projecting existing resources and conditions into the future to establish a benchmark against which alternatives were evaluated. Tradeoffs between alternatives with respect to environmental, economic, and social goals were identified.

Both structural and nonstructural alternatives were evaluated for this planning study. However, nonstructural alternatives were eliminated from detailed study by the planning team due to exorbitant cost compared to the potential benefits. One structural alternative was eliminated because the monetary benefits were well below the costs. Following are summaries of eliminated alternatives, which propose to mitigate damages from the 100-year flood.

- **Alternative 2.** Relocation - The alternative to relocate the residences, improvements, structures, and other land value uses to a location outside of the floodplain has been analyzed. There are 69 residences and 0 commercial businesses in the 100-year floodplain. Costs for such relocation include the purchase of new property for the relocated items; the logistical, labor, and material costs associated with relocating and constructing new facilities; and the demolition and cleanup of the existing improvements and structures. Costs to complete this have been estimated at two times the current assessed value of the properties. Relocating the affected properties in Dammeron Valley and Diamond Valley would require costs about \$140 million. Further, the demolition and cleanup of the existing properties and the development of properties elsewhere create a larger impact on the environment and communities. This alternative is economically and culturally unreasonable and does not provide any additional flood protection benefit.
- **Alternative 3.** Floodproofing - To protect areas that would be affected by flooding, individual properties could be floodproofed or floodwalls could be constructed within the floodplain boundary. The area protected by the dam includes portions of the communities of Dammeron Valley and Diamond Valley. Floodproofed structures would include 69 residences and 0 commercial businesses. Floodwalls would be required along roadways as well as developed areas throughout the floodplain. Floodproofing structures and several miles of floodwalls with dozens of penetrations would be required at a cost of over \$13 million. This alternative is unreasonable because the cost is higher than

the cost of the structural alternative considered for final analysis, there are no additional flood protection benefits, and the community and environmental impacts are significantly greater.

Along with the No Action Alternative, one alternative proposing construction of several flood control structures, for three project areas: Dammeron Valley, Diamond Valley and Shivwits Area, were identified and evaluated in detail. The project consists of eight separate dam structures across six debris basins and tributaries. The debris basins have individual uncontrolled low-level outlets that are designed to convey low flows that can be adequately conveyed in downstream drainage facilities. Principal spillways for each detention basin will be used to safely convey large storm events without causing damage to the dam structures. Shivwits Area includes the repair and flood proofing an irrigation canal and delivery system.

In both Dammeron and Diamond Valley, each of the flood control structures work in conjunction with each other, and the omission of any item within the alternative (i.e., omitting any one of the three detention basins in each area) would render the remaining options ineffective. As such, the alternatives for Dammeron Valley and Diamond Valley are inclusive of all items as a single alternative for each area.

- **Alternative 1 - Dammeron.** Dammeron Valley alternative includes three new detention basins and one channel intended to route a fourth drainage area. Dam structure 1 (max dam height: 33.5') for one detention basin (26 ac-ft capacity). Two detention basins, dam structure 2 and 3, each have individual dam structures (max dam height: 38'), but as water levels rise, the two basins combine into a single body of water with one spillway (390 ac-ft capacity). Storm events will be attenuated through the three detention basins collected upstream of the community. The limited and attenuated flows will be safely routed through the community, across the downstream highway, and into existing drainage corridors. The property where the dam would be located is privately owned and includes some BLM land.
- **Alternative 1 – Diamond.** Diamond Valley involves four dam structures and three detention basins, and the armoring of an existing channel. The detention basins are existing but need dredging and rehabilitation. The spillway for Diamond 3 includes an existing bypass channel that conveys flows to Diamond 2, and the spillway for Diamond 2 includes an existing bypass channel that conveys flows to Diamond 1. Diamond 1 is currently a sump basin with no outlet. Each of the detention basins will be dredged and the existing dam structures will be rehabilitated. Due to site constraints, Diamond 1 will require two separate dam structures (max dam height: 12') to reach the required capacity (61 ac-ft capacity). The low-level outlet being proposed on Diamond 1 with this project will drain a portion of

the sump basin, but the lower elevations of the detention basin will continue as a sump. Flows leaving Diamond 1 will be conveyed through new pipe to a nearby existing drainage corridor that has capacity to safely receive the flows. Diamond 2 will require a single dam structure (max dam height: 19') to reach the required capacity (27 ac-ft capacity). Diamond 3 will require a single dam structure (max dam height: 15') to reach the required capacity (14 ac-ft capacity). The property where the dam would be located is privately owned and includes some BLM land.

- **Alternative 1 - Shivwits.** Shivwits site includes construction of approximately 2,225 linear feet of rock rip-rap bank protection along the Santa Clara River. The armoring is to prevent stream erosion threatening the historic Shivwits school/meeting house and two Civil Conservation Corps rock lined ditches. The armoring will also protect a cultivated field. The plan also includes the installation of approximately 5,800 linear feet of eight-inch pipe to provide irrigation to the cultivated acres.

The preferred alternative will allow the Sponsors to protect property and infrastructure while maximizing public benefits. Average annual monetary benefits of this alternative are estimated to be \$2,992,533. The estimated average annual cost is \$703,142, resulting in an annual net benefit of \$2,289,391.

3.0 ENVIRONMENTAL AND SOCIAL BENEFITS

Environmental and social benefits were not monetized but are further explained for each alternative studied in detail in the Environmental Consequences Section of the Plan/EA.

Environmentally adverse impacts will be minimized during construction. Long-term, there would only be negligible adverse impacts anticipated from any of the evaluated alternatives. The region is arid with sparse trees along the banks of intermittently dry streams.

Socially, the threat of loss of life or property will may be minimized with reduced flood depths at buildings and roads. The annual average daily traffic on county major collector and rural roads near the project area was about 900 vehicles to almost 12,000 vehicles per day (Utah Department of Transportation, 2020). Incidental recreation after construction will continue and is expected to have minimal benefits from the structural alternatives through enhancement of wildlife and scenic improvement. Waterbodies developed from the impoundments would likely attract wildlife for short periods of time, but not significantly increase hunting, fishing, and general outdoor activity in the vicinity of the dams.

The Shivwits portion of the project is located on the Shivwits Band of Paiutes tribal land. There are cultural, social, environmental, and economic benefits by bringing irrigation water back to the project area (personnel communication, Karma Grayman, Shivwits Band, 2023). The tribe could use the area for irrigated pasture, alfalfa hay or native corn species and melons. Based on the lack of data for non-market crops and the high likelihood of growing alfalfa the first few years after flood control, the income from growing alfalfa was used in the economic analysis.

- Cultural: the Shivwits Band will be able to revive traditional agricultural practices and grow native corn species, along with melons, which they have not done for decades (Travis Duran, personal communication, 2023). This will help to restore some of their traditional ecological knowledge and pass it down to younger generations. Without the pipeline, the fields remain dry and will not support these traditional crops. In addition, by installing rip rap at the end of the historic rock lined ditch, we will be preserving components of the historic Shivwits Indian School (42WS5621), which is eligible for the National Register of Historic Places, and it has also served as a gathering place for Shivwits Band meetings, was home to many Shivwits Band members from the 1900-1950s, and was the location of Funeral Cry Ceremonies for the people. The area will also be used to educate tribal school youth about traditional agriculture and the cultural importance of the school.
- Social: by being able to grown traditional native plants and restore the field to agricultural practices, the Shivwits Band will also restore traditional gatherings to this area such as the Bear Dance, which was practiced once a year in this area of land (Travis Duran, personal communication, 2023). In addition, with these traditional gatherings, younger generations will be able to learn about the significant historic of the Shivwits Indian School and the experiences of their ancestors. The school served as a day school for Shivwits Paiute Indians from the late 19th century to early 20th century during extremely dire times, and later served as a meetinghouse. By bringing agriculture back to the area and revitalizing it as a traditional gathering area, new traditions will be built and strengthen the Shivwits community and bring younger generations to this area.
- Environmental: this area used to be flood irrigated from the rock lined irrigation ditches, and by converting it to a piped irrigation system, this will increase irrigation efficiency (Travis Duran, personal communication, 2023).

- Economics: the Shivwits Band will be able to employ Band members on this plot of land during planting and harvesting seasons, and teach them about the gathering of native corn and melons and traditions associated with them (Travis Duran, personal communication, 2023).

4.0 PERIOD OF ANALYSIS

The Period of Analysis used was 51-years (including 1 year for design and construction). Floods from the 2, 5, 10, 25, 50, 100, 200 and 500-year storm events were analyzed to estimate average annual flood-related damages.

A net present value analysis was conducted to compare the costs of project alternatives. Average annual values were also estimated. All costs of installation, operation and maintenance were based on 2022 prices. The costs associated with designing and implementing all structural measures were assumed to be implemented over a one-year period immediately preceding operation. The alternative with a 51-year period of analysis yielded the highest net benefits using the mandated 2.50% discount rate for all federal water resource projects for FY23 to discount and amortize the anticipated streams of costs and benefits.

5.0 ECONOMIC ANALYSIS AND DOCUMENTATION

A customized Excel worksheet using Federal Emergency Management Agency (FEMA) depth-damage curves and locally-obtained data was used to evaluate benefits and costs of alternatives. Each project alternative, storm event and flood damage category were included in the worksheet to estimate average annual damages. Alternative cost estimates provided by the project engineers were also included in the worksheet. Economic data and results were linked in the worksheet to create the required P&G tables for the final project report.

6.0 RURAL COMMUNITY AND AGRICULTURAL DAMAGES

The stream of monetary benefits was described in average annual equivalent terms. The average annual expected benefits were the difference between the No Action Alternative and each project Alternative. The expected average annual damages for each alternative, storm event (8-events), and damage category below were estimated with the following equation:

8

$$\sum_{i=1}^8 (PFED_{i-1} + FED_i) / 2 * (PPFE_{i-1} - PFE_i)$$

PFED_{i-1} - Previous Flood Event Damages

FED_i - Flood Event Damages

PPFE_{i-1} - Probability of Previous Flood Event

PFE_i - Probability of Flood Event

6.1 STRUCTURE, CONTENT & VEHICLE DAMAGES

Structure, building content and vehicle damages for each storm event and project alternative were estimated based on structures identified from aerial imagery, property data provided by the Washington County, Utah tax assessor. The structure damages were estimated using methodology described in the Structural Damages Calculations Template (Tim Goody, NWMC). The value of the structures was estimated by subtracting the depreciated replacement value from the Washinton County Tax Accessor's structure value. The structures in the project area that are affected by flooding are located in a small rural town. Most if not all the structures are 40-60 years old, most typical about 45-years old. Based on the Life Cycle Chart (Swiftestimator.com, building cost reports online 2/2007) the Depreciated Multiplier ranges from 17% to 36% (20-30 years effective age). A Depreciated Multiplier of .20 was selected because most homes and businesses are well kept and necessary repairs and maintenance have been made. The structure value used in the flood damage analysis was estimated as: The County Tax Accessed Value * (1- Depreciated Replacement Value Factor) (see: SantaClaraFloodDamagesBenefitsData.xls for calculations). For vehicles, local project managers estimated the typical vehicle replacement dollar value.

This estimated Depreciated Replacement Values is also consistent with the USACE National Structure Inventory documentation: "Structure Valuation - These replacement values for structures are then depreciated in order to obtain depreciated replacement value; each structure is depreciated by 1% per year for the first 20 years, after which it is assumed that routine maintenance would keep structure values at 80% of their replacement values".

(<https://www.hec.usace.army.mil/confluence/nsi/technicalreferences/latest/technical-documentation>).

The water depths were obtained from hydraulic simulation of the evaluated storm events. Areas flooded and flood depths with and without project were estimated by Alpha Engineering, St. George, Utah. Building types, contents, and the typical number of vehicles and vehicle values associated with impacted

buildings were estimated using interpolation of flood depth-damage curves developed by FEMA. The percent damage factor was multiplied by each building structure and vehicle dollar value to estimate flood damages. Total value of structures on impacted properties is shown below. This value does not include land values, only structure values.

Watershed Project Number and Value of Structures Summary

<u>Dammeron</u>	<u>Number</u>	<u>Value</u>
Total Structures:	27	\$14,747,420
Residences:	27	\$14,747,420
Commercial Properties:	0	\$0
Public Properties:	0	\$0
Critical Facilities:	0	\$0

<u>Diamond</u>	<u>Number</u>	<u>Value</u>
Total Structures:	42	\$20,836,200
Residences:	42	\$20,836,200
Commercial Properties:	0	\$0
Public Properties:	0	\$0
Critical Facilities:	0	\$0

There are no commercial businesses, public properties or critical facilities in the impacted project area. Structure and content values were estimated as a percentage (about 75% structure and 60% content damages at 10-foot flood depth in a 1-story, no basement home) of assessed property values. Estimated floodwater depths (where damage occurs) for various storms (including the 500-year storm) for each structure were based on the results of the hydrology and hydraulics (H&H) simulation modeling. Floodwater data was then used with water depth to damage functions to estimate structural and content damages based on the ground elevation of each structure. A similar analysis was conducted for vehicles located at the property within the floodplain area. Damages to vehicles was estimated to begin at 0.5 foot of flood depth. Each affected property was estimated to have a minimum of two vehicles. The vehicle value was estimated to be \$7,500/vehicle.

6.2 ROAD DAMAGES

Road damages for each storm event and project alternative were estimated. Road location, flood depth and road surface area impacted by floodwater were identified. Areas flooded, flood depths and monetary damages with and without project were estimated by Alpha Engineering, St. George, Utah. The cost of

road repair or replacement was estimated. There were no road damages estimated if the flood depth was less than 0.1 foot. If flood depth was between 0.1- and 0.5-foot, flood damages were estimated to be half the road repair or replacement cost. If flood depth was greater than .5-foot, flood damages were estimated to be the total road repair replacement cost.

For the economic analysis, there are approximately 12 associated roadways within Dammeron Valley and 6 roadways in Diamond Valley project areas affected by storms up to and including the 500-year storm event.

6.3 BRIDGE & CULVERT DAMAGES

For the economic analysis, there were no identified culverts and bridges (stream crossings) affected by storms up to and including the 500-year event.

6.4 OTHER DAMAGES

No additional "Other Damages" (emergency aid, clean-up, sewer, debris removal, etc.) were provided or estimated by local county officials.

6.5 CROP DAMAGES

Crops damages from each storm event and project alternative were estimated. About 4 acres of vineyard was flooded area in the Dammeron sub-basin. Areas flooded and flood depths with and without project were estimated by Alpha Engineering, St. George, Utah; and the local NRCS Field Agronomist provided crop production data. Five-year average crop yields and prices were estimated using crop budget data published by University of California-Davis and National Agricultural Statistics Service (NASS) information. Acreage of damages associated with each crop type were estimated by the project GIS specialist. Crop Percent damage factors for flood inundation were obtained from NRCS, and estimated for depths of less than 1 foot, 1 to 3 feet, and greater than 3 feet.

The "Seasonal Damage Factor" represents the probability that the flood event occurs during the crop growing/harvest season, and then is multiplied by the crop damage factor. The Seasonal (crop) Damage Factor was estimated as: $[0.5 \text{ times (Harvest Starts minus Plant Starts), plus } 0.5 \text{ times (Harvest Ends minus Harvesting Starts)}]$, divided by 365 Days. The Average Crop Value per acre was estimated as: The Average Unit Price times Average Yield

Damageable Value per Acre (per Flood Depth). The dollar crop damages per flood event were estimated by the sum of the Seasonal Damage Factor, the Inundation Factor, and the Average Crop Value per Acre. The flood event losses were estimated as the sum of Damage Value per Acre times Acres Flooded, for each flood event.

The Shivwits Band of Paiutes tribal land could be flooded, and about 30 acres are no longer farmed because of flood damages to ditches, pipeline and sprinklers, and continued streambank flooding, that made farming unfeasible. With flood control measures the Shivwits Band will be able to farm the field again and employ Band members in crop production, and teach tribal members about growing native corn and melons and traditions associated with them (Travis Duran, personal communication, 2023). For the economic analysis, we assumed the Shivwits field would be in alfalfa hay production. The Without Project flood damages are the complete loss of income from the hay land, are were estimated as Net Income from Extension Service Crop Budgets (Utah State University). Net Returns was defined as “price” times “yield minus annual “crop production costs” (excluding owner unpaid labor, management, equity and risk). Crop costs were updated to the current year using the Producer Prices Received Index. Crop prices and yields were the previous ten-year averages. The Net Returns per acre were weighted to account for a 10-year Alfalfa-Oat crop rotation. The benefit is the Net Income from hay land that is restored to crop production

6.6 OTHER AGRICULTURAL DAMAGES

There were no other pasture, range, livestock or confined animal feeding operation damages identified within the project area affected by storms up to and including the 500-year event.

6.7 RECREATION

Based on evidence found at the site and information from local residences, the dam sites and upstream and downstream waterways (on private property and BLM land) are used by some people for recreational purposes. The flood control structures are not intended to store water for recreation. Incidental recreational activities such as hunting and hiking/walking are expected to be minimal. Since there is no official or unofficial count of usage, estimated annual visitor-days is not available. Therefore, incidental recreation impacts were not evaluated.

6.8 SCOUR & SEDIMENT DAMAGES

Flood erosion scour and sediment deposition damages from each storm event and project alternative were estimated. Areas and quantity of scour and sediment with and without project were estimated by Alpha Engineering, St. George, Utah. Erosion-scour was defined as soil loss greater than 6-inches. Up to about 90 acres of rural and residential land was identified with significant erosion-scour in the flooded area. Damages were estimated as the cost per acre to replace lost soil on eroded areas. Sediment deposition damages were estimated to be up to about 1,000 Cubic Yards in the flooded area. Damages were estimated as the cost to remove sediment from deposition areas.

As reflected in the table below, current average annual floodwater damages without project (present condition) are \$3,073,615. Floodwater damages with project (Alternative 1) dams were estimated to be \$81,102.

Table 6-1: Summary of Annual Expected Damages

Plan Annual Expected Damages		
Category	Present Condition	Alternative 1
Structure, Contents & Vehicles		
Dammeron	\$1,098,396	\$32,073
Diamond	\$1,963,451	\$48,836
Shiviwits	\$0	\$0
Roads & Culverts		
Dammeron	\$1,583	\$0
Diamond	\$599	\$0
Shiviwits	\$0	\$0
Other Damages		
Crop-Flood		
Dammeron	\$359	\$3
Diamond	\$0	\$0
Shiviwits	\$4	\$0
Scour		
Dammeron	\$5,859	\$99
Diamond	\$2,372	\$39
Shiviwits	\$147	\$11
Sediment		
Dammeron	\$422	\$34
Diamond	\$422	\$6
Shiviwits	\$25	\$5
Total:	\$3,073,640	\$81,107

1 Price base: 2022. Calculated using FY 2022 Water Resources Discount Rate (2.50%), annualized over 50 years, and 51-year period of analysis. Prepared March 2023

The number of structures that could be flooded and their total structural value are displayed below. Also displayed are the present value and average annual damages to the structures, contents and associated vehicles for each flood event, for each of the two sub-basins:

<u>Dammeron Valley</u>	<u>Number</u>	<u>Structure Value</u>
Total Structures:	27	\$18,434,275
Residences and Apts:	27	\$18,434,275
Commercial Properties:	0	\$0
Public Properties:	0	\$0
Critical Facilities:	0	\$0

Dammeron Valley

Event	< 1 ft	1 to 3 ft	> 3 ft	< 1 ft	1 to 3 ft	> 3 ft	Present Value Damage	Average Annual Damage
	Home	Home	Home	Shed	Shed	Shed		
2-yr	5	0	0	0	0	0	\$1,890,853	-
5-yr	9	0	0	0	0	0	\$2,544,431	\$665,293
10-yr	10	0	0	0	0	0	\$3,243,018	\$289,372
25-yr	12	0	0	0	0	0	\$3,771,027	\$210,421
50-yr	16	0	0	0	0	0	\$5,259,013	\$90,300
100-yr	21	0	0	0	0	0	\$6,772,790	\$60,159
200-yr	22	0	0	0	0	0	\$6,979,522	\$34,381
500-yr	26	0	0	0	0	0	\$8,201,237	\$22,771
Total:								\$1,372,698

<u>Diamond</u>	<u>Number</u>	<u>Value</u>
Total Structures:	42	\$26,045,250
Residences:	42	\$26,045,250
Commercial Properties:	0	\$0
Public Properties:	0	\$0
Critical Facilities:	0	\$0

Diamond Valley

Event	< 1 ft	1 to 3 ft	> 3 ft	< 1 ft	1 to 3 ft	> 3 ft	Present Value Damage	Average Annual Damage
	Home	Home	Home	Shed	Shed	Shed		
2-yr	14	0	0	4	0	0	\$4,238,220	-
5-yr	14	0	0	4	0	0	\$4,297,314	\$1,280,330
10-yr	17	0	0	4	0	0	\$5,416,714	\$485,701
25-yr	22	1	0	5	0	0	\$7,051,101	\$374,034
50-yr	24	1	0	5	0	0	\$7,806,045	\$148,571
100-yr	27	1	0	5	0	0	\$8,408,586	\$81,073
200-yr	37	2	0	6	0	0	\$11,047,121	\$48,639
500-yr	43	1	1	6	0	0	\$12,623,521	\$35,506
Total:								\$2,453,856

7.0 WATERSHED PROJECT COSTS

Project costs for flood control dams and channel work were estimated by Alpha Engineering, St. George, Utah in September, 2022. Installation and operation & maintenance costs for each activity are described in detail in the cost tabs in the economic analysis Excel worksheet.

All costs were allocated to the flood prevention purpose according to the procedure in the National Resource Economics Handbook, Part 611 Water Resources Handbook for Economics, Chapter 6 Costs and Cost Allocation (NRCS 2014b). Work Plan-EA tables were constructed based on the calculated cost allocated to flood prevention. Within this purpose the costs were shared between NRCS and the local and state entities as specified in the NWPM, in this case cost share for flood prevention is 100 percent federal and 0 percent local. Within these guidelines, engineering is 100 percent federal; and operation, maintenance, and replacement is 100 percent local. See Work Plan Table 2 in the Plan-EA for the results of the cost allocation/cost sharing process.

All costs were amortized at the Fiscal Year 2023 Federal Water Resource Discount of 2.50 percent for 51 years. Average Annual Costs are computed as the sum of the amortized construction cost and the annual

operation and maintenance cost. Engineers estimate that each of the structures would last 50 years, the life of the project.

All project costs were estimated by project engineers and converted to Present Values by discounting each cost to the beginning of the period of analysis using the applicable project discount rate. Installation expenditures before the project is installed were brought forward to the end of the period of installation by charging compound interest at the project discount rate from the date the costs are incurred. Finally, the project discount rate was used to convert the present values to average annual equivalent terms. All estimated values and damages were assessed within a customized Excel template.

Watershed Project Annual Cost Summary

Evaluation Unit	Project Outlays		Total
	Amortization of Installation Cost	Operation, Maintenance & Replacement	
Dammeron Alt 1	\$281,800	\$76,869	\$358,669
Diamond Alt 1	\$222,300	\$84,783	\$307,083
Shivwits Alt 1	\$36,900	\$490	\$37,390
Grand Total	\$541,000	\$162,142	\$703,142

1/ Discount rate 2.50% with a 51 year period of analysis. Price base 2022

2/ From Table 2

8.0 WATERSHED PROJECT BENEFITS AND COSTS

As reflected in the table below, current average annual benefits are \$2,992,533 and the average annual costs are \$703,142. The net annual benefits between with and without project that the project would provide to downstream properties is \$2,289,391.

As reflected below, both Dammeron Valley and Diamond Valley had a B/C ratio greater than 1.0. The Shivwits area had a B/C ratio less than 1.0 at .0043. All three geographic areas, under Alternative 1, produces a B/C ratio of 4.26.

Watershed Project Benefit-Cost Summary

	Average Annual Costs ^{3/}	Average Annual Benefits ^{2/}	Benefit Cost Ratio	Net Benefits
Dammeron Alt 1	\$358,669	\$1,074,410	3.00	\$715,741
Diamond Alt 1	\$307,083	\$1,917,963	6.25	\$1,610,880

Shivwits Alt 1	\$37,390	\$160	0.0043	-\$37,230
Grand Total	\$703,142	\$2,992,533	4.26	\$2,289,391

1/ Discount rate 2.50% with a 51 year period of analysis. Price base 2022

2/ From Table 5.

3/ From Table 4.

Funding Schedule*				
Fiscal Year		PL-83-566	Other Funds	Total
2025	Dammeron Alt 1	\$7,724,290	\$72,400	\$7,796,690
2025	Diamond Alt 1	\$6,130,328	\$22,500	\$6,152,828
2025	Shivwits Alt 1	\$758,300	\$262,600	\$1,020,900

9.0 FINAL TABLES

All tables, for all alternatives, are displayed below. The following tables show cost-share percentages and amounts for watershed project plan implementation.

Table 9-1: Alternative 1 Cost-Share Summary – Dammeron

Works of Improvement	%³	NRCS	%³	Sponsors	Total
Cost-Sharable Items					
Construction Costs	100%	\$6,896,688	0%	\$0	\$6,896,688
Engineering Technical Assistance Costs ⁴	100%	\$551,735	0%	\$0	\$551,735
Project Admin. Costs ¹	100%	\$275,868	0%	\$0	\$275,868
Subtotal: Cost-Share Costs		\$7,724,290		\$0	\$7,724,290
Non Cost-Sharable Items²					
Construction Costs	0%	\$0	100%	\$6,000	\$6,000
Engineering Costs	0%	\$0	100%	\$600	\$600
Real Property Landrights ⁵	0%	\$0	100%	\$65,000	\$65,000
Mitigation	0%	\$0	100%	\$0	\$0
Permits	0%	\$0	100%	\$800	\$800
Project Admin. Costs ¹	0%	\$0	100%	\$0	\$0
Subtotal: Non Cost-Share Costs		\$0	-	\$72,400	\$72,400
TOTAL:	99%	\$7,724,290	1%	\$72,400	\$7,796,690

1/ The sponsors and NRCS will each bear the costs of project administration that each incurs.

2/ If actual non-cost-sharable item expenditures vary from these figures, the responsible party will bear the change.

3/ As per NWPM Section 500.42 and Figure 500-E2. PL-566 cost share rates depend on the authorized purposes of the particular watershed plan. For flood prevention measures, PL-566 pays 100% of construction and engineering. Installation of compensatory mitigation is considered part of the construction of the flood control measure (per text between Figures 500-E1 and 500-E2). Real property rights acquisition is 100% sponsor cost for most PL-566 activities. However, acquisition of property rights for mitigation and recreation may be cost-shared (see referenced sections).

4/ Cost-sharable at 100% NRCS if Sponsor hires engineering for structure design. Not cost-shareable if sponsor's engineering is for elements required for real property rights (road improvements, power line modification, livestock water supply line, etc.).

5/ Construction elements required to satisfy real property rights are also 100% Sponsor cost.

Table 9-2: Alternative 1 Cost-Share Summary – Diamond

Works of Improvement	%³	NRCS	%³	Sponsors	Total
Cost-Sharable Items					
Construction Costs	100%	\$5,473,508	0%	\$0	\$5,473,508
Engineering Technical Assistance Costs ⁴	100%	\$437,881	0%	\$0	\$437,881
Project Admin. Costs ¹	100%	\$218,940	0%	\$0	\$218,940
Subtotal: Cost-Share Costs		\$6,130,328		\$0	\$6,130,328
Non Cost-Sharable Items²					
Construction Costs	0%	\$0	100%	\$20,000	\$20,000
Engineering Costs	0%	\$0	100%	\$2,000	\$2,000
Real Property Landrights ⁵	0%	\$0	100%	\$0	\$0
Mitigation	0%	\$0	100%	\$0	\$0
Permits	0%	\$0	100%	\$500	\$500
Project Admin. Costs ¹	0%	\$0	100%	\$0	\$0
Subtotal: Non Cost-Share Costs		\$0	-	\$22,500	\$22,500
TOTAL:	100%	\$6,130,328	0%	\$22,500	\$6,152,828

1/ The sponsors and NRCS will each bear the costs of project administration that each incurs.

2/ If actual non-cost-sharable item expenditures vary from these figures, the responsible party will bear the change.

3/ As per NWPM Section 500.42 and Figure 500-E2. PL-566 cost share rates depend on the authorized purposes of the particular watershed plan. For flood prevention measures, PL-566 pays 100% of construction and engineering. Installation of compensatory mitigation is considered part of the construction of the flood control measure (per text between Figures 500-E1 and 500-E2). Real property rights acquisition is 100% sponsor cost for most PL-566 activities. However, acquisition of property rights for mitigation and recreation may be cost-shared (see referenced sections).

4/ Cost-sharable at 100% NRCS if Sponsor hires engineering for structure design. Not cost-shareable if sponsor's engineering is for elements required for real property rights (road improvements, power line modification, livestock water supply line, etc.).

5/ Construction elements required to satisfy real property rights are also 100% Sponsor cost.

Table 9-3: Alternative 1 Cost-Share Summary – Shivwits

Works of Improvement	% WS Protect ³	% AG Water ³	NRCS	% WS Protect ³	% AG Water ³	Sponsors	Total
Cost-Sharable Items							
Construction Costs	38%	38%	\$728,925	0%	0%	\$0	\$728,925
Engineering Technical Assistance Costs ⁴	38%	38%	\$22,500	0%	0%	\$0	\$22,500
Project Admin. Costs ¹	38%	38%	\$7,500	0%	0%	\$0	\$7,500
Subtotal: Cost-Share Costs			\$758,925			\$0	\$758,925
Sponsor Other Funds²							
Construction Costs	0%	0%	\$0	13%	13%	\$242,975	\$242,975
Engineering Costs	0%	0%	\$0	13%	13%	\$7,500	\$7,500
Real Property Landrights ⁵	0%	0%	\$0	50%	50%	\$0	\$0
Mitigation	0%	0%	\$0	50%	50%	\$8,500	\$8,500
Permits	0%	0%	\$0	50%	50%	\$500	\$500
Project Admin. Costs ¹	0%	0%	\$0	13%	13%	\$2,500	\$2,500
Subtotal: Non Cost-Share Costs			\$0			\$261,975	\$261,975
TOTAL:							\$1,020,900

1/ The sponsors and NRCS will each bear the costs of project administration that each incurs.

2/ If actual non-cost-sharable item expenditures vary from these figures, the responsible party will bear the change.

3/ As per NWPM Section 500.42 and Figure 500-E2. PL-566 cost share rates depend on the authorized purposes of the particular watershed plan. For flood prevention measures, PL-566 pays 100% of construction and engineering. Installation of compensatory mitigation is considered part of the construction of the flood control measure (per text between Figures 500-E1 and 500-E2). Real property rights acquisition is 100% sponsor cost for most PL-566 activities. However, acquisition of property rights for mitigation and recreation may be cost-shared (see referenced sections).

4/ Cost-sharable at 100% NRCS if Sponsor hires engineering for structure design. Not cost-shareable if sponsor's engineering is for elements required for real property rights (road improvements, power line modification, livestock water supply line, etc.).

5/ Construction elements required to satisfy real property rights are also 100% Sponsor cost.

6/ NRCS Construction Cost includes Tribal Mitigation Cost.

Table 1: Estimated Installation Cost for Alternatives 1

Installation Cost Items	Estimated Costs		
	PL-83-566 Funds ²	Other Funds	
Dammeron Alt 1	\$7,724,290	\$72,400	\$7,796,690
Diamond Alt 1	\$6,130,328	\$22,500	\$6,152,828
Shivwits Alt 1	\$758,925	\$261,975	\$1,020,900
Total Project	\$14,613,543	\$356,875	\$14,970,418

1/ Price base 2022

Table 2: Estimated Cost Distribution for Alternatives 1

Installation Cost Items ²	Installation Costs: PL-83-566 Funds				Installation Costs: Other Funds								Amortized Costs, FY2022	Annual OM&R	Total Annual Costs
	Construction Costs ³	Engineering Technical Assistance Costs	Project Admin. Costs	Total PL-83- 566 Costs	Construction Costs	Engineering Costs	Real Property Landrights	Mitigation	Permits	Project Admin. Costs	Total Other Funds	Total Project Cost			
Dammeron Alt 1	\$6,896,688	\$551,735	\$275,868	\$7,724,290	\$6,000	\$600	\$65,000	\$0	\$800	\$0	\$72,400	\$7,796,690	\$281,800	\$76,869	\$358,669
Diamond Alt 1	\$5,473,508	\$437,881	\$218,940	\$6,130,328	\$20,000	\$2,000	\$0	\$0	\$500	\$0	\$22,500	\$6,152,828	\$222,300	\$84,783	\$307,083
Shivwits Alt 1	\$728,925	\$22,500	\$7,500	\$758,925	\$242,975	\$7,500	\$0	\$8,500	\$500	\$2,500	\$261,975	\$1,020,900	\$36,900	\$490	\$37,390
Total Project	\$13,099,120	\$1,012,116	\$502,308	\$14,613,543	\$268,975	\$10,100	\$65,000	\$8,500	\$1,800	\$2,500	\$356,875	\$14,970,418	\$541,000	\$162,142	\$703,142

1/ Discount rate 2.50% with a 51 year period of analysis. Price base 2022

2/ All costs towards the Project Purpose of Flood Prevention.

Table 4: Estimated Average Annual Costs for Alternatives 1

Evaluation Unit	Project Outlays		Total
	Amortization of Installation Cost	Operation, Maintenance & Replacement	
Dammeron Alt 1	\$281,800	\$76,869	\$358,669
Diamond Alt 1	\$222,300	\$84,783	\$307,083
Shivwits Alt 1	\$36,900	\$490	\$37,390
Grand Total	\$541,000	\$162,142	\$703,142

1/ Discount rate 2.50% with a 51 year period of analysis. Price base 2022

2/ From Table 2

**Table 5a: Estimated Average Annual Flood Damage Reduction Benefits
Alternative 1 – Dammeron**

Dammeron Alt 1 Item	Average Annual Damages Without Project		Average Annual Damages With Project		Average Annual Benefits	
	Ag Related	Non-Ag Related	Ag Related	Non-Ag Related	Ag Related	Non-Ag Related
Floodwater Damage						
Structures, Contents, Vehicles		\$1,098,396		\$32,073	\$0	\$1,066,323
Roads		\$1,583			\$0	\$1,583
Crop and Pasture	\$359		\$3		\$356	\$0
Subtotal	\$359	\$1,099,979	\$3	\$32,073	\$356	\$1,067,906
Sediment/Erosion Damage						
Sediment Deposition		\$422		\$34	\$0	\$388
Flood Plain Scour		\$5,859		\$99	\$0	\$5,760
Road and Bridge		0.00%		\$0	\$0	\$0
Urban		\$0		\$0	\$0	\$0
Subtotal		\$6,281		\$133	\$0	\$6,148
Indirect Damage	\$0	\$0	\$0	\$0	\$0	\$0
Grand Total	\$359	\$1,106,260	\$3	\$32,206	\$356	\$1,074,054

1/ Discount rate 2.50% with a 51 year period of analysis. Price base 2022

Table 5b: Estimated Average Annual Flood Damage Reduction Benefits
Alternative 1 – Diamond

Diamond Alt 1	Average Annual Damages Without Project		Average Annual Damages With Project		Average Annual Benefits	
	Ag Related	Non-Ag Related	Ag Related	Non-Ag Related	Ag Related	Non-Ag Related
Floodwater Damage						
Structures, Contents, Vehicles		\$1,963,451		\$48,836	\$0	\$1,914,615
Roads		\$599			\$0	\$599
Crop and Pasture					\$0	\$0
Subtotal		\$1,964,050		\$48,836	\$0	\$1,915,214
Sediment/Erosion Damage						
Sediment Deposition		\$422		\$6	\$0	\$416
Flood Plain Scour		\$2,372		\$39	\$0	\$2,333
Road and Bridge		\$0		\$0	\$0	\$0
Urban		\$0		\$0	\$0	\$0
Subtotal		\$2,794		\$45	\$0	\$2,750
Indirect Damage	\$0	\$0	\$0	\$0	\$0	\$0
Grand Total	\$0	\$1,966,845	\$0	\$48,881	\$0	\$1,917,963

1/ Discount rate 2.50% with a 51 year period of analysis. Price base 2022

Table 5c: Estimated Average Annual Flood Damage Reduction Benefits, Alternative 1 – Shivwits

Shivwits Alt 1	Average Annual Damages Without Project		Average Annual Damages With Project		Average Annual Benefits	
	Ag Related	Non-Ag Related	Ag Related	Non-Ag Related	Ag Related	Non-Ag Related
Floodwater Damage						
Structures, Contents, Vehicles					\$0	\$0
Roads					\$0	\$0
Crop and Pasture	\$4		\$0		\$4	\$0
Subtotal	\$4		\$0		\$4	\$0
Sediment/Erosion Damage						
Sediment Deposition	\$25		\$5		\$20	\$0
Flood Plain Scour	\$147		\$11		\$136	\$0
Road and Bridge					\$0	\$0
Urban					\$0	\$0
Subtotal	\$172		\$16		\$156	\$0
Indirect Damage	\$0	\$0	\$0	\$0	\$0	\$0
Grand Total	\$176	\$0	\$16	\$0	\$160	\$0

1/ Discount rate 2.50% with a 51 year period of analysis. Price base 2022

**Table 5c: Estimated Average Annual Flood Damage Reduction Benefits
Alternative 1 – Dammeron, Diamond and Shivwits**

Dammeron, Diamond & Shivwits Alt 1	Average Annual Damages Without Project		Average Annual Damages With Project		Average Annual Benefits	
	Ag Related	Non-Ag Related	Ag Related	Non-Ag Related	Ag Related	Non-Ag Related
Floodwater Damage						
Structures, Contents, Vehicles	\$0	\$3,061,847	\$0	\$80,909	\$0	\$2,980,938
Roads	\$0	\$2,182	\$0	\$0	\$0	\$2,182
Crop and Pasture	\$363	\$0	\$3	\$0	\$360	\$0
Subtotal	\$363	\$3,064,029	\$3	\$80,909	\$360	\$2,983,120
Sediment/Erosion Damage						
Sediment Deposition	\$25	\$844	\$5	\$40	\$20	\$804
Flood Plain Scour	\$147	\$8,231	\$11	\$138	\$136	\$8,093
Road and Bridge	\$0	\$0	\$0	\$0	\$0	\$0
Urban	\$0	\$0	\$0	\$0	\$0	\$0
Subtotal	\$172	\$9,076	\$16	\$178	\$156	\$8,897
Indirect Damage	\$0	\$0	\$0	\$0	\$0	\$0
Grand Total	\$535	\$3,073,104	\$20	\$81,087	\$516	\$2,992,017

1/ Discount rate 2.50% with a 51 year period of analysis. Price base 2022

**Economic Table 5d - Estimated Average Annual Flood Damage Reduction Benefits
Santa Clara Watershed Project**

Item	Estimated Average Annual Damage		Damage Reduction Benefit
	Without Project (No Action Alternative)	With Project (Preferred Alternative)	
Floodwater Damage			
Structures, Contents, Vehicles	\$3,061,847	\$80,909	\$2,980,938
Roads	\$2,182	\$0	\$2,182
Crop and Pasture	\$363	\$3	\$360
Subtotal	\$3,064,392	\$80,912	\$2,983,480
Sediment/Erosion Damage			
Sediment Deposition	\$869	\$45	\$824
Flood Plain Scour	\$8,379	\$149	\$8,230
Road and Bridge	\$0	\$0	\$0
Urban	\$0	\$0	\$0
Subtotal	\$9,248	\$194	\$9,053
Indirect Damage	\$0	\$0	\$0
Total	\$3,073,640	\$81,107	\$2,992,533

1 Price base: 2022. Calculated using FY 2022 Water Resources Discount Rate (2.50%), annualized over 50 years, and 51-year period of analysis.

Table 9: Comparison of Benefits and Costs

	Average Annual Costs ^{3/}	Average Annual Benefits ^{2/}	Benefit Cost Ratio	Net Benefits
Dammeron Alt 1	\$358,669	\$1,074,410	3.00	\$715,741
Diamond Alt 1	\$307,083	\$1,917,963	6.25	\$1,610,880
Shivwits Alt 1	\$37,390	\$160	0.0043	-\$37,230
Grand Total	\$703,142	\$2,992,533	4.26	\$2,289,391

1/ Discount rate 2.50% with a 51 year period of analysis. Price base 2022

2/ From Table 5.

3/ From Table 4.


APPENDIX E-3
BIOLOGICAL DOCUMENTS

Santa Clara Project Rare Species Evaluation

Holmgren milk-vetch (*Astragalus holmgreniorum*)

Habitat Requirements and Limiting Factors: Holmgren milk-vetch occurs at elevations between 2,480-2,999 feet in areas that drain to the Santa Clara and Virgin Rivers. It is typically found on the skirt edges of hill and plateau formations slightly above or at the edge of drainage areas; it occurs on soils characterized by small stone and gravel deposits and where vegetation cover averages less than 15 percent of the landscape. Holmgren milk-vetch is associated with geological layers or parent materials found within the Moenkopi formation. The species is thinly and discontinuously distributed within its habitat. The figure below depicts the known populations sites. These sites are also included in designated critical habitat is located within each of the six sites.

Findings: The closest known population (South Hills population) is located approximately 6.8 miles to the southeast from the Shivwits Project Area. The site is located south of the community of Santa Clara and south of the Santa Clara River. At 3200 feet, the Shivwits Project Area is located just above upper most elevation level of recognized Holmgren milk-vetch habitat (2,999 feet). Additionally, while the Moenkopi Formation is present near the project area, it does not appear that milk-vetch habitat is present due to the lack of skirt edges of hills; therefore, stone and gravel deposits from these hills are not present. Much of the project area has been disturbed due to farming activities. This is only a desk top analysis so a survey of the project area may be advisable. The Dammeron Valley and Diamond Valley Project Areas are not located within Holmgren milk-vetch habitat. The Moenkopi Formation (including skirt hills and stone and gravel deposits) is not present. At 4600 feet elevation, the two project sites are much higher than is currently recognized for Holmgren milk-vetch habitat (2900 feet).

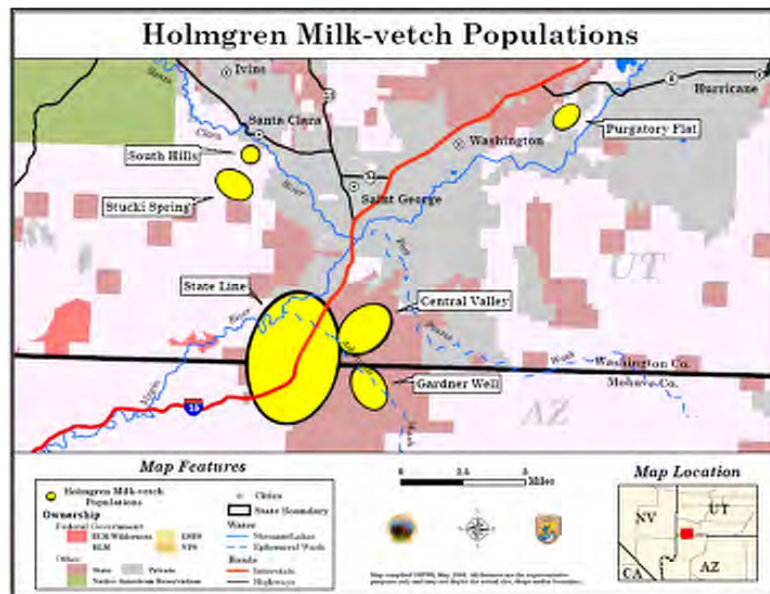


Taken from *Astragalus holmgreniorum* (Holmgren Milk-Vetch) and *Astragalus ampullarioides* (Shivwits Milk-Vetch) Recovery Plan

Shivwits milk-vetch (*Astragalus ampullarioides*)

Habitat Requirements and Limiting Factors: Shivwits: milk-vetch is predominately found in isolated pockets of purple-hued, soft clay soil outcrops found on the Chinle formation near St. George, Utah. Occupied sites are small, and populations are found between 3,018 and 4,363 feet in elevation in sparsely vegetated habitat with an average of 12 percent cover. It is found in dense patches. The milk-vetch is constrained by the isolation of appropriate soil substrate. The figure below depicts the known populations sites. Designated critical habitat is located within each of these sites. The Shivwits milk-vetch site is located almost adjacent to the Shivwits project area.

Findings: The Chinle formation is found adjacent to the Shivwits project area but apparently does not extend into the actual site itself (per David Sims maps). A desk top review did not reveal the presence of any of the purple-hued, soft clay soil outcrops required by the Shivwits milk-vetch. Much of the project area has been disturbed as the result of farming activities. It is unlikely that the milk-vetch is present within the project area. However, because designated habitat is located almost adjacent to the project area, the site should probably be surveyed.

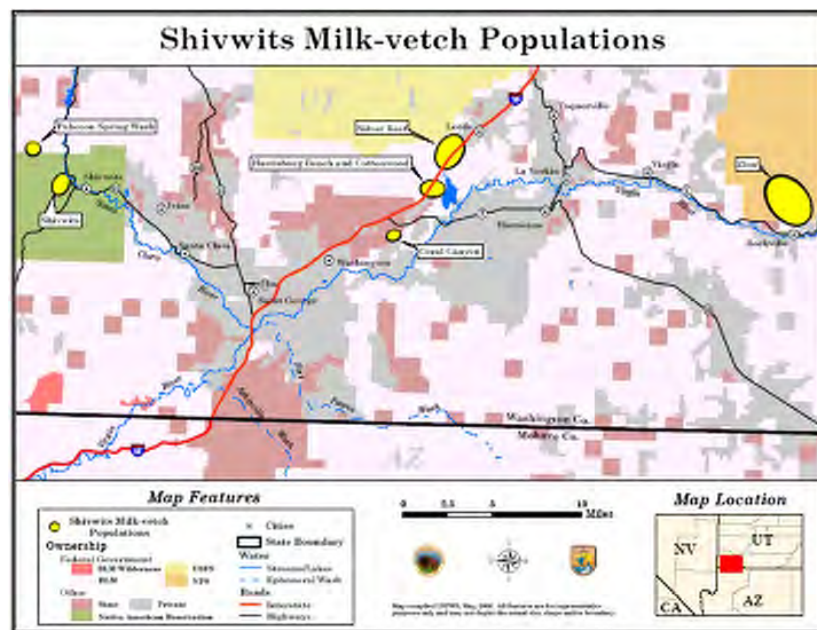

Taken from *Astragalus holmgreniorum* (Holmgren Milk-Vetch) and *Astragalus ampullarioides* (Shivwits Milk-Vetch) Recovery Plan

The following Google Earth photograph shows a typical purple-hued, soft clay soil outcrop required by the Shivwits milk-vetch. This site is located between the north and south bound lanes of Interstate 15 near Harrisburg Junction.




Dwarf bear-claw poppy (*Arctomecon humilis*)

Habitat Requirements and Limiting Factors: Dwarf bear claw-poppy is restricted to approximately 9,000 acres of habitat in the vicinity of St. George in Washington County, Utah. The elevation range the species is between 2,700 to 3,300 feet. Approximately 30 percent of the habitat is located on state, private or municipally administered lands; the remaining 70 percent occurs on public lands managed by the Bureau of Land Management (BLM). The poppy most commonly occurs on soils of the Shnabkaib Member of the Moenkopi Formation, but sometimes is found on the Middle Red Member or Upper Red Member. These soils are slightly basic, high in both gypsum and calcium carbonate, and in comparison with desert shrub soils have lower concentrations of magnesium, ^[SEP]potassium and iron and higher levels of calcium and copper. A recent habitat model indicates annual precipitation is the strongest predictor of suitable habitat followed by geology, soil gypsum content, and summer maximum temperatures.

Dwarf bear-claw poppy habitat is sparsely vegetated, and consists of highly weathered rounded hill and dome formations. Roughly half of the soil surface is bare of vegetation, and the majority of the living cover in the habitat is biological soil crust (see photograph below). Associated native plants include shadscale (*Atriplex confertifolia*), Torrey's ephedera (*Ephedra torreyana*), nodding buckwheat (*Eriogonum cernuum*), desert trumpet (*E. inflatum*), desert pepperweed (*Lepidium fremontii*) and burrobrush (*Ambrosia salsola*). Invasive species include red brome (*Bromus rubens*), cheatgrass (*Bromus tectorum*), barb-wire Russian thistle (*Salsola paulsenii*), and African mustard (*Malcomia africana*). The presence of these invasive species make the habitat unsuitable for the poppy and it soon disappears once these species become established.

Findings: The extreme northeast portion of the Red Bluff poppy population is located adjacent to the southwest boundary of the Shivwits project area (See attached figure). However, the soils and habitat conditions within the project area are not conducive to the poppy. The poppy is not usually found on the Chinle Formation that overlies the project area. Additionally, no gypsum soils or rounded hill or dome formations preferred by the poppy are present. The surface of the project area is highly disturbed and has a substantial vegetation cover of invasive weeds or domestic plants. All of these conditions would retard the establishment of the poppy in the area. However, because the Shivwits project area is located adjacent to the Red Bluff poppy population area, it would be advisable to conduct a survey of the area to ensure that the poppy is not present. The Dammeron Valley and Diamond Valley Project Areas are not located within or near any dwarf bear-claw poppy habitat due to elevation and lack of Moenkopi Formation related soils. These two project areas do not need to be surveyed for the poppy.

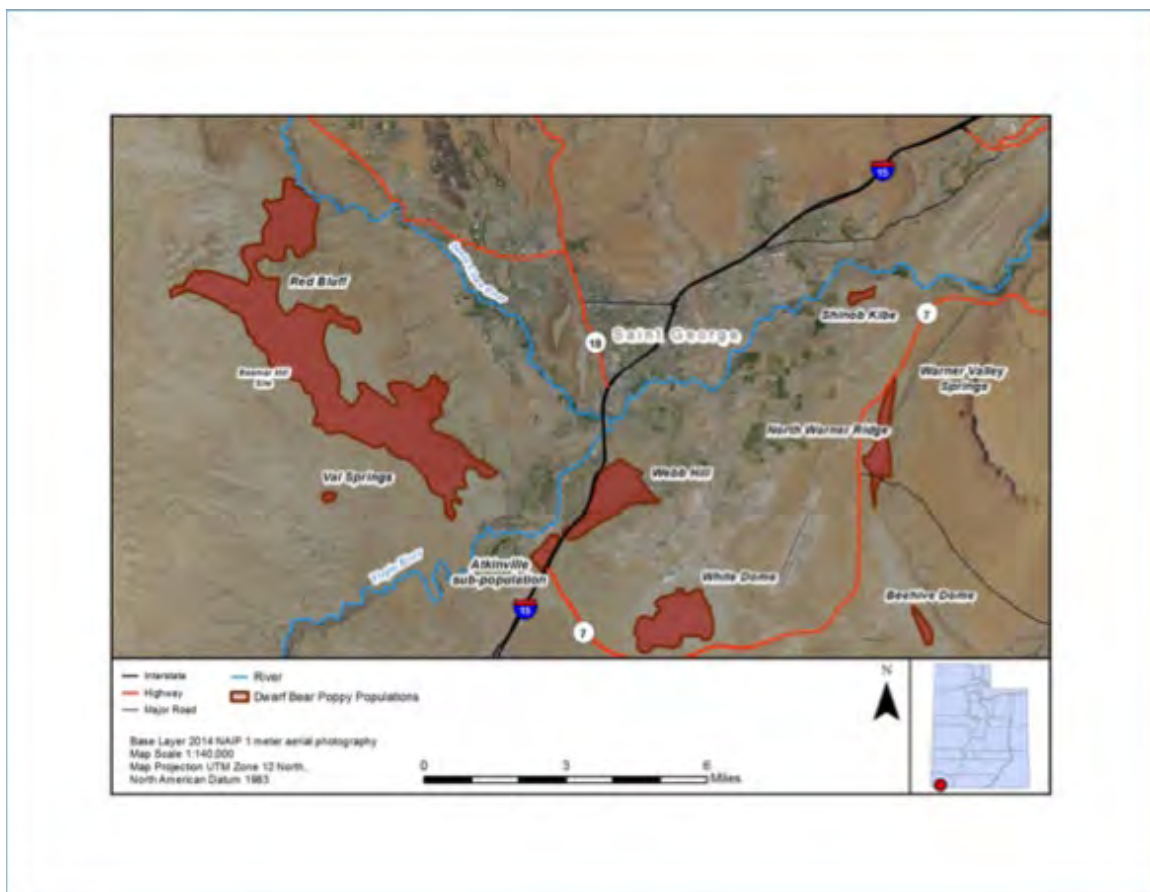



nature.org

Siler Pincushion Cactus (*Pediocactus sileri*)

Habitat Requirements and Limiting Factors: Siler pincushion cactus grows on gypsiferous clay and sandy soils derived from the Moenkopi Formation. The majority of the plants are associated with the Shnabkaib Member of this particular formation. The Shnabkaib Member is composed of 65 percent siltstone, 25 percent gypsum, and 10 percent limestone and dolomite. Siler pincushion cacti are also found scattered on the Middle Red Member of the formation, which is a reddish siltstone with thin to thick layers of gypsum. The cacti are found growing on elevations between 2,800 and 5,400 feet, in the Great Basin Desert Shrub vegetation community. The geographic range of Siler pincushion cactus extends from southeast of Fredonia, extreme northwestern Coconino County, Arizona, and west for about 70 air miles in north-central Mohave County, Arizona. It also includes about 3 miles of southern Utah in Washington and Kane Counties. The majority of the habitat occurs on lands managed by the BLM (Arizona Strip and Cedar City Districts), with smaller amounts of land managed by the Kaibab-Paiute Indian Tribe, Arizona and Utah State trust lands, and lands in private ownership.

The BLM has been monitoring populations of Siler pincushion cactus since 1985 on five plots located on public lands in Arizona and Utah. Four plots are located in Arizona. The Warner Ridge plot in Utah is located generally east of the new St. George Airport. The cactus is also found in the White Dome Nature Preserve located immediately west of the airport. The Muggins Flat area located east of Kanab, Utah, has also been monitored for the species.

Findings: The Siler pincushion cactus Warner Ridge study plot is located over 20 miles south and east of the Shivwits project area. The White Dome Nature Preserve is located approximately 16.5 miles from the project area. The Moenkopi formation surrounds but is not found within the project area, which is entirely composed of the Chinle formation. Soils within the project area are highly disturbed and the gypsum element preferred by the cactus appears to be absent. No known

populations are known within or near the project area. It is highly unlikely that the Siler pincushion cactus or its habitat is found within the Shivwits project area.

The Dammeron Valley and Diamond Valley Project Areas are not located within or near any Siler pincushion cactus habitat due to elevation and lack of Moenkopi Formation related soils. These two project areas do not need to be surveyed for the cactus.



stgeorgeutah.com



dwrcdc.utah.gov

Southwestern Willow Flycatcher (*Empidonax traillii extimus*)

Habitat Requirements and Limiting Factors: The flycatcher breeds in relatively dense riparian tree and shrub communities associated with rivers, swamps, wetlands, and lakes. Most of these habitats are classified as forested wetlands or scrub-shrub wetlands. Its breeding range includes far western Texas, New Mexico, Arizona, southern California, southern portions of Nevada and Utah, and southwestern Colorado. Breeding habitat includes vegetation alongside rivers, streams, or other wetlands (i.e., riparian habitat). Flycatchers establish breeding and nesting territories, build nests, and forage where mosaics of relatively dense and expansive growths of trees and shrubs are established near or adjacent to surface water or are underlain by saturated soil. While riparian habitat vegetation composition, structure, height, and density vary, flycatcher habitat usually includes patches of dense vegetation, most often within the first 3– 4 meters aboveground. Flycatchers have only been documented nesting in stands with a width of 10 meters or more, although they will use narrower, linear habitats during migration. Hydrological conditions play an important role in where flycatchers choose to nest; they will nest along lentic water such as slow moving stream reaches, at river backwaters, in swampy abandoned channels, and in oxbows and margins of impounded water. Washington County is located within the Virgin River Management Unit within the Lower Colorado River Recovery Unit. Between 2008 and 2013, the number of breeding pairs in Washington County fluctuated between seven and ten. In 2014, 13 successful nest sites were documented.

In Washington County, Utah, designated critical habitat occurs along the banks of the Virgin River from the Utah/Arizona state line to Highway 9 near Hurricane, Utah. There is no designated critical habitat on any of the streams or drainages tributary to the Virgin River. This includes the Santa Clara River within the Shivwits project area.

Findings: Based on a desktop review, flycatcher habitat requirements described above within the Shivwits project area are minimal at best. Mosaics of established, relatively dense and expansive growths of trees and shrubs are limited or absent. While flycatchers have only been documented nesting in stands with a width of 10 meters or more, they will use narrower, linear habitats during migration. Therefore, an on-the-ground survey of the project area would be beneficial to determine habitat quality and potential, particularly for migration. The survey should be limited to habitat suitability and not presence/absence. The presence/absence survey is a detailed and time consuming effort that should only be undertaken if suitable habitat is located or birds observed incidentally.

The Dammeron Valley and Diamond Valley project areas are not located within or near any southwestern willow flycatcher habitat due to a lack of riparian vegetation present. These two project areas do not need to be surveyed for the flycatcher.



Southwestern willow flycatcher nps.gov

Western Yellow-Billed Cuckoo (*Coccyzus americanus*)

Habitat Requirements and Limiting Factors: Cuckoo habitat is largely associated with perennial rivers and streams that support the expanse of vegetation characteristics needed by breeding cuckoos. Cuckoos require large tracts of willow-cottonwood or mesquite forest or woodland for their breeding and nesting season habitat, with canopy heights of 16–98 feet and understory heights of 3–19 feet. Sites with strips of habitat less than 325 feet wide are rarely occupied, indicating that edge affects, in addition to overall patch size, influence habitat selection for nesting. In Utah, cuckoos breed and nest in patches that are 12 acres or greater in extent; vegetation within these patches is predominantly multi-layered, with riparian canopy trees and at least one layer of shrubby understory vegetation. The multi-layered vegetation should contain an area at least 100 meters wide by 100 meters long. Patches that are narrower than 100 meters wide are considered unsuitable for breeding and nesting. Open areas or gaps of multi-layered vegetation within a patch should be less than 300 meters in length. Breeding and nesting cuckoos will forage in riparian patches that have only an overstory canopy and are within 300 meters of the edge of suitable breeding and nesting habitat.

Migration and wintering habitat needs are not well known, although they appear to include a relatively wide variety of conditions. Migrating cuckoos have been found in coastal scrub, second growth forests, hedgerows, forest hedges, and in riparian patches. When dispersing between nest sites, cuckoos can be found at riparian sites

with small groves or strips of trees, sometimes less than 10 acres in size. These stopover sites can be similar to breeding sites but are smaller in size, narrower in width, and lack understory vegetation when compared to nesting sites.



Revised critical habitat for the cuckoo was designated on April 20, 2021. No critical habitat was designated in Washington County.

Findings: Based on a desktop review, cuckoo habitat requirements described above within the Shivwits project area are extremely limited if present at all. The cuckoo demands a more robust riparian habitat than is present in the project area. Large tracts of willow-cottonwood breeding and nesting season habitat are lacking. Sites with strips of habitat less than 325 feet wide are rarely occupied. In Utah, cuckoos breed and nest in patches that are 12 acres or greater and are multi-layered with riparian canopy trees and at least one layer of shrubby understory vegetation. Patches that are narrower than 100 meters wide are considered unsuitable for breeding and nesting. An on-the-ground survey of the project area would be beneficial to clearly determine habitat quality and potential, particularly for migration. The survey should be limited to habitat suitability and not presence/absence. The presence/absence survey is a detailed and time consuming effort that should only be undertaken if suitable habitat is located or birds observed incidentally.

The Dammeron Valley and Diamond Valley project areas are not located within or near any southwestern willow flycatcher habitat due to a lack of riparian vegetation present. These two project areas do not need to be surveyed for the flycatcher.

Desert Tortoise (*Gopherus agassizii*)

An analysis of desert tortoise habitat was not undertaken as it is recognized that the three project areas are located within tortoise habitat. Attached below are two maps showing the Red Cliffs Desert Tortoise Reserve. The Dammeron Valley and Diamond Valley project areas are located just north of the Reserve. The Shivwits project area is located approximately 2.6 miles to the southwest of the Reserve. All three sites should be surveyed for the tortoise.

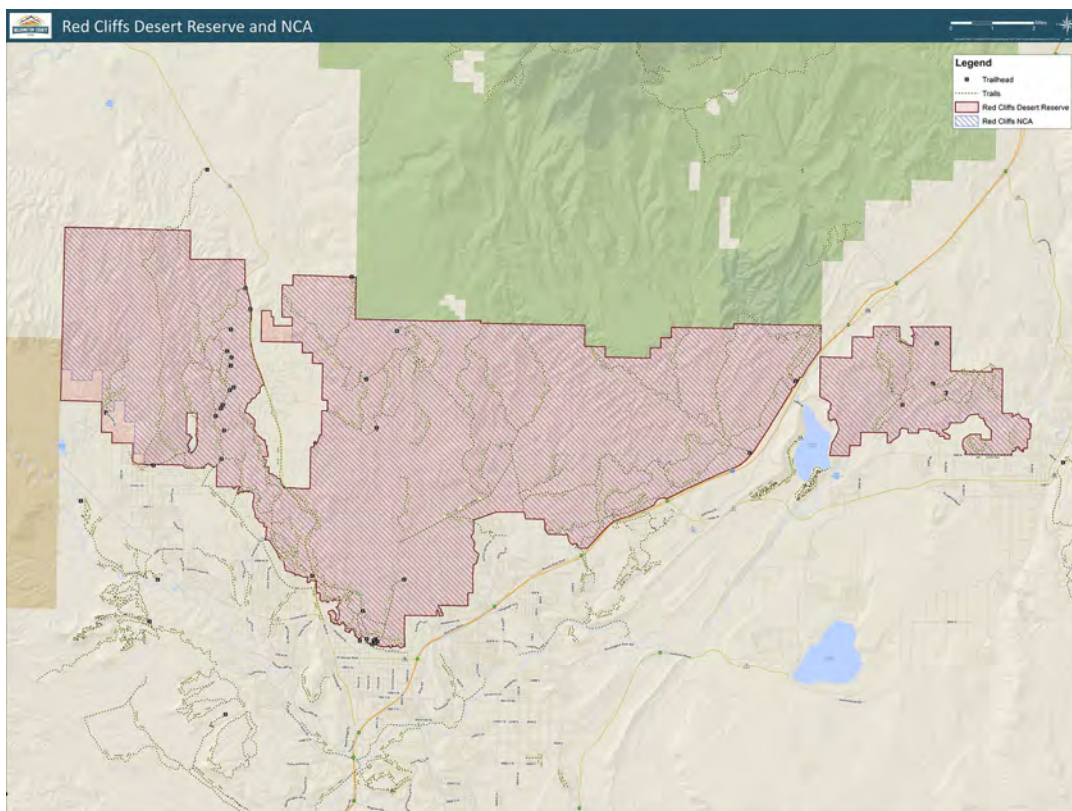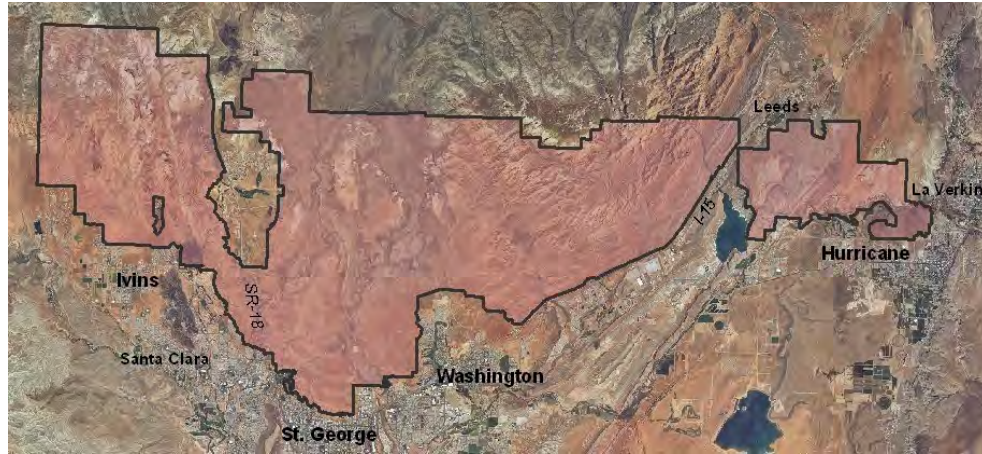

Other Listed Species and Migratory Birds

A review of the US Fish and Wildlife Service Information for Planning and Consultation (IPaC) site was undertaken. The review showed that in addition to the species discussed above, USFWS also identified Mexican spotted owl (*Strix occidentalis lucida*) and Jones Cycladenia (*Cycladenia humilis* var. *jonesii*) as potentially present. However, it is clear that no habitat for either of these species is located near the three project areas. Therefore, no survey for these two species is necessary.

Eight migratory birds were identified as potentially occurring within the project areas. These are black-chinned sparrow (*Spizella atrogularis*), Brewer's sparrow (*Spizella breweri*), golden eagle (*Aquila chrysaetos*), Clark's grebe (*Aechmophorus clarkii*), olive-sided flycatcher (*Contopus cooperi*), pinyon jay (*Gymnorhinus cyanocephalus*), Rufous hummingbird (*Selasphorus rufus*), Virginia's warbler (*Vermivora virginiae*), and willow flycatcher (*Empidonax trailii*).

APPENDIX E-4A
TECHNICAL DOCUMENTS



TECHNICAL MEMO

DRAFT

Date: March 3, 2021
To: NRCS, Lance Smith, P.E.
Washington County, Todd Edwards, P.E.
From: Alpha Engineering, Jared Madsen, P.E.
Re: Santa Clara Watershed EA Dammeron Valley and Diamond Valley Alternatives
Items:

1. Dammeron Valley

The Dammeron Valley area includes four principal drainage areas. See attached Exhibit 1 for an overall exhibit of Dammeron Valley and Exhibits 2 through 5 for exhibits specific to the proposed alternative for each drainage area. It is proposed to route three drainage areas through three separate detention basins (Dammeron 1, 2 and 3 Detention Basins), and the fourth drainage area will be diverted (Dammeron 4 Diversion Channel) to an adjacent existing drainage channel.

Information for each of the three detention basins is shown in the table below. The 100-year peak flow and volume numbers are based off a preliminary analysis and will be updated per NRCS requirements. Earthwork quantities are estimated based on the existing grade surface without grubbing or keyways and will be updated in the detailed design stages of the project.

Alternative	Tributary Area	100-year Peak Flow	100-year Volume	Est. Earthwork Quantity
Dammeron 1 Detention Basin	182 ac	75 cfs	5 ac-ft	2,620 cu-yd
Dammeron 2 Detention Basin	2,286 ac	559 cfs	63 ac-ft	31,835 cu-yd
Dammeron 3 Detention Basin	470 ac	209 cfs	15 ac-ft	31,840 cu-yd

Each of the three outlet pipes will convey flows from its corresponding detention basin with a reduced inlet that will limit flows leaving each detention basins. The outlet pipe for Dammeron 1 Detention Basin is proposed to limit flows to 5 cfs, which will then discharge into an open channel that will convey the flows downstream. The outlet pipes for Dammeron 2 and 3 Detention Basins will connect downstream into a single discharge point that will limit the overall flow to 25 cfs. This flow will be conveyed downstream south of

the Dammeron Valley community via an open channel. The required conveyance geometries are shown in the table below.

Alternative	Limited Flow	Open Channel	Culvert
Dammeron 1 Detention Basin	5 cfs	2' depth, 1' base width, 2:1 banks	18"
Dammeron 2 & 3 Detention Basin	25 cfs	3' depth, 2' base width, 2:1 banks	30"

Information for the drainage area that will be diverted to an adjacent existing drainage channel is shown in the table below. Once the drainage area is routed to the adjacent existing drainage channel, it is combined with the flows from a fifth drainage area that corresponds to it. The table below includes the required geometry to convey the flows, including flows once it is combined with the existing drainage corridor.

Alternative	Tributary Area	100-year Peak Flow	Open Channel	Culvert
Dammeron 4 Diversion Channel	1,104 ac	333 cfs	5' depth, 10' base width, 2:1 bank	N/A
Dammeron 4 Diversion Channel, including Existing Drainage Channel	2,404 ac	708 cfs	7' depth, 12' base width, 2:1 bank	(2) 72"

2. Diamond Valley

The Diamond Valley area includes four drainage areas. See attached Exhibit 6 for an overall exhibit of Diamond Valley and Exhibits 7 through 9 for exhibits specific to the proposed alternative for each drainage area. It is proposed to rehabilitate an existing detention basin (Diamond 1 Existing Detention Basin), which collects flows from three of the four drainage areas. Upstream of this detention basin, it is proposed to rehabilitate another existing detention basin (Diamond 2 Existing Detention Basin), which collects flows from two drainage areas. The fourth and largest tributary drainage area is conveyed through the Diamond Valley community via an existing drainage channel. It is proposed to armor this channel (Diamond 4 Existing Channel) to protect adjacent infrastructure.

Information for both rehabilitated existing detention basins is shown in the table below. The 100-year peak flow and volume numbers are based off a preliminary analysis and will be updated per NRCS requirements. Earthwork quantities are estimated based on an estimated surface that removes the existing dams but does not include keyways and will be updated in the detailed design stages of the project.

Alternative	Tributary Area	100-year Peak Flow	100-year Volume	Est. Earthwork Quantity
Diamond 1 Existing Detention Basin	575 ac	505 cfs	37 ac-ft	12,390 cu-yd (cut) 11,370 cu-yd (fill)
Diamond 2 Existing Detention Basin	597 ac	536 cfs	38 ac-ft	10,900 cu-yd (cut) 10,200 cu-yd (fill)

An existing drainage channel conveys flows from Diamond 2 Existing Detention Basin to Diamond 1 Existing Detention Basin and another existing drainage channel conveys flows from the upstream drainage area into Diamond 2 Existing Detention Basin. Information for these channels is shown in the table below.

Downstream Channel Outlet	Channel Existing Capacity	Channel Existing Geometry
Diamond 1 Existing Detention Basin	380 cfs	3' depth, 10' base width, 3:1 banks
Diamond 2 Existing Detention Basin	138 cfs	2' depth, 6' base width, 4:1 banks

Finally, information for the Diamond 4 Existing Channel is shown in the table below. Note the geometry shown is intended to represent a general section of the channel since the geometry varies along the length of the channel. Riprap and other armoring methods will be analyzed in the detailed design stages of the project.

Alternative	100-year Peak Flow	Channel Existing Capacity	Channel Existing Geometry
Diamond 4 Existing Channel	2,214 cfs	3,704 cfs	12' depth, 10' base width, 1:1 banks

Hydraulic and Freeboard Report Santa Clara Watershed

Washington County

PRELIMINARY

May 2022

Table of Contents

Table of Contents.....	i
Part I. Introduction	2
Part II. Hydraulic Analysis	4
A. Detention Basin Operation	4
B. Spillway Analysis	4
C. Spillway Parameters.....	5
D. Emergency Drain and Outlet Works.....	7
Part III. Freeboard Analysis	8
A. Storm and Wind Events.....	8
B. Design Waves	8
C. Results	8
Part IV. Inundation Maps	10
A. Inundation Events	10
B. Breach Analysis	10
Appendix A. Exhibits	
Appendix B. Calculations	
Appendix C. Model Output	

Part I. Introduction

Washington County is proposing to install a series of new detention basins in Dammeron Valley and Diamond Valley in Washington County, Utah and to provide armoring along the Santa Clara River on Shivwits land near Ivins, Utah. The basins and armoring will provide flood protection to the local communities and Shivwits tribe farming area. The engineering design is being performed by Alpha Engineering Company out of its office in St. George, Utah.

The project includes the construction of three detention basins on dry washes to the east of Dammeron Valley; the rerouting of existing flows to an adjacent routed channel on the south end of Dammeron Valley; the reestablishment of three existing detention basins in Diamond Valley; the armoring and protection along an existing channel in Diamond Valley; and armoring portions of the south bank of the Santa Clara River just west of the Shivwits tribal community near the Shem dam. The dams will be earthen structures with principal spillways. The purpose of the basins is to detain peak flows during large storm events protecting downstream infrastructure. Due to homes located immediately downstream, these dams are classified as High Hazard.

This hydraulic analysis is being prepared to design elements associated with the construction and operation of the proposed detention basins and channels. The hydrologic analysis has been prepared under a separate report (Alpha Hydrology). The project locations are shown in **Figure 1**.

This report references the following sources in the hydraulic analysis of the Diamond and Dammeron Valley Detention Basins:

- Technical Release 210-60 (TR-210-60), USDA 2019
- Technical Release 210-56 (TR-210-56), USDA 2014
- National Engineering Handbook Part 630 (NEH), USDA 2019
- Preliminary Hydrology Report Santa Clara Watershed (Alpha Hydrology), Alpha Engineering 2021
- Design of Small Dams (USBR DAMS), USBR 1987

The following software programs were used in modeling the hydraulic conditions:

- HEC-HMS version 4.7.1, USACE 2021
- HEC-RAS version 5.0.7, USACE 2022

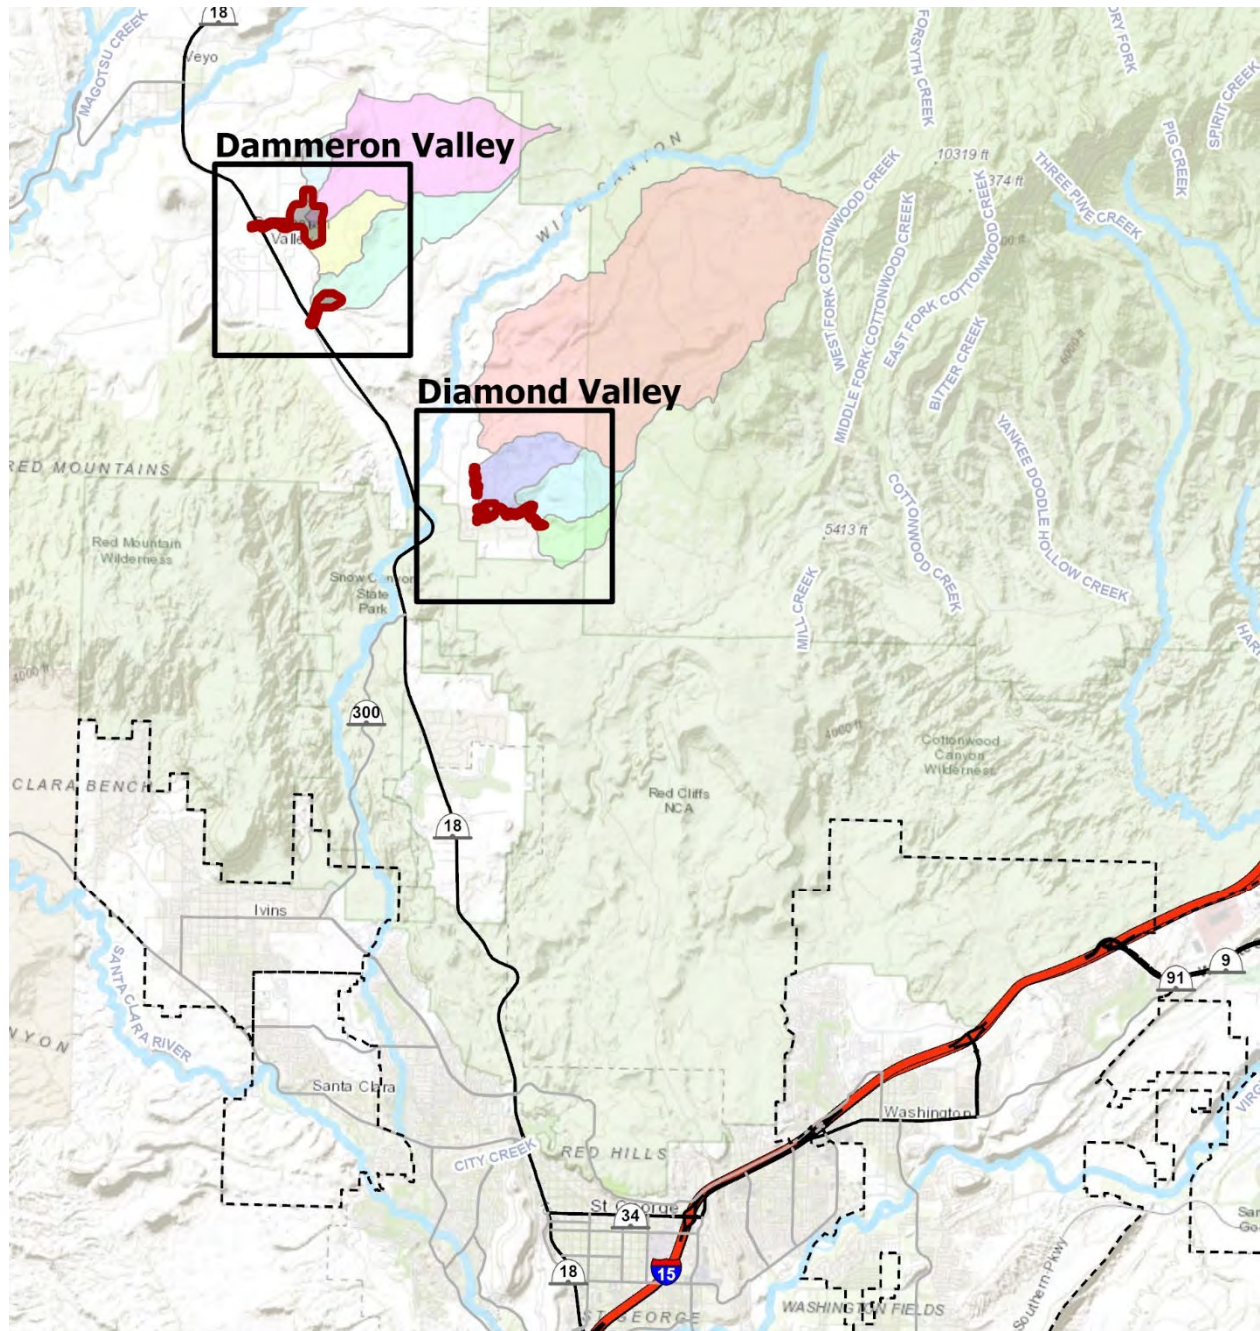


Figure 1 Dammeron Valley and Diamond Valley Location

Part II. Hydraulic Analysis

A. Detention Basin Operation

The project consists of eight separate dam structures across six debris basins and tributaries. The debris basins have individual uncontrolled low-level outlets that are designed to convey low flows that can be adequately conveyed in downstream drainage facilities (Alpha Hydrology), which are:

- Dammeron 1, 2 and 3: 30 cfs
- Diamond 1: 130 cfs
- Diamond 2: 5 cfs
- Diamond 3: 5 cfs

Principal spillways for each detention basin will be used to safely convey large storm events without causing damage to the dam structures.

Dammeron Valley involves four of the dam structures and three detention basins. Dammeron 1 includes two dam structures for one detention basin. Two detention basins, Dammeron 2 and 3, each have individual dam structures, but as water levels rise, the two basins combine into a single body of water with one spillway. Storm events will be attenuated through the three detention basins collected upstream of the community. The limited and attenuated flows will be safely routed through the community, across the downstream highway, and into existing drainage corridors. The hydraulic components of Dammeron Valley are shown in **Exhibit 1, Appendix A**.

Diamond Valley involves four more dam structures and three detention basins. The detention basins are existing but need dredging and rehabilitation. The spillway for Diamond 3 includes an existing bypass channel that conveys flows to Diamond 2, and the spillway for Diamond 2 includes an existing bypass channel that conveys flows to Diamond 1. Diamond 1 is currently a sump basin with no outlet. Each of the detention basins will be dredged and the existing dam structures will be rehabilitated. Due to site constraints, Diamond 1 will require two separate dam structures to reach the required capacity. The low-level outlet being proposed on Diamond 1 with this project will drain a portion of the sump basin, but the lower elevations of the detention basin will continue as a sump. Flows leaving Diamond 1 will be conveyed through new pipe to a nearby existing drainage corridor that has capacity to safely receive the flows. The hydraulic components of Diamond Valley are shown in **Exhibit 2, Appendix A**.

B. Spillway Analysis

The detention basins will consist of an uncontrolled outlet at the low point within each reservoir and a principal spillway at the 100-year volume storage elevation (Storm Event 01). The principal

spillway, which includes a broad-crested weir discharging into a trapezoidal open channel, will be engaged for storm events larger than the 100-year storm event. Based on TR-60, Section 2-2 and Part 7, the hydrographs analyzed in designing the spillway configuration are the Principal Spillway Hydrograph (PSH), Auxiliary Spillway Hydrographs (ASH) and the Freeboard Hydrographs (FBH) (Storm Events 06-10). Additional storm events are being analyzed for comparison purposes and to ensure they are routed adequately through the uncontrolled outlet and spillway configuration (Storm Events 02-06 and 11-18). A summary of the storms is shown in **Table 1**.

	Storm Event	Duration	Frequency	AMC
01	100-year 24-hour	24-hour	100-year	II
02	100-year 6-hour AMC III	6-hour	100-year	III
03	100-year 24-hour AMC III	24-hour	100-year	III
04	Local SEP Hydrograph (SEP-L)	6-hour	Maximum	II
05	General SEP Hydrograph (SEP-G)	72-hour	Maximum	II
06	Principal Spillway Hydrograph (PSH)	10-day	100-year	- ¹
07	Local Auxiliary Spillway Hydrograph (ASH-L)	6-hour	Maximum	II
08	General Auxiliary Spillway Hydrograph (ASH-G)	24-hour	Maximum	II
09	Local Freeboard Hydrograph (FBH-L)	6-hour	Maximum	II
10	General Freeboard Hydrograph (FBH-G)	24-hour	Maximum	II
11	2-year 6-hour	6-hour	2-year	II
12	5-year 6-hour	6-hour	5-year	II
13	10-year 6-hour	6-hour	10-year	II
14	25-year 6-hour	6-hour	25-year	II
15	50-year 6-hour	6-hour	50-year	II
16	100-year 6-hour	6-hour	100-year	II
17	200-year 6-hour	6-hour	200-year	II
18	500-year 6-hour	6-hour	500-year	II

Table 1 Summary of Storm Events

HEC-HMS and SITES was used to model the storm events. The spillway was iteratively designed in the model to accurately reflect conditions. A principal spillway crest elevation adequate to hold the 100-year storm event (Storm Event 01) was used and each of the storm events were attenuated accordingly.

C. Spillway Parameters

Models were setup in HEC-HMS and calibrated with the uncontrolled outlets and spillways based on the corresponding storm events. The inflow hydrographs for each storm event produced in the Alpha Hydrology report were input into the model. Output for the model is included in **Appendix C**. A summary of parameters derived from the Alpha Hydrology report in conjunction with the calibrated uncontrolled outlets and spillways for each detention basin are shown in **Table 2**. Sediment volumes have been incorporated to each detention basin based on preliminary

¹ Curve Numbers reflected in NEH 630.2102, Table 21-2, are used for the PSH where precipitation value exceeds 6".

calculations. These sediment volumes will be refined with more detailed analysis of the upstream tributary basins. This table also includes the results from these parameters within the HEC-HMS model.

	Damm 1	Damm 2	Damm 3	Diam 1	Diam 2	Diam 3
Tributary Area	0.3 sq mi 182 ac	3.6 sq mi 2,286 ac	0.7 sq mi 470 ac	0.9 sq mi 575 ac	0.9 sq mi 597 ac	0.6 sq mi 386 ac
Curve Number	86.8	83.9	87.9	87.8	85.8	88.9
10-day, 100-yr (PSH) Flow	298 cfs	2,518 cfs	655 cfs	847 cfs	860 cfs	608 cfs
10-day, 100-yr (PSH) Volume	80 ac ft	1,013 ac ft	188 ac ft	246 ac ft	246 ac ft	171 ac ft
Low Level Outlet Flow	5 cfs	25 cfs ²		130 cfs	5 cfs	5 cfs
ASH Flow (L/G), cfs	475/149	2,325/1,520	941/348	1,183/440	1,120/434	893/306
ASH Runoff Volume (L/G), in	4.91/5.73	4.37/5.84	4.90/5.71	4.91/6.25	4.94/6.31	4.91/6.27
FBH Flow (L/G), cfs	1,312/406	6,533/4,406	2,658/946	3,344/1,214	3,275/1,201	2,446/816
FBH Runoff Volume (L/G), in	11.73/14.10	9.30/14.05	11.73/14.10	11.73/14.10	11.73/14.10	11.73/14.10
Storm Detention Volume	21 ac ft	312 ac ft ²		51 ac ft	13 ac ft	8 ac ft
Sediment Detention Volume	5 ac ft	65 ac ft	15 ac ft	10 ac ft	11 ac ft	4 ac ft
Total Detention Volume	26 ac ft	392 ac ft ²		61 ac ft	24 ac ft	12 ac ft
Maximum Water Elevation	4694.4'	4700.2' ²		4560.0'	4604.0'	4611.0'
Spillway Peak Flow	1,199 cfs	7,124 cfs ²		3,296 cfs	2,538 cfs	2,078 cfs

Table 2 Summary of Results

The worst-case scenario storm event for each detention basin is the Local Freeboard Hydrograph (FBH-L, Storm Event 09). This storm event is also referred to as the Inflow Design Flood (IDF) and was used in determining the maximum water elevation.

Additional constraints are considered in the design of the uncontrolled outlets and principal spillways. A riser is proposed to be installed at the inlet to the uncontrolled outlet. The riser shall have a larger cross-sectional area to reduce excessive surging, noise, vibration and vortex action. Per TR-60, Section 6-2, this cross-sectional area shall be a minimum of 2.5' x 7.5' (L x W). A trash rack shall be incorporated into the riser structure to avoid clogging, and an anti-vortex device (i.e. anti-vortex baffle plate) shall also be incorporated to prevent a vortex condition as water spills into the riser. An air vent is also added to the inlet to remove air and improve hydraulic performance.

Based on the HEC-HMS model results and the site and code constraints, spillway parameters were selected and are shown in **Table 3**.

² Dammeron 2 and 3 collect flows from separate tributary basins. However, their low-level outlets combine just downstream of the dam; and during large storm events, they combine and discharge through a single spillway.

	Damm 1	Damm 2	Damm 3	Diam 1	Diam 2	Diam 3
Uncontrolled Outlet Diameter³	30 in	30 in	30 in	30 in	30 in	30 in
Spillway Crest Elevation	4691.5'	4697.0' ³		4556.0'	4600.0'	4607.0'
Spillway Base Width	90'	450' ³		150'	130'	100'
Top of Dam Elev	4694.5'	4700.2' ³		4560.0'	4604.0'	4611.0'
Height of Dam	33.5'	38.0' ³		12'	19'	15'

Table 3 Spillway Design Parameters

D. Emergency Drain and Outlet Works

The emergency drain pipeline is required to drain the water supply storage in case of emergency. According to Utah State Code R655-11-7A, the pipeline is required to drain 90% of the storage volume within 30 days neglecting reservoir inflows.

As discussed, the detention basins have uncontrolled low-level outlets that are sized based on allowable downstream flows. These allowable flows and the amount of time required to drain the detention basins is summarized in **Table 4**.

	Damm 1	Damm 2	Damm 3	Diam 1	Diam 2	Diam 3
Detention Basin Storage	26 ac ft	390 ac ft ⁴		61 ac ft	27 ac ft	14 ac ft
Low Level Outlet Flow	5 cfs	25 cfs ⁵		120 cfs	10 cfs	10 cfs
Time to Drain	2.6 days	7.9 days ⁵		0.3 days	1.4 days	0.71 days

Table 4 Emergency Drain Calculations

³ An orifice plate or similar structure will be required to limit flows to less than the capacity of the indicated diameter such that flows do not exceed the Low-Level Outlet Flow shown in Table 2.

⁴ Dammeron 2 and 3 collect flows from separate tributary basins. However, their low-level outlets combine just downstream of the dam; and during large storm events, they combine and discharge through a single spillway.

Part III. Freeboard Analysis

A. Storm and Wind Events

The Administrative Rules for Dam Safety and TR-60, Part 5, state that the freeboard above the spillway crest elevation must exceed the values produced by the scenarios given below. In analyzing a permeable and an impermeable dam, a range of freeboard is given for the first and second condition. The dam is considered to be semi-permeable, and therefore, the actual freeboard requirement is adjusted within this range.

1. 100-year, 24-hour storm (AMC III) in conjunction with a 50-mph wind.
2. 100-mph wind without any significant rainstorm.
3. IDF (or FBH-G) without any significant windstorm.
4. ASH with Wave Action (TR-60)

Where these detention basins will be empty under non-storm event conditions, Scenario 2 will not produce any wave runoff and is not further analyzed.

B. Design Waves

Historic data for the design wind for these detention basins is not available. The fetch length was determined for each of the detention basins. The fetch lengths are illustrated in **Exhibits 3 and 4, Appendix A**. Calculations are included in **Appendix B**. The fetch lengths are less than one mile and a minimum freeboard of three feet is assumed for each detention basin for Scenario 1 (USBR DAMS).

Wave Action was further calculated using procedures outlined in TR-210-56. The maximum overwater wind velocity calculated to 81 mph and produced wave heights for each detention basin less than one foot. A minimum freeboard of one foot is assumed for each detention basin in Scenario 4. Calculations are included in **Appendix B**.

C. Results

The total required freeboard for each storm and wind event is summarized in **Table 5**. The Storm Freeboard is taken from the difference between the principal spillway crest elevation and the maximum water surface elevation produced by the respective storm events. The Total Freeboard is the sum of the Storm Freeboard plus the Wave Freeboard.

	Damm 1	Damm 2	Damm 3	Diam 1	Diam 2	Diam 3
100-yr, 24-hr Water Rise	0.0 ft	0.0 ft ⁵		0.0 ft	0.0 ft	0.0 ft
50-mph Wind Wave	3.0 ft	3.0 ft ⁶		3.0 ft	3.0 ft	3.0 ft
Scenario 1 Freeboard	3.0 ft	3.0 ft ⁶		3.0 ft	3.0 ft	3.0 ft
IDF Water Rise	3.0 ft	3.2 ft ⁶		4.0 ft	4.0 ft	4.0 ft
Scenario 3 Freeboard	3.0 ft	3.2 ft ⁶		4.0 ft	4.0 ft	4.0 ft
ASH Water Rise	0.7 ft	1.4 ft ⁶		2.7 ft	2.1 ft	1.9 ft
Wave Action	1.0 ft	1.0 ft ⁶		1.0 ft	1.0 ft	1.0 ft
Scenario 4 Freeboard	1.7 ft	2.4 ft ⁶		3.7 ft	3.1 ft	2.9 ft

Table 5 Total Freeboard Requirements

The governing total freeboard requirement is Scenario 3 for each of the detention basins. The top of dam outlined in Table 3 therefore considers freeboard requirements and is the proposed top of dam for each of the detention basins.

⁵ Dammeron 2 and 3 collect flows from separate tributary basins. However, their low-level outlets combine just downstream of the dam; and during large storm events, they combine and discharge through a single spillway.

Part IV. Inundation Maps

A. Inundation Events

A breach analysis and each of the frequency storm events (Storm Events 11 through 18) before and after the project was modeled using HEC-RAS to determine the inundation boundaries. Constraints were input based on the hydraulic analysis discussed in this report. The terrain downstream of the dam structure was imported into the HEC-RAS geometry editor using USGS 2017 1M Bare Earth LiDAR DEM files.

The inundation boundaries were mapped and are shown on Exhibits 5 through 26. The following inundation boundaries are included for both Dammeron Valley and Diamond Valley:

- IDF (or FBH-G), Breach Analysis
- 2-year, 6-hour
- 5-year, 6-hour
- 10-year, 6-hour
- 25-year, 6-hour
- 50-year, 6-hour
- 100-year, 6-hour
- 200-year, 6-hour
- 500-year, 6-hour

B. Breach Analysis

A breach simulation was completed at each detention basin during a “Rainy Day” scenario. Where these detention basins are not designed to hold water, the “Sunny Day” scenario was not included. It is assumed that the water level is at the auxiliary spillway crest elevation at the start of each model. Per TR-60, the minimum peak discharge of the breach hydrograph is:

$$Q_{max} = 1,100 \left(\frac{V_s H_w}{A} \right)^{1.35}$$

But not less than,

$$Q_{max} = 3.2 H_w^{2.5}$$

Nor more than,

$$Q_{max} = 65 H_w^{1.85}$$

Where,

V_s = Reservoir Storage at Breach

H_w = Depth of Water at Breach

A = Cross-sectional Area of Dam Embankment at Breach Location

A summary of the breach parameters for each detention basin, including the peak flow during the breach, is summarized in **Table 6**.

	Damm 1	Damm 2	Damm 3	Diam 1	Diam 2	Diam 3
Reservoir Storage at Breach	26 ac ft	266 ac ft	126 ac ft	61 ac ft	24 ac ft	12 ac ft
Depth of Water at Breach	30.5 ft	35 ft	25 ft	8 ft	15 ft	11 ft
Cross-Sectional Area of Dam	3,770 sf	4,790 sf	2,690 sf	580 sf	1,310 sf	860 sf
Peak Flow during Breach	16,440 cfs	23,191 cfs	10,000 cfs	879 cfs	2,789 cfs	1,284 cfs

Table 6 Breach Parameters

APPENDIX E-4B

TECHNICAL DOCUMENTS, CONTINUED



Appendix A. Exhibits

Exhibits 1-2 Hydraulic Overview Exhibits

Exhibits 3-4 Fetch Length Exhibits

Exhibits 5-10 Breach Inundation Maps

Exhibits 11-26 Frequency Storms Inundation Maps

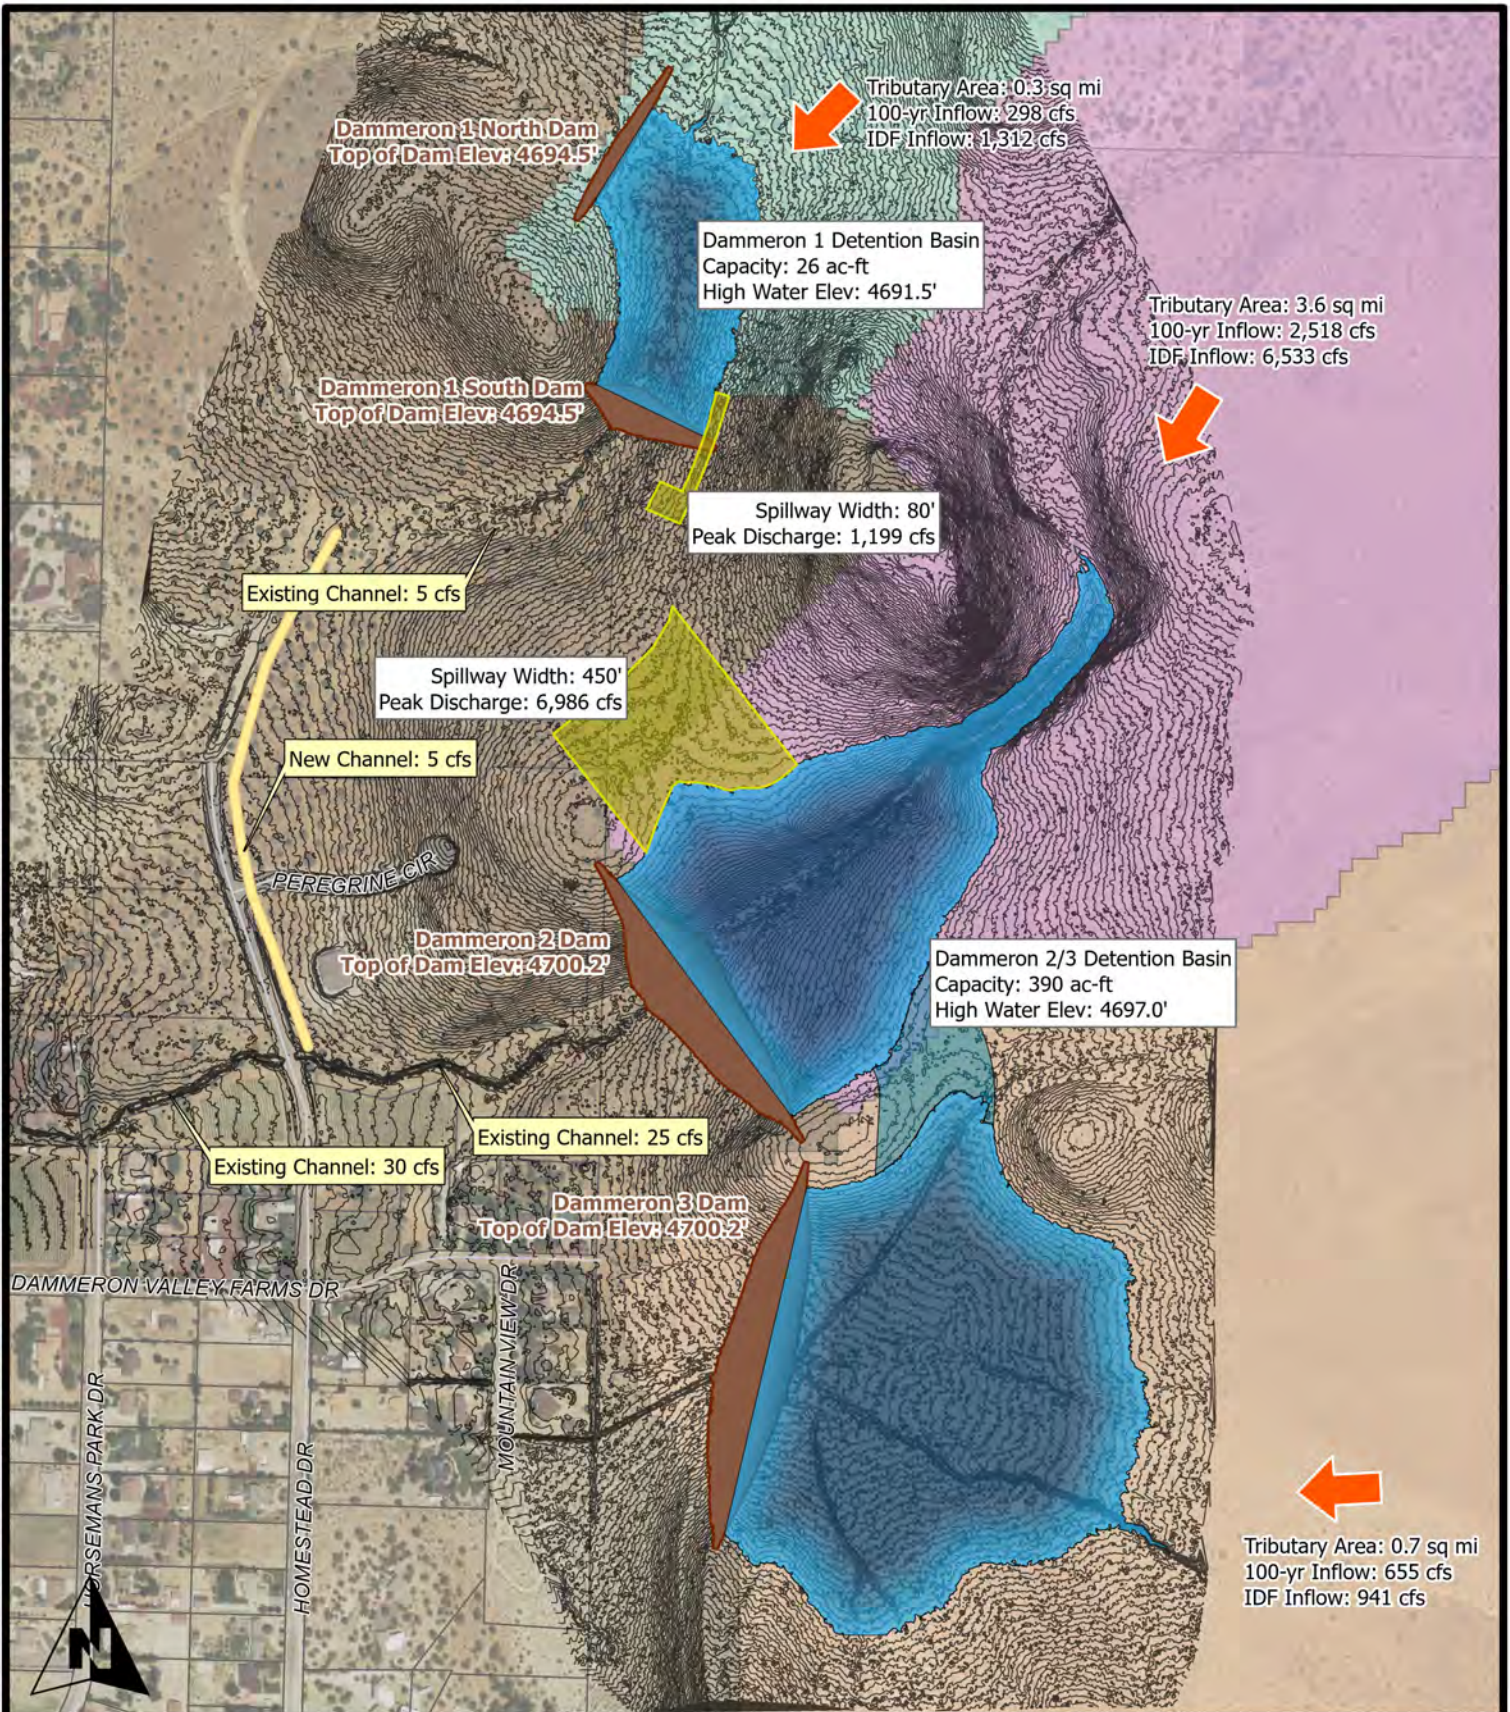

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- New Channel
- DamDamBndry
- Spillway

DRAFT




Exhibit 1. Dammeron Valley Santa Clara Watershed Hydraulics

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 500 feet

Date: January 4, 2022

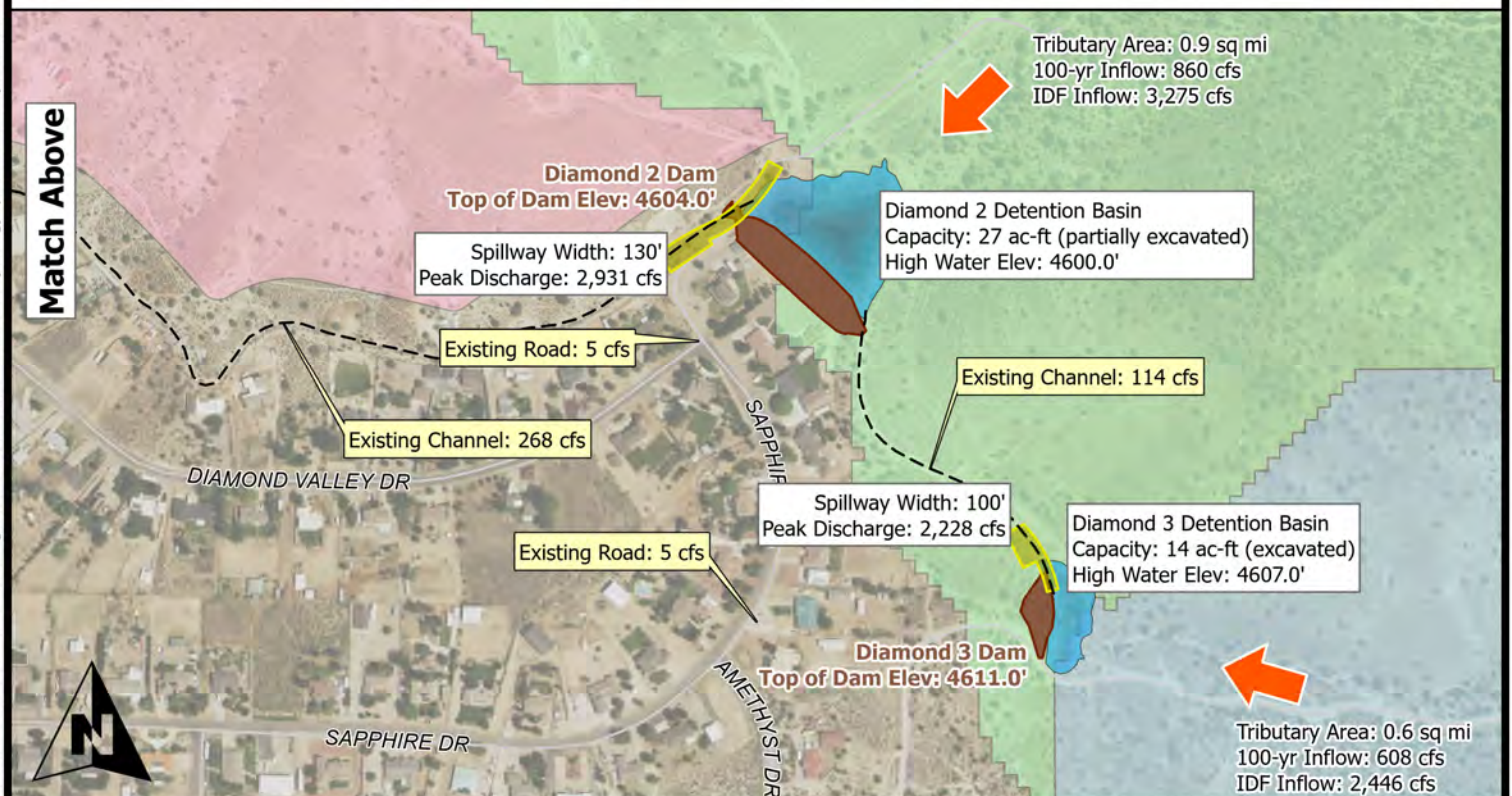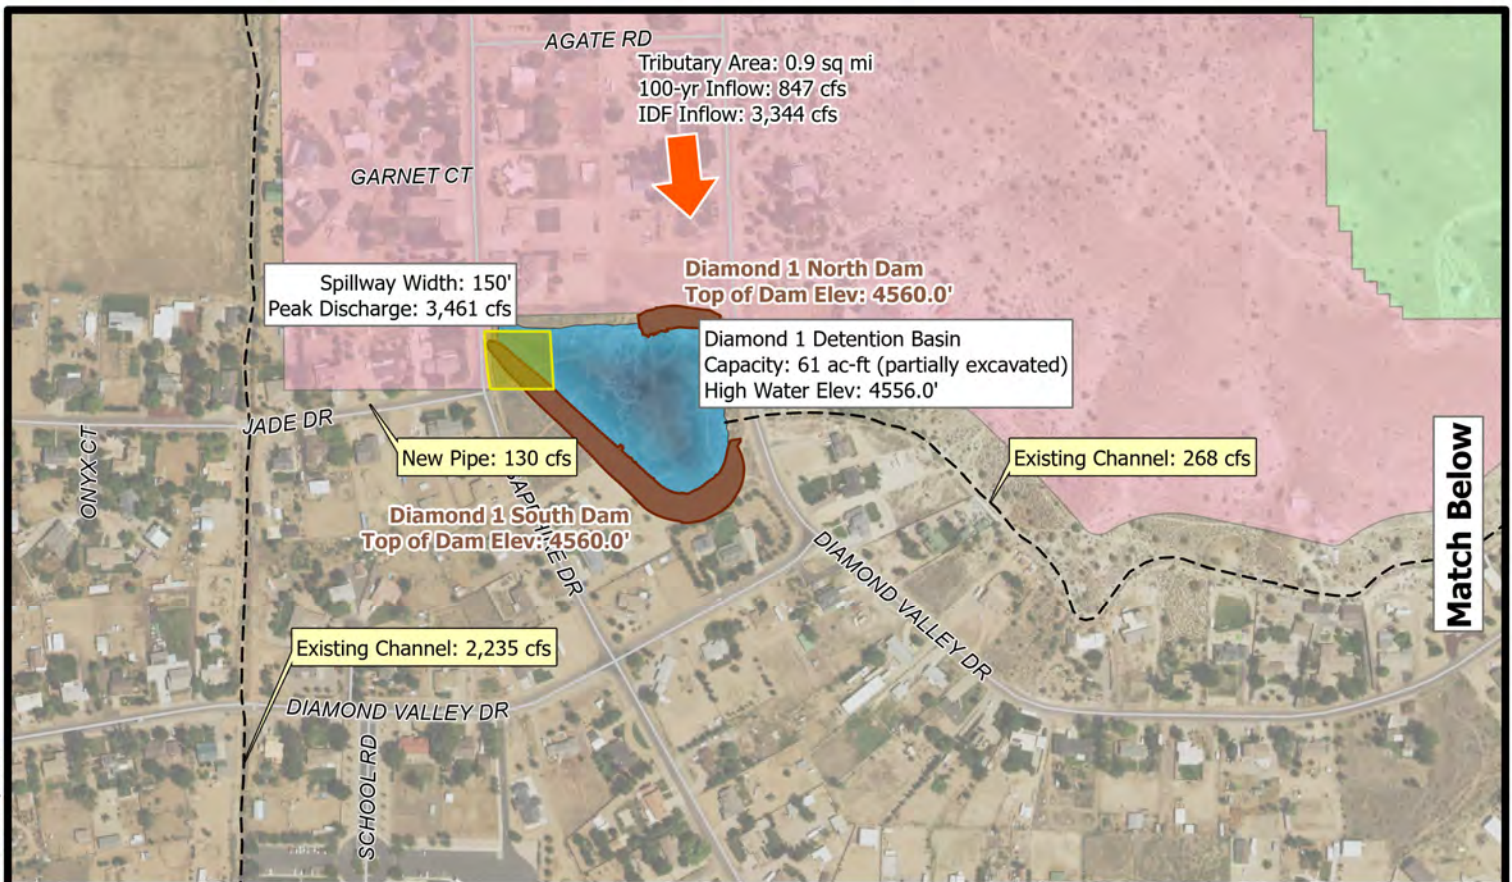

- Dam
- Detention Basin High Water
- Spillway



Exhibit 2. Diamond Valley Santa Clara Watershed Hydraulics

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 500 feet

Date: February 28, 2022

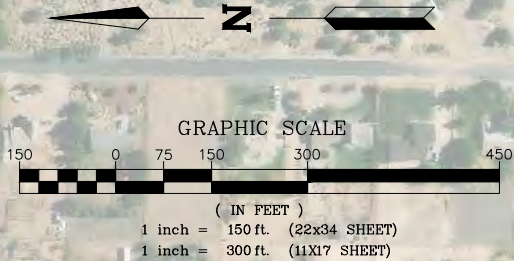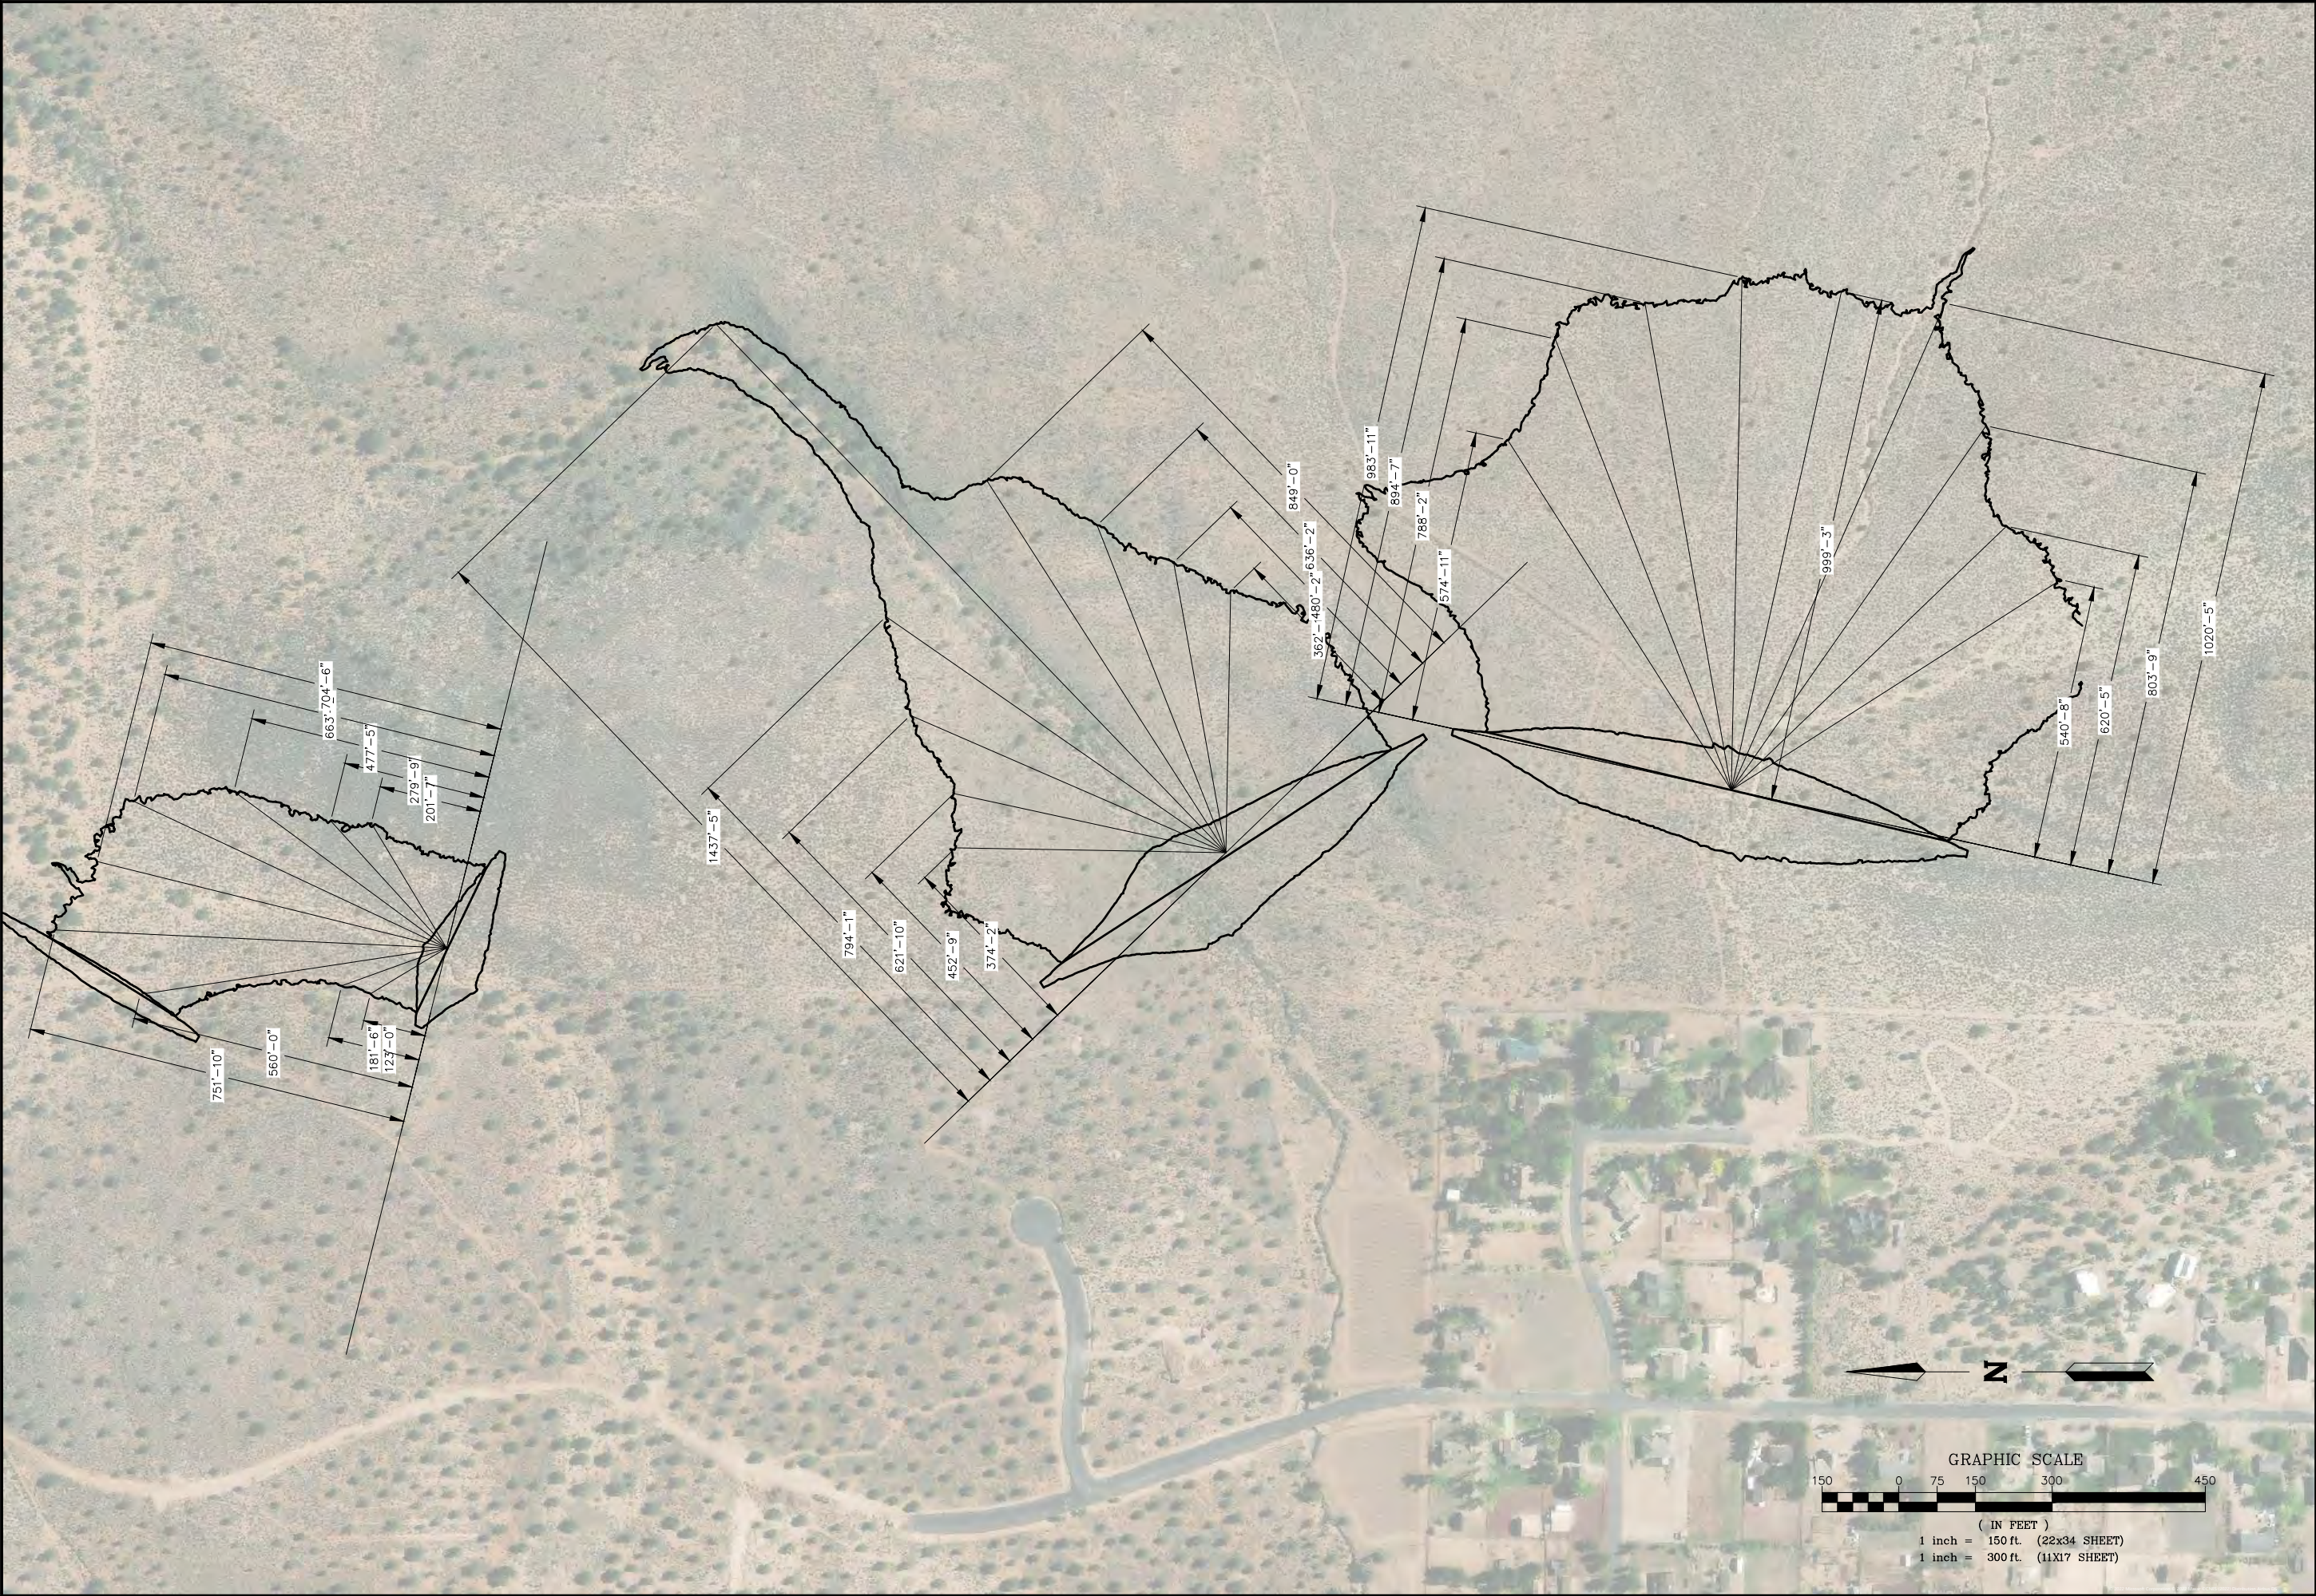

NO.		DATE	BY	DESCRIPTION
REVISIONS				



43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

TITLE	
DAMMERON VALLEY FETCH LENGTH EXHIBIT	
SANTA CLARA EA	
WASHINGTON COUNTY, UTAH	

PROJECT #	308-10
NAME	JTM
DATE	FEBRUARY 1, 2022
SCALE	AS NOTED

SHEET	Exhibit 3
FILE	308-10 EXH.dwg

P:\308-10 Washington County - Santa Clara Watershed Plan EA\Drawings\Exhibit Drawings\308-10 EXH.dwg, damm (2), 2/2/2022 3:29:17 PM, jmadson



NO.		DATE	BY	DESCRIPTION
REVISIONS				



PRELIMINARY
NOT FOR CONSTRUCTION

ALPHA
ENGINEERING

43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

TITLE	
DIAMOND VALLEY FETCH LENGTH EXHIBIT	
PROJECT #	308-10
NAME	JTM
DATE	FEBRUARY 1, 2022
SCALE	AS NOTED

SHEET
Exhibit 4
FILE
308-10 EXH.dwg

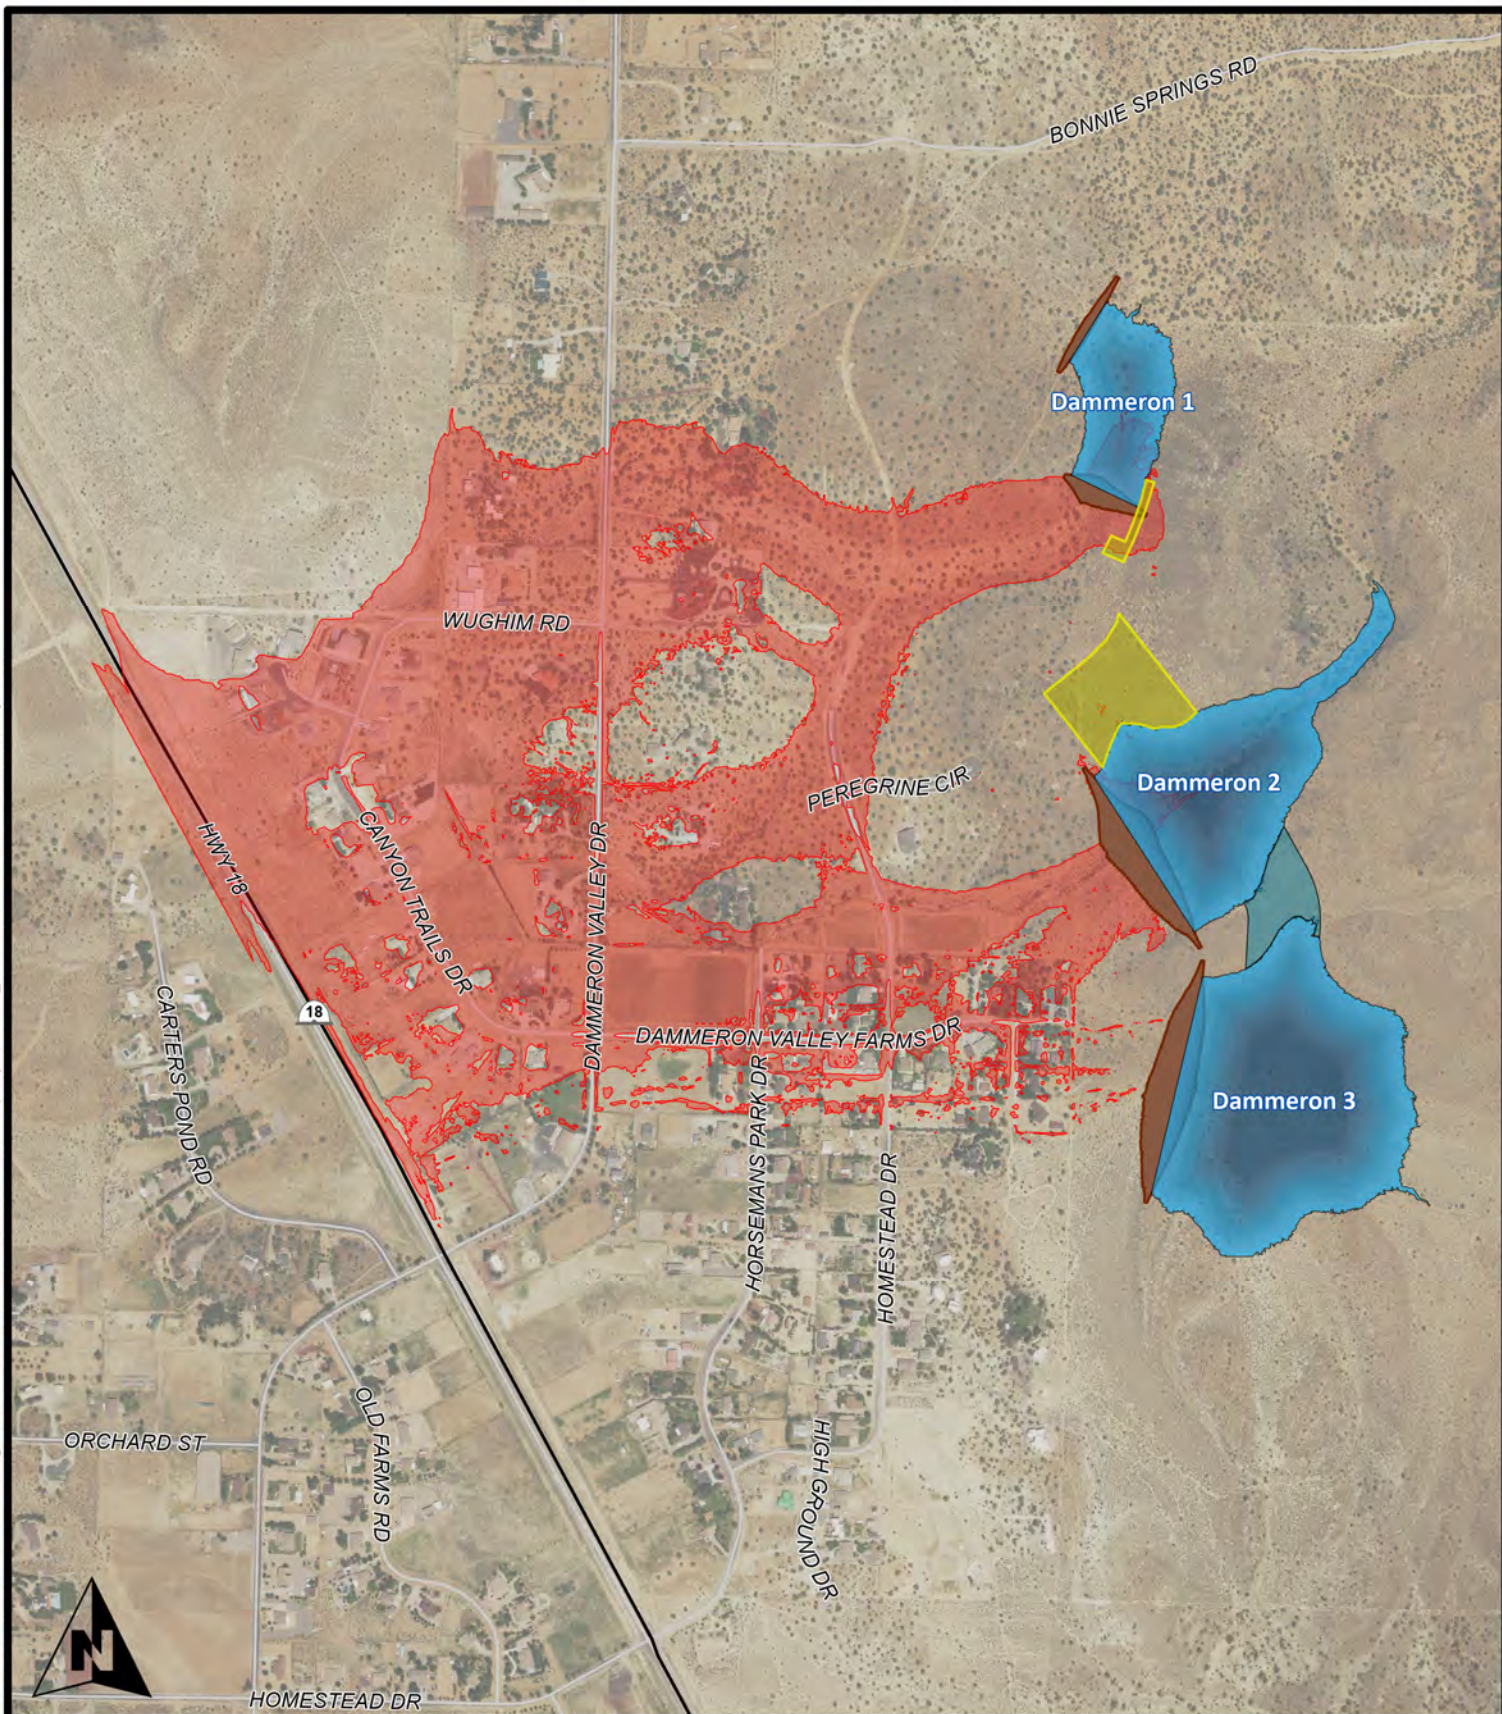

ALPHA
ENGINEERING

43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- Dammeron 1 Breach Inundation Boundary
- Diamond 1 Breach Inundation Boundary

Fig 5. Damm1 Breach Map
Santa Clara EA, Dammeron Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 800 feet

Date: May 11, 2022

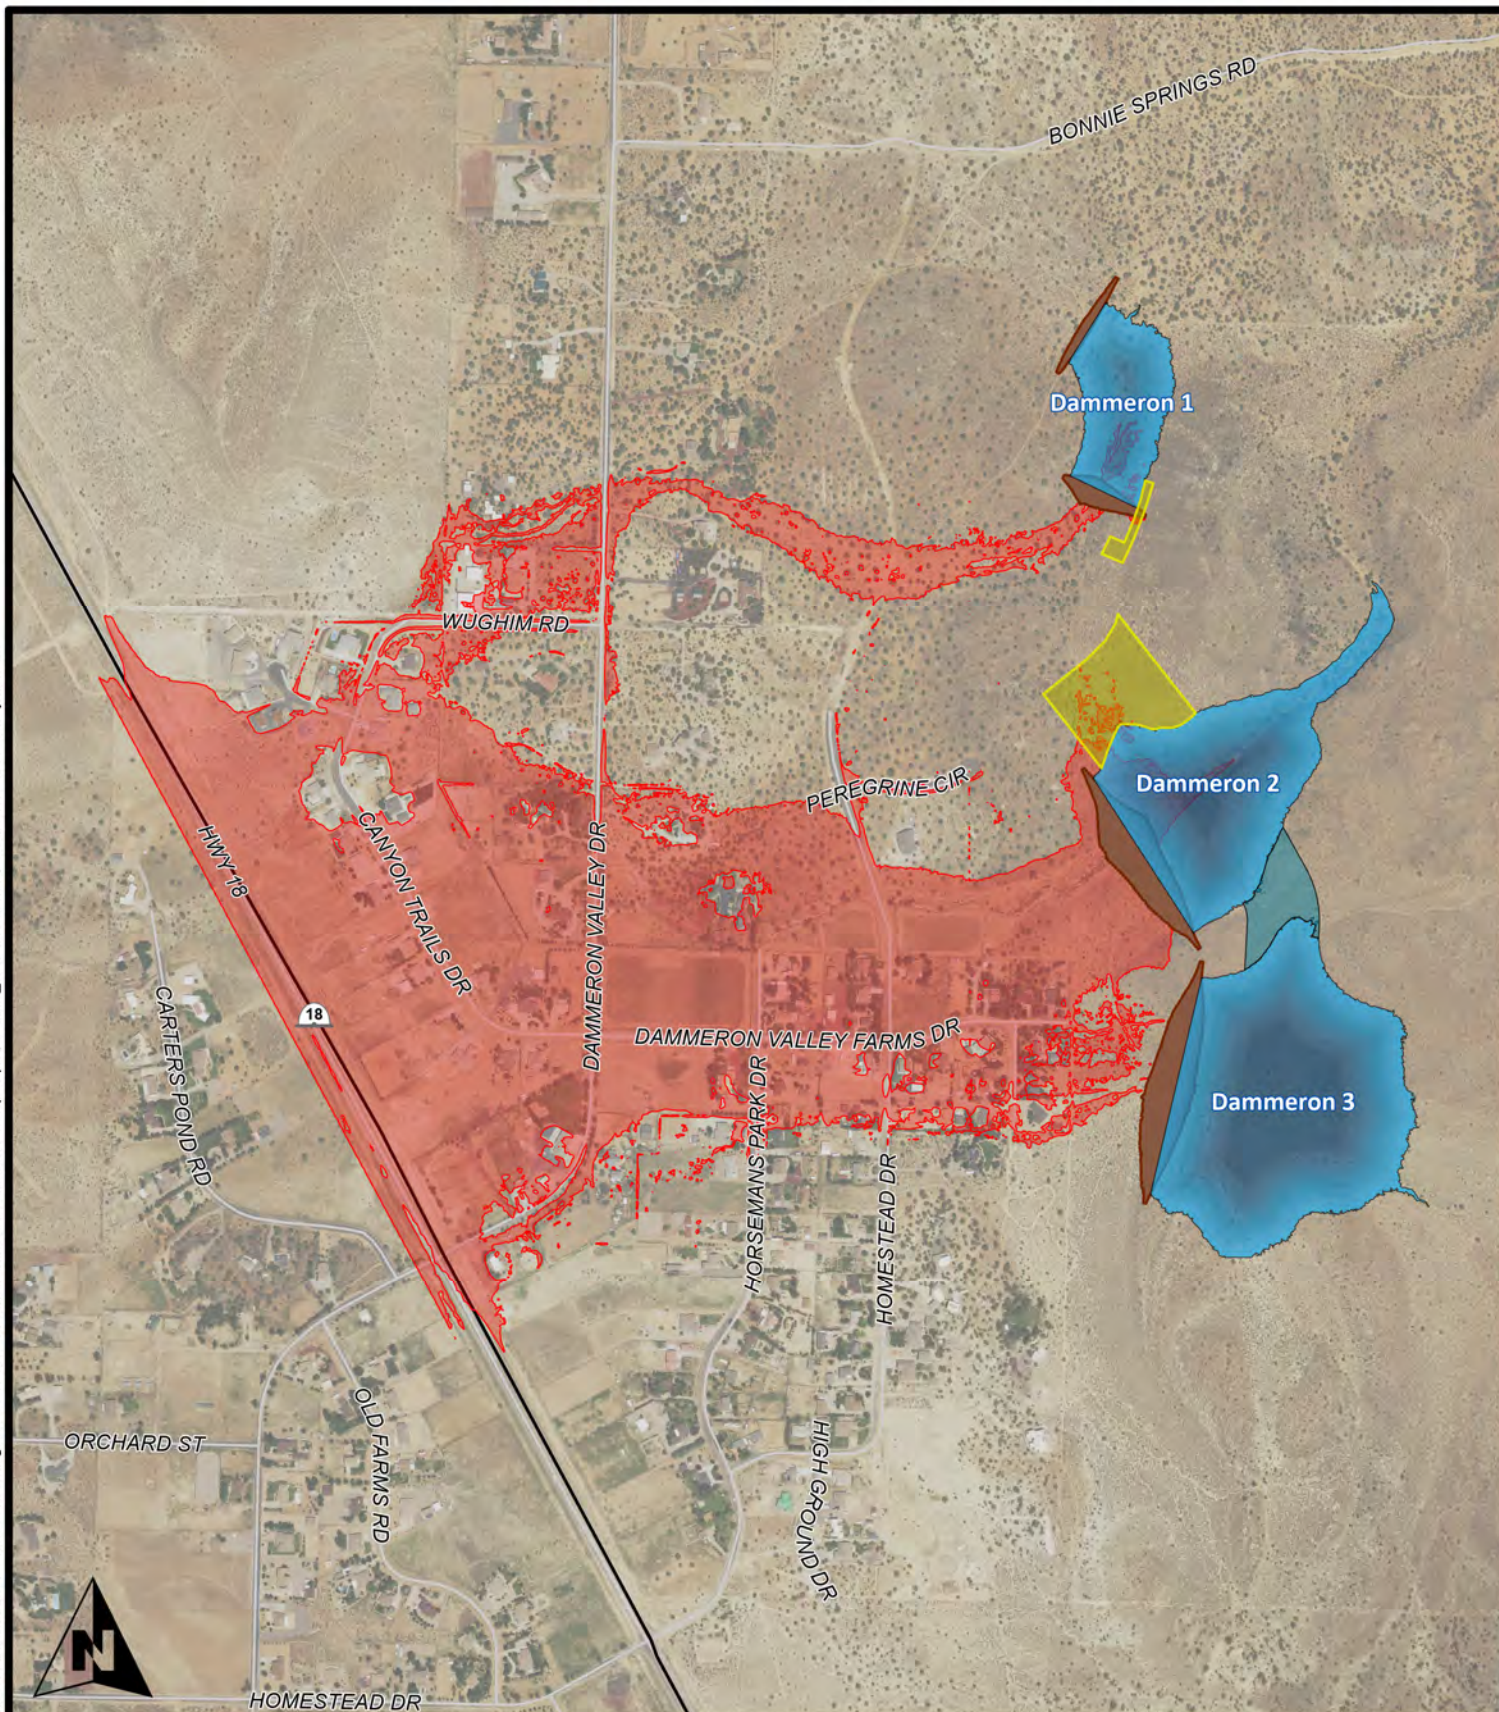


Fig 6. Damm2 Breach Map
Santa Clara EA, Dammeron Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 800 feet

Date: May 11, 2022

0 200 400 800 1,200
Feet

ALPHA
ENGINEERING

43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- Dammeron 2 Breach Inundation Boundary
- Diamond 2 Breach Inundation Boundary

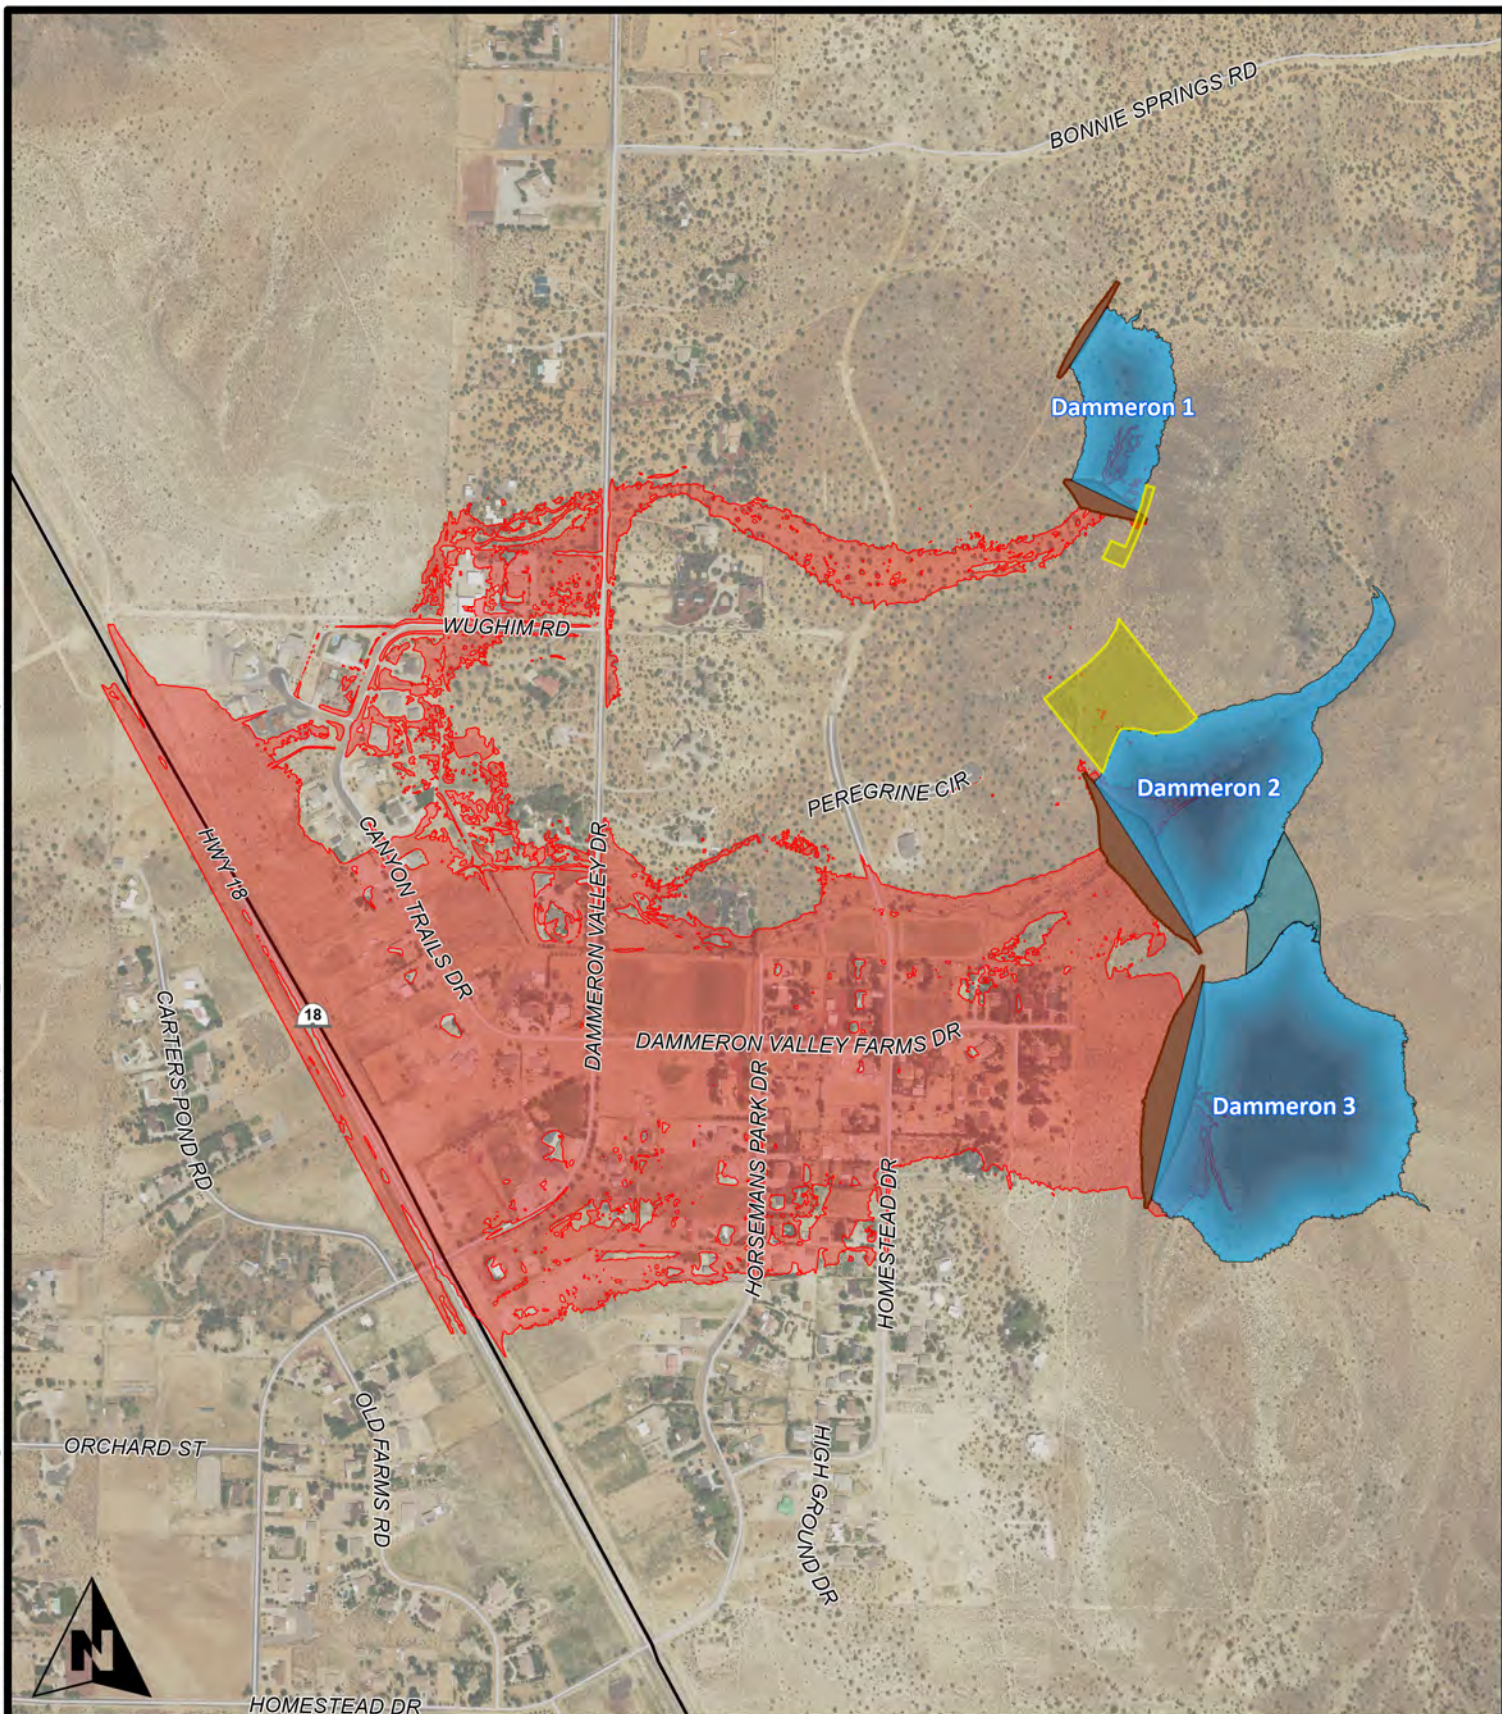




Fig 7. Damm3 Breach Map
Santa Clara EA, Dammeron Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 800 feet

Date: May 11, 2022

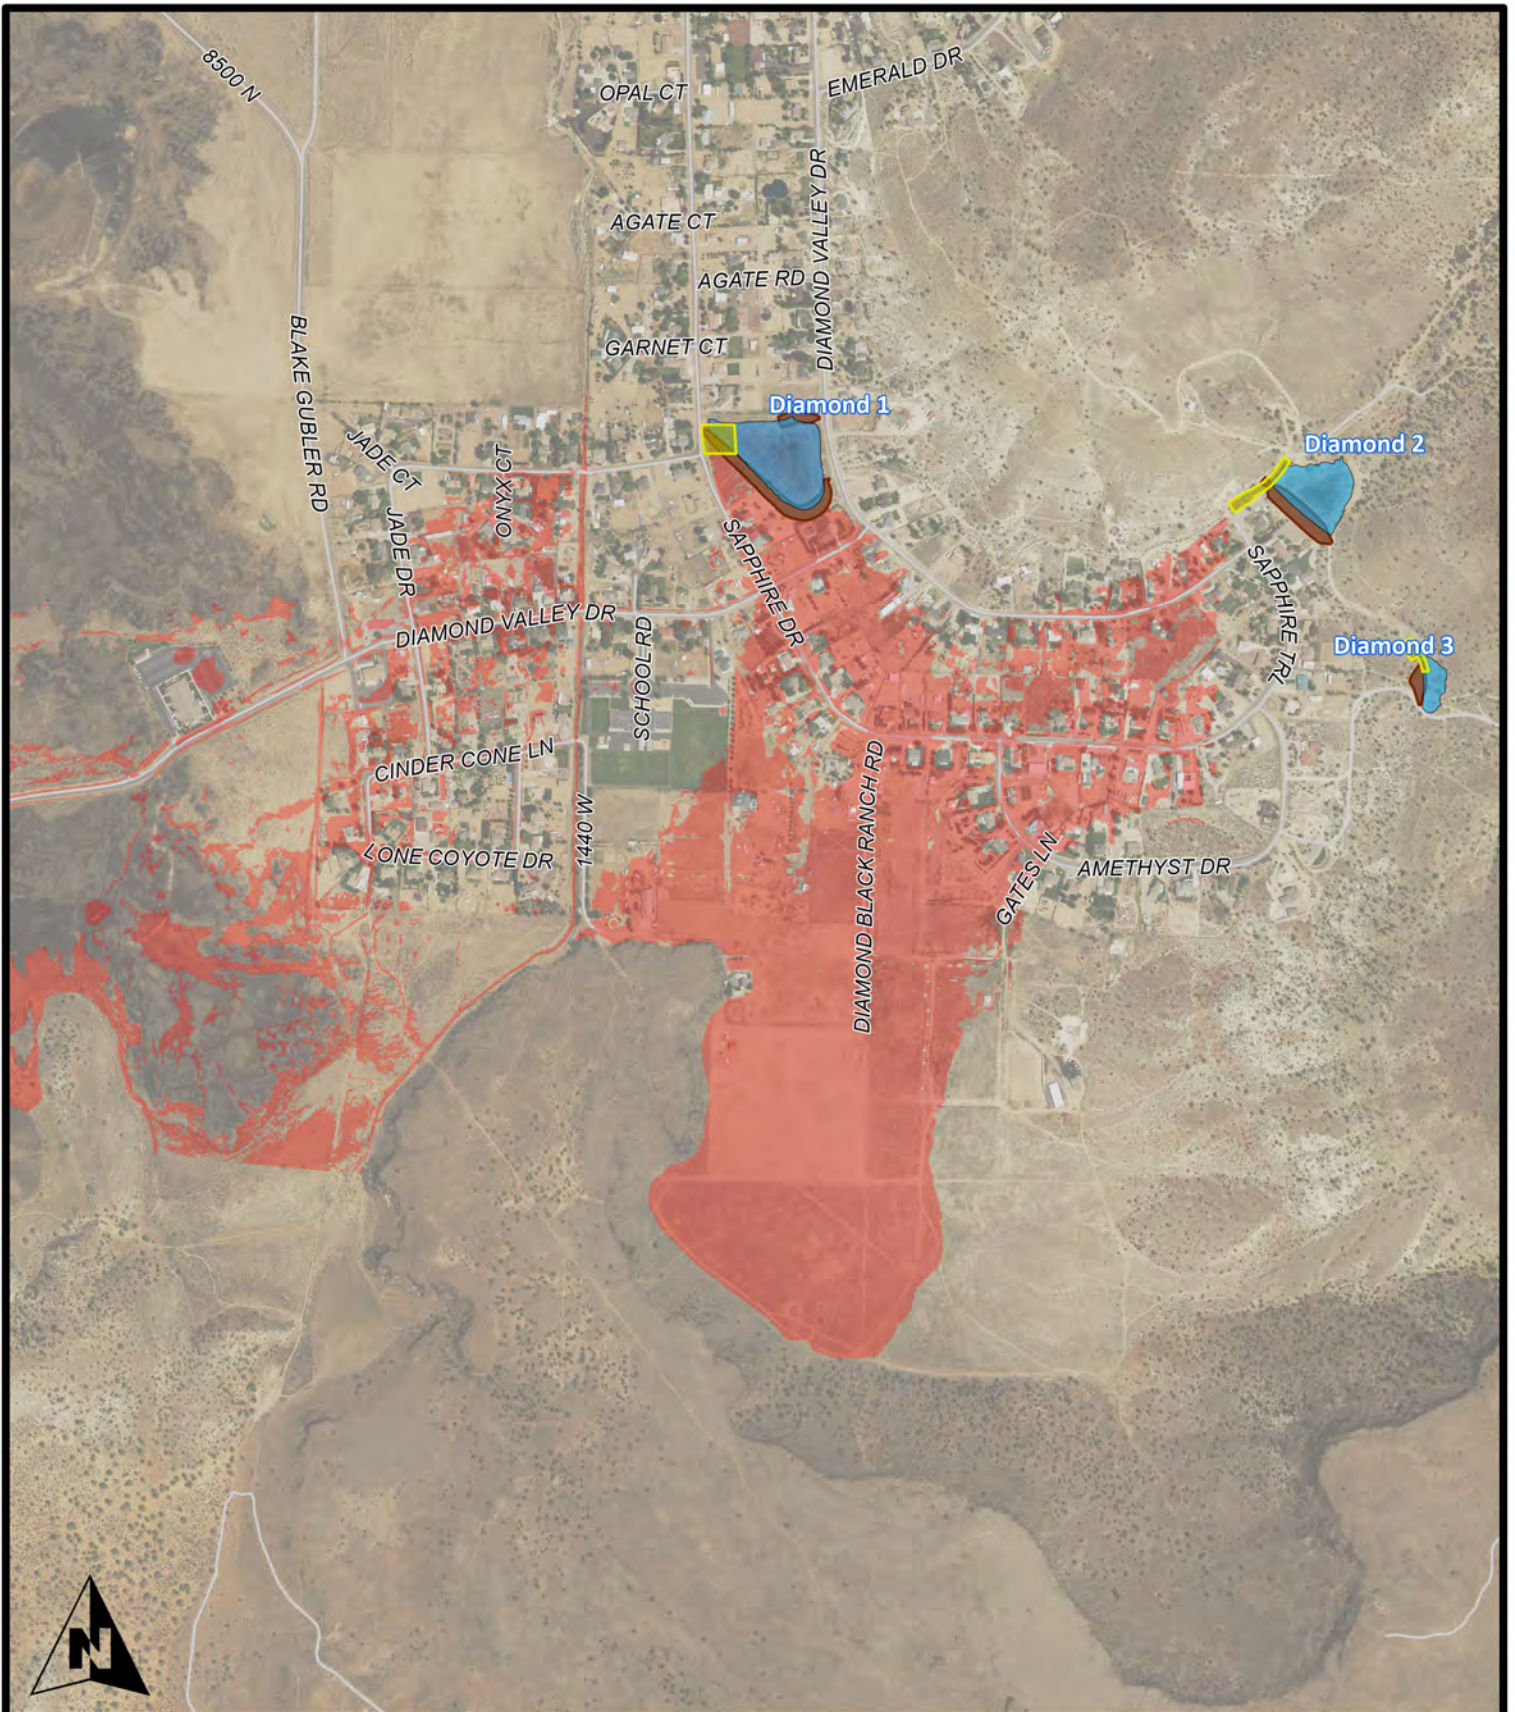

-  Dam
-  Detention Basin High Water
-  Excavated Channel
-  Spillway
-  Diamond 1 Breach Inundation Boundary

Fig 8. Diam1 Breach Map
Santa Clara EA, Diamond Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 1,000 feet

Date: May 11, 2022

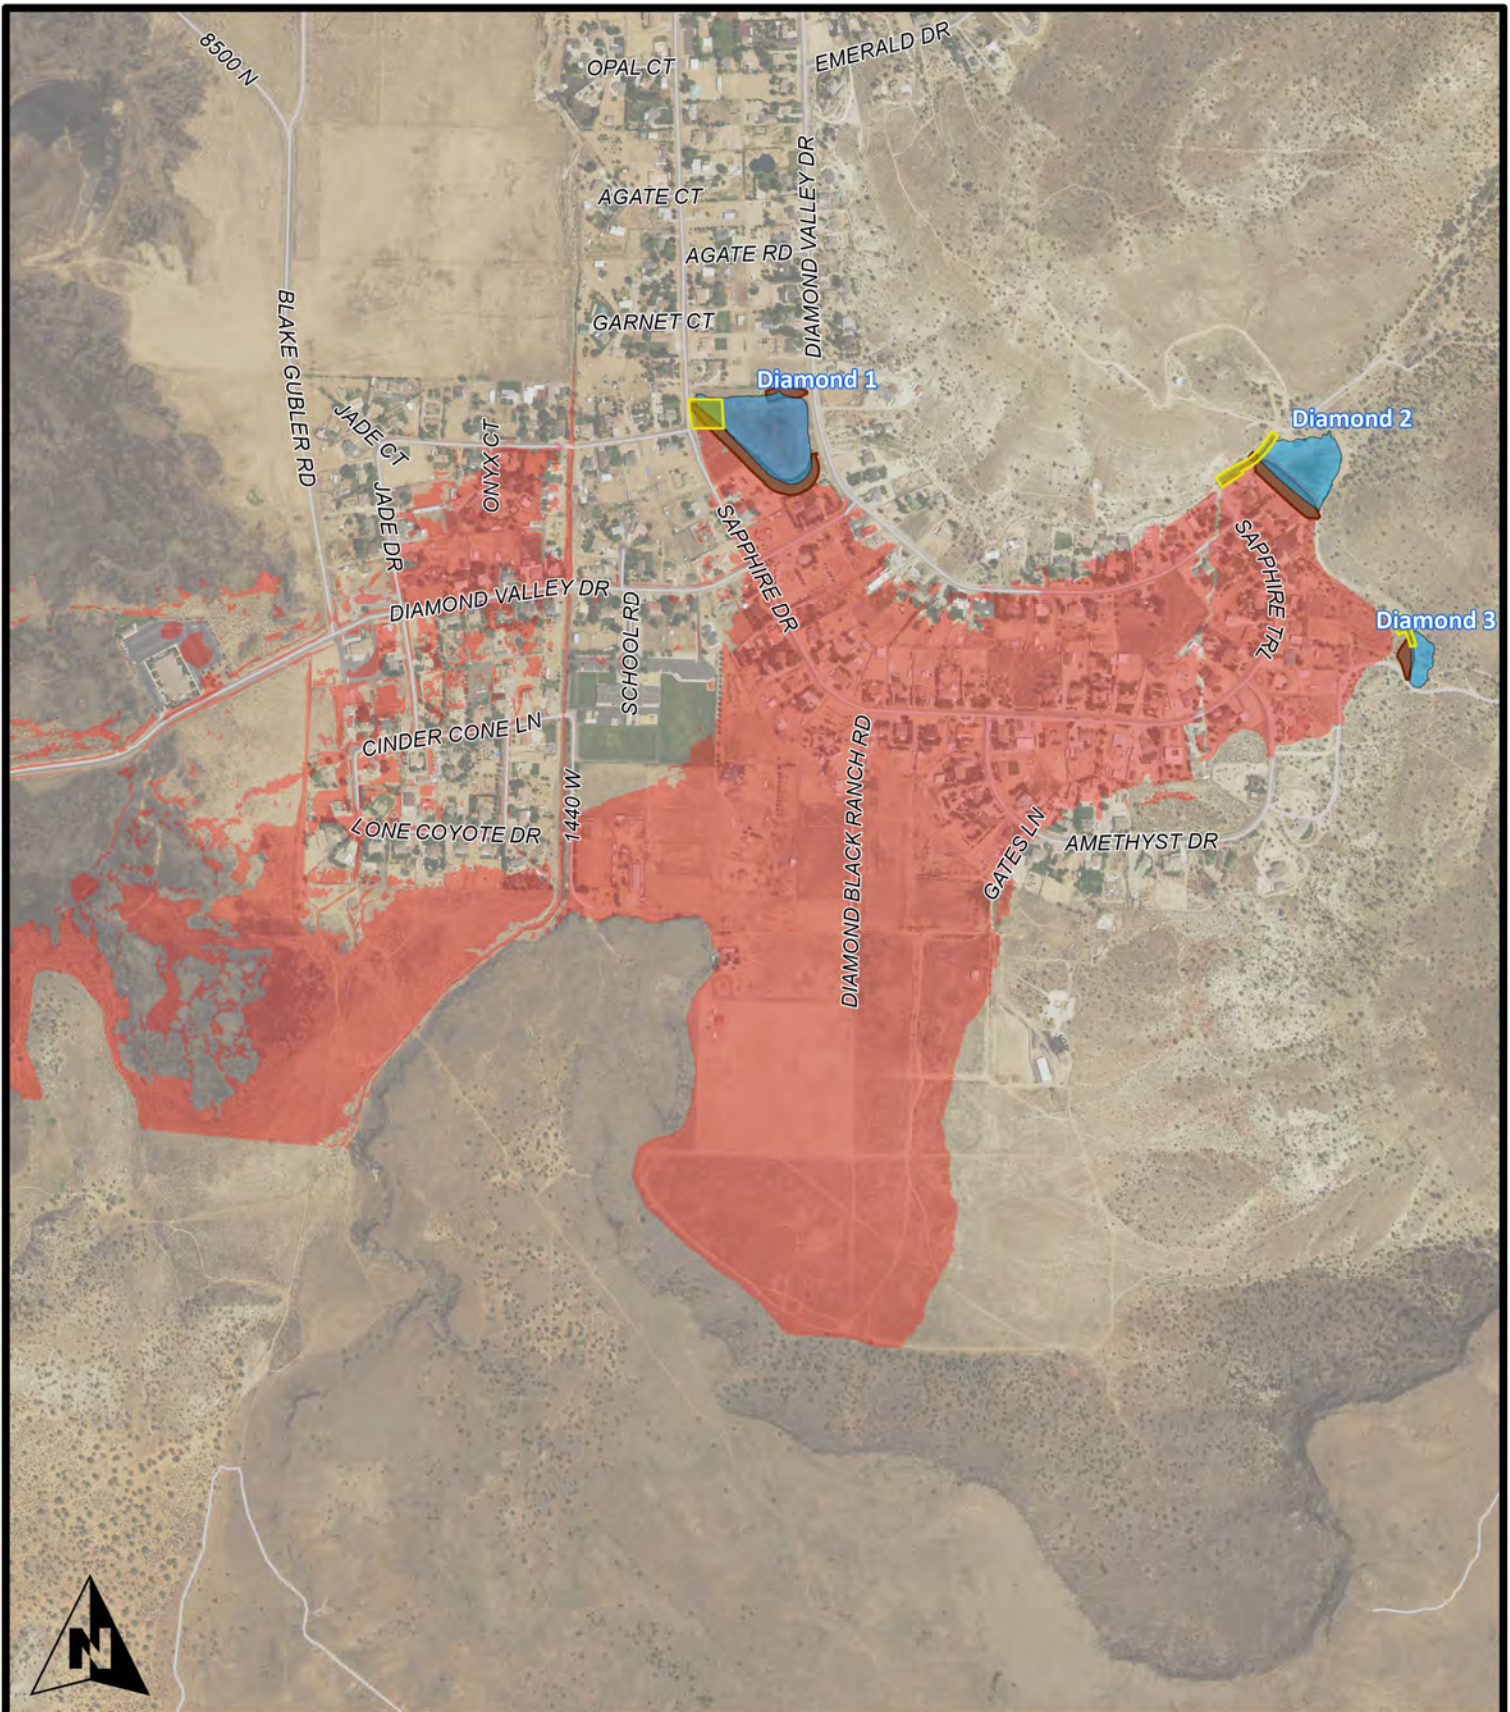


Fig 9. Diam2 Breach Map
Santa Clara EA, Diamond Valley



Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 1,000 feet

Date: May 11, 2022

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- Diamond 2 Breach Inundation Boundary

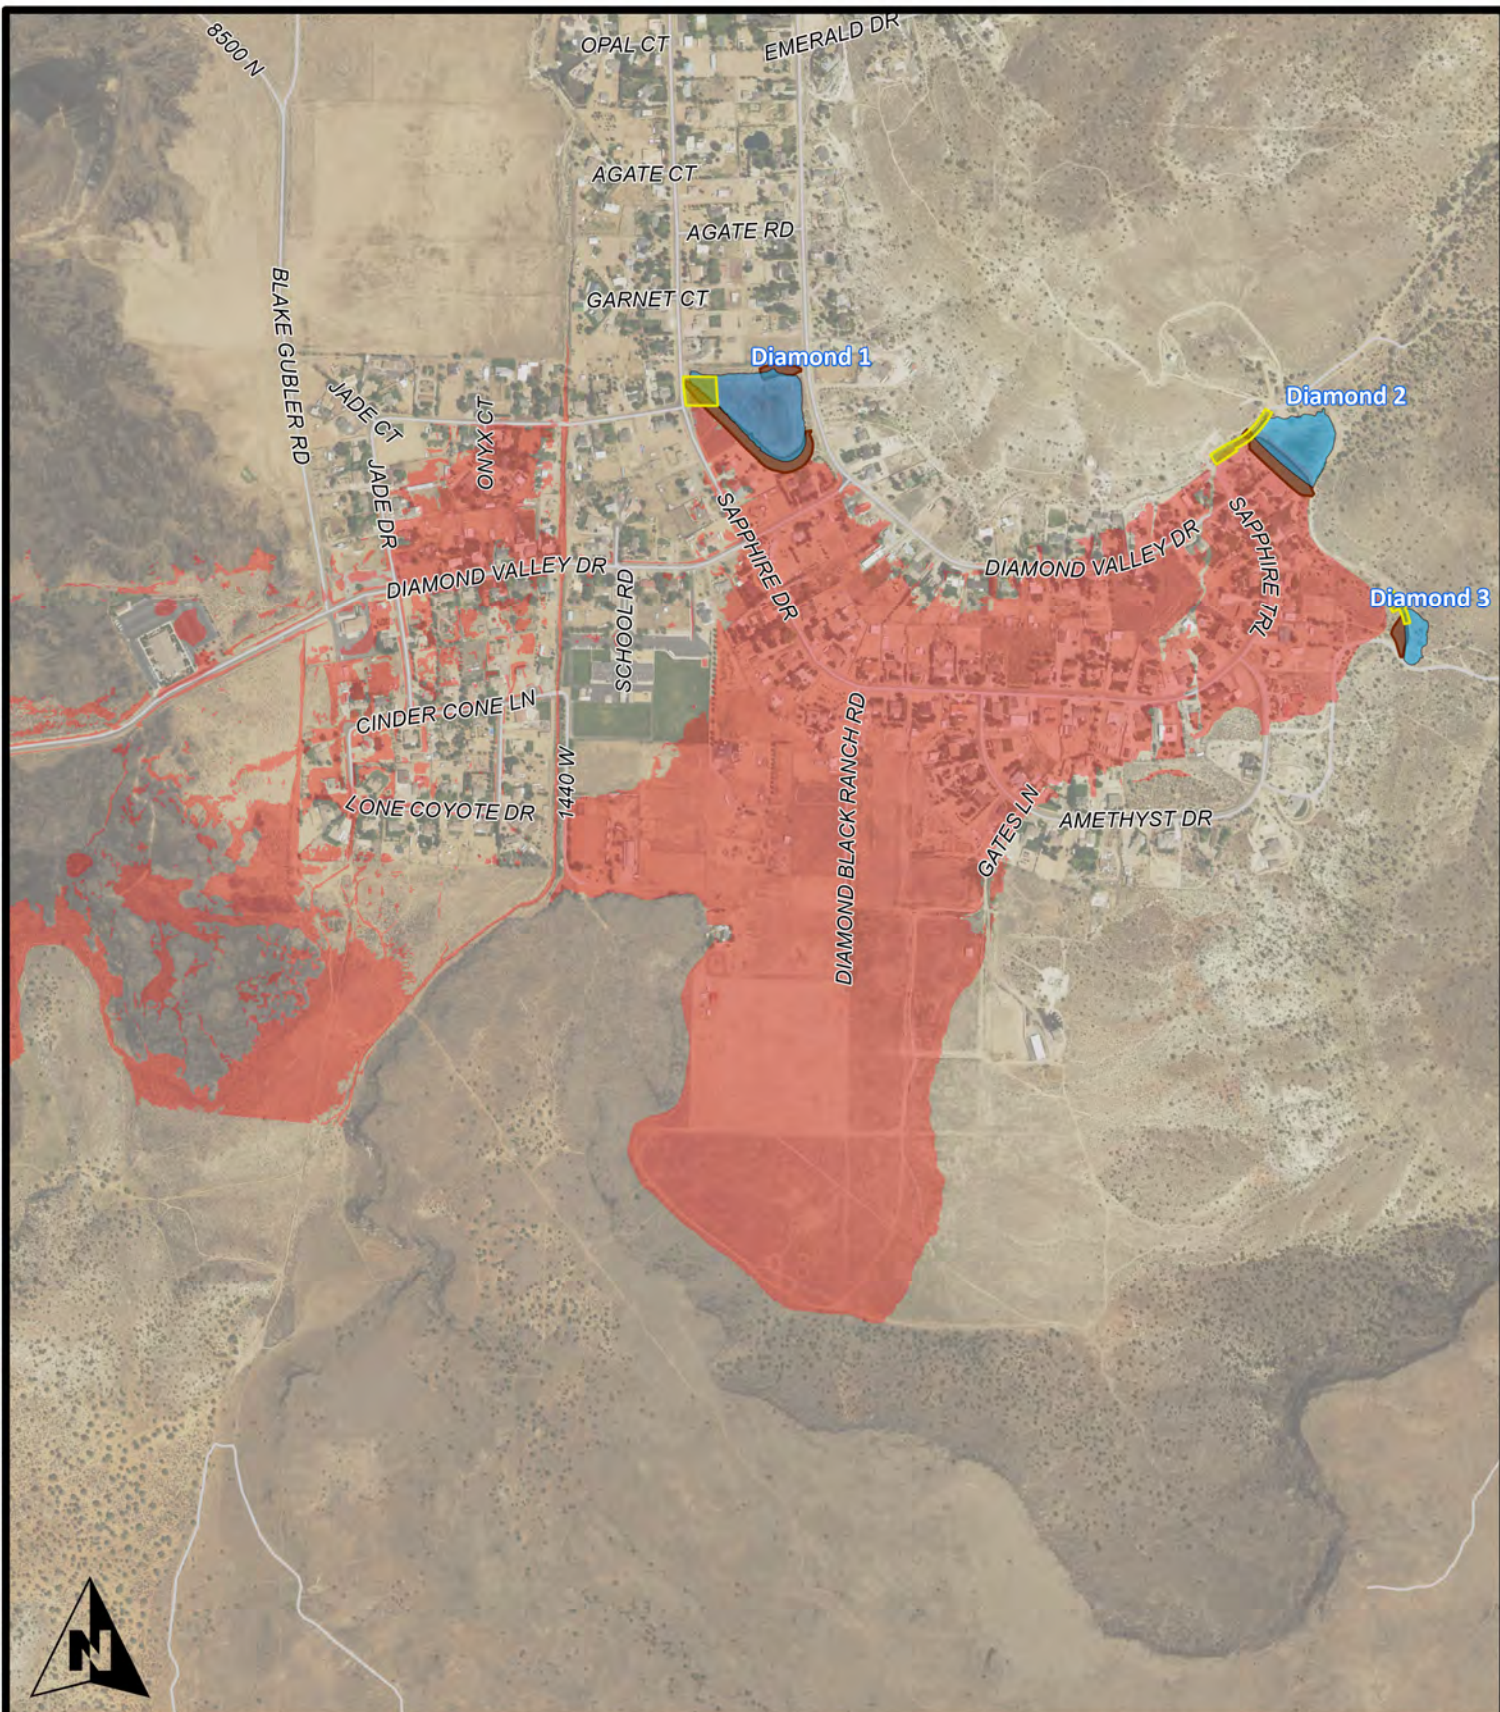

ALPHA
ENGINEERING

43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- Diamond 3 Breach Inundation Boundary

Fig 10. Diam3 Breach Map
Santa Clara EA, Diamond Valley

Spatial Reference: UT83-SF


Drawn By: JTM

Scale: 1" = 1,000 feet

Date: May 11, 2022

APPENDIX E-4C

TECHNICAL DOCUMENTS, CONTINUED

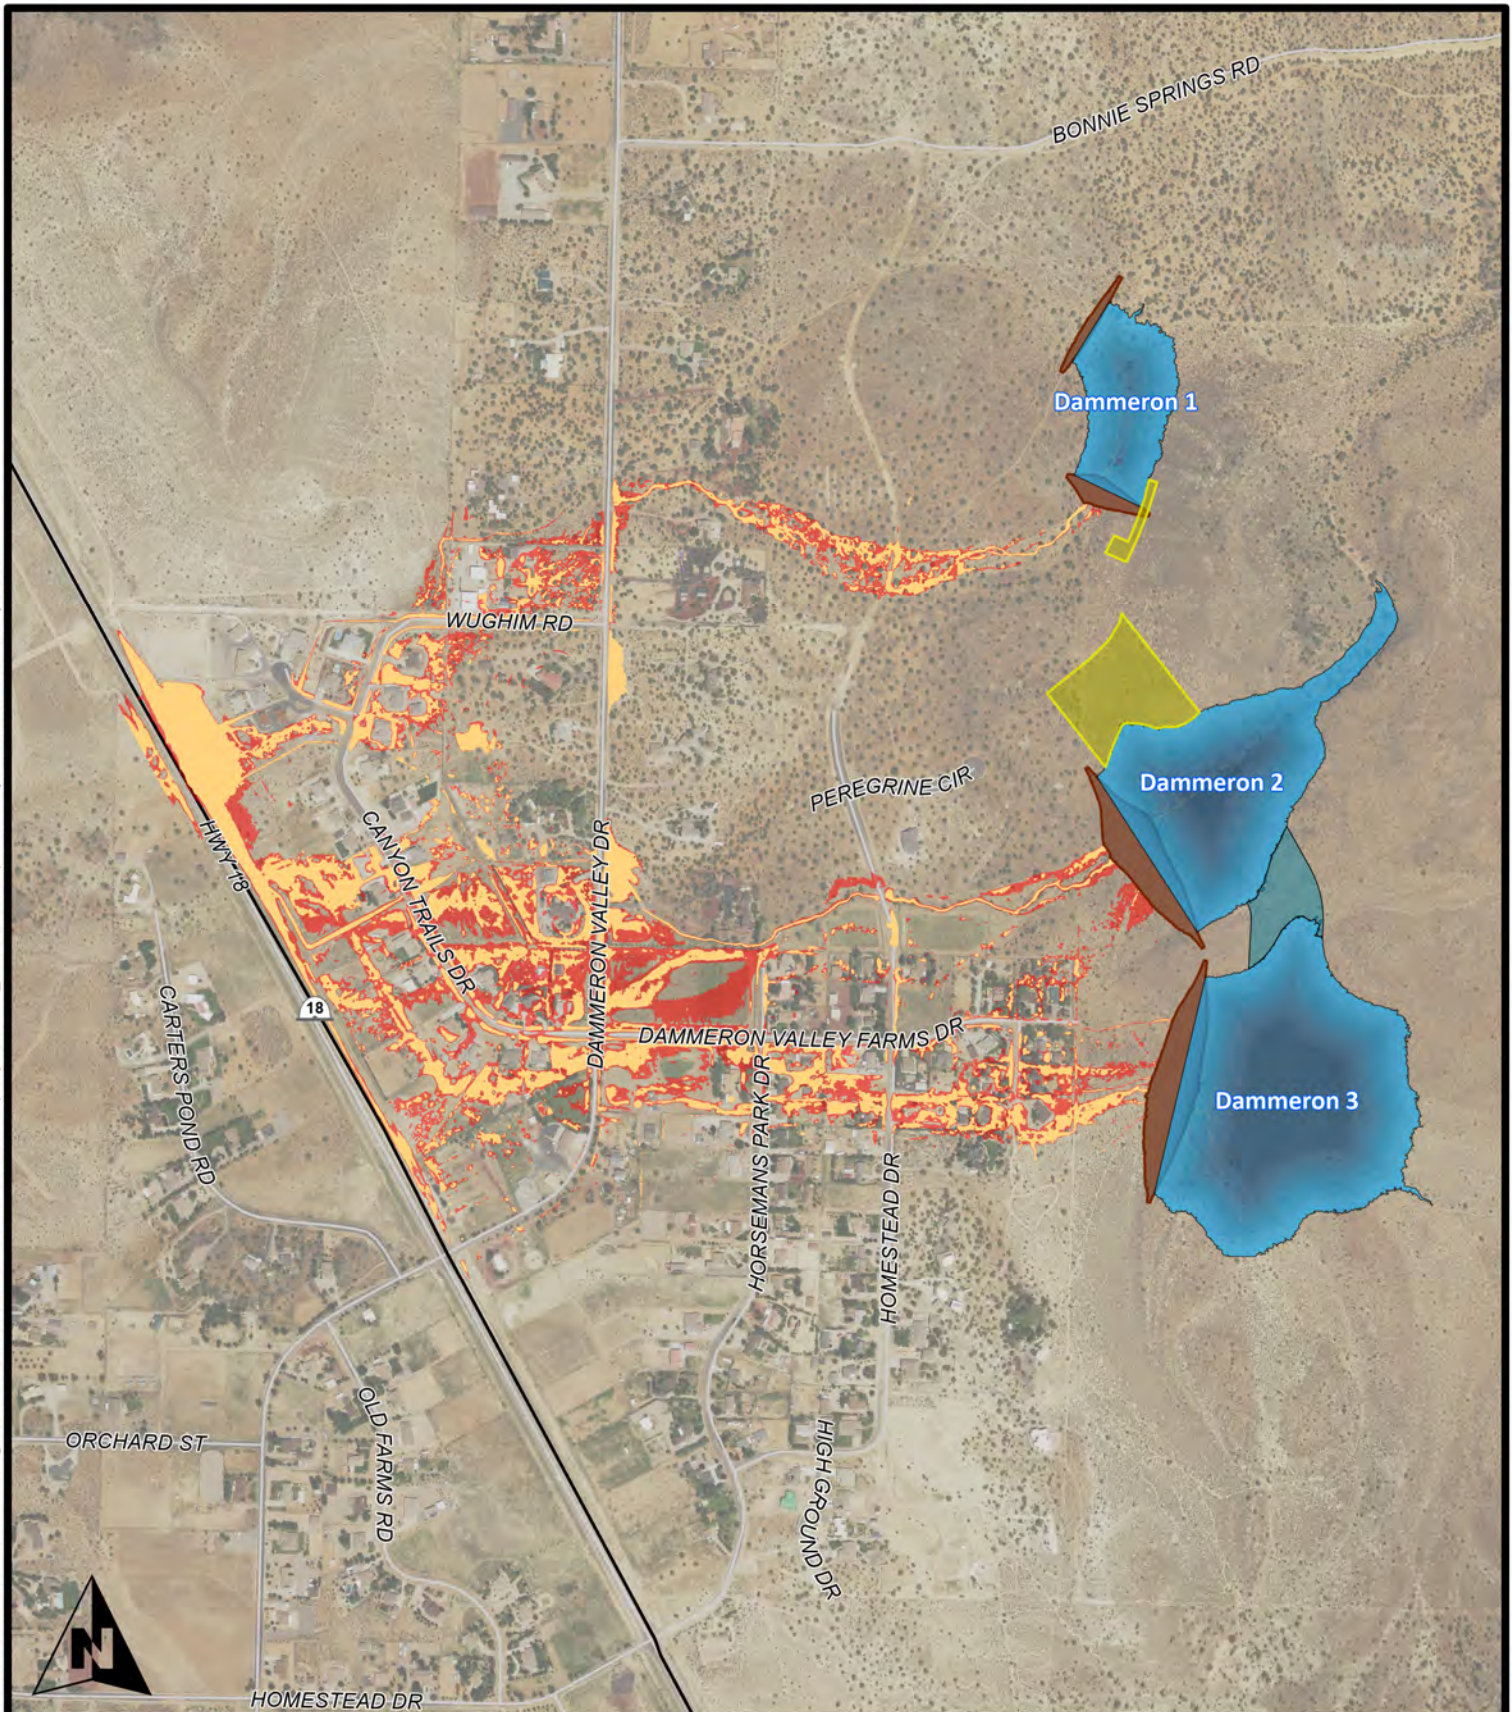

0 200 400 800 1,200
Feet



43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- 2-year Inundation Boundary without Dams
- 2-year Inundation Boundary with Dams
- 2-year Inundation Boundary without Dams
- 2-year Inundation Boundary with Dams


Fig 11. 2-yr Inundation Map
Santa Clara EA, Dammeron Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 800 feet

Date: May 11, 2022

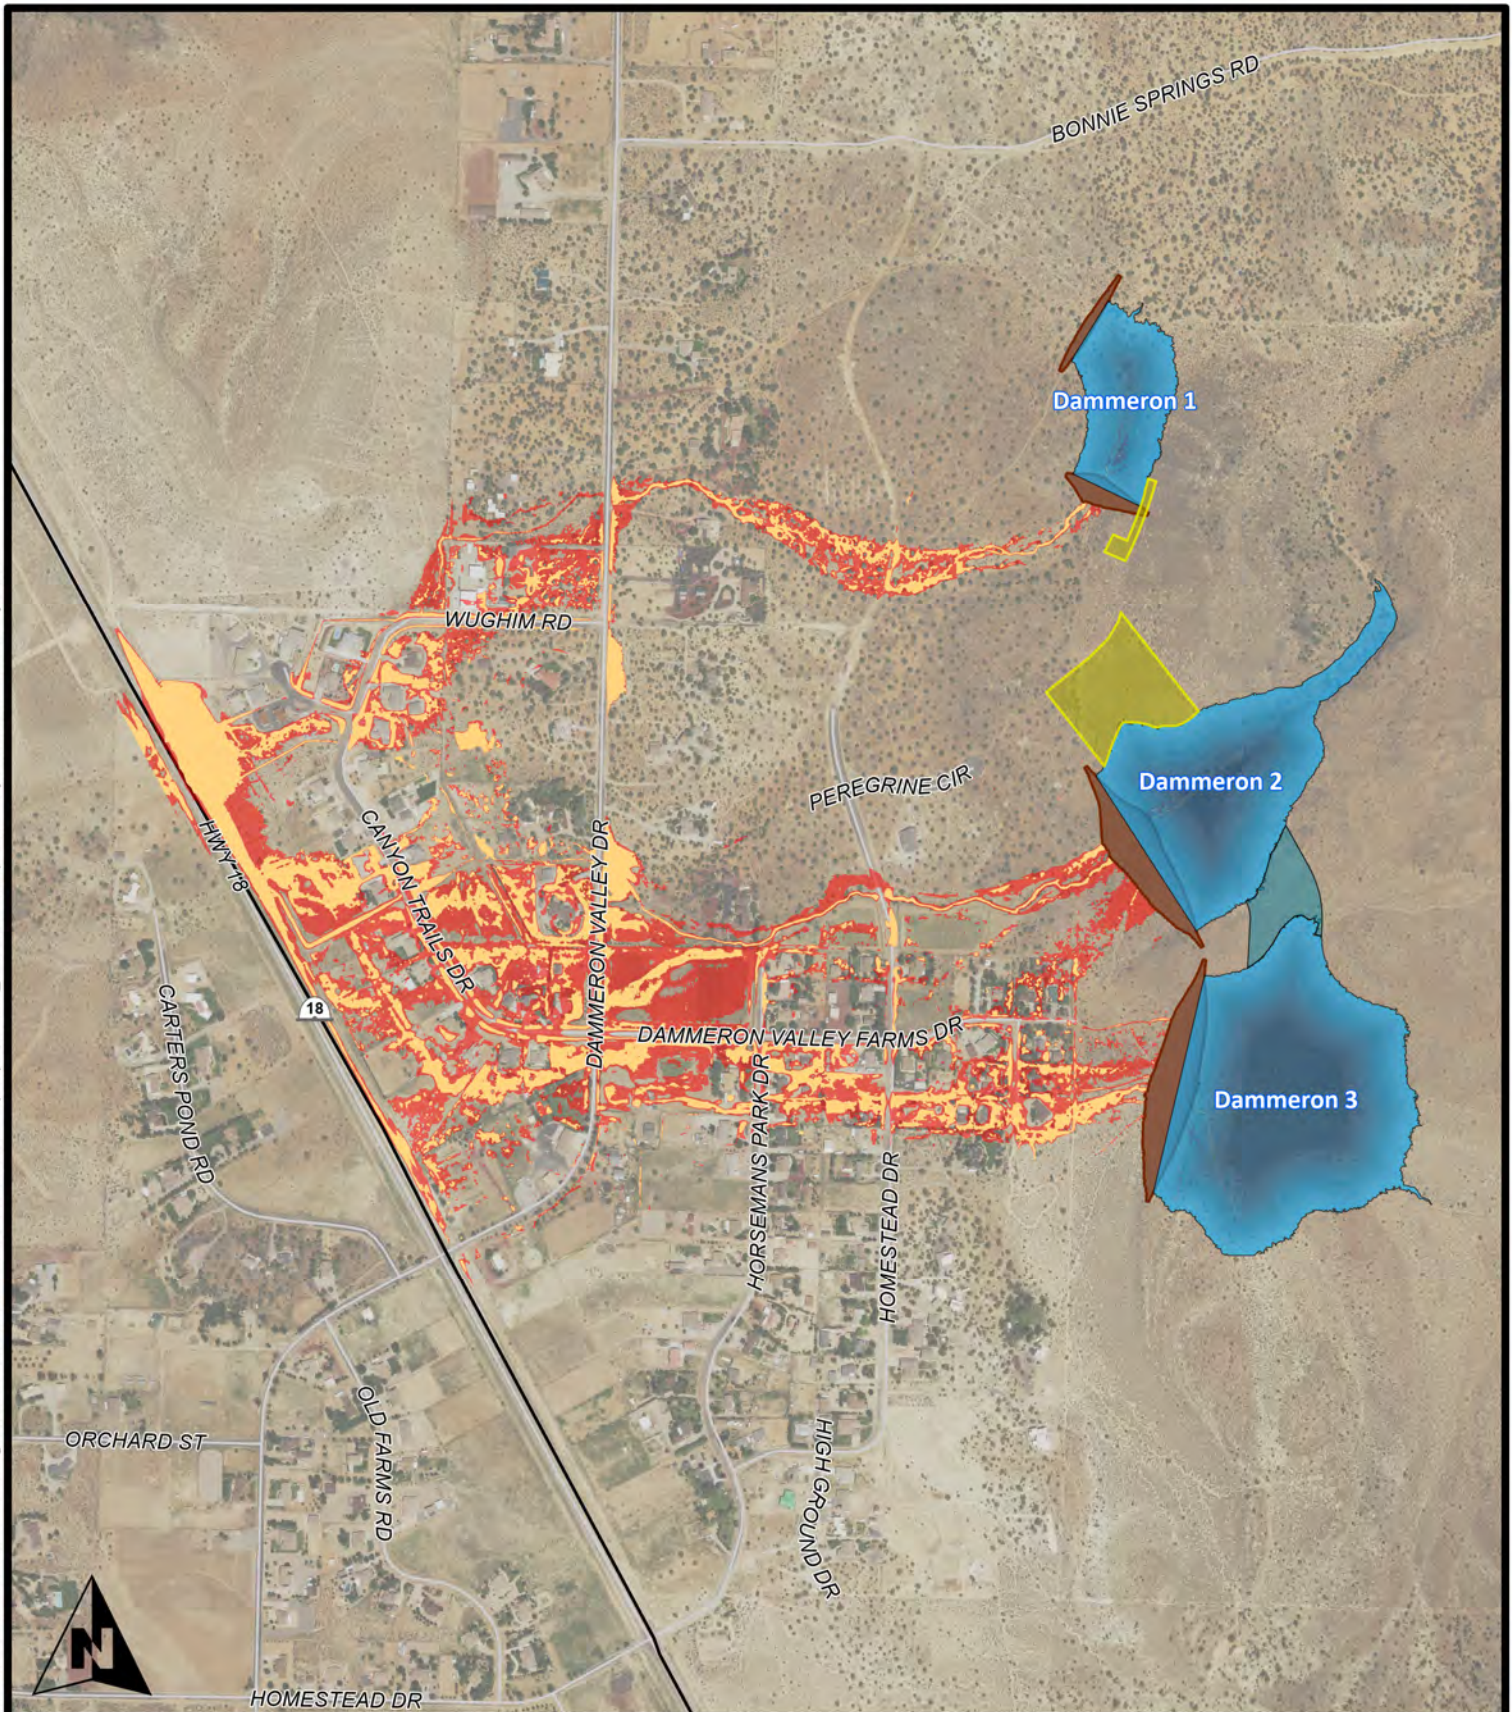

0 200 400 800 1,200
Feet

ALPHA
ENGINEERING

43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- 5-year Inundation Boundary without Dams
- 5-year Inundation Boundary with Dams
- 5-year Inundation Boundary without Dams
- 5-year Inundation Boundary with Dams


Fig 12. 5-yr Inundation Map
Santa Clara EA, Dammeron Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 800 feet

Date: May 11, 2022

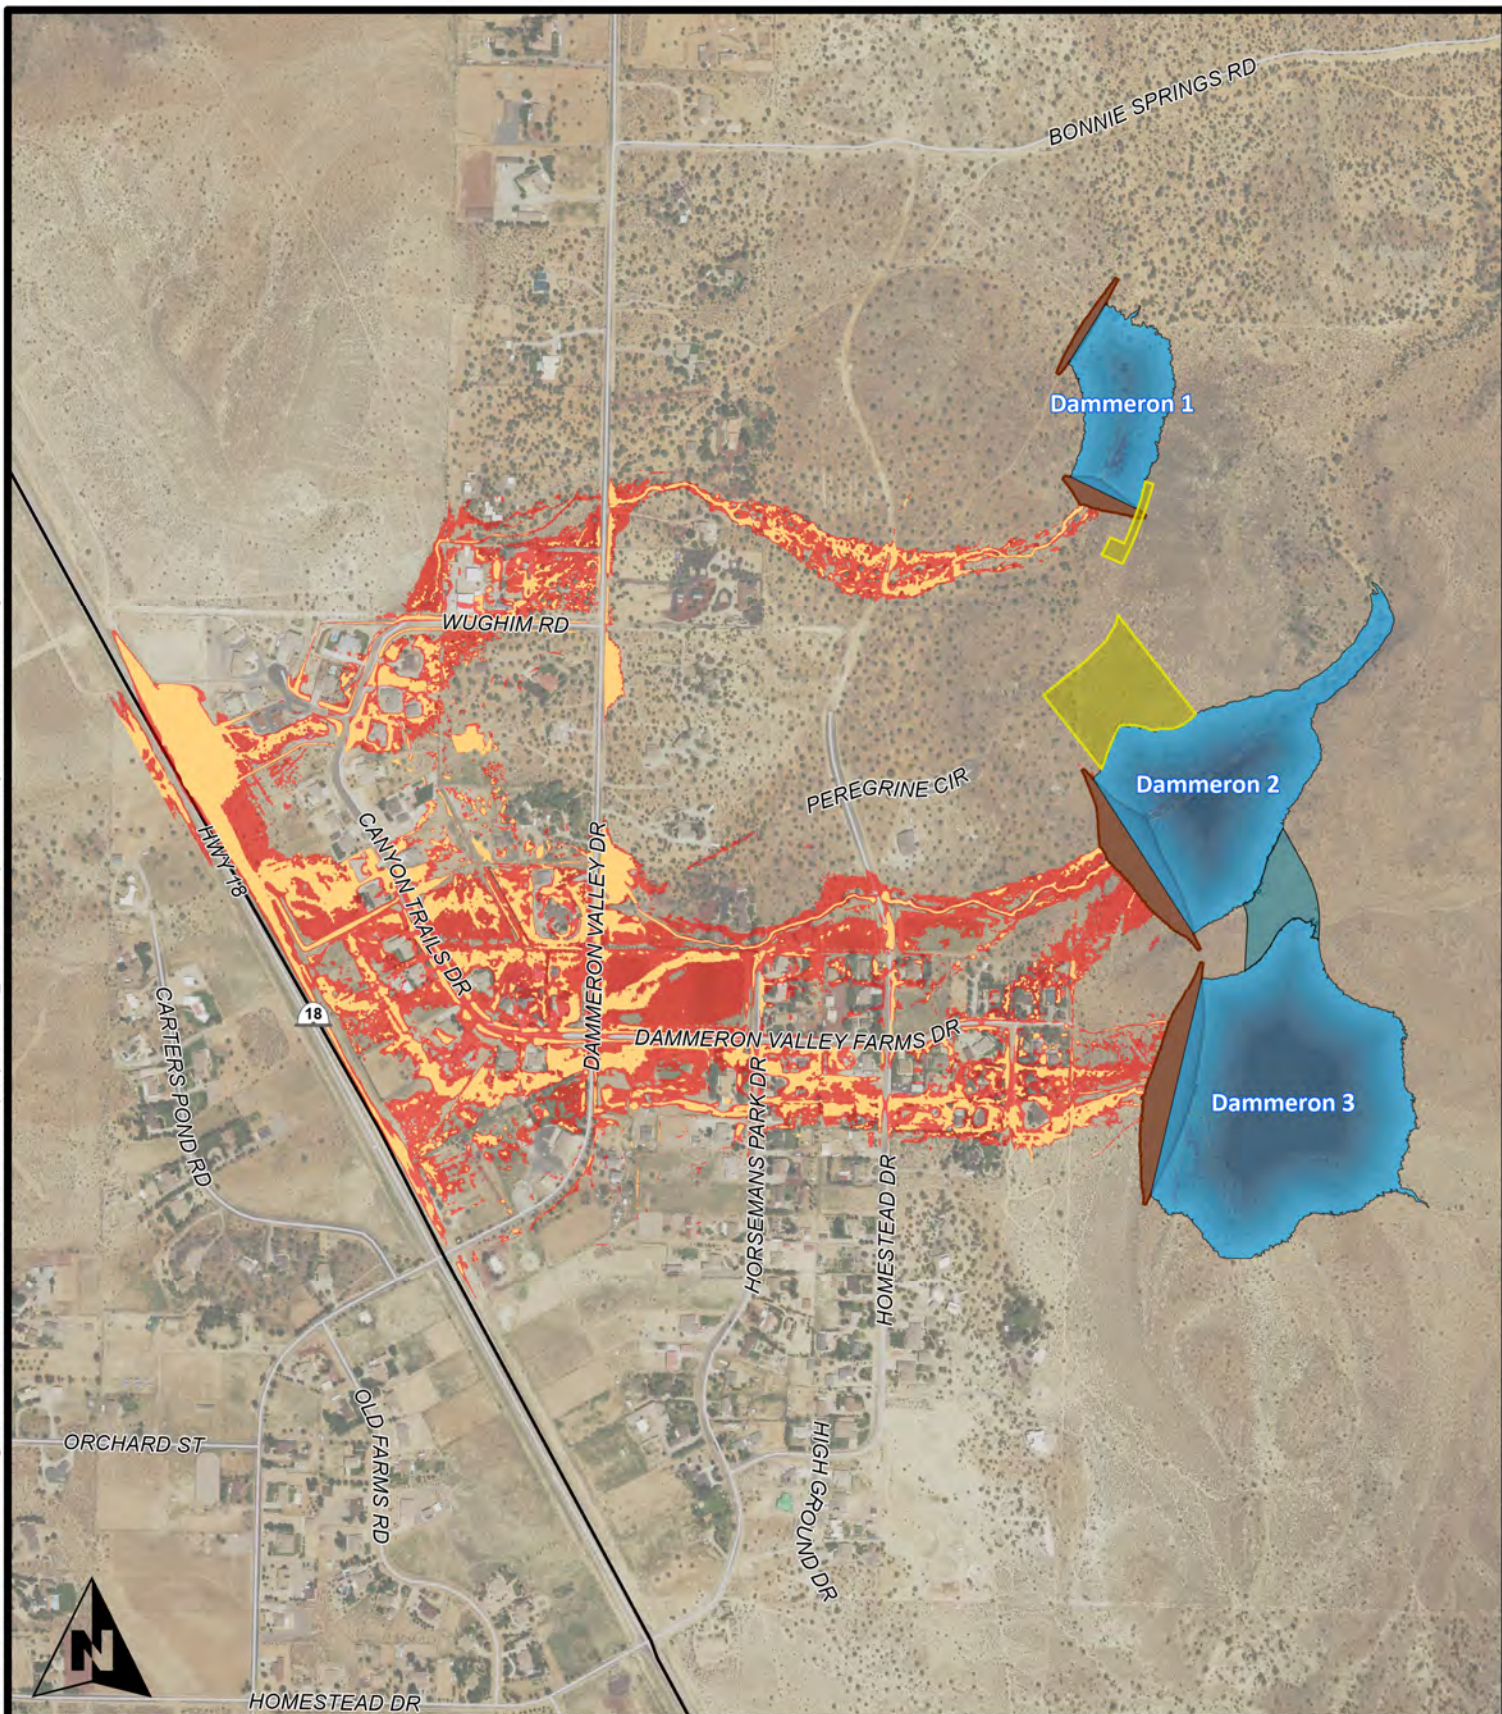

0 200 400 800 1,200
Feet



43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- 10-year Inundation Boundary without Dams
- 10-year Inundation Boundary with Dams
- 10-year Inundation Boundary without Dams
- 10-year Inundation Boundary with Dams

Fig 13. 10-yr Inundation Map
Santa Clara EA, Dammeron Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 800 feet

Date: May 11, 2022

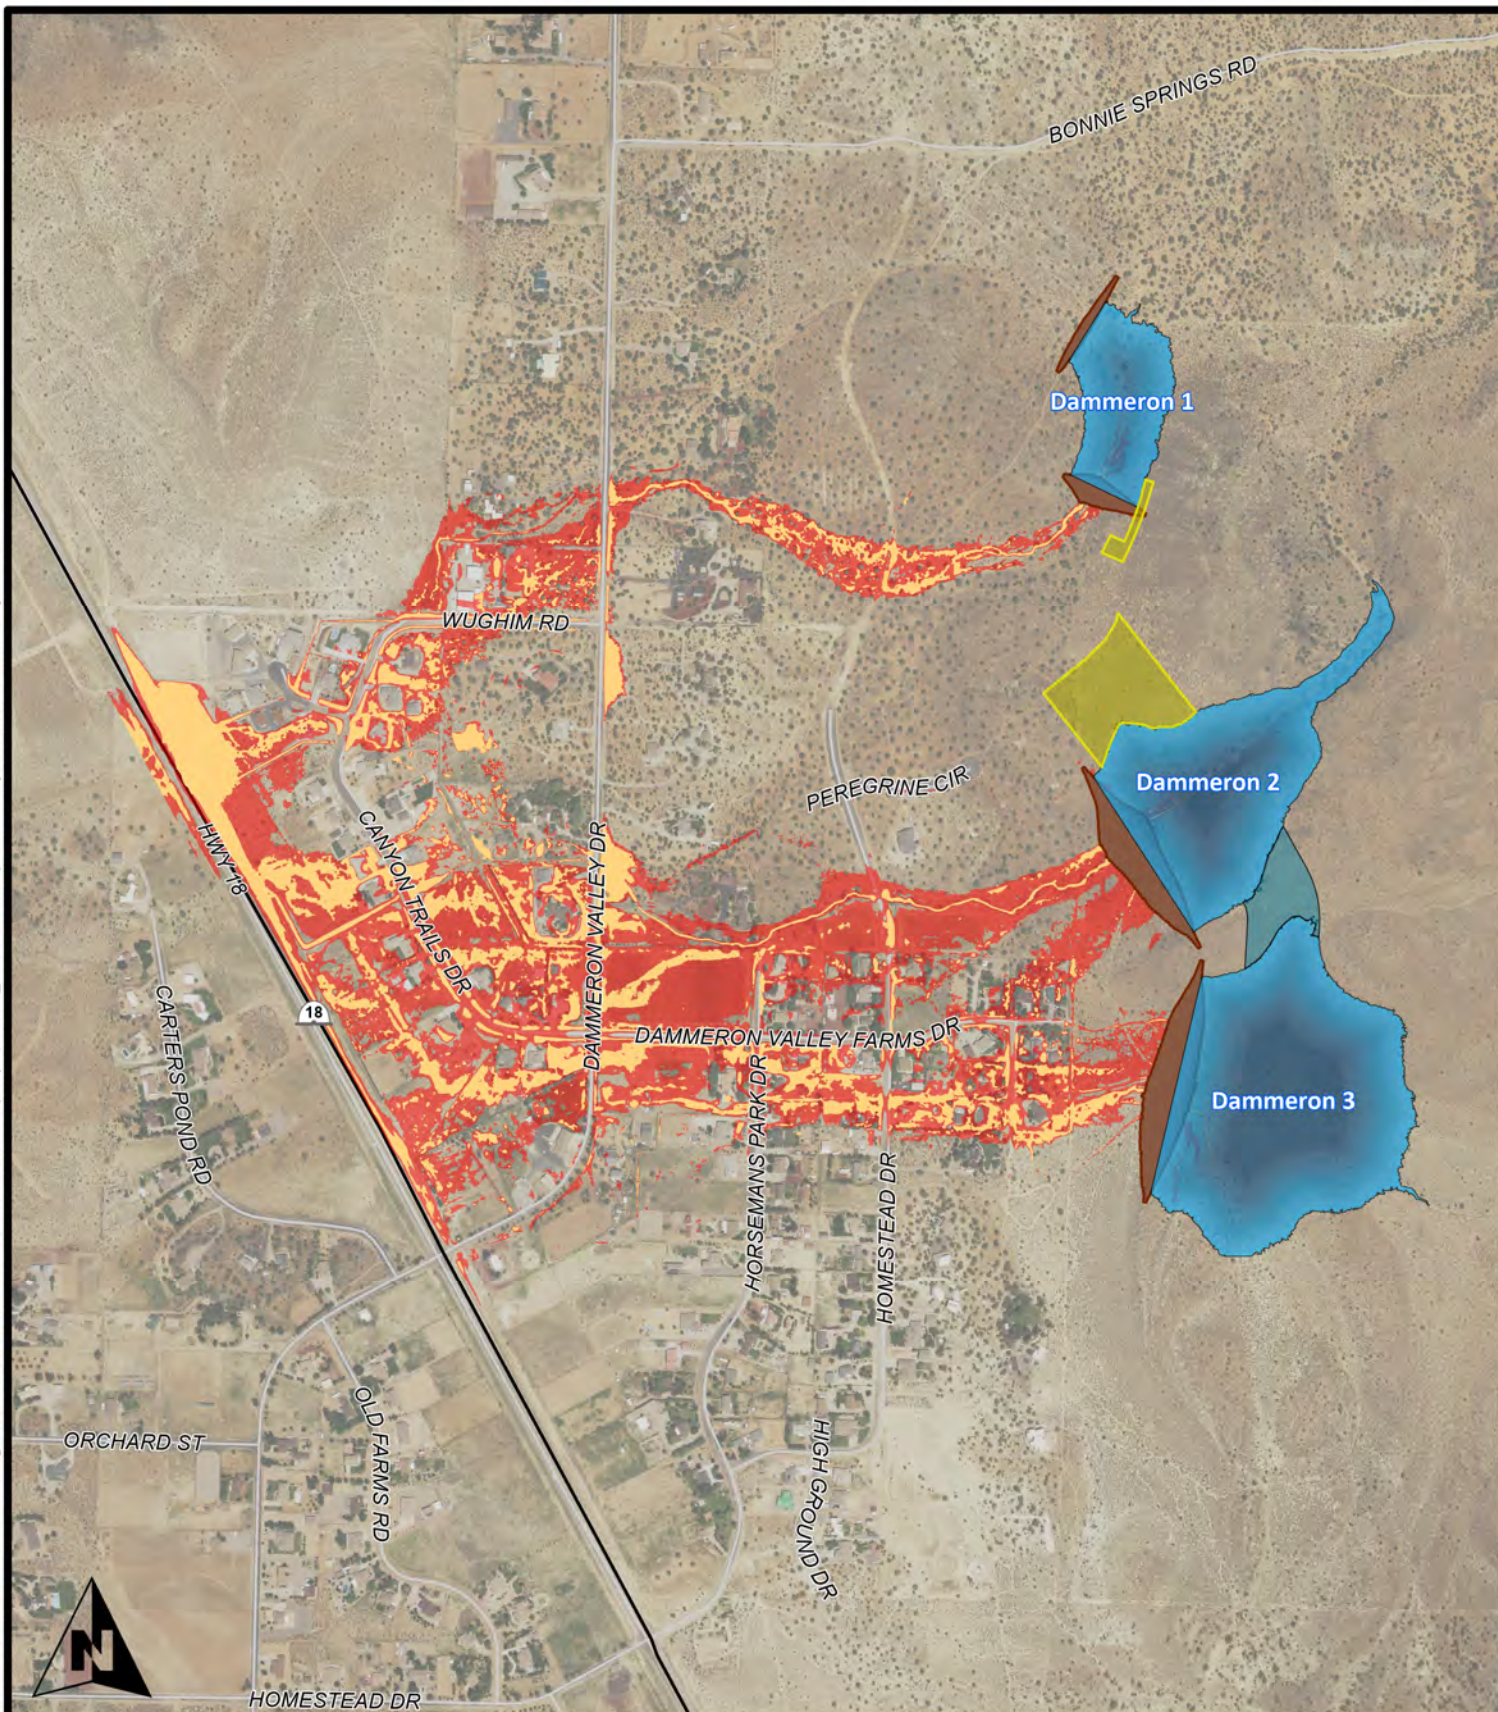


Fig 14. 25-yr Inundation Map
Santa Clara EA, Dammeron Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 800 feet

Date: May 11, 2022

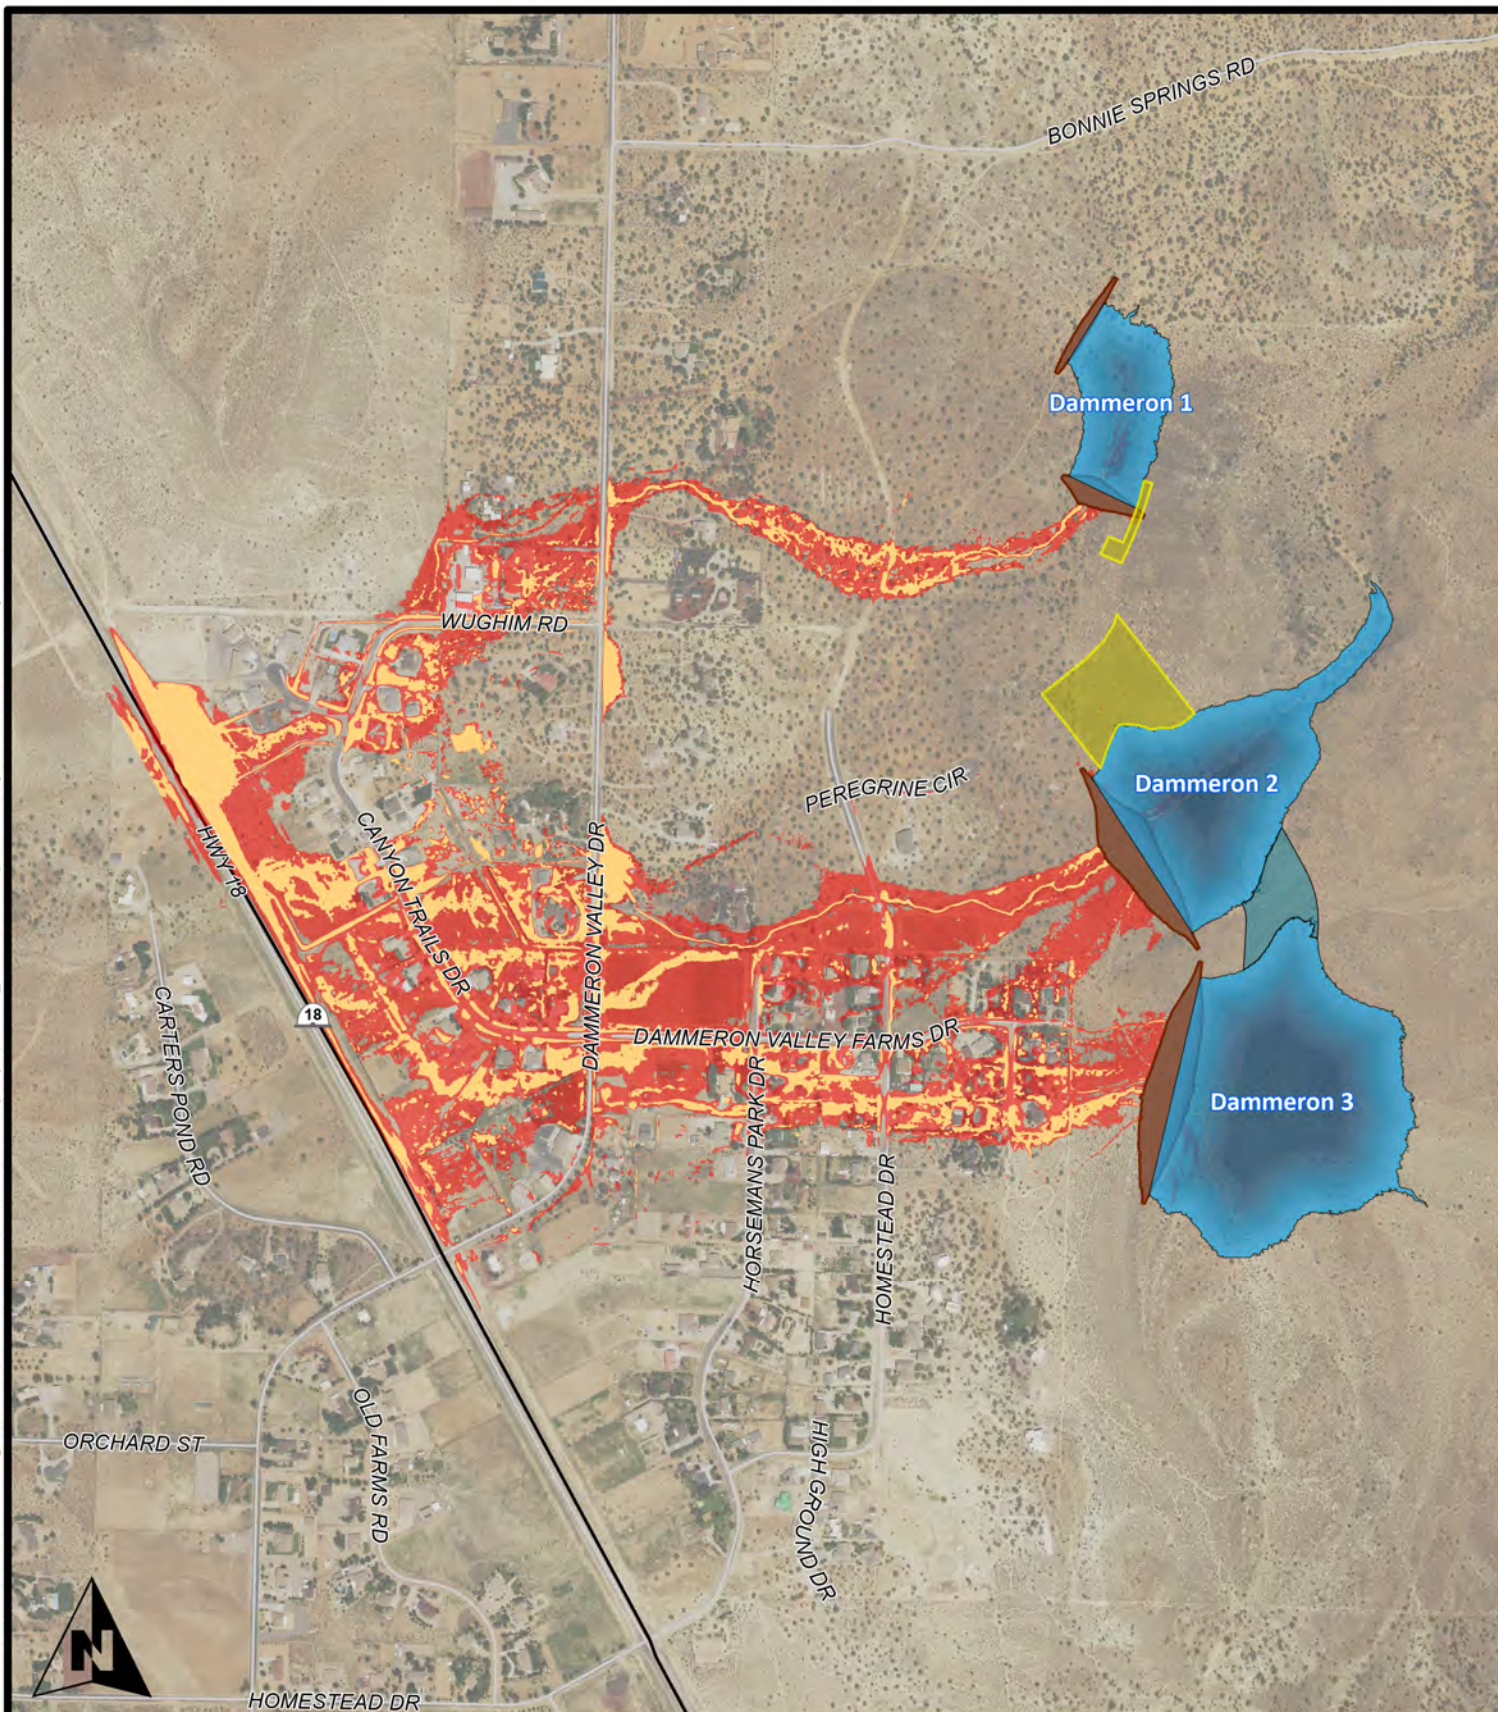


Fig 15. 50-yr Inundation Map
Santa Clara EA, Dammeron Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 800 feet

Date: May 11, 2022

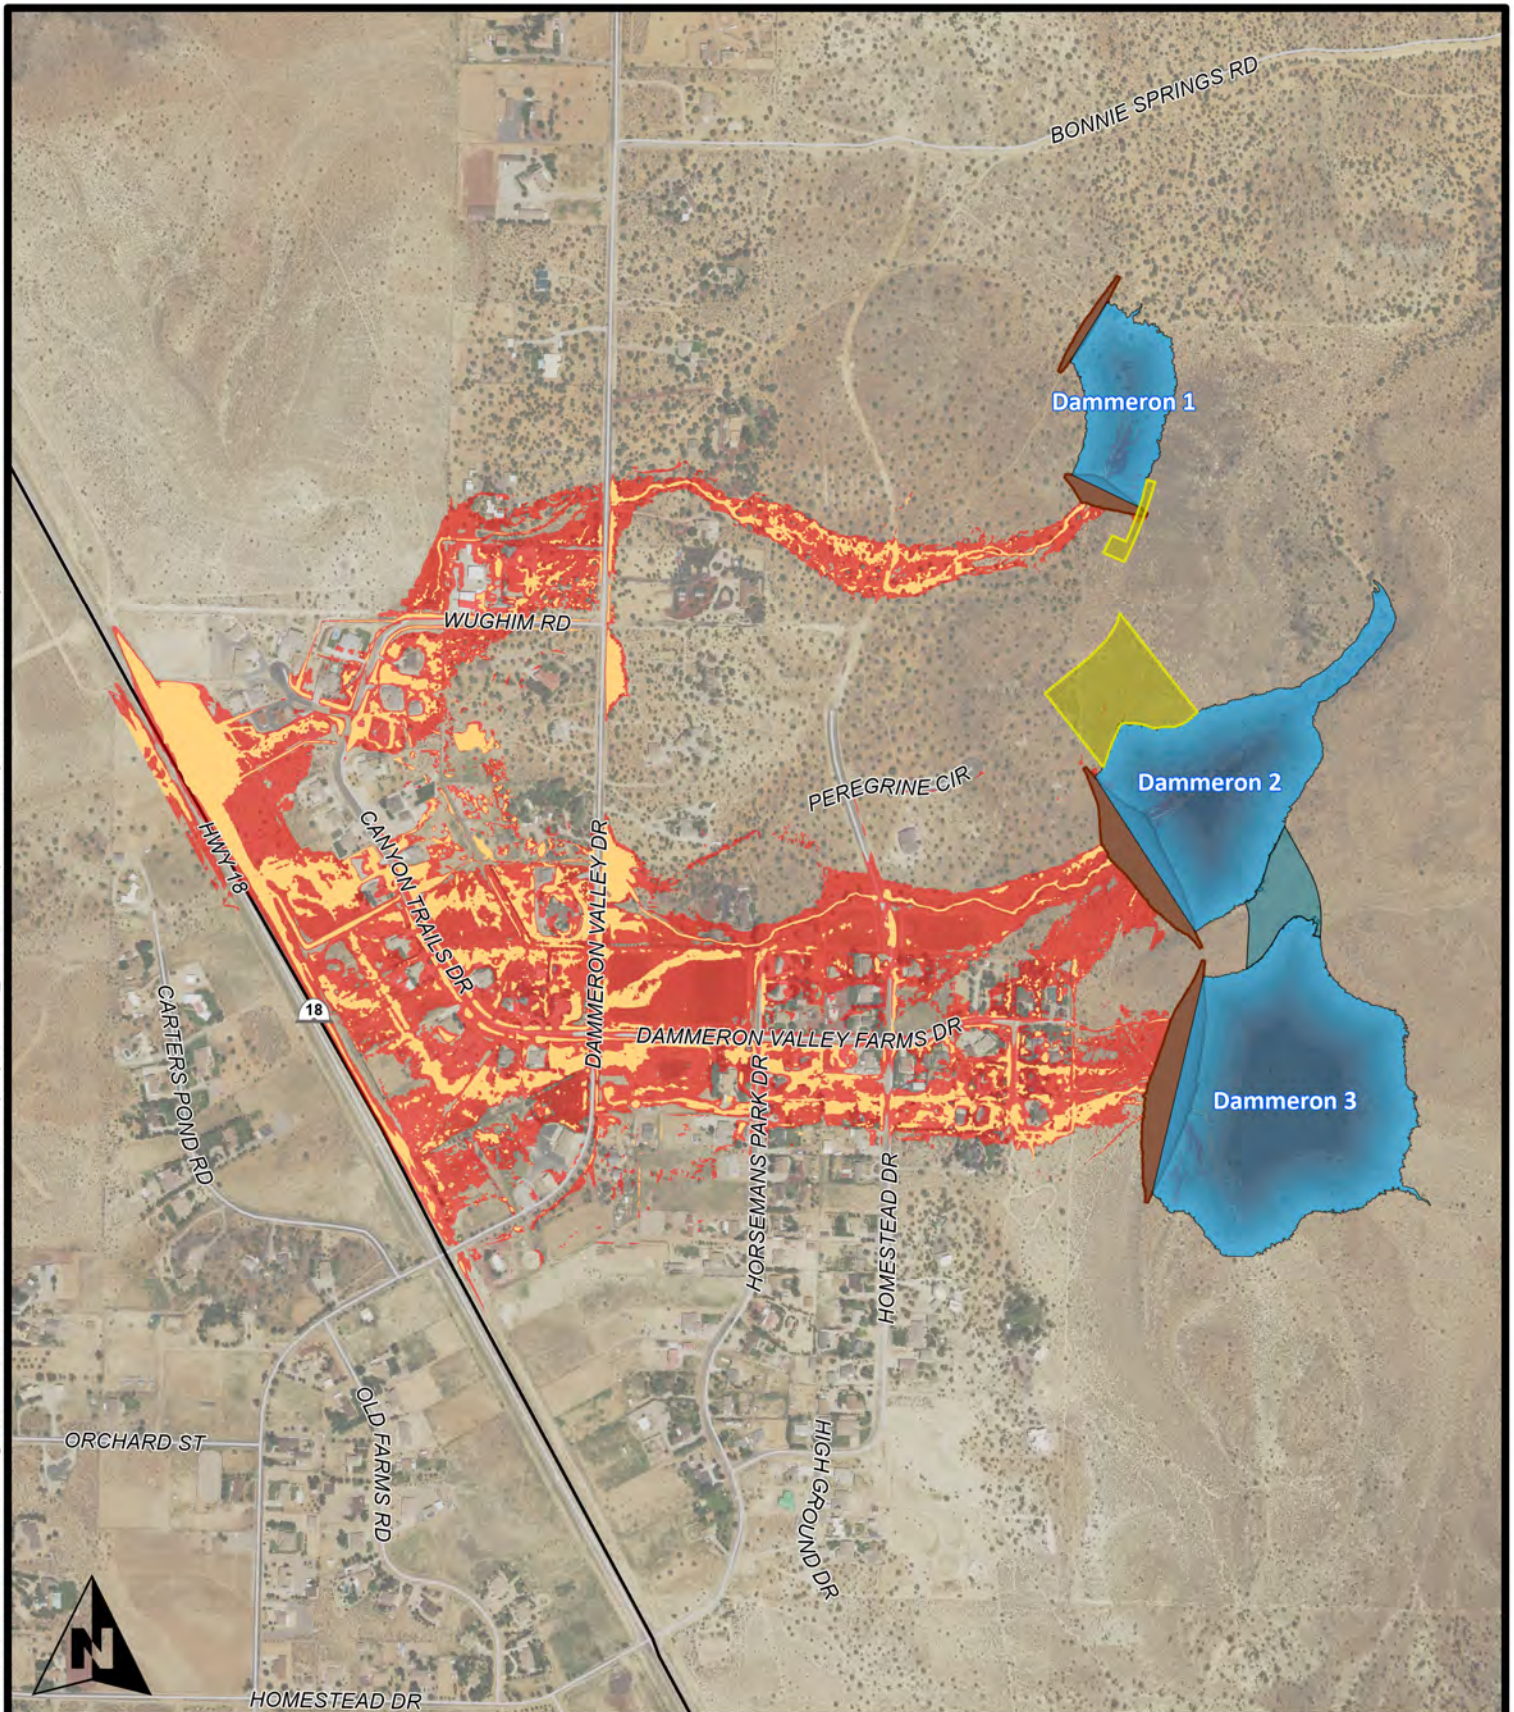


Fig 16. 100-yr Inundation Map
Santa Clara EA, Dammeron Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 800 feet

Date: May 11, 2022

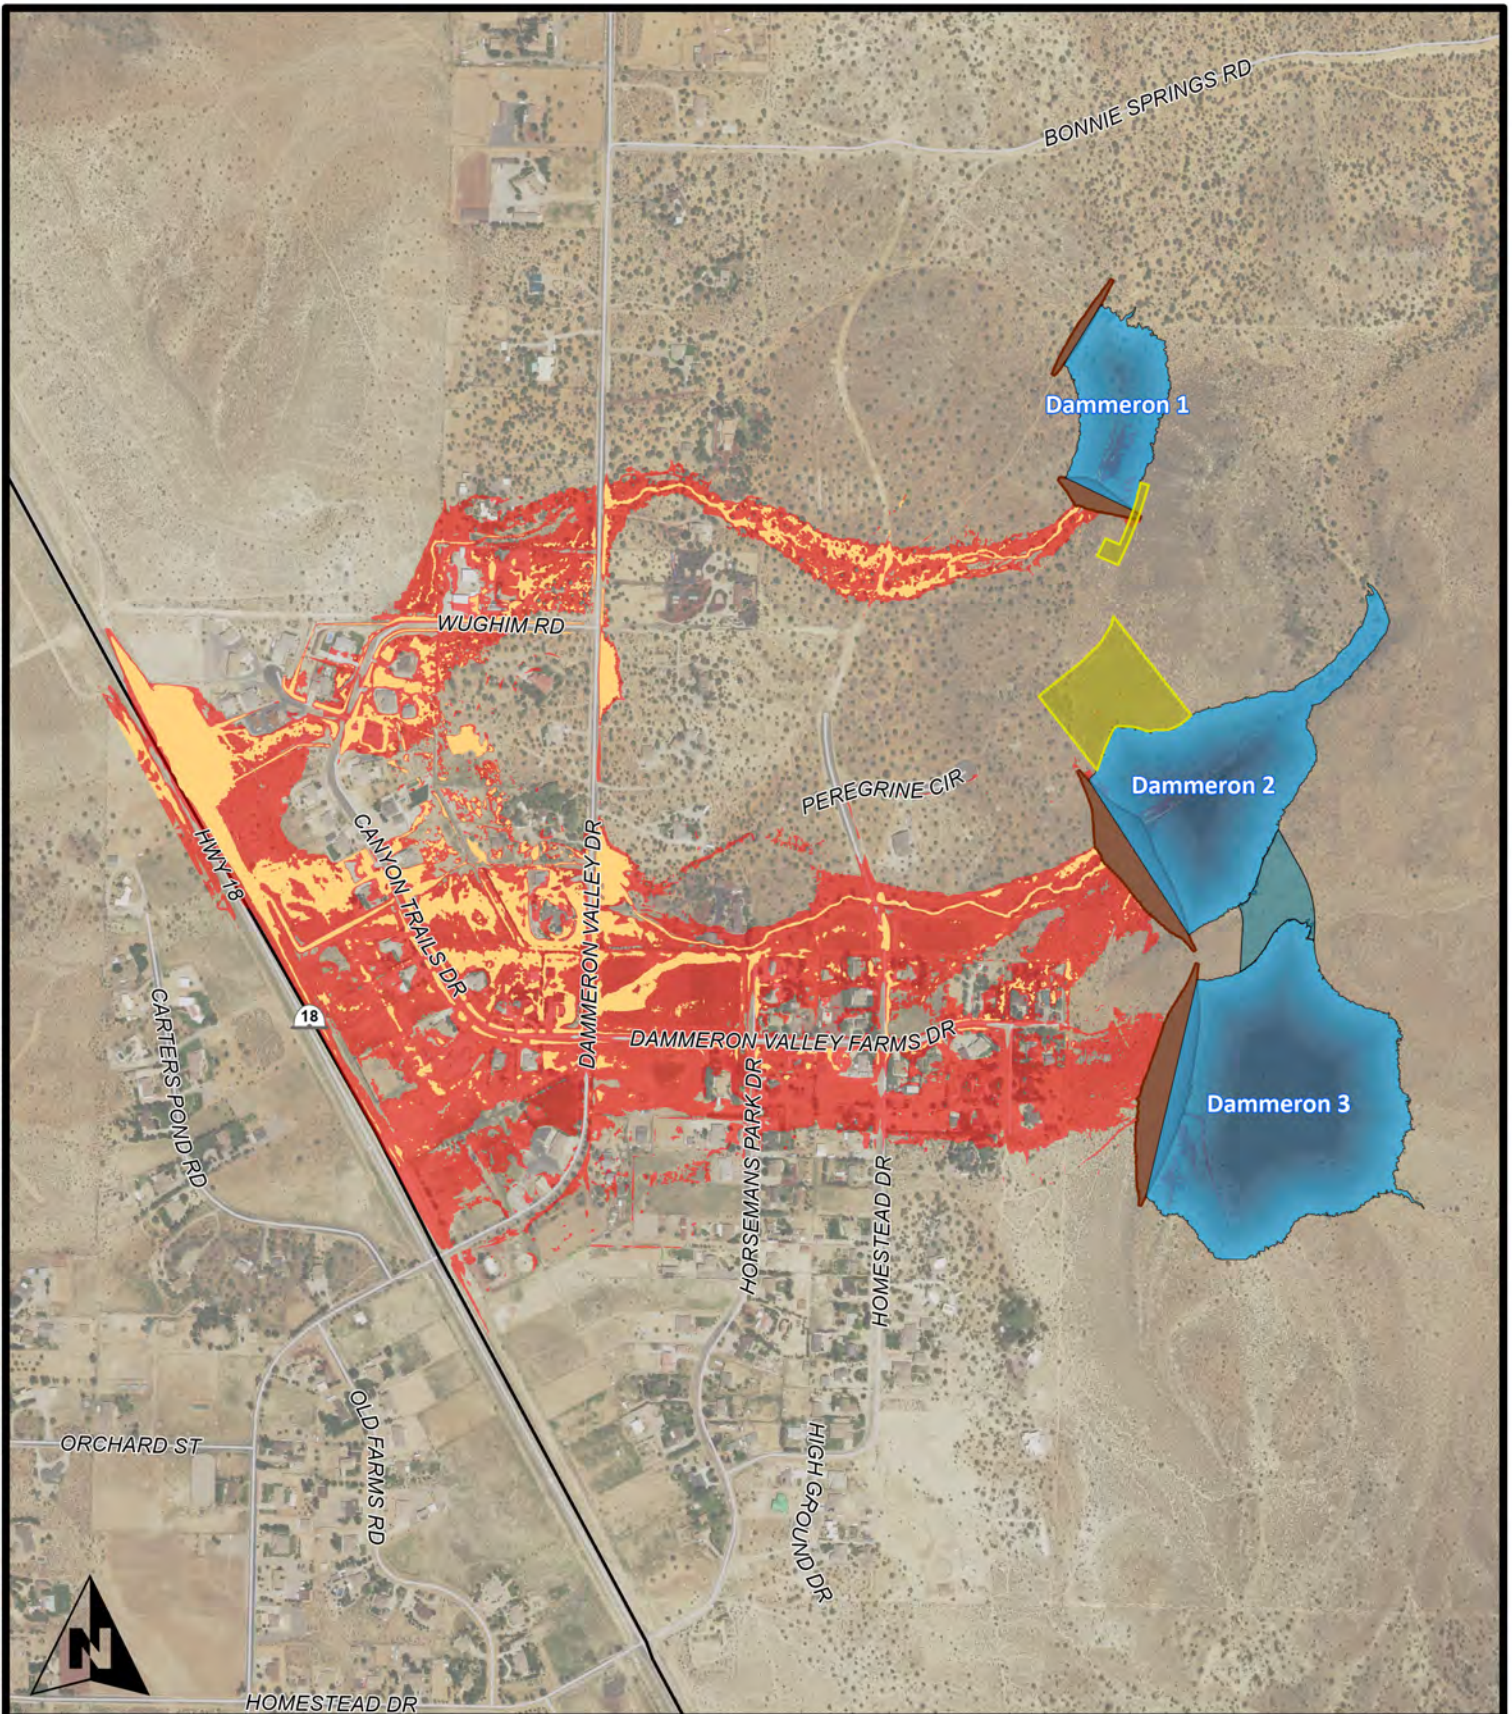


Fig 17. 200-yr Inundation Map
Santa Clara EA, Dammeron Valley

Spatial Reference: UT83-SF	
Drawn By:	JTM
Scale:	1" = 800 feet
Date:	May 11, 2022


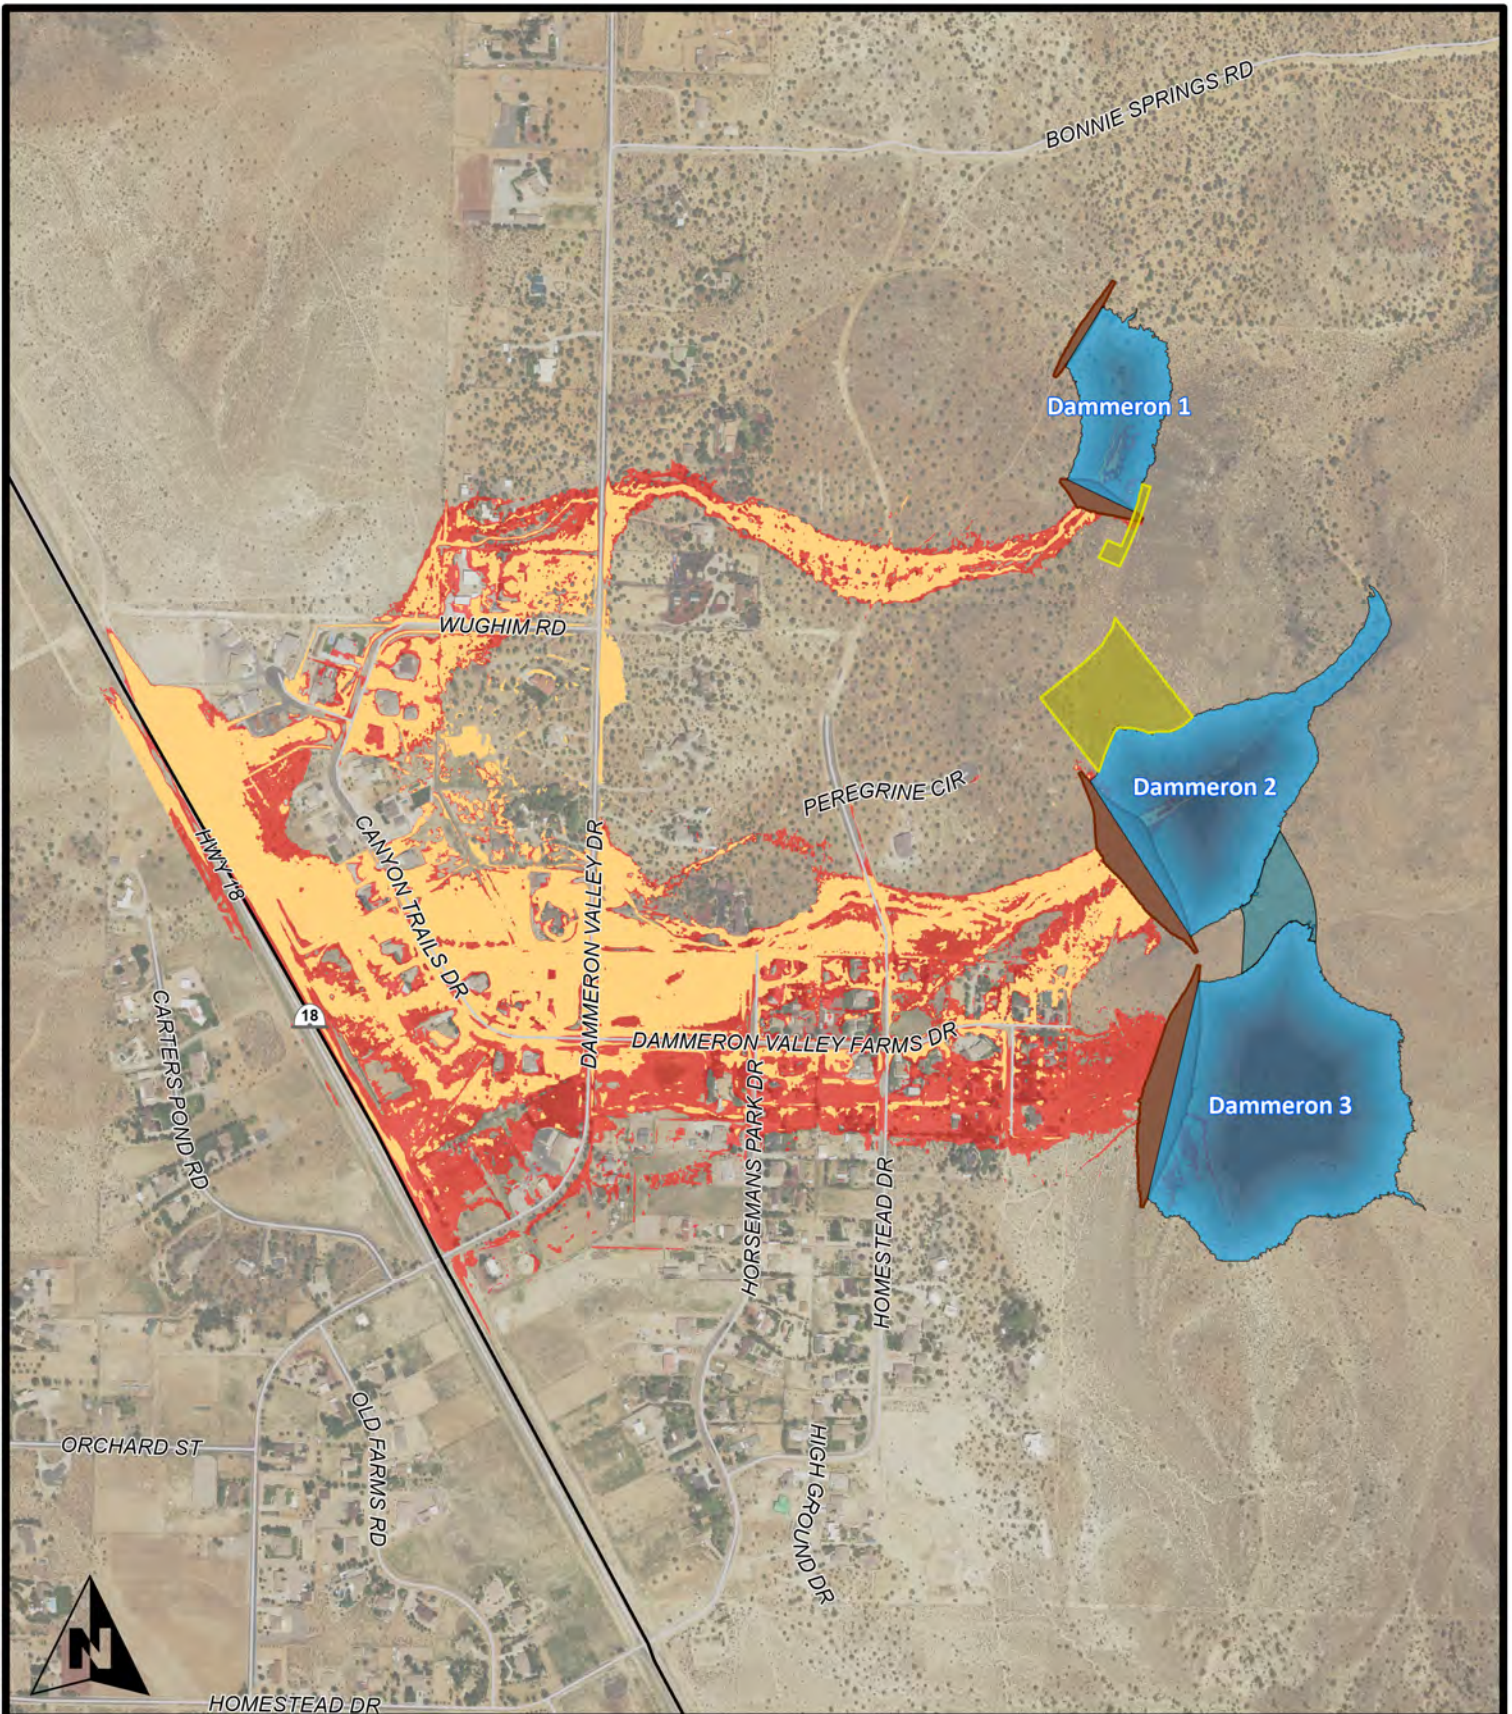


Fig 18. 500-yr Inundation Map
Santa Clara EA, Dammeron Valley

Spatial Reference: UT83-SF	
Drawn By:	JTM
Scale:	1" = 800 feet
Date:	May 11, 2022



0 250 500 1,000 1,500
Feet

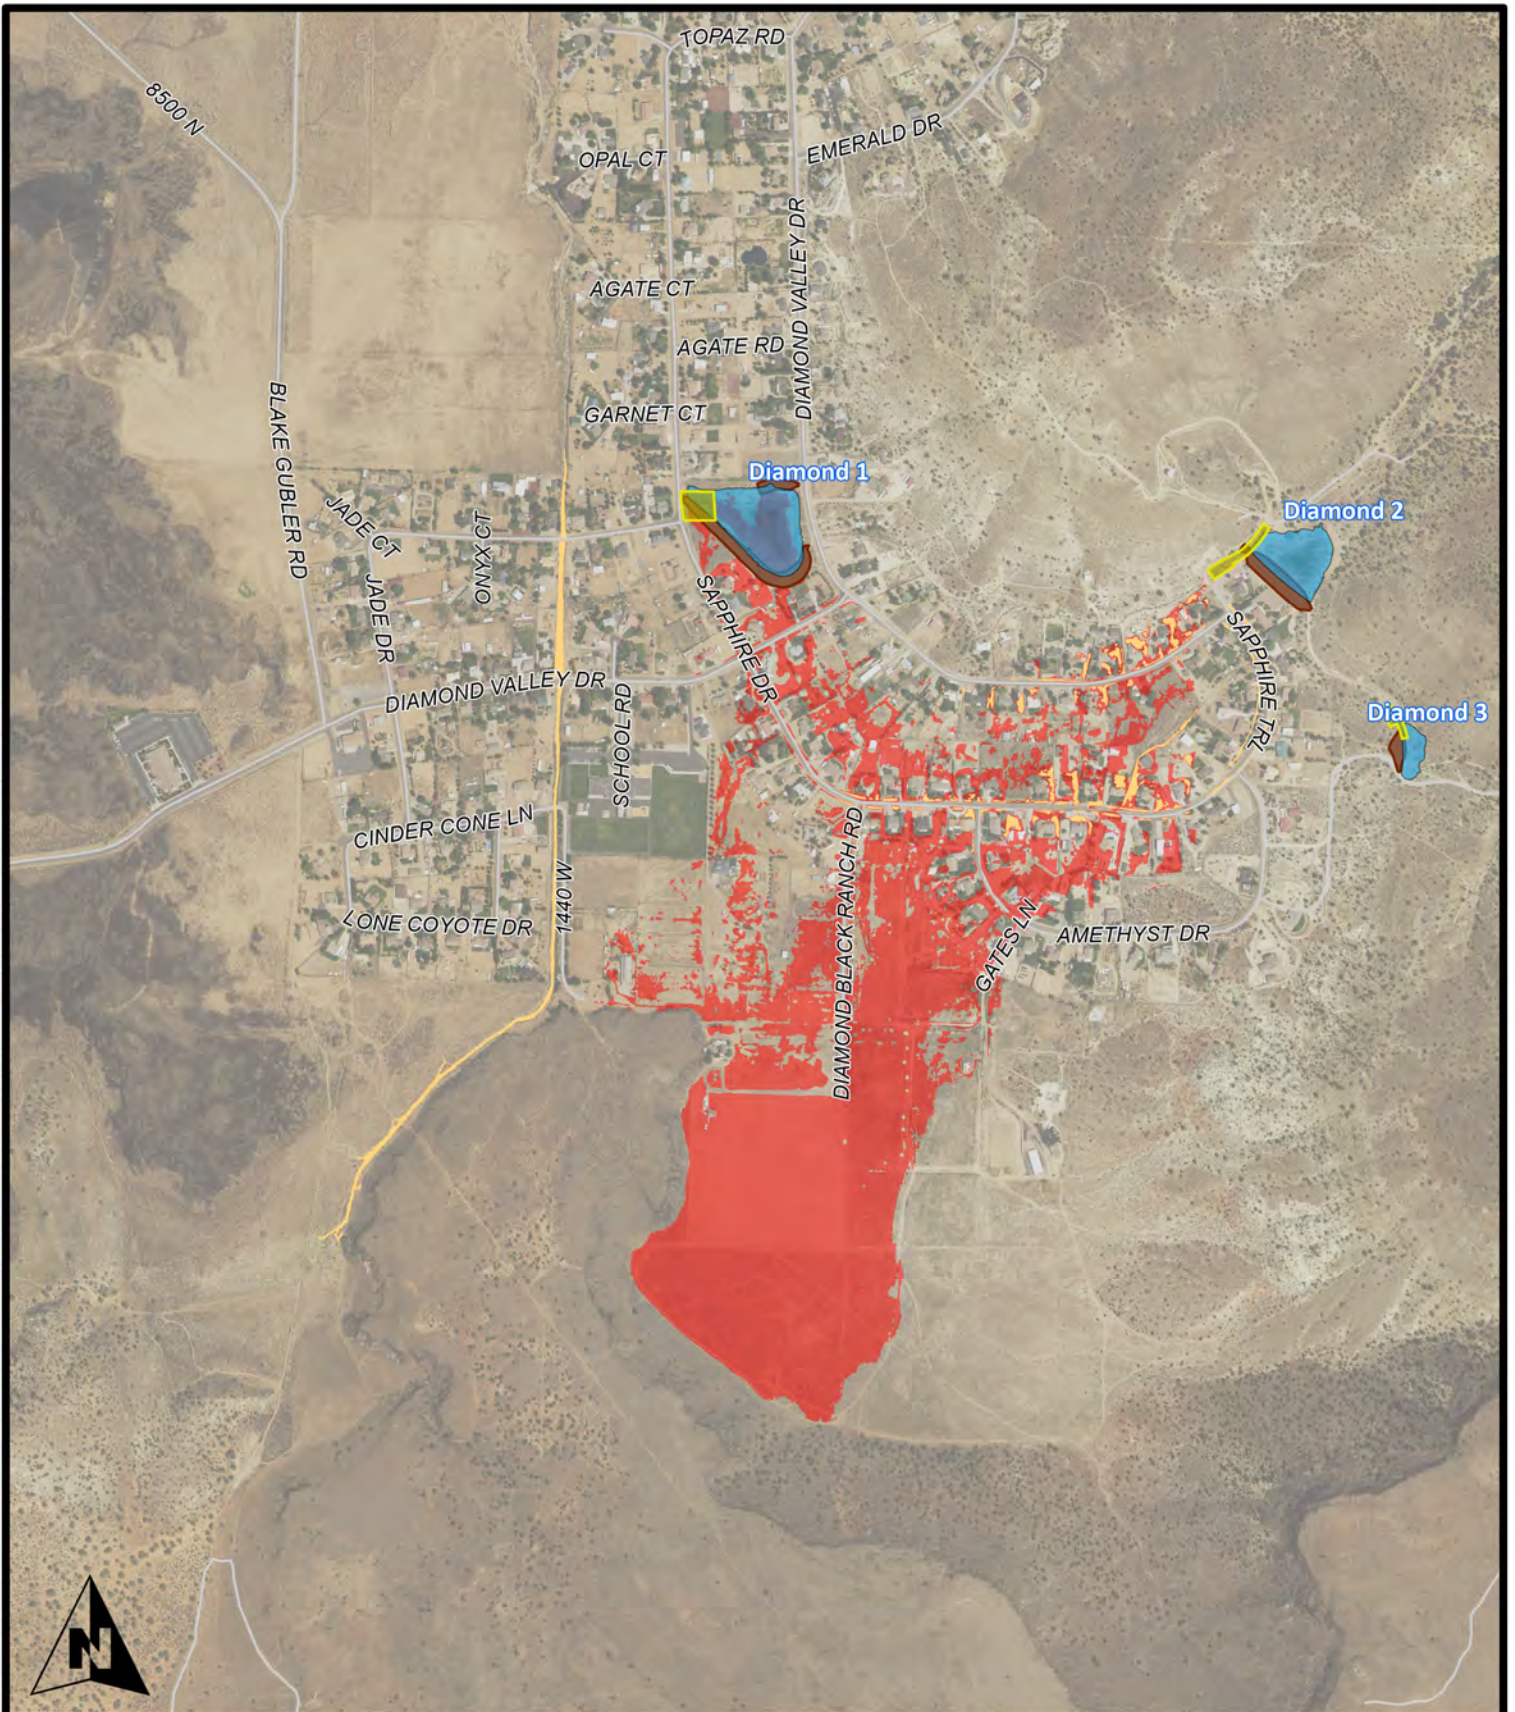

43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- 2-year Inundation Boundary without Dams
- 2-year Inundation Boundary with Dams



Fig 19. 2-yr Inundation Map
Santa Clara EA, Diamond Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 1,000 feet

Date: May 11, 2022

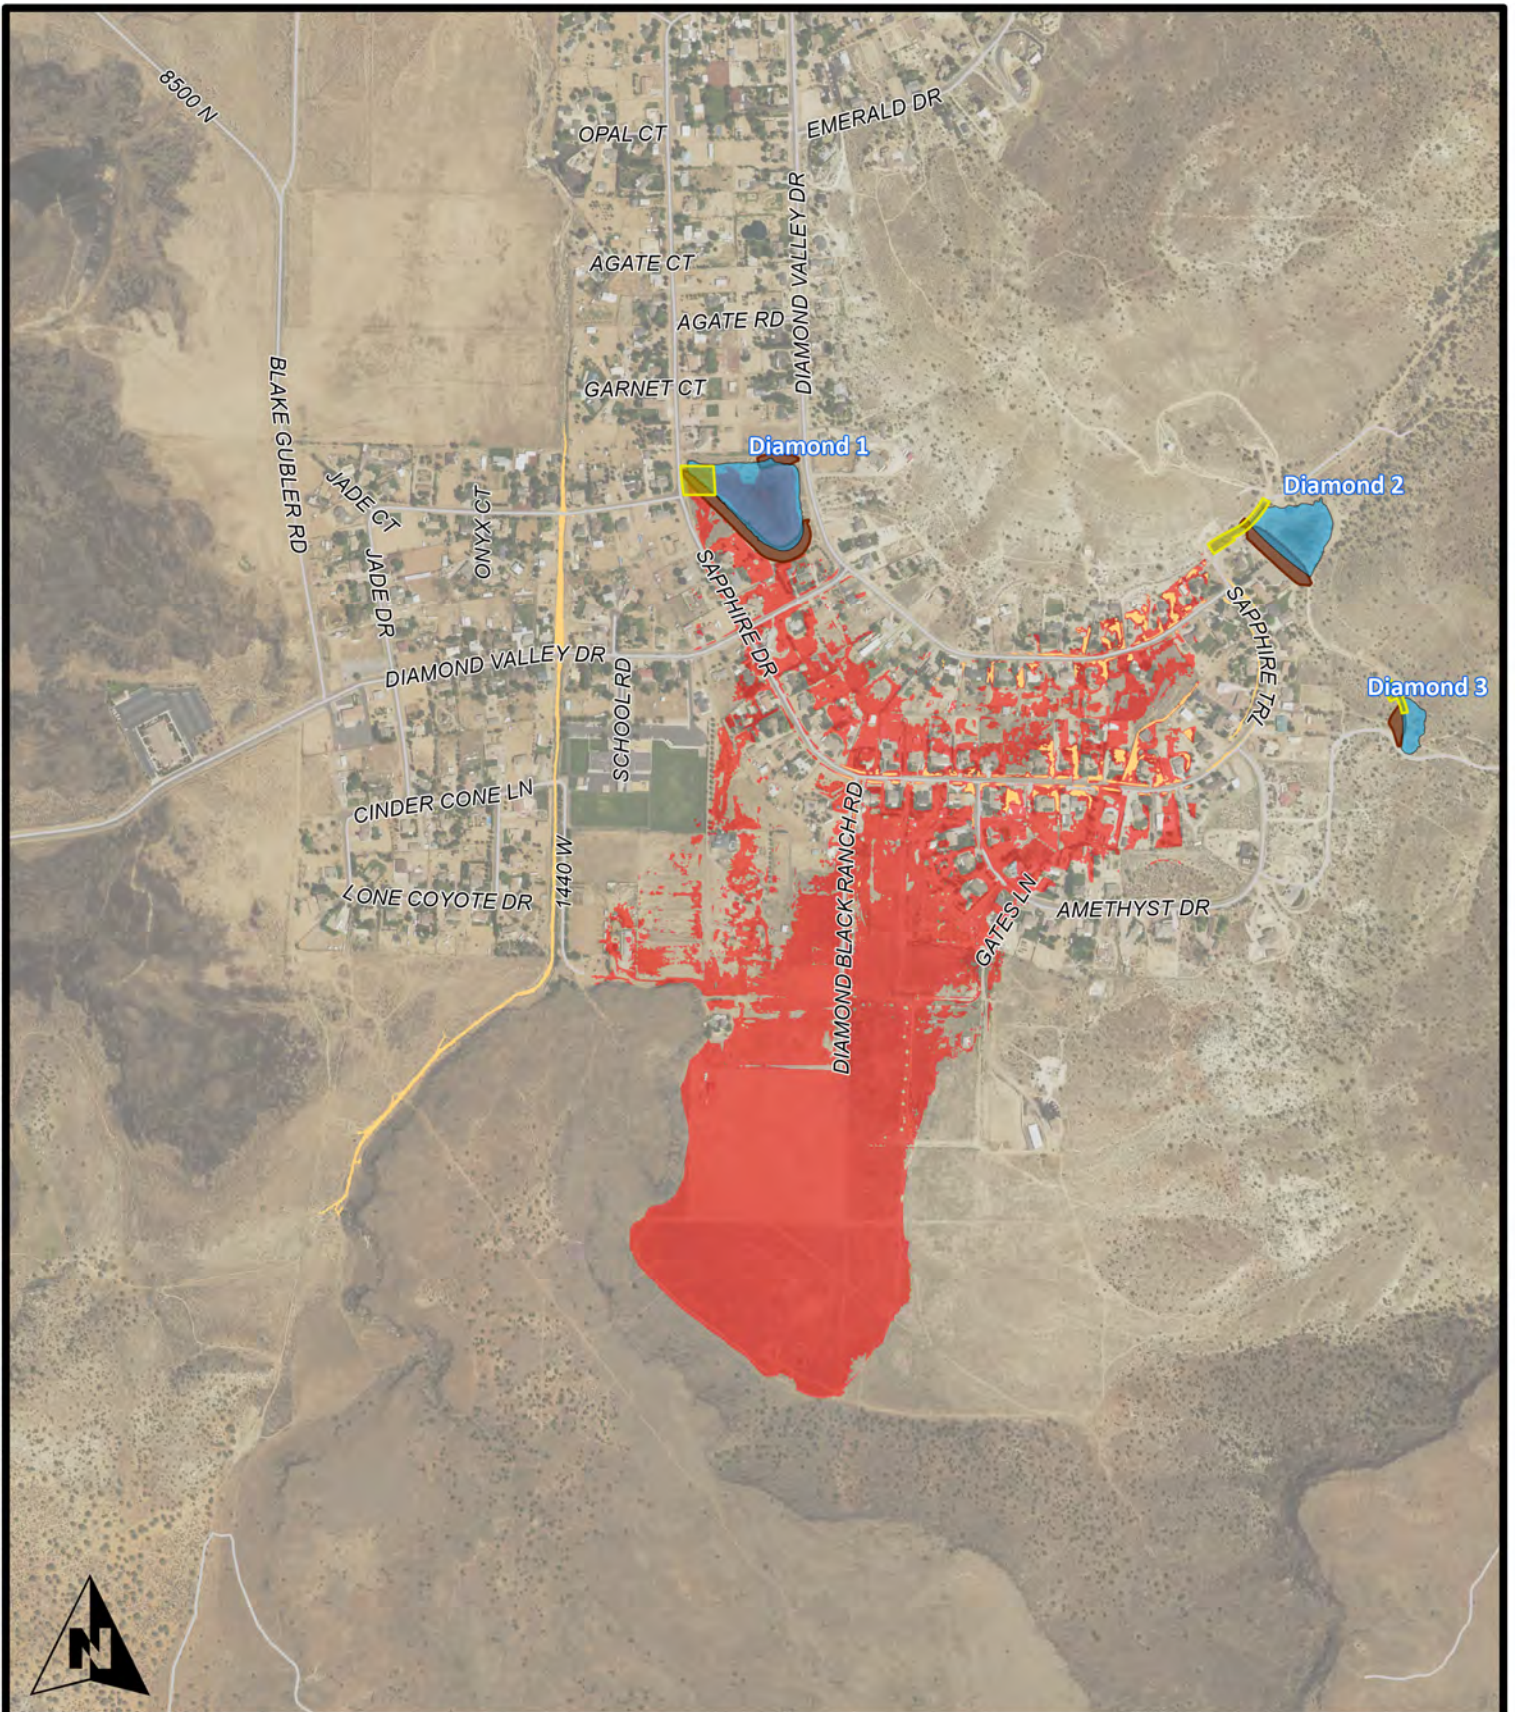

-  Dam
-  Detention Basin High Water
-  Excavated Channel
-  Spillway
-  5-year Inundation Boundary without Dams
-  5-year Inundation Boundary with Dams


Fig 20. 5-yr Inundation Map
Santa Clara EA, Diamond Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 1,000 feet

Date: May 11, 2022

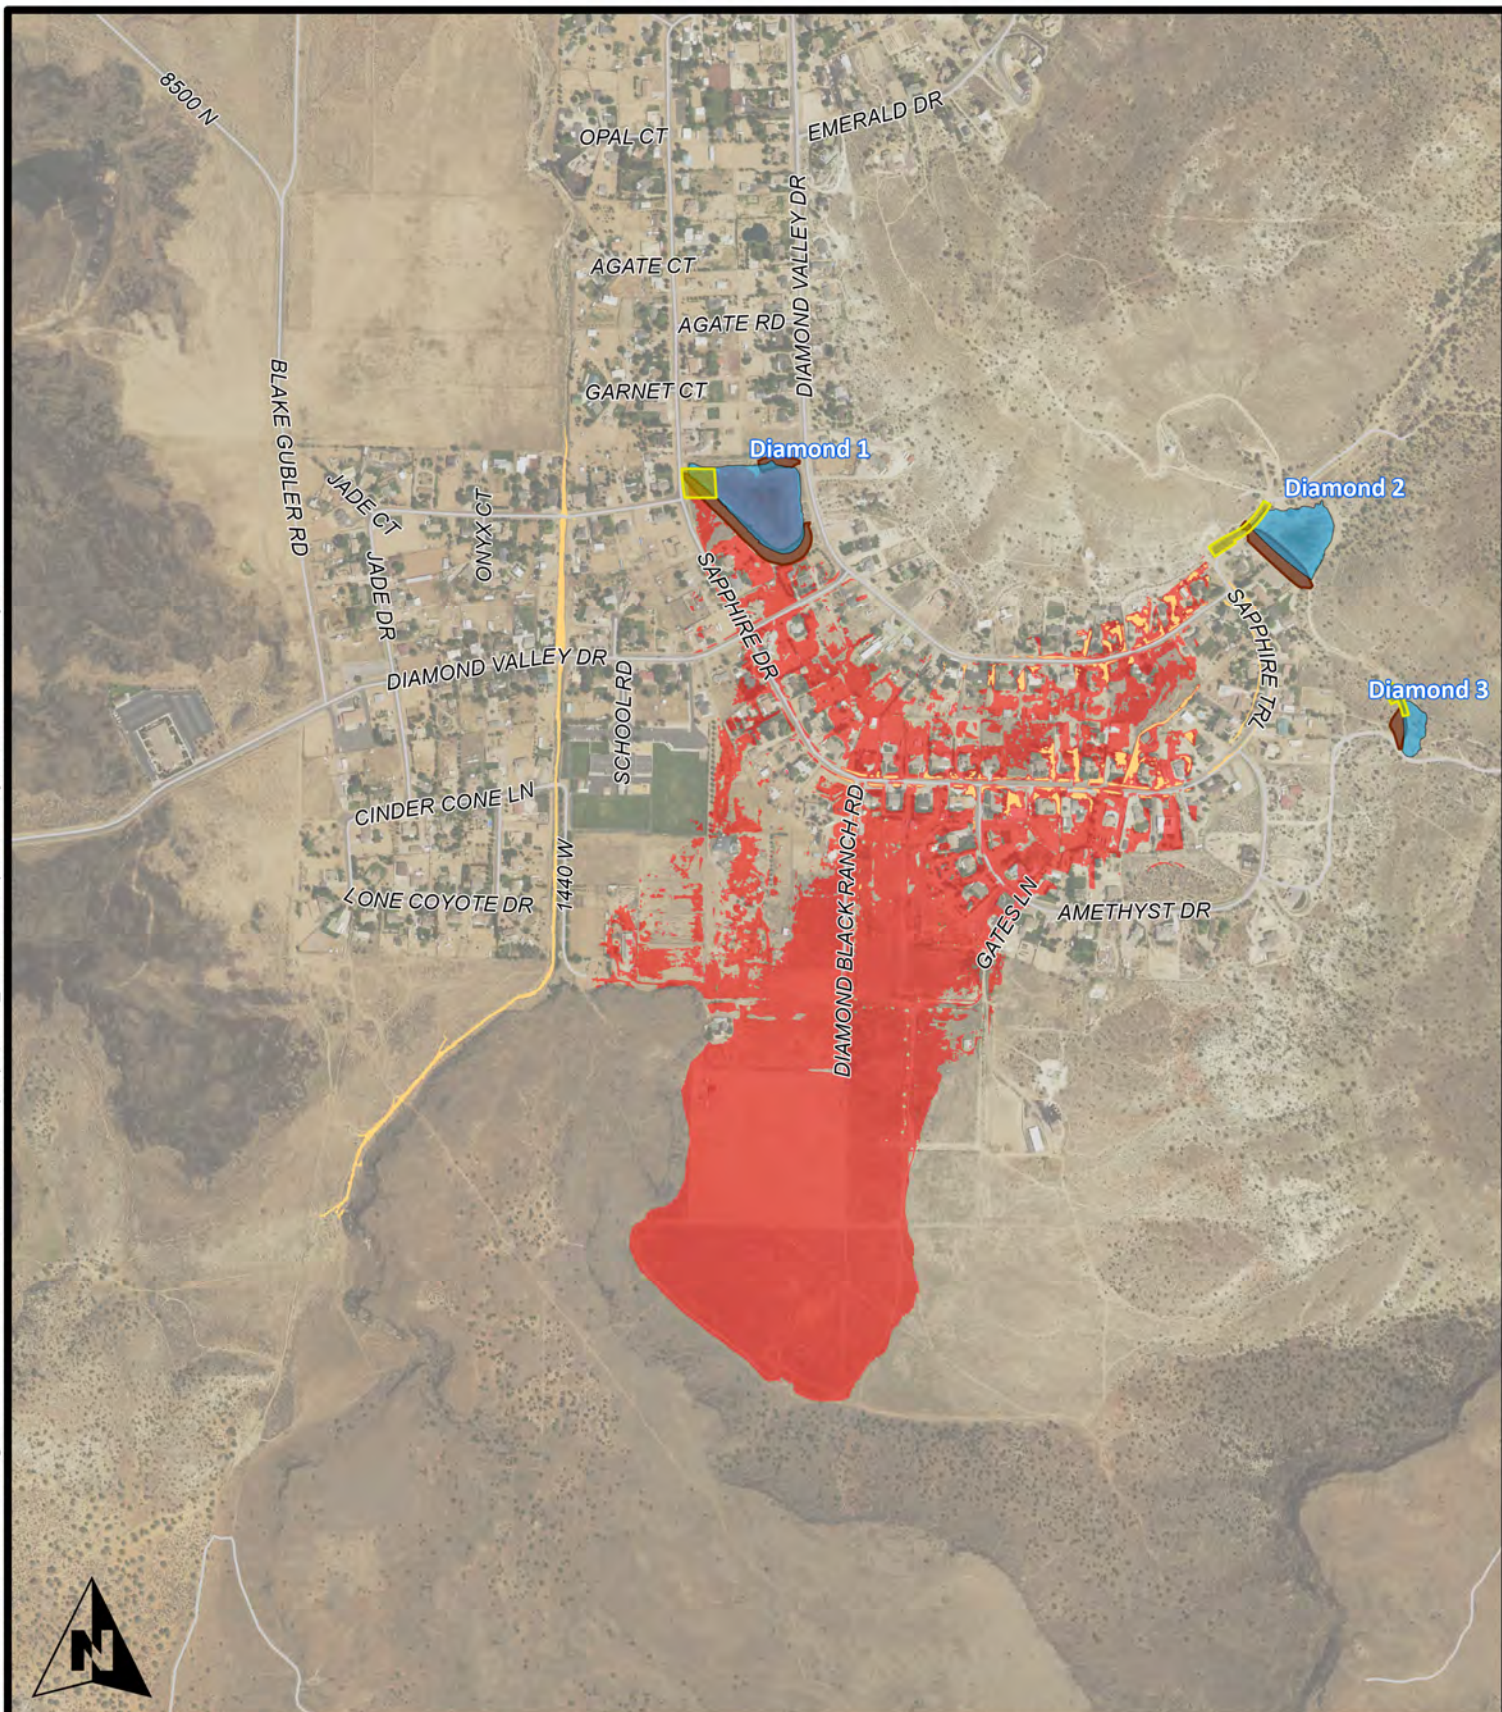

0 250 500 1,000 1,500
Feet

ALPHA
ENGINEERING
43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- 10-year Inundation Boundary without Dams
- 10-year Inundation Boundary with Dams


Fig 21. 10-yr Inundation Map
Santa Clara EA, Diamond Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 1,000 feet

Date: May 11, 2022

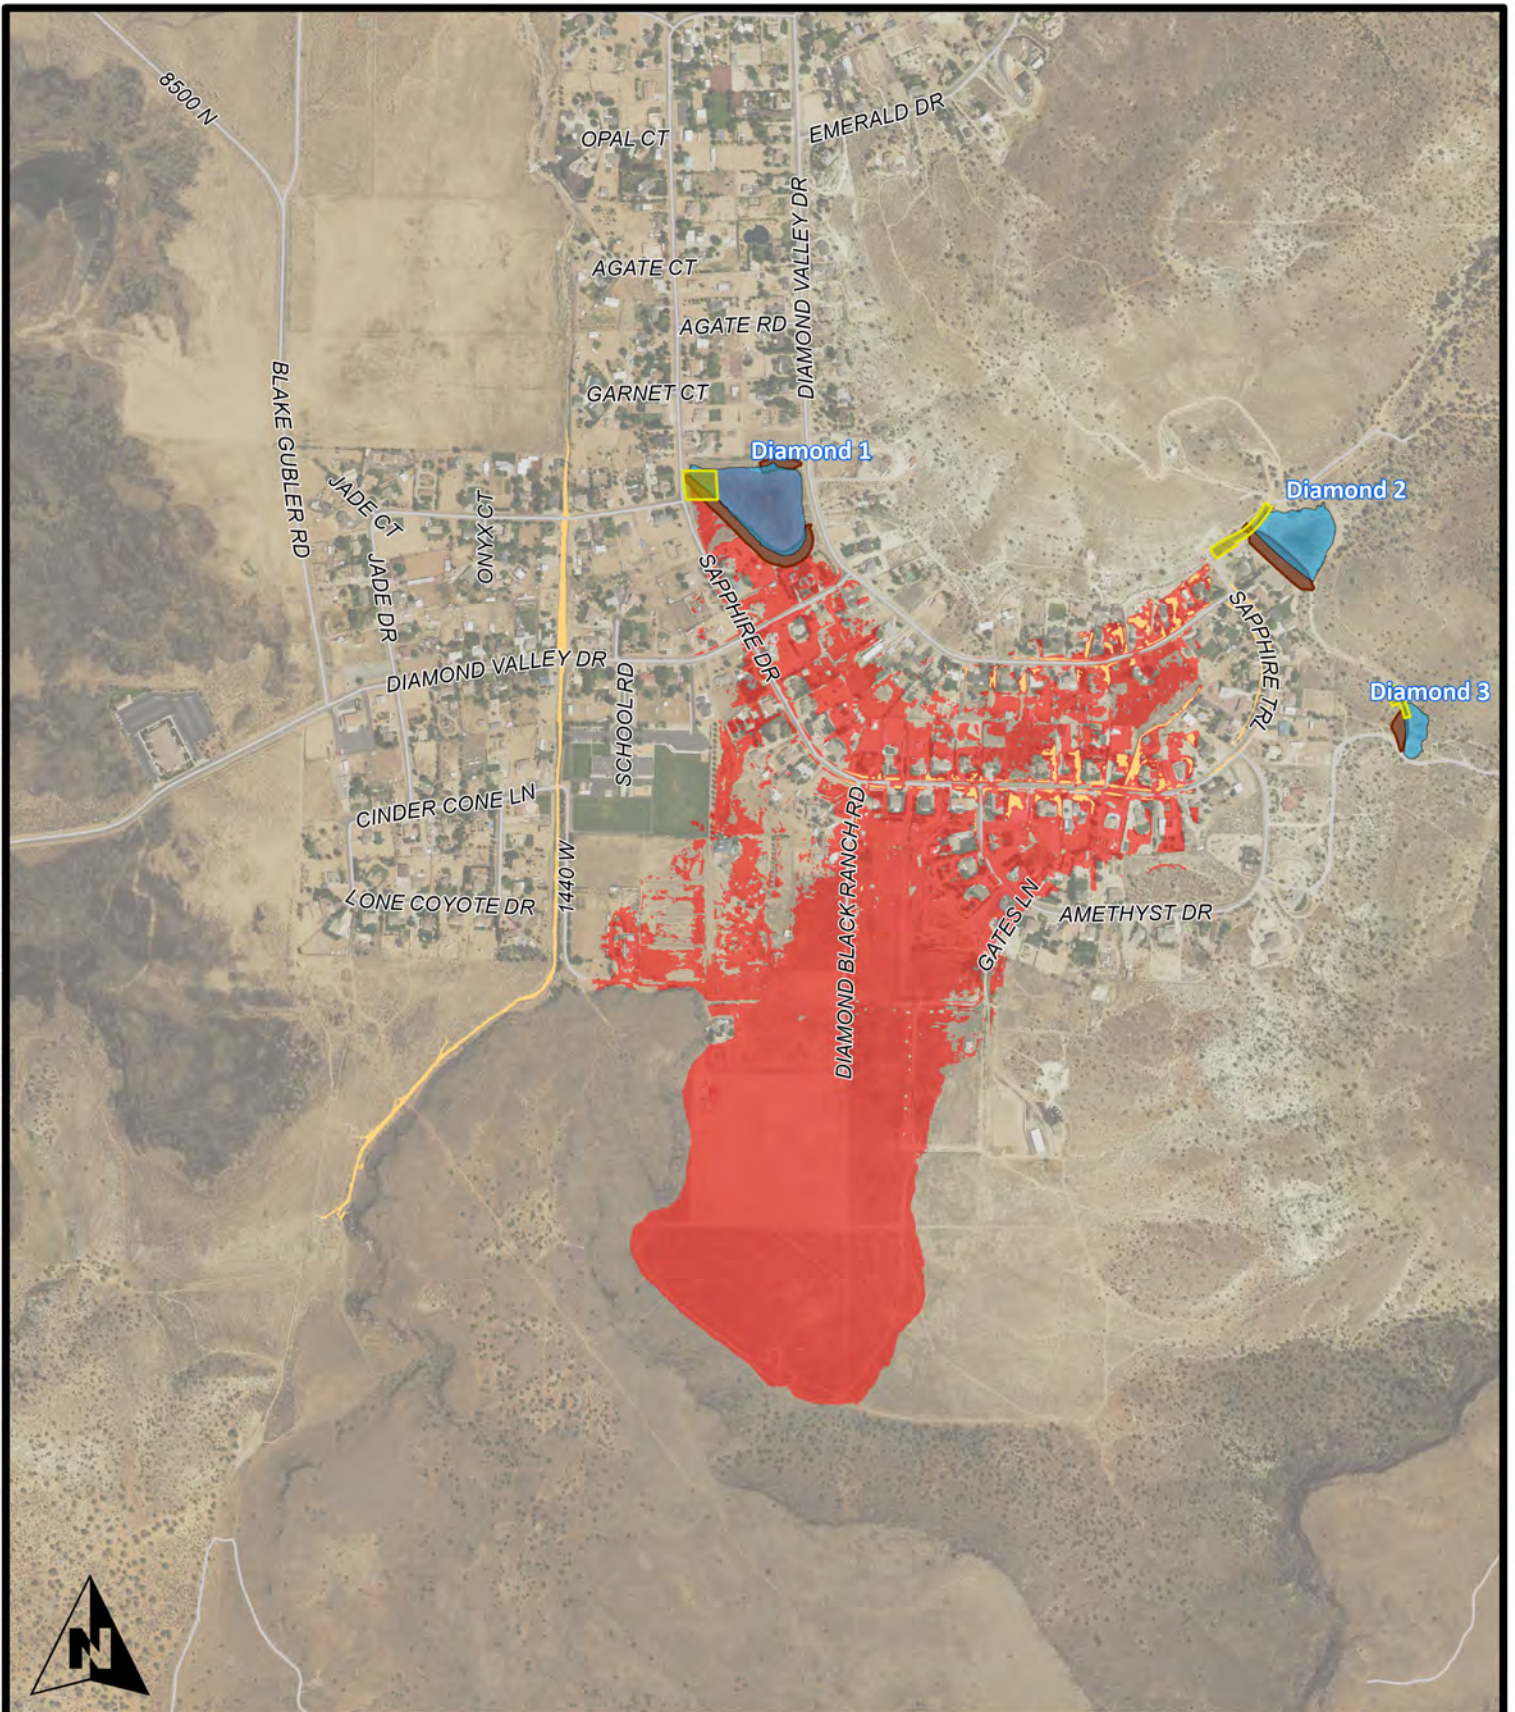

0 250 500 1,000 1,500
Feet



43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- 25-year Inundation Boundary without Dams
- 25-year Inundation Boundary with Dams

Fig 22. 25-yr Inundation Map
Santa Clara EA, Diamond Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 1,000 feet

Date: May 11, 2022

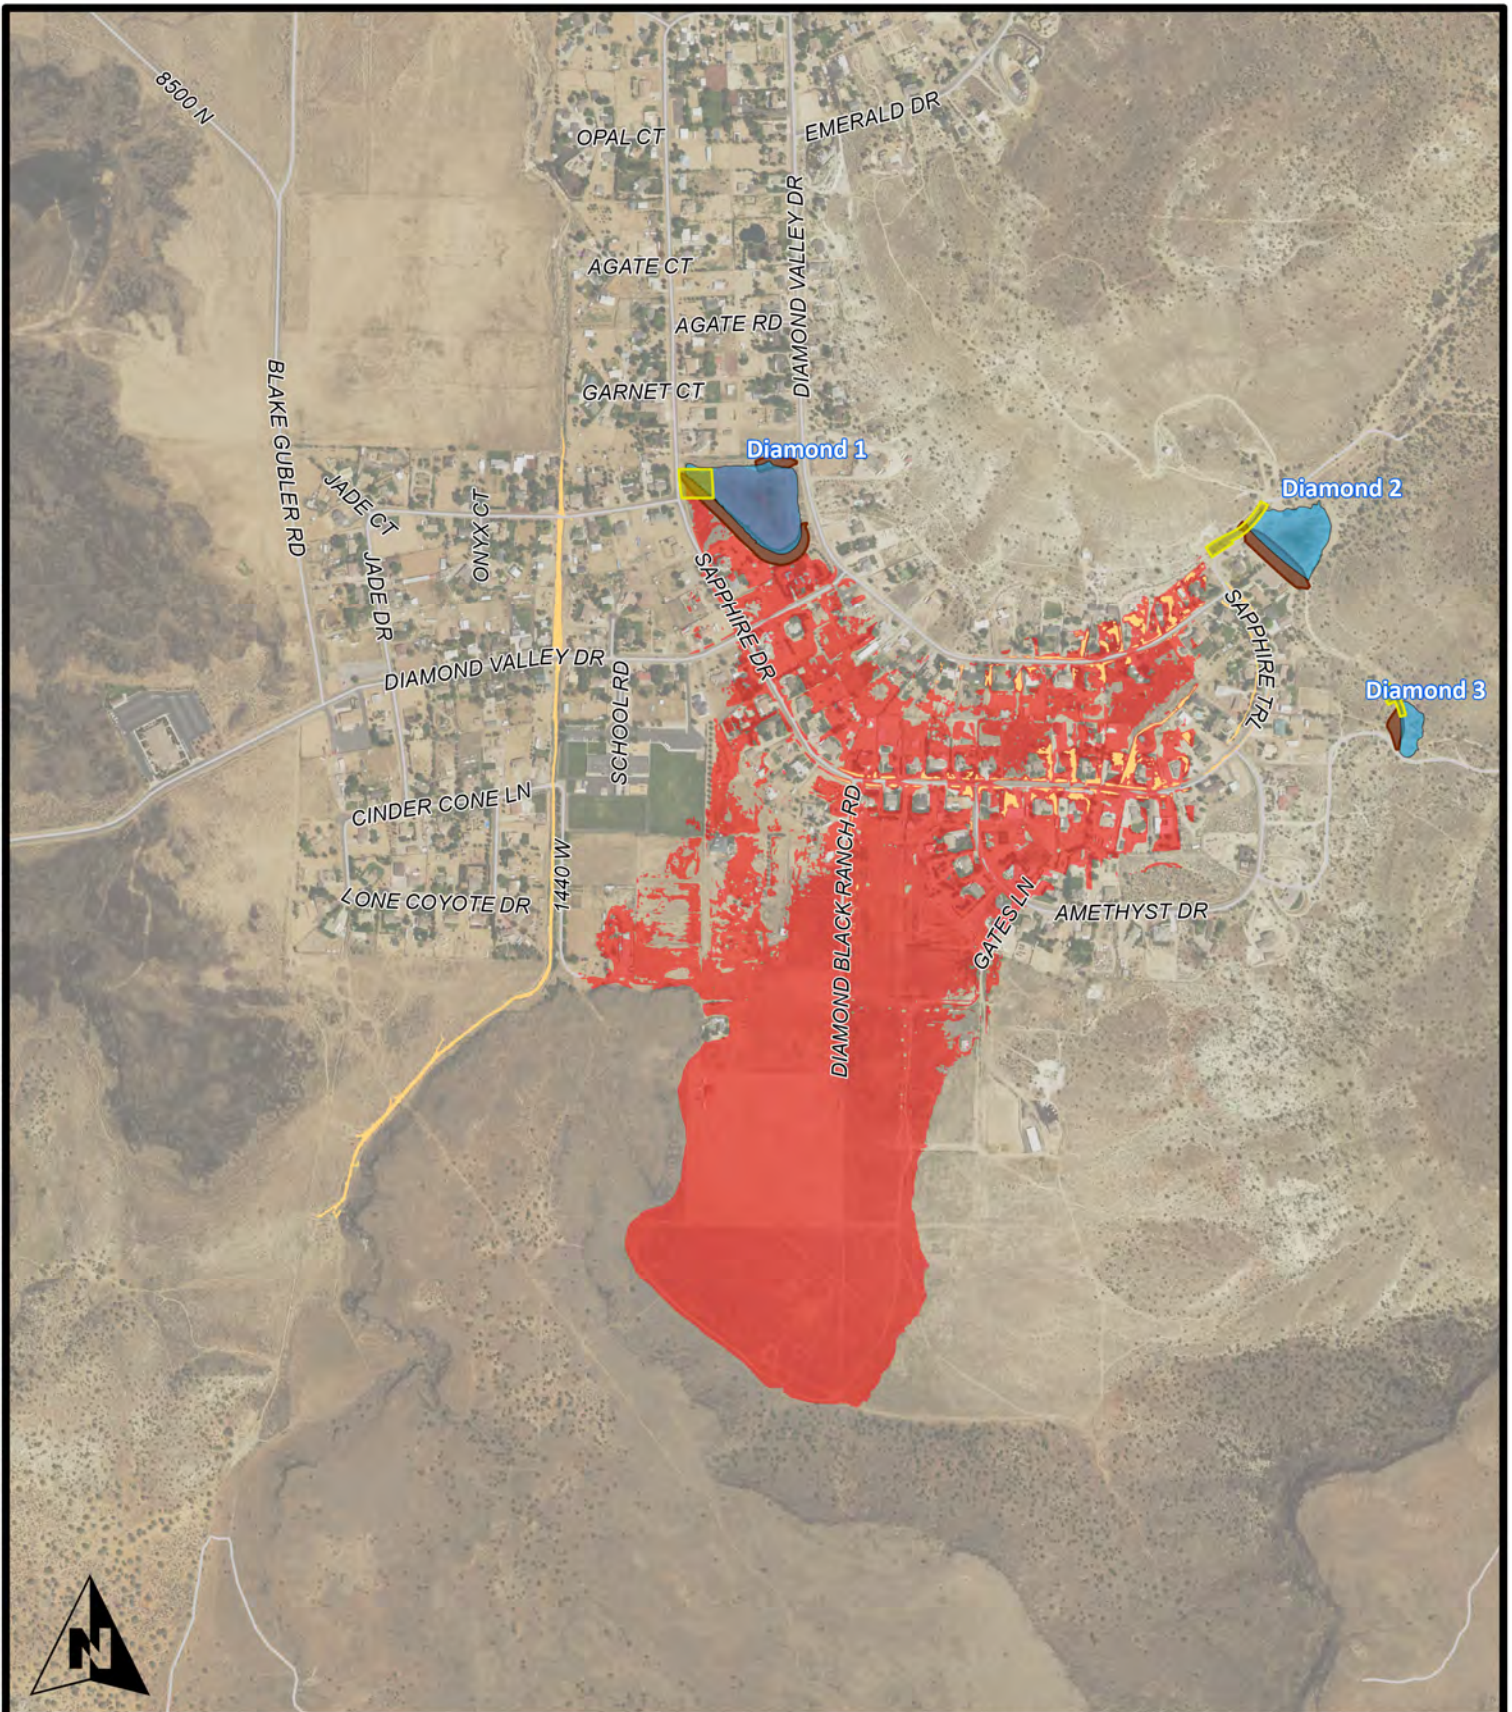


Fig 23. 50-yr Inundation Map
Santa Clara EA, Diamond Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 1,000 feet



Date: May 11, 2022

0 250 500 1,000 1,500
Feet

ALPHA
ENGINEERING

43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- 50-year Inundation Boundary without Dams
- 50-year Inundation Boundary with Dams

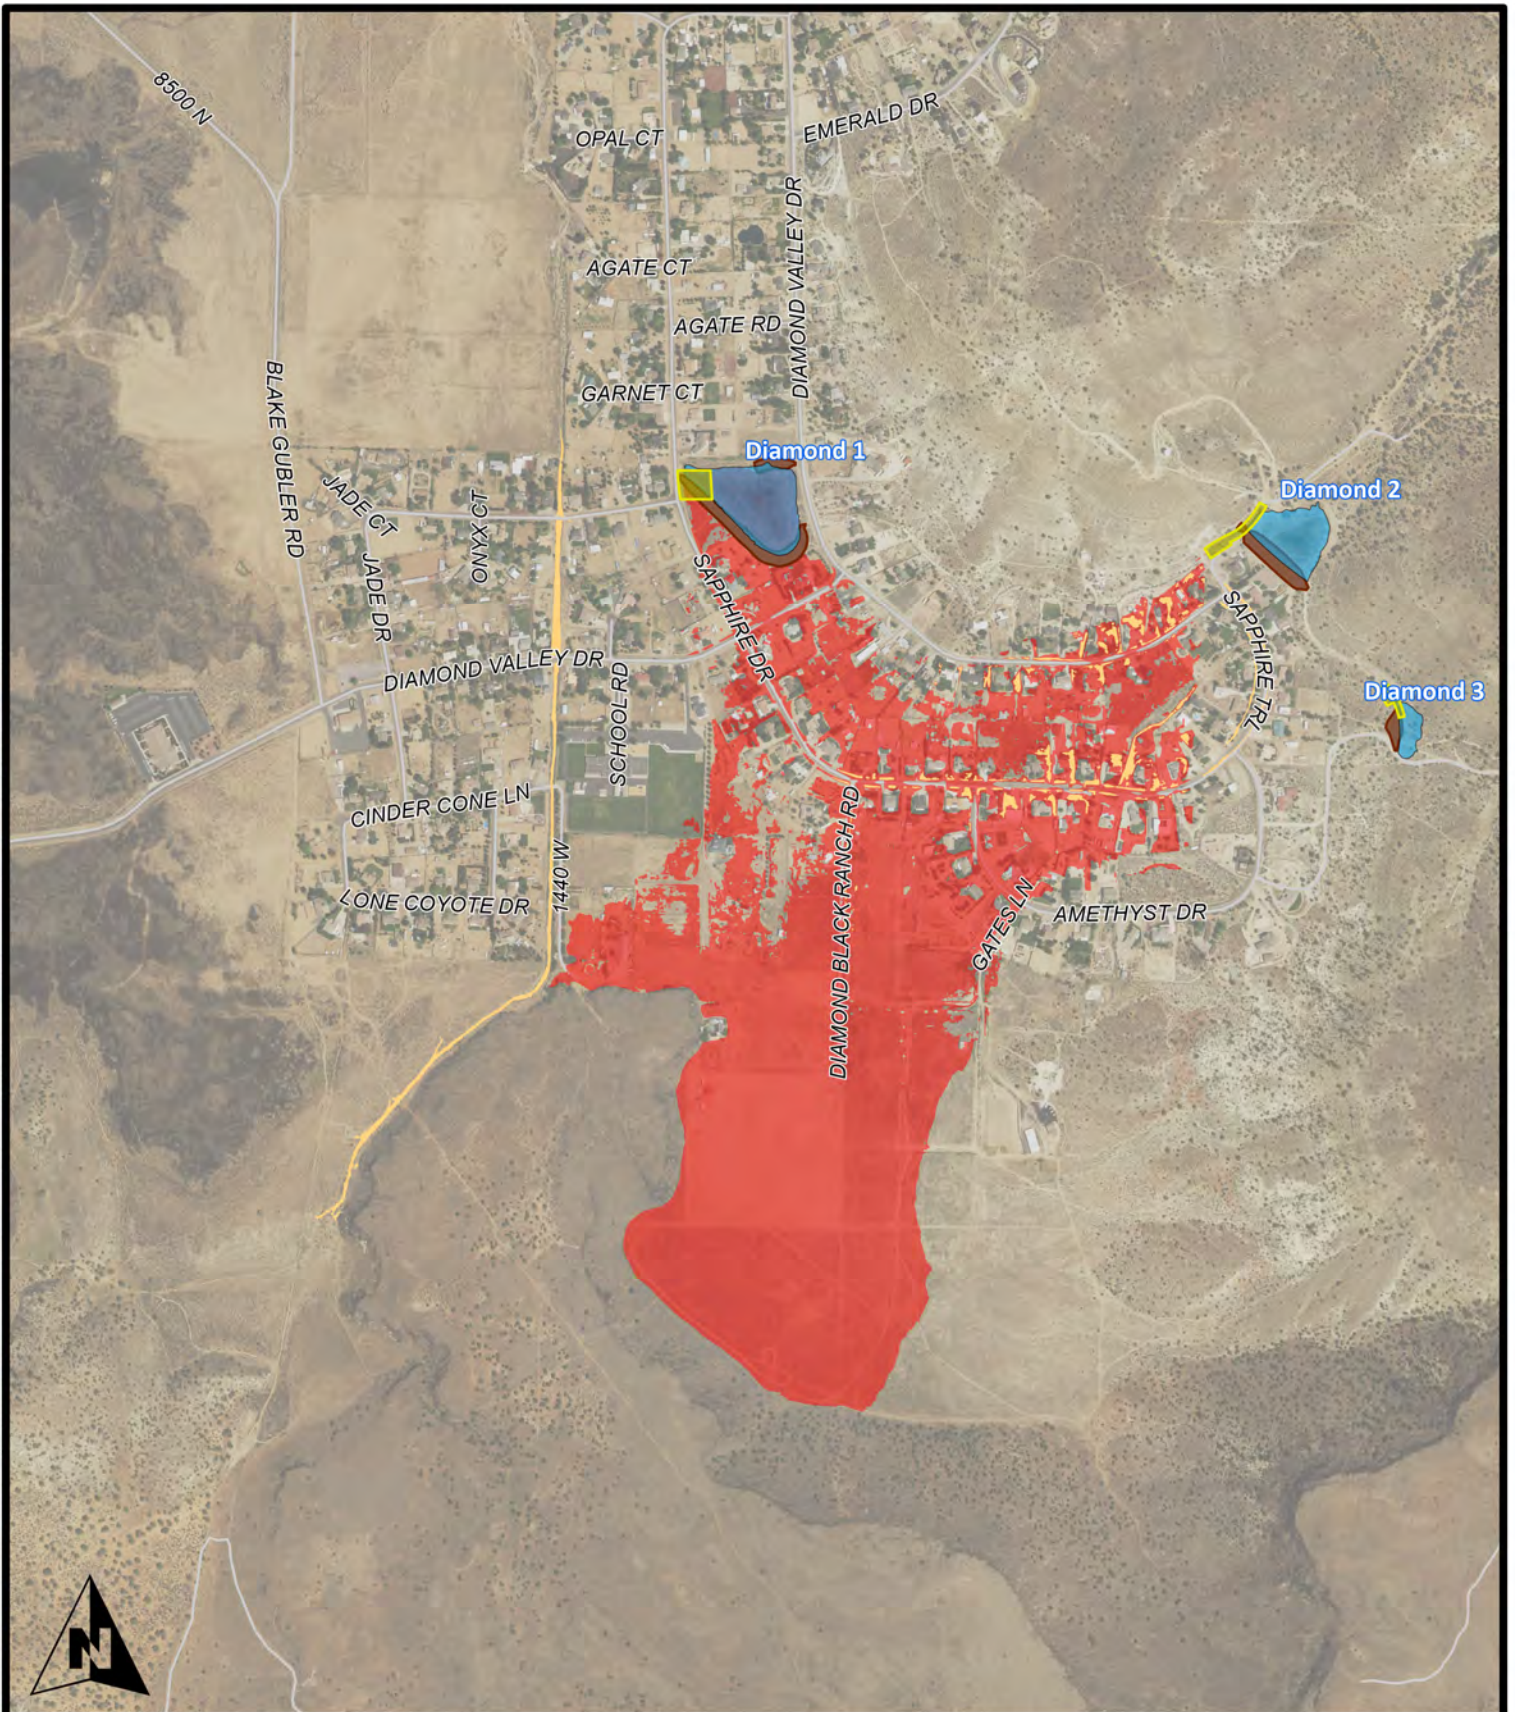

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- 100-year Inundation Boundary without Dams
- 100-year Inundation Boundary with Dams


Fig 24. 100-yr Inundation Map
Santa Clara Watershed Hydraulics

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 1,000 feet

Date: May 11, 2022

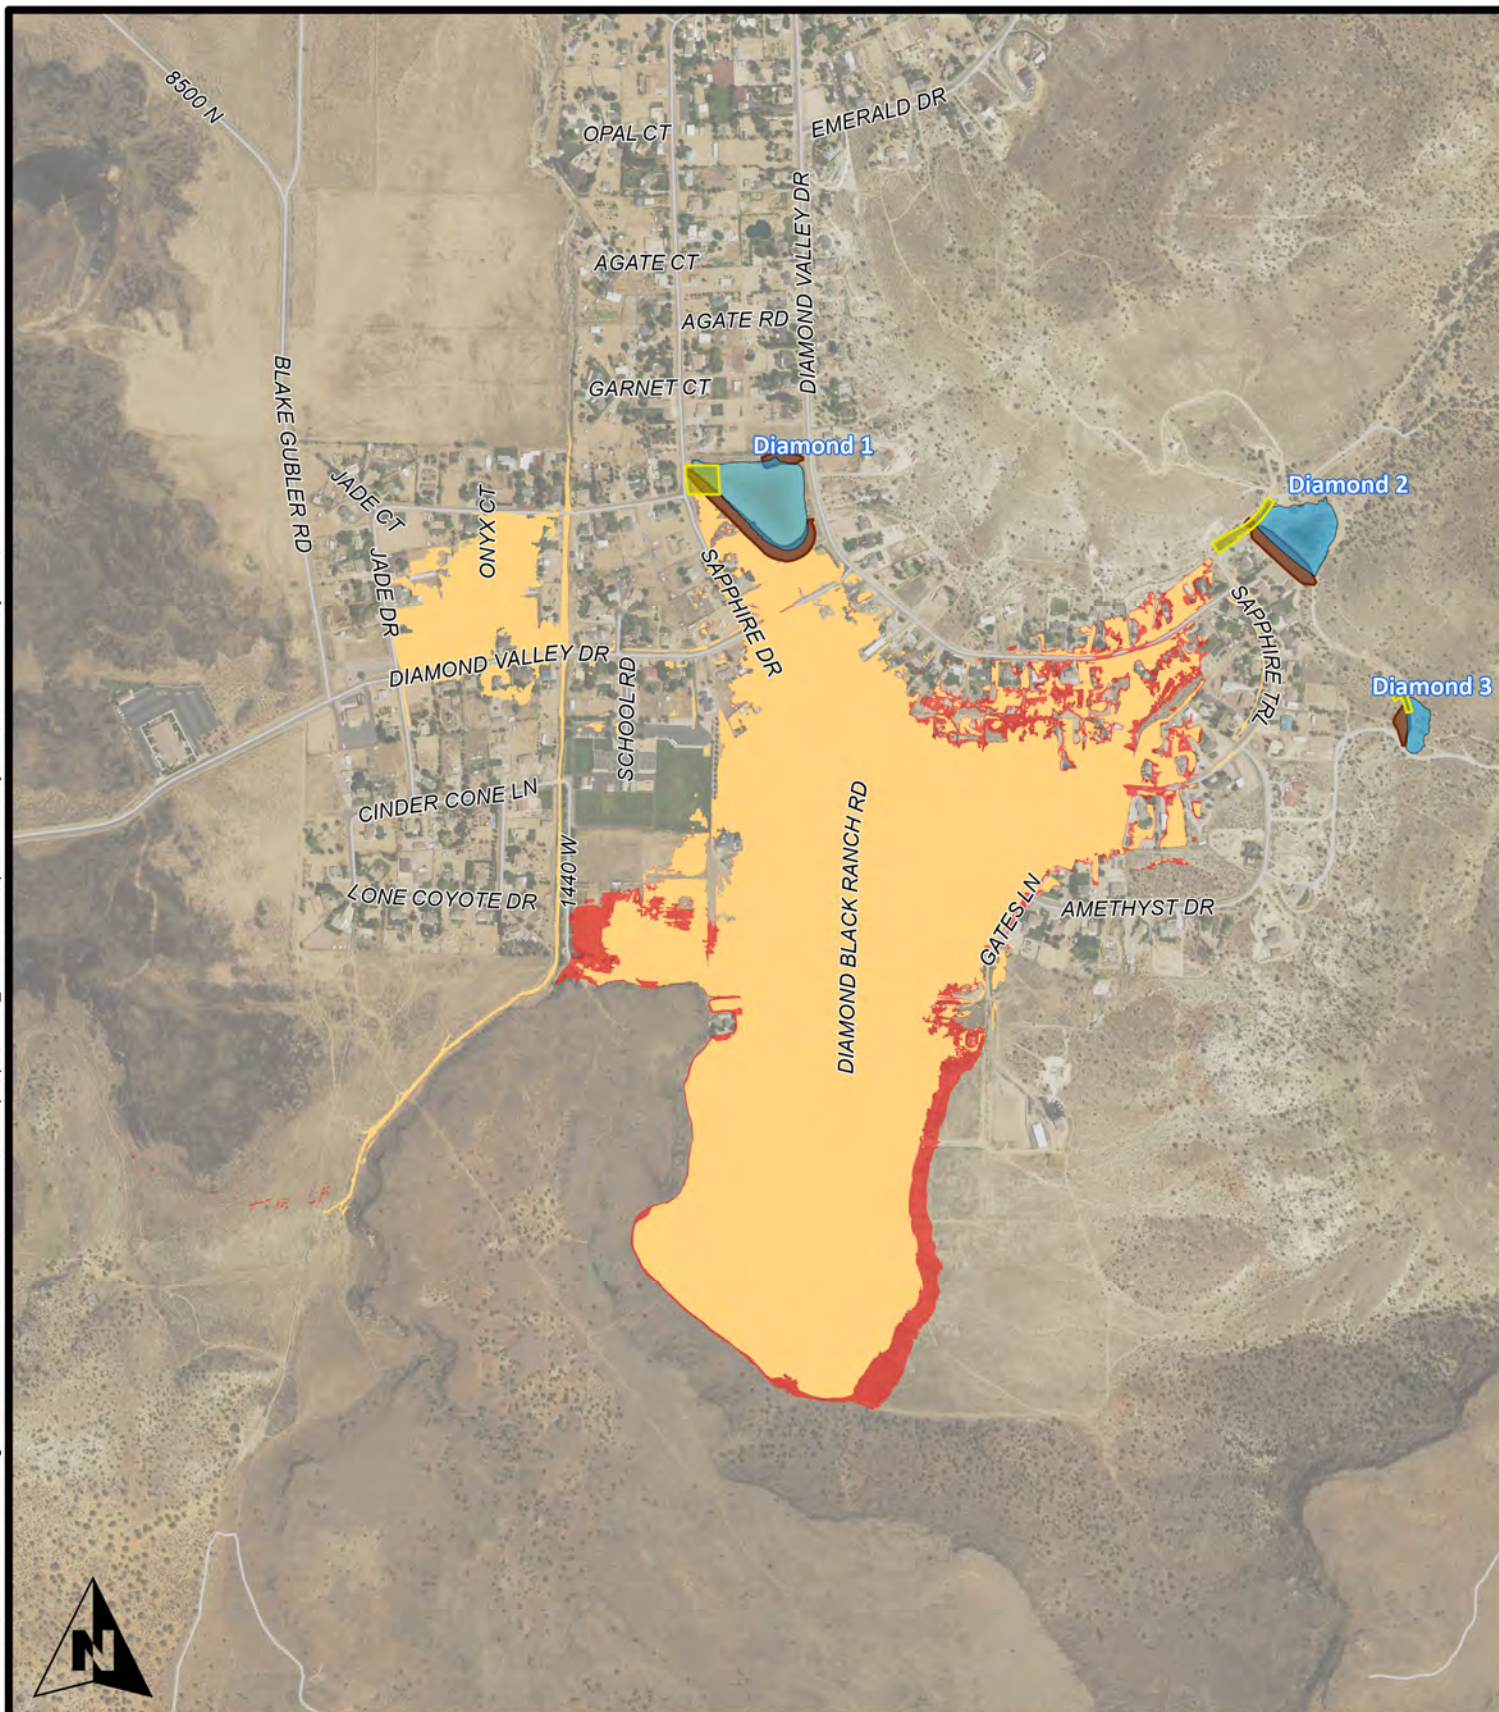

0 250 500 1,000 1,500
Feet

ALPHA
ENGINEERING
43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- 200-year Inundation Boundary without Dams
- 200-year Inundation Boundary with Dams


Fig 25. 200-yr Inundation Map
Santa Clara EA, Diamond Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 1,000 feet

Date: May 11, 2022

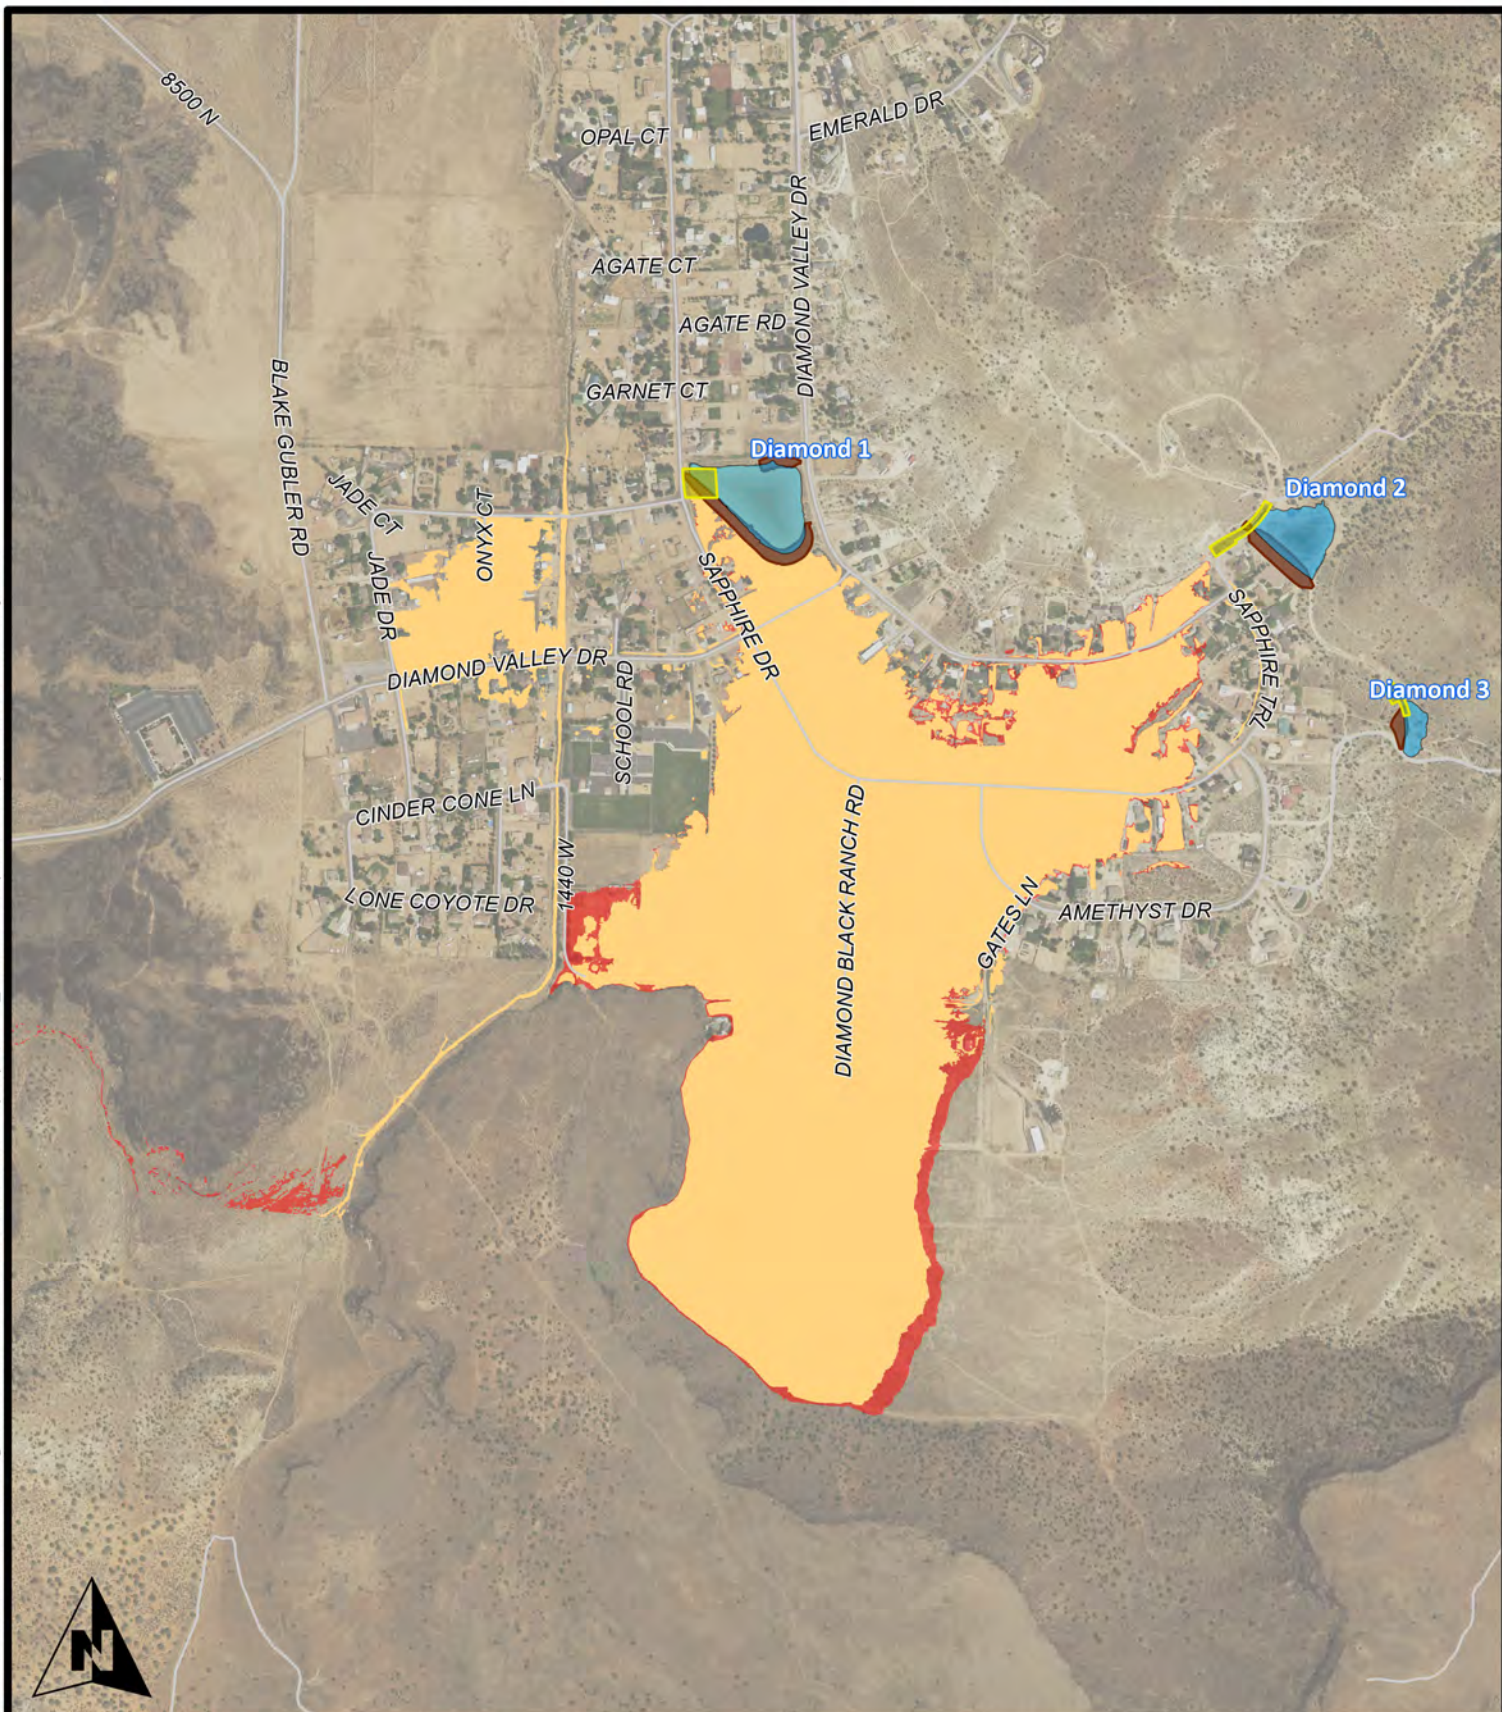

0 250 500 1,000 1,500
Feet

ALPHA
ENGINEERING
43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Dam
- Detention Basin High Water
- Excavated Channel
- Spillway
- 500-year Inundation Boundary without Dams
- 500-year Inundation Boundary with Dams

Fig 26. 500-yr Inundation Map
Santa Clara EA, Diamond Valley

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 1,000 feet

Date: May 11, 2022

Appendix B. Calculations

Section 1. Freeboard Calculations

Section 1. Freeboard Calculations

Wave Action

Wave Action

Fetch (F) Length:		(see attached <i>Fetch Length Exhibit</i>)
Damm1	0.09 miles	
Damm2	0.13 miles	
Damm3	0.16 miles	
Diam1	0.07 miles	
Diam2	0.05 miles	
Diam3	0.02 miles	
Maximum Land Wind Velocity:		
81 mph		(TR-210-56, Figure 4)
Water-Land Velocity Ratio:		
1.02		(TR-210-56, Figure 5)
Overwater Wind Velocity		
82 mph		(TR-210-56, Equation 2)
Significant Wave Height		(TR-210-56, Equation 3)
Damm1	0.79 ft	
Damm2	0.96 ft	
Damm3	1.04 ft	
Diam1	0.72 ft	
Diam2	0.60 ft	
Diam3	0.39 ft	

Fetch

Fetch Calculations (see Fetch Exhibits)

$$\Sigma x_i (\cos \alpha)$$

$$\text{-- } \Sigma \cos \alpha$$

Fetch

			Damm1		Damm2		Damm3		Diam1		Diam2		Diam3	
α , deg	α , rad	$\cos \alpha$	x_i	$x_i (\cos \alpha)$	x_i	$x_i (\cos \alpha)$	x_i	$x_i (\cos \alpha)$	x_i	$x_i (\cos \alpha)$	x_i	$x_i (\cos \alpha)$	x_i	$x_i (\cos \alpha)$
45	0.785398	0.707107	123	86.97413	374	264.4579	575	406.5864	143	101.1163	187	132.229	96	67.88225
33.75	0.589049	0.83147	181	150.496	453	376.6557	788	655.1981	320	266.0703	211	175.4401	118	98.11341
22.5	0.392699	0.92388	560	517.3725	622	574.6531	895	826.8722	576	532.1546	248	229.1221	120	110.8655
11.25	0.19635	0.980785	752	737.5505	794	778.7435	984	965.0927	528	517.8546	290	284.4277	111	108.8672
0	0	1	705	705	1437	1437	999	999	487	487	339	339	115	115
11.25	0.19635	0.980785	663	650.2606	849	832.6867	1020	1000.401	473	463.9114	332	325.6207	113	110.8287
22.5	0.392699	0.92388	477	440.6905	636	587.5874	803	741.8753	407	376.019	291	268.8489	100	92.38795
33.75	0.589049	0.83147	280	232.8115	480	399.1054	620	515.5112	231	192.0695	225	187.0807	85	70.67492
45	0.785398	0.707107	202	142.8356	362	255.9727	541	382.5448	131	92.63099	153	108.1873	84	59.39697
	Σ	7.886482	Σ	3663.991	Σ	5506.862	Σ	6493.082	Σ	3028.827	Σ	2049.957	Σ	834.017
			Fetch	0.087991	Fetch	0.132247	Fetch	0.155931	Fetch	0.072737	Fetch	0.04923	Fetch	0.020029

Appendix C. Model Output

Project: Rev3

Simulation Run: Storm Event 01 100y24h

Simulation Start: 31 December 1999, 24:00

Simulation End: 2 January 2000, 03:00

HMS Version: 4.9

Executed: 30 March 2022, 12:30

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element		Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1		0.3	57.25	01Jan2000, 10:00	1.55
Reservoir - Da1		0.3	5	02Jan2000, 00:08	0.43
Da2		3.6	534.86	01Jan2000, 10:40	1.47
Reservoir - Da2/3		4.3	25.02	02Jan2000, 01:36	0.14
Da3		0.7	130.31	01Jan2000, 10:06	1.59
Da4		1.7	287.91	01Jan2000, 10:24	1.57
Di1		0.9	170.81	01Jan2000, 10:06	1.61
Reservoir - Di1		0.9	119.84	01Jan2000, 13:42	2.97
Di2		0.9	162.26	01Jan2000, 10:08	1.55
Reservoir - Di2		0.9	5.22	01Jan2000, 10:28	0.16
Di3		0.6	122.39	01Jan2000, 10:04	1.71
Reservoir - Di3		0.6	5.16	01Jan2000, 10:18	0.24
Di4		11.4	2225.38	01Jan2000, 10:38	1.92
Junction - 1		4.6	29.96	02Jan2000, 01:18	0.16
Junction - 2		1.5	10.38	01Jan2000, 10:24	0.19
Junction - 3		0.9	119.84	01Jan2000, 13:42	2.97
Reach - Di3 to Di2	0		99.93	01Jan2000, 10:20	Not specified
Reach - Di2 to Di1	0		232.29	01Jan2000, 10:34	Not specified

Subbasin: Da1

Area (MI²) : 0.3	
Downstream : Reservoir - Da1	
Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	86.8
Initial Abstraction	0.3
Transform: Scs	
Lag	7.2
Unitgraph Type Standard	

Results: Da1

Peak Discharge (CFS)	57.25
Time of Peak Discharge	01Jan2000, 10:00
Volume (IN)	1.55
Precipitation Volume (AC - FT)	44.64
Loss Volume (AC - FT)	19.91
Excess Volume (AC - FT)	24.73
Direct Runoff Volume (AC - FT)	24.73
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	5
Time of Peak Discharge	02Jan2000, 00:08
Volume (IN)	0.43
Peak Inflow (CFS)	57.25
Time of Peak Inflow	01Jan2000, 10:00
Inflow Volume (AC - FT)	24.73
Maximum Storage (AC - FT)	20.72
Peak Elevation (FT)	4688.56
Discharge Volume (AC - FT)	6.94

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	534.86
Time of Peak Discharge	01Jan2000, 10:40
Volume (IN)	1.47
Precipitation Volume (AC - FT)	566.4
Loss Volume (AC - FT)	283.9
Excess Volume (AC - FT)	282.5
Direct Runoff Volume (AC - FT)	282.39
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	25.02
Time of Peak Discharge	02Jan2000, 01:36

Volume (IN)	0.14
Peak Inflow (CFS)	636.82
Time of Peak Inflow	01Jan2000, 10:30
Inflow Volume (AC - FT)	341.93
Maximum Storage (AC - FT)	312.09
Peak Elevation (FT)	4691.01
Discharge Volume (AC - FT)	31.6

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.9
Initial Abstraction	0.28
Transform: Scs	
Lag	22.2
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	130.31
Time of Peak Discharge	01Jan2000, 10:06
Volume (IN)	1.59
Precipitation Volume (AC - FT)	103.04
Loss Volume (AC - FT)	43.5
Excess Volume (AC - FT)	59.54
Direct Runoff Volume (AC - FT)	59.54
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	86.2
Initial Abstraction	0.32
Transform: Scs	
Lag	46.8
Unitgraph Type	Standard
Results: Da4	
Peak Discharge (CFS)	287.91
Time of Peak Discharge	01Jan2000, 10:24
Volume (IN)	1.57
Precipitation Volume (AC - FT)	260.21
Loss Volume (AC - FT)	118.18
Excess Volume (AC - FT)	142.03
Direct Runoff Volume (AC - FT)	142.02
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di1	
Peak Discharge (CFS)	170.81
Time of Peak Discharge	01Jan2000, 10:06
Volume (IN)	1.61
Precipitation Volume (AC - FT)	133.44
Loss Volume (AC - FT)	56.31
Excess Volume (AC - FT)	77.13
Direct Runoff Volume (AC - FT)	77.13
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	119.84
Time of Peak Discharge	01Jan2000, 13:42
Volume (IN)	2.97
Peak Inflow (CFS)	378.05
Time of Peak Inflow	01Jan2000, 10:22
Inflow Volume (AC - FT)	166.2
Maximum Storage (AC - FT)	60.63
Peak Elevation (FT)	4555.9
Discharge Volume (AC - FT)	142.52

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	162.26
Time of Peak Discharge	01Jan2000, 10:08
Volume (IN)	1.55
Precipitation Volume (AC - FT)	138.24
Loss Volume (AC - FT)	64.01
Excess Volume (AC - FT)	74.23
Direct Runoff Volume (AC - FT)	74.23
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	5.22
Time of Peak Discharge	01Jan2000, 10:28
Volume (IN)	0.16
Peak Inflow (CFS)	259.41
Time of Peak Inflow	01Jan2000, 10:14
Inflow Volume (AC - FT)	114.98
Maximum Storage (AC - FT)	23.89
Peak Elevation (FT)	4598.83
Discharge Volume (AC - FT)	7.62

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	122.39
Time of Peak Discharge	01Jan2000, 10:04
Volume (IN)	1.71
Precipitation Volume (AC - FT)	89.6
Loss Volume (AC - FT)	34.82
Excess Volume (AC - FT)	54.78
Direct Runoff Volume (AC - FT)	54.78
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	5.16
Time of Peak Discharge	01Jan2000, 10:18
Volume (IN)	0.24
Peak Inflow (CFS)	122.39
Time of Peak Inflow	01Jan2000, 10:08
Inflow Volume (AC - FT)	54.78
Maximum Storage (AC - FT)	12.07
Peak Elevation (FT)	4606.17
Discharge Volume (AC - FT)	7.7

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	2225.38
Time of Peak Discharge	01Jan2000, 10:38
Volume (IN)	1.92
Precipitation Volume (AC - FT)	1890.88
Loss Volume (AC - FT)	724.3
Excess Volume (AC - FT)	1166.58
Direct Runoff Volume (AC - FT)	1165.99
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	29.96
Time of Peak Discharge	02Jan2000, 01:18
Volume (IN)	0.16

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	10.38
Time of Peak Discharge	01Jan2000, 10:24
Volume (IN)	0.19

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	119.84
Time of Peak Discharge	01Jan2000, 13:42
Volume (IN)	2.97

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	99.93
Time of Peak Discharge	01Jan2000, 10:20
Peak Inflow (CFS)	99.96
Inflow Volume (AC - FT)	40.75

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	232.29
Time of Peak Discharge	01Jan2000, 10:34
Peak Inflow (CFS)	232.28
Inflow Volume (AC - FT)	89.04

Project: Rev3

Simulation Run: Storm Event 02 100y6h3

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.9

Executed: 30 March 2022, 12:30

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	93.8	0.13
Da2	0	92.3	0.17
Da3	0	94.4	0.12
Da4	0	93.5	0.14
Di1	0	94.3	0.12
Di2	0	93.3	0.14
Di3	0	94.9	0.11
Di4	0	94.4	0.12
Transform: Scs			
Element Name	Lag	Unitgraph Type	
Da1	5.4	Standard	
Da2	43.2	Standard	
Da3	16.8	Standard	
Da4	34.8	Standard	
Di1	18	Standard	
Di2	17.4	Standard	
Di3	13.2	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	252.08	01Jan2000, 02:30	1.86
Reservoir - Da1	0.3	34.47	01Jan2000, 05:50	0.36
Da2	3.6	1944.49	01Jan2000, 03:08	1.85
Reservoir - Da2/3	4.3	228.2	01Jan2000, 06:50	0.15
Da3	0.7	537.61	01Jan2000, 02:38	1.91
Da4	1.7	1004.72	01Jan2000, 02:58	1.83
Di1	0.9	678.47	01Jan2000, 02:40	1.91
Reservoir - Di1	0.9	622.24	01Jan2000, 03:26	2.97
Di2	0.9	671.2	01Jan2000, 02:40	1.86
Reservoir - Di2	0.9	287.17	01Jan2000, 02:56	0.3
Di3	0.6	498.5	01Jan2000, 02:36	1.97
Reservoir - Di3	0.6	294.36	01Jan2000, 02:46	0.52
Di4	11.4	6042.93	01Jan2000, 03:12	1.91
Junction - 1	4.6	238.41	01Jan2000, 06:48	0.16
Junction - 2	1.5	542.69	01Jan2000, 02:52	0.39
Junction - 3	0.9	622.24	01Jan2000, 03:26	2.97
Reach - Di3 to Di2	0	138	01Jan2000, 02:52	Not specified
Reach - Di2 to Di1	0	384.38	01Jan2000, 02:46	Not specified

Subbasin: Da1

Area (MI²) : 0.3	
Downstream : Reservoir - Da1	
Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	93.8
Initial Abstraction	0.13
Transform: Scs	
Lag	5.4
Unitgraph Type Standard	

Results: Da1

Peak Discharge (CFS)	252.08
Time of Peak Discharge	01Jan2000, 02:30
Volume (IN)	1.86
Precipitation Volume (AC - FT)	40.16
Loss Volume (AC - FT)	10.36
Excess Volume (AC - FT)	29.8
Direct Runoff Volume (AC - FT)	29.8
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	34.47
Time of Peak Discharge	01Jan2000, 05:50
Volume (IN)	0.36
Peak Inflow (CFS)	252.08
Time of Peak Inflow	01Jan2000, 02:30
Inflow Volume (AC - FT)	29.8
Maximum Storage (AC - FT)	27.75
Peak Elevation (FT)	4691.75
Discharge Volume (AC - FT)	5.83

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	92.3
Initial Abstraction	0.17

Transform: Scs

Lag	43.2
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	1944.49
Time of Peak Discharge	01Jan2000, 03:08
Volume (IN)	1.85
Precipitation Volume (AC - FT)	506.88
Loss Volume (AC - FT)	152.37
Excess Volume (AC - FT)	354.51
Direct Runoff Volume (AC - FT)	354.48
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	228.2
Time of Peak Discharge	01Jan2000, 06:50

Volume (IN)	0.15
Peak Inflow (CFS)	2249.16
Time of Peak Inflow	01Jan2000, 03:02
Inflow Volume (AC - FT)	425.61
Maximum Storage (AC - FT)	402.22
Peak Elevation (FT)	4697.3
Discharge Volume (AC - FT)	34.38

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	94.4
Initial Abstraction	0.12
Transform: Scs	
Lag	16.8
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	537.61
Time of Peak Discharge	01Jan2000, 02:38
Volume (IN)	1.91
Precipitation Volume (AC - FT)	93.33
Loss Volume (AC - FT)	22.21
Excess Volume (AC - FT)	71.13
Direct Runoff Volume (AC - FT)	71.13
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	93.5
Initial Abstraction	0.14
Transform: Scs	
Lag	34.8
Unitgraph Type	Standard
Results: Da4	
Peak Discharge (CFS)	1004.72
Time of Peak Discharge	01Jan2000, 02:58
Volume (IN)	1.83
Precipitation Volume (AC - FT)	227.57
Loss Volume (AC - FT)	61.43
Excess Volume (AC - FT)	166.15
Direct Runoff Volume (AC - FT)	166.15
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	94.3
Initial Abstraction	0.12
Transform: Scs	
Lag	18
Unitgraph Type	Standard
Results: Di1	
Peak Discharge (CFS)	678.47
Time of Peak Discharge	01Jan2000, 02:40
Volume (IN)	1.91
Precipitation Volume (AC - FT)	120.48
Loss Volume (AC - FT)	28.92
Excess Volume (AC - FT)	91.56
Direct Runoff Volume (AC - FT)	91.56
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	622.24
Time of Peak Discharge	01Jan2000, 03:26
Volume (IN)	2.97
Peak Inflow (CFS)	1045.98
Time of Peak Inflow	01Jan2000, 02:44
Inflow Volume (AC - FT)	187.41
Maximum Storage (AC - FT)	66.59
Peak Elevation (FT)	4557.12
Discharge Volume (AC - FT)	142.42

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	93.3
Initial Abstraction	0.14
Transform: Scs	
Lag	17.4
Unitgraph Type	Standard
Results: Di2	
Peak Discharge (CFS)	671.2
Time of Peak Discharge	01Jan2000, 02:40
Volume (IN)	1.86
Precipitation Volume (AC - FT)	122.4
Loss Volume (AC - FT)	33.28
Excess Volume (AC - FT)	89.12
Direct Runoff Volume (AC - FT)	89.12
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	287.17
Time of Peak Discharge	01Jan2000, 02:56
Volume (IN)	0.3
Peak Inflow (CFS)	809.2
Time of Peak Inflow	01Jan2000, 02:42
Inflow Volume (AC - FT)	129.02
Maximum Storage (AC - FT)	31.53
Peak Elevation (FT)	4600.86
Discharge Volume (AC - FT)	14.63

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	94.9
Initial Abstraction	0.11
Transform: Scs	
Lag	13.2
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	498.5
Time of Peak Discharge	01Jan2000, 02:36
Volume (IN)	1.97
Precipitation Volume (AC - FT)	80.64
Loss Volume (AC - FT)	17.58
Excess Volume (AC - FT)	63.06
Direct Runoff Volume (AC - FT)	63.06
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	294.36
Time of Peak Discharge	01Jan2000, 02:46
Volume (IN)	0.52
Peak Inflow (CFS)	498.5
Time of Peak Inflow	01Jan2000, 02:40
Inflow Volume (AC - FT)	63.06
Maximum Storage (AC - FT)	17.92
Peak Elevation (FT)	4608.05
Discharge Volume (AC - FT)	16.55

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	94.4
Initial Abstraction	0.12
Transform: Scs	
Lag	48.6
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	6042.93
Time of Peak Discharge	01Jan2000, 03:12
Volume (IN)	1.91
Precipitation Volume (AC - FT)	1526.08
Loss Volume (AC - FT)	361.92
Excess Volume (AC - FT)	1164.16
Direct Runoff Volume (AC - FT)	1163.89
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	238.41
Time of Peak Discharge	01Jan2000, 06:48
Volume (IN)	0.16

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	542.69
Time of Peak Discharge	01Jan2000, 02:52
Volume (IN)	0.39

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	622.24
Time of Peak Discharge	01Jan2000, 03:26
Volume (IN)	2.97

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	138
Time of Peak Discharge	01Jan2000, 02:52
Peak Inflow (CFS)	138
Inflow Volume (AC - FT)	39.89

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	384.38
Time of Peak Discharge	01Jan2000, 02:46
Peak Inflow (CFS)	380
Inflow Volume (AC - FT)	95.81

Project: Rev3

Simulation Run: Storm Event 03 100y24h3

Simulation Start: 31 December 1999, 24:00

Simulation End: 2 January 2000, 03:00

HMS Version: 4.9

Executed: 30 March 2022, 12:30

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	93.8	0.13
Da2	0	92.3	0.17
Da3	0	94.4	0.12
Da4	0	93.5	0.14
Di1	0	94.3	0.12
Di2	0	93.3	0.14
Di3	0	94.9	0.11
Di4	0	94.4	0.12
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	5.4	Standard	
Da2	43.2	Standard	
Da3	16.8	Standard	
Da4	34.8	Standard	
Di1	18	Standard	
Di2	17.4	Standard	
Di3	13.2	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	74.58	01Jan2000, 10:00	2.13
Reservoir - Da1	0.3	12.38	01Jan2000, 18:04	0.65
Da2	3.6	841.16	01Jan2000, 10:16	2.14
Reservoir - Da2/3	4.3	156.77	01Jan2000, 22:10	0.44
Da3	0.7	170.56	01Jan2000, 10:02	2.16
Da4	1.7	412.36	01Jan2000, 10:10	2.18
Di1	0.9	223.98	01Jan2000, 10:02	2.17
Reservoir - Di1	0.9	528.73	01Jan2000, 10:20	4.18
Di2	0.9	223.58	01Jan2000, 10:02	2.17
Reservoir - Di2	0.9	5.36	01Jan2000, 10:12	0.17
Di3	0.6	152.87	01Jan2000, 10:00	2.24
Reservoir - Di3	0.6	5.33	01Jan2000, 10:10	0.26
Di4	11.4	3012.85	01Jan2000, 10:16	2.49
Junction - 1	4.6	167.79	01Jan2000, 22:06	0.46
Junction - 2	1.5	10.69	01Jan2000, 10:10	0.21
Junction - 3	0.9	528.73	01Jan2000, 10:20	4.18
Reach - Di3 to Di2	0	137.59	01Jan2000, 10:12	Not specified
Reach - Di2 to Di1	0	346.07	01Jan2000, 10:16	Not specified

Subbasin: Da1

Area (MI²) : 0.3	
Downstream : Reservoir - Da1	
Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	93.8
Initial Abstraction	0.13
Transform: Scs	
Lag	5.4
Unitgraph Type Standard	

Results: Da1

Peak Discharge (CFS)	74.58
Time of Peak Discharge	01Jan2000, 10:00
Volume (IN)	2.13
Precipitation Volume (AC - FT)	44.64
Loss Volume (AC - FT)	10.55
Excess Volume (AC - FT)	34.09
Direct Runoff Volume (AC - FT)	34.09
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	12.38
Time of Peak Discharge	01Jan2000, 18:04
Volume (IN)	0.65
Peak Inflow (CFS)	74.58
Time of Peak Inflow	01Jan2000, 10:00
Inflow Volume (AC - FT)	34.09
Maximum Storage (AC - FT)	26.76
Peak Elevation (FT)	4691.61
Discharge Volume (AC - FT)	10.34

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	92.3
Initial Abstraction	0.17

Transform: Scs

Lag	43.2
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	841.16
Time of Peak Discharge	01Jan2000, 10:16
Volume (IN)	2.14
Precipitation Volume (AC - FT)	566.4
Loss Volume (AC - FT)	155.84
Excess Volume (AC - FT)	410.56
Direct Runoff Volume (AC - FT)	410.55
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	156.77
Time of Peak Discharge	01Jan2000, 22:10

Volume (IN)	0.44
Peak Inflow (CFS)	1002.88
Time of Peak Inflow	01Jan2000, 10:08
Inflow Volume (AC - FT)	491.03
Maximum Storage (AC - FT)	399.11
Peak Elevation (FT)	4697.22
Discharge Volume (AC - FT)	101.5

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	94.4
Initial Abstraction	0.12
Transform: Scs	
Lag	16.8
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	170.56
Time of Peak Discharge	01Jan2000, 10:02
Volume (IN)	2.16
Precipitation Volume (AC - FT)	103.04
Loss Volume (AC - FT)	22.56
Excess Volume (AC - FT)	80.48
Direct Runoff Volume (AC - FT)	80.48
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	93.5
Initial Abstraction	0.14
Transform: Scs	
Lag	34.8
Unitgraph Type	Standard
Results: Da4	
Peak Discharge (CFS)	412.36
Time of Peak Discharge	01Jan2000, 10:10
Volume (IN)	2.18
Precipitation Volume (AC - FT)	260.21
Loss Volume (AC - FT)	62.93
Excess Volume (AC - FT)	197.28
Direct Runoff Volume (AC - FT)	197.28
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	94.3
Initial Abstraction	0.12
Transform: Scs	
Lag	18
Unitgraph Type Standard	
Results: Di1	
Peak Discharge (CFS)	223.98
Time of Peak Discharge	01Jan2000, 10:02
Volume (IN)	2.17
Precipitation Volume (AC - FT)	133.44
Loss Volume (AC - FT)	29.4
Excess Volume (AC - FT)	104.04
Direct Runoff Volume (AC - FT)	104.04
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	528.73
Time of Peak Discharge	01Jan2000, 10:20
Volume (IN)	4.18
Peak Inflow (CFS)	563.98
Time of Peak Inflow	01Jan2000, 10:06
Inflow Volume (AC - FT)	238.63
Maximum Storage (AC - FT)	65.85
Peak Elevation (FT)	4556.97
Discharge Volume (AC - FT)	200.51

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	93.3
Initial Abstraction	0.14
Transform: Scs	
Lag	17.4
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	223.58
Time of Peak Discharge	01Jan2000, 10:02
Volume (IN)	2.17
Precipitation Volume (AC - FT)	138.24
Loss Volume (AC - FT)	34.03
Excess Volume (AC - FT)	104.21
Direct Runoff Volume (AC - FT)	104.21
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	5.36
Time of Peak Discharge	01Jan2000, 10:12
Volume (IN)	0.17
Peak Inflow (CFS)	359.45
Time of Peak Inflow	01Jan2000, 10:06
Inflow Volume (AC - FT)	161.18
Maximum Storage (AC - FT)	26.29
Peak Elevation (FT)	4599.73
Discharge Volume (AC - FT)	8.33

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	94.9
Initial Abstraction	0.11
Transform: Scs	
Lag	13.2
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	152.87
Time of Peak Discharge	01Jan2000, 10:00
Volume (IN)	2.24
Precipitation Volume (AC - FT)	89.6
Loss Volume (AC - FT)	17.85
Excess Volume (AC - FT)	71.75
Direct Runoff Volume (AC - FT)	71.75
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	5.33
Time of Peak Discharge	01Jan2000, 10:10
Volume (IN)	0.26
Peak Inflow (CFS)	152.87
Time of Peak Inflow	01Jan2000, 10:04
Inflow Volume (AC - FT)	71.75
Maximum Storage (AC - FT)	13.98
Peak Elevation (FT)	4606.99
Discharge Volume (AC - FT)	8.45

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	94.4
Initial Abstraction	0.12
Transform: Scs	
Lag	48.6
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	3012.85
Time of Peak Discharge	01Jan2000, 10:16
Volume (IN)	2.49
Precipitation Volume (AC - FT)	1890.88
Loss Volume (AC - FT)	373.93
Excess Volume (AC - FT)	1516.95
Direct Runoff Volume (AC - FT)	1516.88
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	167.79
Time of Peak Discharge	01Jan2000, 22:06
Volume (IN)	0.46

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	10.69
Time of Peak Discharge	01Jan2000, 10:10
Volume (IN)	0.21

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	528.73
Time of Peak Discharge	01Jan2000, 10:20
Volume (IN)	4.18

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	137.59
Time of Peak Discharge	01Jan2000, 10:12
Peak Inflow (CFS)	137.62
Inflow Volume (AC - FT)	56.97

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	346.07
Time of Peak Discharge	01Jan2000, 10:16
Peak Inflow (CFS)	346.11
Inflow Volume (AC - FT)	134.57

Project: Rev3

Simulation Run: Storm Event 04 SEPL

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.9

Executed: 30 March 2022, 12:31

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element		Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1		0.3	1312.24	01Jan2000, 02:30	10.09
Reservoir - Da1		0.3	1198.11	01Jan2000, 02:36	8.6
Da2		3.6	6533.46	01Jan2000, 03:24	7.33
Reservoir - Da2/3		4.3	7149.67	01Jan2000, 03:38	6.07
Da3		0.7	2657.47	01Jan2000, 02:42	10.22
Da4		1.7	4804.31	01Jan2000, 03:08	10
Di1		0.9	3344.14	01Jan2000, 02:44	10.21
Reservoir - Di1		0.9	3435.53	01Jan2000, 02:56	12.62
Di2		0.9	3275.07	01Jan2000, 02:44	9.95
Reservoir - Di2		0.9	2923.79	01Jan2000, 02:52	7.44
Di3		0.6	2446.04	01Jan2000, 02:38	10.35
Reservoir - Di3		0.6	2221.72	01Jan2000, 02:42	8.13
Di4		11.4	27796.15	01Jan2000, 03:26	10.22
Junction - 1		4.6	7483.79	01Jan2000, 03:36	6.23
Junction - 2		1.5	5103.92	01Jan2000, 02:48	7.71
Junction - 3		0.9	3435.53	01Jan2000, 02:56	12.62
Reach - Di3 to Di2		0	138	01Jan2000, 02:06	Not specified
Reach - Di2 to Di1		0	383.82	01Jan2000, 02:04	Not specified

Subbasin: Da1

Area (MI²) : 0.3
Downstream : Reservoir - Da1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.8
Initial Abstraction 0.3
Transform: Scs
Lag 7.2
Unitgraph Type Standard

Results: Da1

Peak Discharge (CFS)	1312.24
Time of Peak Discharge	01Jan2000, 02:30
Volume (IN)	10.09
Precipitation Volume (AC - FT)	187.68
Loss Volume (AC - FT)	26.27
Excess Volume (AC - FT)	161.41
Direct Runoff Volume (AC - FT)	161.41
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	1198.11
Time of Peak Discharge	01Jan2000, 02:36
Volume (IN)	8.6
Peak Inflow (CFS)	1312.24
Time of Peak Inflow	01Jan2000, 02:30
Inflow Volume (AC - FT)	161.41
Maximum Storage (AC - FT)	46.02
Peak Elevation (FT)	4694.39
Discharge Volume (AC - FT)	137.53

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	6533.46
Time of Peak Discharge	01Jan2000, 03:24
Volume (IN)	7.33
Precipitation Volume (AC - FT)	1785.6
Loss Volume (AC - FT)	376.17
Excess Volume (AC - FT)	1409.43
Direct Runoff Volume (AC - FT)	1407.63
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	7149.67
Time of Peak Discharge	01Jan2000, 03:38

Volume (IN)	6.07
Peak Inflow (CFS)	7765.51
Time of Peak Inflow	01Jan2000, 03:14
Inflow Volume (AC - FT)	1789.22
Maximum Storage (AC - FT)	524.62
Peak Elevation (FT)	4700.25
Discharge Volume (AC - FT)	1391.57

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.9
Initial Abstraction	0.28
Transform: Scs	
Lag	22.2
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	2657.47
Time of Peak Discharge	01Jan2000, 02:42
Volume (IN)	10.22
Precipitation Volume (AC - FT)	437.92
Loss Volume (AC - FT)	56.33
Excess Volume (AC - FT)	381.59
Direct Runoff Volume (AC - FT)	381.59
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	86.2
Initial Abstraction	0.32
Transform: Scs	
Lag	46.8
Unitgraph Type	Standard
Results: Da4	
Peak Discharge (CFS)	4804.31
Time of Peak Discharge	01Jan2000, 03:08
Volume (IN)	10
Precipitation Volume (AC - FT)	1063.52
Loss Volume (AC - FT)	156.3
Excess Volume (AC - FT)	907.22
Direct Runoff Volume (AC - FT)	907.08
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di1	
Peak Discharge (CFS)	3344.14
Time of Peak Discharge	01Jan2000, 02:44
Volume (IN)	10.21
Precipitation Volume (AC - FT)	563.04
Loss Volume (AC - FT)	72.92
Excess Volume (AC - FT)	490.12
Direct Runoff Volume (AC - FT)	490.12
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	3435.53
Time of Peak Discharge	01Jan2000, 02:56
Volume (IN)	12.62
Peak Inflow (CFS)	3724.14
Time of Peak Inflow	01Jan2000, 02:44
Inflow Volume (AC - FT)	656.48
Maximum Storage (AC - FT)	87.14
Peak Elevation (FT)	4560.03
Discharge Volume (AC - FT)	605.97

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di2	
Peak Discharge (CFS)	3275.07
Time of Peak Discharge	01Jan2000, 02:44
Volume (IN)	9.95
Precipitation Volume (AC - FT)	563.04
Loss Volume (AC - FT)	85.21
Excess Volume (AC - FT)	477.83
Direct Runoff Volume (AC - FT)	477.83
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	2923.79
Time of Peak Discharge	01Jan2000, 02:52
Volume (IN)	7.44
Peak Inflow (CFS)	3413.07
Time of Peak Inflow	01Jan2000, 02:46
Inflow Volume (AC - FT)	542.17
Maximum Storage (AC - FT)	49.95
Peak Elevation (FT)	4604.08
Discharge Volume (AC - FT)	356.93

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	2446.04
Time of Peak Discharge	01Jan2000, 02:38
Volume (IN)	10.35
Precipitation Volume (AC - FT)	375.36
Loss Volume (AC - FT)	44.04
Excess Volume (AC - FT)	331.32
Direct Runoff Volume (AC - FT)	331.32
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	2221.72
Time of Peak Discharge	01Jan2000, 02:42
Volume (IN)	8.13
Peak Inflow (CFS)	2446.04
Time of Peak Inflow	01Jan2000, 02:42
Inflow Volume (AC - FT)	331.32
Maximum Storage (AC - FT)	30.12
Peak Elevation (FT)	4611.06
Discharge Volume (AC - FT)	260.03

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	27796.15
Time of Peak Discharge	01Jan2000, 03:26
Volume (IN)	10.22
Precipitation Volume (AC - FT)	7131.84
Loss Volume (AC - FT)	905.09
Excess Volume (AC - FT)	6226.75
Direct Runoff Volume (AC - FT)	6215.3
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	7483.79
Time of Peak Discharge	01Jan2000, 03:36
Volume (IN)	6.23

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	5103.92
Time of Peak Discharge	01Jan2000, 02:48
Volume (IN)	7.71

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	3435.53
Time of Peak Discharge	01Jan2000, 02:56
Volume (IN)	12.62

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	138
Time of Peak Discharge	01Jan2000, 02:06
Peak Inflow (CFS)	138
Inflow Volume (AC - FT)	64.34

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	383.82
Time of Peak Discharge	01Jan2000, 02:04
Peak Inflow (CFS)	380
Inflow Volume (AC - FT)	166.32

Project: Rev3

Simulation Run: Storm Event 05 SEPG

Simulation Start: 31 December 1999, 24:00

Simulation End: 4 January 2000, 03:00

HMS Version: 4.9

Executed: 30 March 2022, 12:31

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element		Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1		0.3	135.45	02Jan2000, 06:00	12.43
Reservoir - Da1		0.3	135.26	02Jan2000, 06:00	10.97
Da2		3.6	1579.63	02Jan2000, 06:06	11.99
Reservoir - Da2/3		4.3	1893.12	02Jan2000, 06:08	10.37
Da3		0.7	317.07	02Jan2000, 06:00	12.57
Da4		1.7	761.62	02Jan2000, 06:02	12.35
Di1		0.9	407.43	02Jan2000, 06:00	12.56
Reservoir - Di1		0.9	787.3	02Jan2000, 06:02	27.98
Di2		0.9	403.66	02Jan2000, 06:00	12.29
Reservoir - Di2		0.9	161.33	02Jan2000, 06:02	2.03
Di3		0.6	273	02Jan2000, 06:00	12.7
Reservoir - Di3		0.6	134.86	02Jan2000, 06:00	2.94
Di4		11.4	5139.33	02Jan2000, 06:04	12.59
Junction - 1		4.6	2027.51	02Jan2000, 06:04	10.41
Junction - 2		1.5	296.2	02Jan2000, 06:02	2.39
Junction - 3		0.9	787.3	02Jan2000, 06:02	27.98
Reach - Di3 to Di2		0	138	01Jan2000, 23:50	Not specified
Reach - Di2 to Di1		0	380.43	02Jan2000, 00:36	Not specified

Subbasin: Da1

Area (MI²) : 0.3
Downstream : Reservoir - Da1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.8
Initial Abstraction 0.3
Transform: Scs
Lag 7.2
Unitgraph Type Standard

Results: Da1

Peak Discharge (CFS)	135.45
Time of Peak Discharge	02Jan2000, 06:00
Volume (IN)	12.43
Precipitation Volume (AC - FT)	225.6
Loss Volume (AC - FT)	26.72
Excess Volume (AC - FT)	198.88
Direct Runoff Volume (AC - FT)	198.88
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	135.26
Time of Peak Discharge	02Jan2000, 06:00
Volume (IN)	10.97
Peak Inflow (CFS)	135.45
Time of Peak Inflow	02Jan2000, 06:00
Inflow Volume (AC - FT)	198.88
Maximum Storage (AC - FT)	30.56
Peak Elevation (FT)	4692.16
Discharge Volume (AC - FT)	175.48

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	1579.63
Time of Peak Discharge	02Jan2000, 06:06
Volume (IN)	11.99
Precipitation Volume (AC - FT)	2697.6
Loss Volume (AC - FT)	396.04
Excess Volume (AC - FT)	2301.55
Direct Runoff Volume (AC - FT)	2301.36
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	1893.12
Time of Peak Discharge	02Jan2000, 06:08

Volume (IN) 10.37
Peak Inflow (CFS) 1896.21
Time of Peak Inflow 02Jan2000, 06:02
Inflow Volume (AC - FT) 2770.57
Maximum Storage (AC - FT) 444.05
Peak Elevation (FT) 4698.33
Discharge Volume (AC - FT) 2379.25

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 87.9
Initial Abstraction 0.28
Transform: Scs
Lag 22.2
Unitgraph Type Standard
Results: Da3
Peak Discharge (CFS) 317.07
Time of Peak Discharge 02Jan2000, 06:00
Volume (IN) 12.57
Precipitation Volume (AC - FT) 526.4
Loss Volume (AC - FT) 57.19
Excess Volume (AC - FT) 469.21
Direct Runoff Volume (AC - FT) 469.21
Baseflow Volume (AC - FT) 0

Subbasin: Da4

Area (MI²) : 1.7
Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.2
Initial Abstraction 0.32
Transform: Scs
Lag 46.8
Unitgraph Type Standard
Results: Da4
Peak Discharge (CFS) 761.62
Time of Peak Discharge 02Jan2000, 06:02
Volume (IN) 12.35
Precipitation Volume (AC - FT) 1278.4
Loss Volume (AC - FT) 159.06
Excess Volume (AC - FT) 1119.34
Direct Runoff Volume (AC - FT) 1119.33
Baseflow Volume (AC - FT) 0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di1	
Peak Discharge (CFS)	407.43
Time of Peak Discharge	02Jan2000, 06:00
Volume (IN)	12.56
Precipitation Volume (AC - FT)	676.8
Loss Volume (AC - FT)	74.04
Excess Volume (AC - FT)	602.76
Direct Runoff Volume (AC - FT)	602.76
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	787.3
Time of Peak Discharge	02Jan2000, 06:02
Volume (IN)	27.98
Peak Inflow (CFS)	787.43
Time of Peak Inflow	02Jan2000, 06:00
Inflow Volume (AC - FT)	1383.01
Maximum Storage (AC - FT)	67.93
Peak Elevation (FT)	4557.39
Discharge Volume (AC - FT)	1343.18

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	403.66
Time of Peak Discharge	02Jan2000, 06:00
Volume (IN)	12.29
Precipitation Volume (AC - FT)	676.8
Loss Volume (AC - FT)	86.76
Excess Volume (AC - FT)	590.04
Direct Runoff Volume (AC - FT)	590.04
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	161.33
Time of Peak Discharge	02Jan2000, 06:02
Volume (IN)	2.03
Peak Inflow (CFS)	541.66
Time of Peak Inflow	02Jan2000, 06:02
Inflow Volume (AC - FT)	895.93
Maximum Storage (AC - FT)	30.05
Peak Elevation (FT)	4600.58
Discharge Volume (AC - FT)	97.26

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	273
Time of Peak Discharge	02Jan2000, 06:00
Volume (IN)	12.7
Precipitation Volume (AC - FT)	451.2
Loss Volume (AC - FT)	44.65
Excess Volume (AC - FT)	406.55
Direct Runoff Volume (AC - FT)	406.55
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	134.86
Time of Peak Discharge	02Jan2000, 06:00
Volume (IN)	2.94
Peak Inflow (CFS)	273
Time of Peak Inflow	02Jan2000, 06:04
Inflow Volume (AC - FT)	406.55
Maximum Storage (AC - FT)	16.3
Peak Elevation (FT)	4607.61
Discharge Volume (AC - FT)	94.22

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	5139.33
Time of Peak Discharge	02Jan2000, 06:04
Volume (IN)	12.59
Precipitation Volume (AC - FT)	8572.8
Loss Volume (AC - FT)	918.84
Excess Volume (AC - FT)	7653.96
Direct Runoff Volume (AC - FT)	7652.99
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	2027.51
Time of Peak Discharge	02Jan2000, 06:04
Volume (IN)	10.41

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	296.2
Time of Peak Discharge	02Jan2000, 06:02
Volume (IN)	2.39

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	787.3
Time of Peak Discharge	02Jan2000, 06:02
Volume (IN)	27.98

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	138
Time of Peak Discharge	01Jan2000, 23:50
Peak Inflow (CFS)	138
Inflow Volume (AC - FT)	305.88

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	380.43
Time of Peak Discharge	02Jan2000, 00:36
Peak Inflow (CFS)	380
Inflow Volume (AC - FT)	780.24

Project: Rev3

Simulation Run: Storm Event 06 PSH

Simulation Start: 31 December 1999, 24:00

Simulation End: 11 January 2000, 03:00

HMS Version: 4.9

Executed: 30 March 2022, 14:39

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element		Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1		0.3	298.2	05Jan2000, 24:00	5.01
Reservoir - Da1		0.3	200.21	06Jan2000, 00:08	4.68
Da2		3.6	2518.19	06Jan2000, 00:36	5.27
Reservoir - Da2/3		4.3	2066.78	06Jan2000, 01:08	3.64
Da3		0.7	654.86	06Jan2000, 00:04	5.03
Da4		1.7	1259.56	06Jan2000, 00:24	4.94
Di1		0.9	847.03	06Jan2000, 00:06	5.12
Reservoir - Di1		0.9	1218.43	06Jan2000, 00:10	9.04
Di2		0.9	859.93	06Jan2000, 00:06	5.13
Reservoir - Di2		0.9	601.6	06Jan2000, 00:10	2.19
Di3		0.6	607.65	06Jan2000, 00:02	5.35
Reservoir - Di3		0.6	462.45	06Jan2000, 00:06	2.86
Di4		11.4	7391.81	06Jan2000, 00:40	5.15
Junction - 1		4.6	2129.34	06Jan2000, 01:08	3.71
Junction - 2		1.5	1057.01	06Jan2000, 00:08	2.46
Junction - 3		0.9	1218.43	06Jan2000, 00:10	9.04
Reach - Di3 to Di2		0	138	05Jan2000, 23:50	Not specified
Reach - Di2 to Di1		0	381.98	05Jan2000, 23:38	Not specified

Subbasin: Da1

Area (MI²) : 0.3
Downstream : Reservoir - Da1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.8
Initial Abstraction 0.3
Transform: Scs
Lag 7.2
Unitgraph Type Standard

Results: Da1

Peak Discharge (CFS)	298.2
Time of Peak Discharge	05Jan2000, 24:00
Volume (IN)	5.01
Precipitation Volume (AC - FT)	104.48
Loss Volume (AC - FT)	24.36
Excess Volume (AC - FT)	80.12
Direct Runoff Volume (AC - FT)	80.12
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	200.21
Time of Peak Discharge	06Jan2000, 00:08
Volume (IN)	4.68
Peak Inflow (CFS)	298.2
Time of Peak Inflow	05Jan2000, 24:00
Inflow Volume (AC - FT)	80.12
Maximum Storage (AC - FT)	31.97
Peak Elevation (FT)	4692.36
Discharge Volume (AC - FT)	74.85

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	2518.19
Time of Peak Discharge	06Jan2000, 00:36
Volume (IN)	5.27
Precipitation Volume (AC - FT)	1372.8
Loss Volume (AC - FT)	360.03
Excess Volume (AC - FT)	1012.77
Direct Runoff Volume (AC - FT)	1012.75
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	2066.78
Time of Peak Discharge	06Jan2000, 01:08

Volume (IN)	3.64
Peak Inflow (CFS)	2831.84
Time of Peak Inflow	06Jan2000, 00:28
Inflow Volume (AC - FT)	1200.35
Maximum Storage (AC - FT)	447.35
Peak Elevation (FT)	4698.41
Discharge Volume (AC - FT)	834.15

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.9
Initial Abstraction	0.28
Transform: Scs	
Lag	22.2
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	654.86
Time of Peak Discharge	06Jan2000, 00:04
Volume (IN)	5.03
Precipitation Volume (AC - FT)	240.05
Loss Volume (AC - FT)	52.45
Excess Volume (AC - FT)	187.61
Direct Runoff Volume (AC - FT)	187.61
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	86.2
Initial Abstraction	0.32
Transform: Scs	
Lag	46.8
Unitgraph Type	Standard
Results: Da4	
Peak Discharge (CFS)	1259.56
Time of Peak Discharge	06Jan2000, 00:24
Volume (IN)	4.94
Precipitation Volume (AC - FT)	592.05
Loss Volume (AC - FT)	144.41
Excess Volume (AC - FT)	447.64
Direct Runoff Volume (AC - FT)	447.64
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di1	
Peak Discharge (CFS)	847.03
Time of Peak Discharge	06Jan2000, 00:06
Volume (IN)	5.12
Precipitation Volume (AC - FT)	313.92
Loss Volume (AC - FT)	68.02
Excess Volume (AC - FT)	245.9
Direct Runoff Volume (AC - FT)	245.9
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	1218.43
Time of Peak Discharge	06Jan2000, 00:10
Volume (IN)	9.04
Peak Inflow (CFS)	1227.03
Time of Peak Inflow	06Jan2000, 00:06
Inflow Volume (AC - FT)	447.47
Maximum Storage (AC - FT)	70.67
Peak Elevation (FT)	4557.93
Discharge Volume (AC - FT)	434.13

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di2	
Peak Discharge (CFS)	859.93
Time of Peak Discharge	06Jan2000, 00:06
Volume (IN)	5.13
Precipitation Volume (AC - FT)	325.44
Loss Volume (AC - FT)	79.06
Excess Volume (AC - FT)	246.38
Direct Runoff Volume (AC - FT)	246.38
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	601.6
Time of Peak Discharge	06Jan2000, 00:10
Volume (IN)	2.19
Peak Inflow (CFS)	997.93
Time of Peak Inflow	06Jan2000, 00:08
Inflow Volume (AC - FT)	323.23
Maximum Storage (AC - FT)	34.47
Peak Elevation (FT)	4601.42
Discharge Volume (AC - FT)	105.03

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	607.65
Time of Peak Discharge	06Jan2000, 00:02
Volume (IN)	5.35
Precipitation Volume (AC - FT)	212.48
Loss Volume (AC - FT)	41.42
Excess Volume (AC - FT)	171.06
Direct Runoff Volume (AC - FT)	171.06
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	462.45
Time of Peak Discharge	06Jan2000, 00:06
Volume (IN)	2.86
Peak Inflow (CFS)	607.65
Time of Peak Inflow	06Jan2000, 00:06
Inflow Volume (AC - FT)	171.06
Maximum Storage (AC - FT)	19.32
Peak Elevation (FT)	4608.42
Discharge Volume (AC - FT)	91.54

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	7391.81
Time of Peak Discharge	06Jan2000, 00:40
Volume (IN)	5.15
Precipitation Volume (AC - FT)	3976.32
Loss Volume (AC - FT)	845.15
Excess Volume (AC - FT)	3131.17
Direct Runoff Volume (AC - FT)	3131.07
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	2129.34
Time of Peak Discharge	06Jan2000, 01:08
Volume (IN)	3.71

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	1057.01
Time of Peak Discharge	06Jan2000, 00:08
Volume (IN)	2.46

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	1218.43
Time of Peak Discharge	06Jan2000, 00:10
Volume (IN)	9.04

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	138
Time of Peak Discharge	05Jan2000, 23:50
Peak Inflow (CFS)	138
Inflow Volume (AC - FT)	76.85

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	381.98
Time of Peak Discharge	05Jan2000, 23:38
Peak Inflow (CFS)	380
Inflow Volume (AC - FT)	201.56

Project: Rev3

Simulation Run: Storm Event 07 ASHL

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.9

Executed: 30 March 2022, 12:33

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element	Drainage Area (MI ²)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	474.65	01Jan2000, 02:32	3.47
Reservoir - Da1	0.3	150.98	01Jan2000, 03:04	1.98
Da2	3.6	2324.75	01Jan2000, 03:28	2.69
Reservoir - Da2/3	4.3	1247.65	01Jan2000, 05:12	1.11
Da3	0.7	940.91	01Jan2000, 02:44	3.56
Da4	1.7	1619.14	01Jan2000, 03:12	3.4
Di1	0.9	1183.36	01Jan2000, 02:46	3.56
Reservoir - Di1	0.9	1331.1	01Jan2000, 03:04	5.37
Di2	0.9	1120	01Jan2000, 02:48	3.39
Reservoir - Di2	0.9	823.35	01Jan2000, 02:56	1.3
Di3	0.6	892.46	01Jan2000, 02:38	3.68
Reservoir - Di3	0.6	724.01	01Jan2000, 02:44	1.8
Di4	11.4	9656.43	01Jan2000, 03:30	3.58
Junction - 1	4.6	1326.27	01Jan2000, 05:12	1.17
Junction - 2	1.5	1481.59	01Jan2000, 02:52	1.5
Junction - 3	0.9	1331.1	01Jan2000, 03:04	5.37
Reach - Di3 to Di2	0	138	01Jan2000, 02:44	Not specified
Reach - Di2 to Di1	0	385.84	01Jan2000, 02:40	Not specified

Subbasin: Da1

Area (MI²) : 0.3
Downstream : Reservoir - Da1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.8
Initial Abstraction 0.3
Transform: Scs
Lag 7.2
Unitgraph Type Standard

Results: Da1

Peak Discharge (CFS)	474.65
Time of Peak Discharge	01Jan2000, 02:32
Volume (IN)	3.47
Precipitation Volume (AC - FT)	78.56
Loss Volume (AC - FT)	23.1
Excess Volume (AC - FT)	55.46
Direct Runoff Volume (AC - FT)	55.46
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	150.98
Time of Peak Discharge	01Jan2000, 03:04
Volume (IN)	1.98
Peak Inflow (CFS)	474.65
Time of Peak Inflow	01Jan2000, 02:32
Inflow Volume (AC - FT)	55.46
Maximum Storage (AC - FT)	30.92
Peak Elevation (FT)	4692.21
Discharge Volume (AC - FT)	31.72

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	2324.75
Time of Peak Discharge	01Jan2000, 03:28
Volume (IN)	2.69
Precipitation Volume (AC - FT)	839.04
Loss Volume (AC - FT)	321.75
Excess Volume (AC - FT)	517.29
Direct Runoff Volume (AC - FT)	516.52
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	1247.65
Time of Peak Discharge	01Jan2000, 05:12

Volume (IN) 1.11
Peak Inflow (CFS) 2732.99
Time of Peak Inflow 01Jan2000, 03:22
Inflow Volume (AC - FT) 649.4
Maximum Storage (AC - FT) 430.72
Peak Elevation (FT) 4698
Discharge Volume (AC - FT) 254.76

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 87.9
Initial Abstraction 0.28
Transform: Scs
Lag 22.2
Unitgraph Type Standard
Results: Da3
Peak Discharge (CFS) 940.91
Time of Peak Discharge 01Jan2000, 02:44
Volume (IN) 3.56
Precipitation Volume (AC - FT) 182.93
Loss Volume (AC - FT) 50.05
Excess Volume (AC - FT) 132.89
Direct Runoff Volume (AC - FT) 132.89
Baseflow Volume (AC - FT) 0

Subbasin: Da4

Area (MI²) : 1.7
Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.2
Initial Abstraction 0.32
Transform: Scs
Lag 46.8
Unitgraph Type Standard
Results: Da4
Peak Discharge (CFS) 1619.14
Time of Peak Discharge 01Jan2000, 03:12
Volume (IN) 3.4
Precipitation Volume (AC - FT) 445.17
Loss Volume (AC - FT) 136.63
Excess Volume (AC - FT) 308.54
Direct Runoff Volume (AC - FT) 308.49
Baseflow Volume (AC - FT) 0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di1	
Peak Discharge (CFS)	1183.36
Time of Peak Discharge	01Jan2000, 02:46
Volume (IN)	3.56
Precipitation Volume (AC - FT)	235.68
Loss Volume (AC - FT)	64.74
Excess Volume (AC - FT)	170.94
Direct Runoff Volume (AC - FT)	170.94
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	1331.1
Time of Peak Discharge	01Jan2000, 03:04
Volume (IN)	5.37
Peak Inflow (CFS)	1563.09
Time of Peak Inflow	01Jan2000, 02:46
Inflow Volume (AC - FT)	306.06
Maximum Storage (AC - FT)	71.32
Peak Elevation (FT)	4558.06
Discharge Volume (AC - FT)	257.88

Subbasin: Di2

Area (MI²) : 0.9

Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di2	
Peak Discharge (CFS)	1120
Time of Peak Discharge	01Jan2000, 02:48
Volume (IN)	3.39
Precipitation Volume (AC - FT)	237.12
Loss Volume (AC - FT)	74.29
Excess Volume (AC - FT)	162.83
Direct Runoff Volume (AC - FT)	162.83
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	823.35
Time of Peak Discharge	01Jan2000, 02:56
Volume (IN)	1.3
Peak Inflow (CFS)	1258
Time of Peak Inflow	01Jan2000, 02:50
Inflow Volume (AC - FT)	216.14
Maximum Storage (AC - FT)	36.23
Peak Elevation (FT)	4601.76
Discharge Volume (AC - FT)	62.28

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	892.46
Time of Peak Discharge	01Jan2000, 02:38
Volume (IN)	3.68
Precipitation Volume (AC - FT)	157.12
Loss Volume (AC - FT)	39.51
Excess Volume (AC - FT)	117.61
Direct Runoff Volume (AC - FT)	117.61
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	724.01
Time of Peak Discharge	01Jan2000, 02:44
Volume (IN)	1.8
Peak Inflow (CFS)	892.46
Time of Peak Inflow	01Jan2000, 02:42
Inflow Volume (AC - FT)	117.61
Maximum Storage (AC - FT)	21.2
Peak Elevation (FT)	4608.92
Discharge Volume (AC - FT)	57.49

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	9656.43
Time of Peak Discharge	01Jan2000, 03:30
Volume (IN)	3.58
Precipitation Volume (AC - FT)	2985.28
Loss Volume (AC - FT)	804.94
Excess Volume (AC - FT)	2180.34
Direct Runoff Volume (AC - FT)	2175.79
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	1326.27
Time of Peak Discharge	01Jan2000, 05:12
Volume (IN)	1.17

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	1481.59
Time of Peak Discharge	01Jan2000, 02:52
Volume (IN)	1.5

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	1331.1
Time of Peak Discharge	01Jan2000, 03:04
Volume (IN)	5.37

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	138
Time of Peak Discharge	01Jan2000, 02:44
Peak Inflow (CFS)	138
Inflow Volume (AC - FT)	53.31

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	385.84
Time of Peak Discharge	01Jan2000, 02:40
Peak Inflow (CFS)	380
Inflow Volume (AC - FT)	135.08

Project: Rev3

Simulation Run: Storm Event 08 ASHG

Simulation Start: 31 December 1999, 24:00

Simulation End: 2 January 2000, 03:00

HMS Version: 4.9

Executed: 30 March 2022, 12:33

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious Area	Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	149.14	01Jan2000, 10:00	4.24
Reservoir - Da1	0.3	96.6	01Jan2000, 10:18	2.77
Da2	3.6	1520.45	01Jan2000, 10:32	4.04
Reservoir - Da2/3	4.3	1110.31	01Jan2000, 11:54	2.38
Da3	0.7	347.57	01Jan2000, 10:04	4.33
Da4	1.7	771.85	01Jan2000, 10:18	4.17
Di1	0.9	440.33	01Jan2000, 10:04	4.33
Reservoir - Di1	0.9	819.09	01Jan2000, 10:08	8.71
Di2	0.9	434	01Jan2000, 10:04	4.2
Reservoir - Di2	0.9	188.37	01Jan2000, 10:10	0.69
Di3	0.6	305.8	01Jan2000, 10:02	4.47
Reservoir - Di3	0.6	166.11	01Jan2000, 10:06	1.07
Di4	11.4	5086.32	01Jan2000, 10:32	4.36
Junction - 1	4.6	1160.02	01Jan2000, 11:54	2.4
Junction - 2	1.5	353.6	01Jan2000, 10:08	0.84
Junction - 3	0.9	819.09	01Jan2000, 10:08	8.71
Reach - Di3 to Di2	0	138	01Jan2000, 08:52	Not specified
Reach - Di2 to Di1	0	380.7	01Jan2000, 08:50	Not specified

Subbasin: Da1

Area (MI²) : 0.3
Downstream : Reservoir - Da1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.8
Initial Abstraction 0.3
Transform: Scs
Lag 7.2
Unitgraph Type Standard

Results: Da1

Peak Discharge (CFS)	149.14
Time of Peak Discharge	01Jan2000, 10:00
Volume (IN)	4.24
Precipitation Volume (AC - FT)	91.68
Loss Volume (AC - FT)	23.81
Excess Volume (AC - FT)	67.87
Direct Runoff Volume (AC - FT)	67.87
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	96.6
Time of Peak Discharge	01Jan2000, 10:18
Volume (IN)	2.77
Peak Inflow (CFS)	149.14
Time of Peak Inflow	01Jan2000, 10:00
Inflow Volume (AC - FT)	67.87
Maximum Storage (AC - FT)	29.6
Peak Elevation (FT)	4692.02
Discharge Volume (AC - FT)	44.4

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	1520.45
Time of Peak Discharge	01Jan2000, 10:32
Volume (IN)	4.04
Precipitation Volume (AC - FT)	1121.28
Loss Volume (AC - FT)	345.58
Excess Volume (AC - FT)	775.7
Direct Runoff Volume (AC - FT)	775.45
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	1110.31
Time of Peak Discharge	01Jan2000, 11:54

Volume (IN)	2.38
Peak Inflow (CFS)	1815.1
Time of Peak Inflow	01Jan2000, 10:18
Inflow Volume (AC - FT)	937.17
Maximum Storage (AC - FT)	427.6
Peak Elevation (FT)	4697.93
Discharge Volume (AC - FT)	545.39

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.9
Initial Abstraction	0.28
Transform: Scs	
Lag	22.2
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	347.57
Time of Peak Discharge	01Jan2000, 10:04
Volume (IN)	4.33
Precipitation Volume (AC - FT)	213.17
Loss Volume (AC - FT)	51.45
Excess Volume (AC - FT)	161.72
Direct Runoff Volume (AC - FT)	161.72
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	86.2
Initial Abstraction	0.32
Transform: Scs	
Lag	46.8
Unitgraph Type	Standard
Results: Da4	
Peak Discharge (CFS)	771.85
Time of Peak Discharge	01Jan2000, 10:18
Volume (IN)	4.17
Precipitation Volume (AC - FT)	519.52
Loss Volume (AC - FT)	141.02
Excess Volume (AC - FT)	378.5
Direct Runoff Volume (AC - FT)	378.49
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di1	
Peak Discharge (CFS)	440.33
Time of Peak Discharge	01Jan2000, 10:04
Volume (IN)	4.33
Precipitation Volume (AC - FT)	274.56
Loss Volume (AC - FT)	66.57
Excess Volume (AC - FT)	207.99
Direct Runoff Volume (AC - FT)	207.99
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	819.09
Time of Peak Discharge	01Jan2000, 10:08
Volume (IN)	8.71
Peak Inflow (CFS)	820.33
Time of Peak Inflow	01Jan2000, 10:04
Inflow Volume (AC - FT)	460.37
Maximum Storage (AC - FT)	68.15
Peak Elevation (FT)	4557.43
Discharge Volume (AC - FT)	417.93

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	434
Time of Peak Discharge	01Jan2000, 10:04
Volume (IN)	4.2
Precipitation Volume (AC - FT)	278.4
Loss Volume (AC - FT)	76.83
Excess Volume (AC - FT)	201.57
Direct Runoff Volume (AC - FT)	201.57
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	188.37
Time of Peak Discharge	01Jan2000, 10:10
Volume (IN)	0.69
Peak Inflow (CFS)	572
Time of Peak Inflow	01Jan2000, 10:06
Inflow Volume (AC - FT)	303.98
Maximum Storage (AC - FT)	30.4
Peak Elevation (FT)	4600.65
Discharge Volume (AC - FT)	33.15

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	305.8
Time of Peak Discharge	01Jan2000, 10:02
Volume (IN)	4.47
Precipitation Volume (AC - FT)	183.68
Loss Volume (AC - FT)	40.55
Excess Volume (AC - FT)	143.13
Direct Runoff Volume (AC - FT)	143.13
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	166.11
Time of Peak Discharge	01Jan2000, 10:06
Volume (IN)	1.07
Peak Inflow (CFS)	305.8
Time of Peak Inflow	01Jan2000, 10:06
Inflow Volume (AC - FT)	143.13
Maximum Storage (AC - FT)	16.65
Peak Elevation (FT)	4607.71
Discharge Volume (AC - FT)	34.22

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	5086.32
Time of Peak Discharge	01Jan2000, 10:32
Volume (IN)	4.36
Precipitation Volume (AC - FT)	3477.76
Loss Volume (AC - FT)	827.32
Excess Volume (AC - FT)	2650.44
Direct Runoff Volume (AC - FT)	2649.2
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	1160.02
Time of Peak Discharge	01Jan2000, 11:54
Volume (IN)	2.4

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	353.6
Time of Peak Discharge	01Jan2000, 10:08
Volume (IN)	0.84

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	819.09
Time of Peak Discharge	01Jan2000, 10:08
Volume (IN)	8.71

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	138
Time of Peak Discharge	01Jan2000, 08:52
Peak Inflow (CFS)	138
Inflow Volume (AC - FT)	102.41

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	380.7
Time of Peak Discharge	01Jan2000, 08:50
Peak Inflow (CFS)	380
Inflow Volume (AC - FT)	252.35

Project: Rev3

Simulation Run: Storm Event 09 FBHL

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.9

Executed: 30 March 2022, 12:33

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	1312.24	01Jan2000, 02:30	10.09
Reservoir - Da1	0.3	1198.11	01Jan2000, 02:36	8.6
Da2	3.6	6533.46	01Jan2000, 03:24	7.33
Reservoir - Da2/3	4.3	7149.67	01Jan2000, 03:38	6.07
Da3	0.7	2657.47	01Jan2000, 02:42	10.22
Da4	1.7	4804.31	01Jan2000, 03:08	10
Di1	0.9	3344.14	01Jan2000, 02:44	10.21
Reservoir - Di1	0.9	3435.53	01Jan2000, 02:56	12.62
Di2	0.9	3275.07	01Jan2000, 02:44	9.95
Reservoir - Di2	0.9	2923.79	01Jan2000, 02:52	7.44
Di3	0.6	2446.04	01Jan2000, 02:38	10.35
Reservoir - Di3	0.6	2221.72	01Jan2000, 02:42	8.13
Di4	11.4	27796.15	01Jan2000, 03:26	10.22
Junction - 1	4.6	7483.79	01Jan2000, 03:36	6.23
Junction - 2	1.5	5103.92	01Jan2000, 02:48	7.71
Junction - 3	0.9	3435.53	01Jan2000, 02:56	12.62
Reach - Di3 to Di2	0	138	01Jan2000, 02:06	Not specified
Reach - Di2 to Di1	0	383.82	01Jan2000, 02:04	Not specified

Subbasin: Da1

Area (MI²) : 0.3	
Downstream : Reservoir - Da1	
Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	86.8
Initial Abstraction	0.3
Transform: Scs	
Lag	7.2
Unitgraph Type Standard	

Results: Da1

Peak Discharge (CFS)	1312.24
Time of Peak Discharge	01Jan2000, 02:30
Volume (IN)	10.09
Precipitation Volume (AC - FT)	187.68
Loss Volume (AC - FT)	26.27
Excess Volume (AC - FT)	161.41
Direct Runoff Volume (AC - FT)	161.41
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	1198.11
Time of Peak Discharge	01Jan2000, 02:36
Volume (IN)	8.6
Peak Inflow (CFS)	1312.24
Time of Peak Inflow	01Jan2000, 02:30
Inflow Volume (AC - FT)	161.41
Maximum Storage (AC - FT)	46.02
Peak Elevation (FT)	4694.39
Discharge Volume (AC - FT)	137.53

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	6533.46
Time of Peak Discharge	01Jan2000, 03:24
Volume (IN)	7.33
Precipitation Volume (AC - FT)	1785.6
Loss Volume (AC - FT)	376.17
Excess Volume (AC - FT)	1409.43
Direct Runoff Volume (AC - FT)	1407.63
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	7149.67
Time of Peak Discharge	01Jan2000, 03:38

Volume (IN)	6.07
Peak Inflow (CFS)	7765.51
Time of Peak Inflow	01Jan2000, 03:14
Inflow Volume (AC - FT)	1789.22
Maximum Storage (AC - FT)	524.62
Peak Elevation (FT)	4700.25
Discharge Volume (AC - FT)	1391.57

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.9
Initial Abstraction	0.28
Transform: Scs	
Lag	22.2
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	2657.47
Time of Peak Discharge	01Jan2000, 02:42
Volume (IN)	10.22
Precipitation Volume (AC - FT)	437.92
Loss Volume (AC - FT)	56.33
Excess Volume (AC - FT)	381.59
Direct Runoff Volume (AC - FT)	381.59
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	86.2
Initial Abstraction	0.32
Transform: Scs	
Lag	46.8
Unitgraph Type	Standard
Results: Da4	

Peak Discharge (CFS)	4804.31
Time of Peak Discharge	01Jan2000, 03:08
Volume (IN)	10
Precipitation Volume (AC - FT)	1063.52
Loss Volume (AC - FT)	156.3
Excess Volume (AC - FT)	907.22
Direct Runoff Volume (AC - FT)	907.08
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di1	
Peak Discharge (CFS)	3344.14
Time of Peak Discharge	01Jan2000, 02:44
Volume (IN)	10.21
Precipitation Volume (AC - FT)	563.04
Loss Volume (AC - FT)	72.92
Excess Volume (AC - FT)	490.12
Direct Runoff Volume (AC - FT)	490.12
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	3435.53
Time of Peak Discharge	01Jan2000, 02:56
Volume (IN)	12.62
Peak Inflow (CFS)	3724.14
Time of Peak Inflow	01Jan2000, 02:44
Inflow Volume (AC - FT)	656.48
Maximum Storage (AC - FT)	87.14
Peak Elevation (FT)	4560.03
Discharge Volume (AC - FT)	605.97

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	3275.07
Time of Peak Discharge	01Jan2000, 02:44
Volume (IN)	9.95
Precipitation Volume (AC - FT)	563.04
Loss Volume (AC - FT)	85.21
Excess Volume (AC - FT)	477.83
Direct Runoff Volume (AC - FT)	477.83
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	2923.79
Time of Peak Discharge	01Jan2000, 02:52
Volume (IN)	7.44
Peak Inflow (CFS)	3413.07
Time of Peak Inflow	01Jan2000, 02:46
Inflow Volume (AC - FT)	542.17
Maximum Storage (AC - FT)	49.95
Peak Elevation (FT)	4604.08
Discharge Volume (AC - FT)	356.93

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	2446.04
Time of Peak Discharge	01Jan2000, 02:38
Volume (IN)	10.35
Precipitation Volume (AC - FT)	375.36
Loss Volume (AC - FT)	44.04
Excess Volume (AC - FT)	331.32
Direct Runoff Volume (AC - FT)	331.32
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	2221.72
Time of Peak Discharge	01Jan2000, 02:42
Volume (IN)	8.13
Peak Inflow (CFS)	2446.04
Time of Peak Inflow	01Jan2000, 02:42
Inflow Volume (AC - FT)	331.32
Maximum Storage (AC - FT)	30.12
Peak Elevation (FT)	4611.06
Discharge Volume (AC - FT)	260.03

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	27796.15
Time of Peak Discharge	01Jan2000, 03:26
Volume (IN)	10.22
Precipitation Volume (AC - FT)	7131.84
Loss Volume (AC - FT)	905.09
Excess Volume (AC - FT)	6226.75
Direct Runoff Volume (AC - FT)	6215.3
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	7483.79
Time of Peak Discharge	01Jan2000, 03:36
Volume (IN)	6.23

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	5103.92
Time of Peak Discharge	01Jan2000, 02:48
Volume (IN)	7.71

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	3435.53
Time of Peak Discharge	01Jan2000, 02:56
Volume (IN)	12.62

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	138
Time of Peak Discharge	01Jan2000, 02:06
Peak Inflow (CFS)	138
Inflow Volume (AC - FT)	64.34

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	383.82
Time of Peak Discharge	01Jan2000, 02:04
Peak Inflow (CFS)	380
Inflow Volume (AC - FT)	166.32

Project: Rev3

Simulation Run: Storm Event 11 2y6h

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.9

Executed: 30 March 2022, 12:34

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element		Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1		0.3	29.6	01Jan2000, 02:34	0.26
Reservoir - Da1		0.3	2.18	01Jan2000, 06:12	0.06
Da2		3.6	138.61	01Jan2000, 03:56	0.21
Reservoir - Da2/3		4.3	9.75	01Jan2000, 08:10	0.02
Da3		0.7	62.47	01Jan2000, 02:56	0.29
Da4		1.7	87.52	01Jan2000, 03:30	0.24
Di1		0.9	77.66	01Jan2000, 02:58	0.29
Reservoir - Di1		0.9	6.59	01Jan2000, 06:40	0.01
Di2		0.9	62.16	01Jan2000, 02:58	0.24
Reservoir - Di2		0.9	3.91	01Jan2000, 07:02	0.04
Di3		0.6	70.68	01Jan2000, 02:46	0.33
Reservoir - Di3		0.6	4.71	01Jan2000, 06:06	0.07
Di4		11.4	664.34	01Jan2000, 03:52	0.29
Junction - 1		4.6	11.84	01Jan2000, 07:50	0.02
Junction - 2		1.5	8.56	01Jan2000, 06:46	0.05
Junction - 3		0.9	6.59	01Jan2000, 06:40	0.01
Reach - Di3 to Di2		0	14.22	01Jan2000, 06:08	Not specified
Reach - Di2 to Di1		0	0	31Dec1999, 24:00	Not specified

Subbasin: Da1

Area (MI²) : 0.3	
Downstream : Reservoir - Da1	
Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	86.8
Initial Abstraction	0.3
Transform: Scs	
Lag	7.2
Unitgraph Type Standard	

Results: Da1

Peak Discharge (CFS)	29.6
Time of Peak Discharge	01Jan2000, 02:34
Volume (IN)	0.26
Precipitation Volume (AC - FT)	17.12
Loss Volume (AC - FT)	12.98
Excess Volume (AC - FT)	4.14
Direct Runoff Volume (AC - FT)	4.14
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	2.18
Time of Peak Discharge	01Jan2000, 06:12
Volume (IN)	0.06
Peak Inflow (CFS)	29.6
Time of Peak Inflow	01Jan2000, 02:34
Inflow Volume (AC - FT)	4.14
Maximum Storage (AC - FT)	5.37
Peak Elevation (FT)	4680
Discharge Volume (AC - FT)	1.03

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	138.61
Time of Peak Discharge	01Jan2000, 03:56
Volume (IN)	0.21
Precipitation Volume (AC - FT)	216.96
Loss Volume (AC - FT)	176.49
Excess Volume (AC - FT)	40.47
Direct Runoff Volume (AC - FT)	40.36
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	9.75
Time of Peak Discharge	01Jan2000, 08:10

Volume (IN)	0.02
Peak Inflow (CFS)	171.12
Time of Peak Inflow	01Jan2000, 03:50
Inflow Volume (AC - FT)	51.11
Maximum Storage (AC - FT)	47.42
Peak Elevation (FT)	4670.65
Discharge Volume (AC - FT)	4.01

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.9
Initial Abstraction	0.28
Transform: Scs	
Lag	22.2
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	62.47
Time of Peak Discharge	01Jan2000, 02:56
Volume (IN)	0.29
Precipitation Volume (AC - FT)	39.95
Loss Volume (AC - FT)	29.19
Excess Volume (AC - FT)	10.75
Direct Runoff Volume (AC - FT)	10.75
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	86.2
Initial Abstraction	0.32
Transform: Scs	
Lag	46.8
Unitgraph Type	Standard
Results: Da4	
Peak Discharge (CFS)	87.52
Time of Peak Discharge	01Jan2000, 03:30
Volume (IN)	0.24
Precipitation Volume (AC - FT)	97.01
Loss Volume (AC - FT)	75.32
Excess Volume (AC - FT)	21.69
Direct Runoff Volume (AC - FT)	21.69
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di1	
Peak Discharge (CFS)	77.66
Time of Peak Discharge	01Jan2000, 02:58
Volume (IN)	0.29
Precipitation Volume (AC - FT)	51.36
Loss Volume (AC - FT)	37.62
Excess Volume (AC - FT)	13.74
Direct Runoff Volume (AC - FT)	13.74
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	6.59
Time of Peak Discharge	01Jan2000, 06:40
Volume (IN)	0.01
Peak Inflow (CFS)	77.66
Time of Peak Inflow	01Jan2000, 02:58
Inflow Volume (AC - FT)	13.74
Maximum Storage (AC - FT)	13.49
Peak Elevation (FT)	4543.54
Discharge Volume (AC - FT)	0.4

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	62.16
Time of Peak Discharge	01Jan2000, 02:58
Volume (IN)	0.24
Precipitation Volume (AC - FT)	52.32
Loss Volume (AC - FT)	40.84
Excess Volume (AC - FT)	11.48
Direct Runoff Volume (AC - FT)	11.48
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	3.91
Time of Peak Discharge	01Jan2000, 07:02
Volume (IN)	0.04
Peak Inflow (CFS)	62.16
Time of Peak Inflow	01Jan2000, 03:00
Inflow Volume (AC - FT)	13.41
Maximum Storage (AC - FT)	12.28
Peak Elevation (FT)	4592.76
Discharge Volume (AC - FT)	1.7

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	70.68
Time of Peak Discharge	01Jan2000, 02:46
Volume (IN)	0.33
Precipitation Volume (AC - FT)	34.56
Loss Volume (AC - FT)	23.95
Excess Volume (AC - FT)	10.61
Direct Runoff Volume (AC - FT)	10.61
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	4.71
Time of Peak Discharge	01Jan2000, 06:06
Volume (IN)	0.07
Peak Inflow (CFS)	70.68
Time of Peak Inflow	01Jan2000, 02:50
Inflow Volume (AC - FT)	10.61
Maximum Storage (AC - FT)	7.72
Peak Elevation (FT)	4604.31
Discharge Volume (AC - FT)	2.32

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	664.34
Time of Peak Discharge	01Jan2000, 03:52
Volume (IN)	0.29
Precipitation Volume (AC - FT)	650.56
Loss Volume (AC - FT)	470.71
Excess Volume (AC - FT)	179.85
Direct Runoff Volume (AC - FT)	179.22
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	11.84
Time of Peak Discharge	01Jan2000, 07:50
Volume (IN)	0.02

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	8.56
Time of Peak Discharge	01Jan2000, 06:46
Volume (IN)	0.05

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	6.59
Time of Peak Discharge	01Jan2000, 06:40
Volume (IN)	0.01

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	14.22
Time of Peak Discharge	01Jan2000, 06:08
Peak Inflow (CFS)	14.23
Inflow Volume (AC - FT)	1.93

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	0
Time of Peak Discharge	31Dec1999, 24:00
Peak Inflow (CFS)	0
Inflow Volume (AC - FT)	0

Project: Rev3

Simulation Run: Storm Event 12 5y6h

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.9

Executed: 30 March 2022, 12:34

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element		Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1		0.3	55.24	01Jan2000, 02:34	0.43
Reservoir - Da1		0.3	2.84	01Jan2000, 06:12	0.09
Da2		3.6	263.02	01Jan2000, 03:46	0.37
Reservoir - Da2/3		4.3	12.94	01Jan2000, 08:14	0.02
Da3		0.7	111.44	01Jan2000, 02:54	0.47
Da4		1.7	161.87	01Jan2000, 03:24	0.4
Di1		0.9	141.25	01Jan2000, 02:54	0.47
Reservoir - Di1		0.9	48.28	01Jan2000, 06:42	0.29
Di2		0.9	115.96	01Jan2000, 02:56	0.41
Reservoir - Di2		0.9	4.96	01Jan2000, 06:04	0.05
Di3		0.6	118.22	01Jan2000, 02:44	0.52
Reservoir - Di3		0.6	4.81	01Jan2000, 04:18	0.08
Di4		11.4	1135.48	01Jan2000, 03:44	0.48
Junction - 1		4.6	15.69	01Jan2000, 07:56	0.03
Junction - 2		1.5	9.74	01Jan2000, 06:00	0.06
Junction - 3		0.9	48.28	01Jan2000, 06:42	0.29
Reach - Di3 to Di2		0	32.02	01Jan2000, 04:20	Not specified
Reach - Di2 to Di1		0	60.8	01Jan2000, 06:10	Not specified

Subbasin: Da1

Area (MI²) : 0.3
Downstream : Reservoir - Da1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.8
Initial Abstraction 0.3
Transform: Scs
Lag 7.2
Unitgraph Type Standard

Results: Da1

Peak Discharge (CFS)	55.24
Time of Peak Discharge	01Jan2000, 02:34
Volume (IN)	0.43
Precipitation Volume (AC - FT)	21.6
Loss Volume (AC - FT)	14.74
Excess Volume (AC - FT)	6.86
Direct Runoff Volume (AC - FT)	6.86
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	2.84
Time of Peak Discharge	01Jan2000, 06:12
Volume (IN)	0.09
Peak Inflow (CFS)	55.24
Time of Peak Inflow	01Jan2000, 02:34
Inflow Volume (AC - FT)	6.86
Maximum Storage (AC - FT)	7.9
Peak Elevation (FT)	4681.4
Discharge Volume (AC - FT)	1.38

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	263.02
Time of Peak Discharge	01Jan2000, 03:46
Volume (IN)	0.37
Precipitation Volume (AC - FT)	274.56
Loss Volume (AC - FT)	203.26
Excess Volume (AC - FT)	71.3
Direct Runoff Volume (AC - FT)	71.14
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	12.94
Time of Peak Discharge	01Jan2000, 08:14

Volume (IN) 0.02
Peak Inflow (CFS) 313.13
Time of Peak Inflow 01Jan2000, 03:40
Inflow Volume (AC - FT) 88.61
Maximum Storage (AC - FT) 83.52
Peak Elevation (FT) 4673.42
Discharge Volume (AC - FT) 5.44

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 87.9
Initial Abstraction 0.28
Transform: Scs
Lag 22.2
Unitgraph Type Standard
Results: Da3
Peak Discharge (CFS) 111.44
Time of Peak Discharge 01Jan2000, 02:54
Volume (IN) 0.47
Precipitation Volume (AC - FT) 50.4
Loss Volume (AC - FT) 32.93
Excess Volume (AC - FT) 17.47
Direct Runoff Volume (AC - FT) 17.47
Baseflow Volume (AC - FT) 0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.2
Initial Abstraction 0.32
Transform: Scs
Lag 46.8
Unitgraph Type Standard
Results: Da4
Peak Discharge (CFS) 161.87
Time of Peak Discharge 01Jan2000, 03:24
Volume (IN) 0.4
Precipitation Volume (AC - FT) 122.4
Loss Volume (AC - FT) 85.84
Excess Volume (AC - FT) 36.56
Direct Runoff Volume (AC - FT) 36.55
Baseflow Volume (AC - FT) 0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di1	
Peak Discharge (CFS)	141.25
Time of Peak Discharge	01Jan2000, 02:54
Volume (IN)	0.47
Precipitation Volume (AC - FT)	65.28
Loss Volume (AC - FT)	42.61
Excess Volume (AC - FT)	22.67
Direct Runoff Volume (AC - FT)	22.67
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	48.28
Time of Peak Discharge	01Jan2000, 06:42
Volume (IN)	0.29
Peak Inflow (CFS)	141.25
Time of Peak Inflow	01Jan2000, 02:54
Inflow Volume (AC - FT)	29.3
Maximum Storage (AC - FT)	21.02
Peak Elevation (FT)	4545.51
Discharge Volume (AC - FT)	14.08

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di2	
Peak Discharge (CFS)	115.96
Time of Peak Discharge	01Jan2000, 02:56
Volume (IN)	0.41
Precipitation Volume (AC - FT)	66.24
Loss Volume (AC - FT)	46.68
Excess Volume (AC - FT)	19.56
Direct Runoff Volume (AC - FT)	19.56
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	4.96
Time of Peak Discharge	01Jan2000, 06:04
Volume (IN)	0.05
Peak Inflow (CFS)	115.96
Time of Peak Inflow	01Jan2000, 02:58
Inflow Volume (AC - FT)	27.34
Maximum Storage (AC - FT)	20.28
Peak Elevation (FT)	4597.48
Discharge Volume (AC - FT)	2.3

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	118.22
Time of Peak Discharge	01Jan2000, 02:44
Volume (IN)	0.52
Precipitation Volume (AC - FT)	43.52
Loss Volume (AC - FT)	26.8
Excess Volume (AC - FT)	16.72
Direct Runoff Volume (AC - FT)	16.72
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	4.81
Time of Peak Discharge	01Jan2000, 04:18
Volume (IN)	0.08
Peak Inflow (CFS)	118.22
Time of Peak Inflow	01Jan2000, 02:48
Inflow Volume (AC - FT)	16.72
Maximum Storage (AC - FT)	8.62
Peak Elevation (FT)	4604.7
Discharge Volume (AC - FT)	2.5

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	1135.48
Time of Peak Discharge	01Jan2000, 03:44
Volume (IN)	0.48
Precipitation Volume (AC - FT)	826.88
Loss Volume (AC - FT)	532.47
Excess Volume (AC - FT)	294.41
Direct Runoff Volume (AC - FT)	293.51
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	15.69
Time of Peak Discharge	01Jan2000, 07:56
Volume (IN)	0.03

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	9.74
Time of Peak Discharge	01Jan2000, 06:00
Volume (IN)	0.06

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	48.28
Time of Peak Discharge	01Jan2000, 06:42
Volume (IN)	0.29

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	32.02
Time of Peak Discharge	01Jan2000, 04:20
Peak Inflow (CFS)	32.02
Inflow Volume (AC - FT)	7.78

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	60.8
Time of Peak Discharge	01Jan2000, 06:10
Peak Inflow (CFS)	60.81
Inflow Volume (AC - FT)	6.62

Project: Rev3

Simulation Run: Storm Event 13 10y6h

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.9

Executed: 30 March 2022, 12:34

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element		Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1		0.3	79.66	01Jan2000, 02:34	0.59
Reservoir - Da1		0.3	3.36	01Jan2000, 06:14	0.1
Da2		3.6	394.44	01Jan2000, 03:42	0.52
Reservoir - Da2/3		4.3	15.4	01Jan2000, 08:18	0.03
Da3		0.7	157.6	01Jan2000, 02:50	0.64
Da4		1.7	232.42	01Jan2000, 03:20	0.56
Di1		0.9	196.12	01Jan2000, 02:52	0.64
Reservoir - Di1		0.9	77.45	01Jan2000, 06:36	0.57
Di2		0.9	169	01Jan2000, 02:54	0.57
Reservoir - Di2		0.9	5.02	01Jan2000, 04:44	0.05
Di3		0.6	158.47	01Jan2000, 02:44	0.7
Reservoir - Di3		0.6	4.92	01Jan2000, 03:38	0.08
Di4		11.4	1572.77	01Jan2000, 03:42	0.65
Junction - 1		4.6	18.66	01Jan2000, 08:00	0.03
Junction - 2		1.5	9.91	01Jan2000, 04:34	0.06
Junction - 3		0.9	77.45	01Jan2000, 06:36	0.57
Reach - Di3 to Di2		0	53.83	01Jan2000, 03:40	Not specified
Reach - Di2 to Di1		0	103	01Jan2000, 04:50	Not specified

Subbasin: Da1

Area (MI²) : 0.3	
Downstream : Reservoir - Da1	
Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	86.8
Initial Abstraction	0.3
Transform: Scs	
Lag	7.2
Unitgraph Type Standard	

Results: Da1

Peak Discharge (CFS)	79.66
Time of Peak Discharge	01Jan2000, 02:34
Volume (IN)	0.59
Precipitation Volume (AC - FT)	25.44
Loss Volume (AC - FT)	15.97
Excess Volume (AC - FT)	9.47
Direct Runoff Volume (AC - FT)	9.47
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	3.36
Time of Peak Discharge	01Jan2000, 06:14
Volume (IN)	0.1
Peak Inflow (CFS)	79.66
Time of Peak Inflow	01Jan2000, 02:34
Inflow Volume (AC - FT)	9.47
Maximum Storage (AC - FT)	10.34
Peak Elevation (FT)	4682.77
Discharge Volume (AC - FT)	1.66

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	394.44
Time of Peak Discharge	01Jan2000, 03:42
Volume (IN)	0.52
Precipitation Volume (AC - FT)	322.56
Loss Volume (AC - FT)	221.76
Excess Volume (AC - FT)	100.8
Direct Runoff Volume (AC - FT)	100.59
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	15.4
Time of Peak Discharge	01Jan2000, 08:18

Volume (IN)	0.03
Peak Inflow (CFS)	468.34
Time of Peak Inflow	01Jan2000, 03:38
Inflow Volume (AC - FT)	124.44
Maximum Storage (AC - FT)	118.22
Peak Elevation (FT)	4676.09
Discharge Volume (AC - FT)	6.56

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.9
Initial Abstraction	0.28
Transform: Scs	
Lag	22.2
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	157.6
Time of Peak Discharge	01Jan2000, 02:50
Volume (IN)	0.64
Precipitation Volume (AC - FT)	59.36
Loss Volume (AC - FT)	35.51
Excess Volume (AC - FT)	23.85
Direct Runoff Volume (AC - FT)	23.85
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	86.2
Initial Abstraction	0.32
Transform: Scs	
Lag	46.8
Unitgraph Type	Standard
Results: Da4	
Peak Discharge (CFS)	232.42
Time of Peak Discharge	01Jan2000, 03:20
Volume (IN)	0.56
Precipitation Volume (AC - FT)	144.16
Loss Volume (AC - FT)	93.22
Excess Volume (AC - FT)	50.94
Direct Runoff Volume (AC - FT)	50.92
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di1	
Peak Discharge (CFS)	196.12
Time of Peak Discharge	01Jan2000, 02:52
Volume (IN)	0.64
Precipitation Volume (AC - FT)	76.32
Loss Volume (AC - FT)	45.81
Excess Volume (AC - FT)	30.51
Direct Runoff Volume (AC - FT)	30.51
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	77.45
Time of Peak Discharge	01Jan2000, 06:36
Volume (IN)	0.57
Peak Inflow (CFS)	196.12
Time of Peak Inflow	01Jan2000, 02:52
Inflow Volume (AC - FT)	50.07
Maximum Storage (AC - FT)	33.09
Peak Elevation (FT)	4548.68
Discharge Volume (AC - FT)	27.59

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di2	
Peak Discharge (CFS)	169
Time of Peak Discharge	01Jan2000, 02:54
Volume (IN)	0.57
Precipitation Volume (AC - FT)	77.76
Loss Volume (AC - FT)	50.64
Excess Volume (AC - FT)	27.12
Direct Runoff Volume (AC - FT)	27.12
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	5.02
Time of Peak Discharge	01Jan2000, 04:44
Volume (IN)	0.05
Peak Inflow (CFS)	179.87
Time of Peak Inflow	01Jan2000, 03:06
Inflow Volume (AC - FT)	40.48
Maximum Storage (AC - FT)	21.17
Peak Elevation (FT)	4597.81
Discharge Volume (AC - FT)	2.47

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	158.47
Time of Peak Discharge	01Jan2000, 02:44
Volume (IN)	0.7
Precipitation Volume (AC - FT)	51.2
Loss Volume (AC - FT)	28.76
Excess Volume (AC - FT)	22.44
Direct Runoff Volume (AC - FT)	22.44
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	4.92
Time of Peak Discharge	01Jan2000, 03:38
Volume (IN)	0.08
Peak Inflow (CFS)	158.47
Time of Peak Inflow	01Jan2000, 02:48
Inflow Volume (AC - FT)	22.44
Maximum Storage (AC - FT)	9.73
Peak Elevation (FT)	4605.17
Discharge Volume (AC - FT)	2.58

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	1572.77
Time of Peak Discharge	01Jan2000, 03:42
Volume (IN)	0.65
Precipitation Volume (AC - FT)	966.72
Loss Volume (AC - FT)	571.96
Excess Volume (AC - FT)	394.76
Direct Runoff Volume (AC - FT)	393.6
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	18.66
Time of Peak Discharge	01Jan2000, 08:00
Volume (IN)	0.03

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	9.91
Time of Peak Discharge	01Jan2000, 04:34
Volume (IN)	0.06

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	77.45
Time of Peak Discharge	01Jan2000, 06:36
Volume (IN)	0.57

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	53.83
Time of Peak Discharge	01Jan2000, 03:40
Peak Inflow (CFS)	53.84
Inflow Volume (AC - FT)	13.36

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	103
Time of Peak Discharge	01Jan2000, 04:50
Peak Inflow (CFS)	103
Inflow Volume (AC - FT)	19.53

Project: Rev3

Simulation Run: Storm Event 14 25y6h

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.9

Executed: 30 March 2022, 12:34

Global Parameter Summary - Subbasin

Area (MI ²)			
Element Name	Area (MI ²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	114.44	01Jan2000, 02:32	0.84
Reservoir - Da1	0.3	4.04	01Jan2000, 06:12	0.13
Da2	3.6	597.33	01Jan2000, 03:38	0.76
Reservoir - Da2/3	4.3	18.58	01Jan2000, 08:22	0.03
Da3	0.7	226.36	01Jan2000, 02:50	0.9
Da4	1.7	348.21	01Jan2000, 03:18	0.81
Di1	0.9	282.25	01Jan2000, 02:52	0.9
Reservoir - Di1	0.9	111.31	01Jan2000, 06:34	0.93
Di2	0.9	248.59	01Jan2000, 02:54	0.81
Reservoir - Di2	0.9	5.15	01Jan2000, 03:54	0.05
Di3	0.6	226.42	01Jan2000, 02:42	0.97
Reservoir - Di3	0.6	5.15	01Jan2000, 03:18	0.08
Di4	11.4	2274.41	01Jan2000, 03:38	0.91
Junction - 1	4.6	22.52	01Jan2000, 08:04	0.04
Junction - 2	1.5	10.25	01Jan2000, 03:44	0.07
Junction - 3	0.9	111.31	01Jan2000, 06:34	0.93
Reach - Di3 to Di2	0	98.39	01Jan2000, 03:20	Not specified
Reach - Di2 to Di1	0	184.66	01Jan2000, 03:58	Not specified

Subbasin: Da1

Area (MI²) : 0.3
Downstream : Reservoir - Da1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.8
Initial Abstraction 0.3
Transform: Scs
Lag 7.2
Unitgraph Type Standard

Results: Da1

Peak Discharge (CFS)	114.44
Time of Peak Discharge	01Jan2000, 02:32
Volume (IN)	0.84
Precipitation Volume (AC - FT)	30.88
Loss Volume (AC - FT)	17.39
Excess Volume (AC - FT)	13.49
Direct Runoff Volume (AC - FT)	13.49
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	4.04
Time of Peak Discharge	01Jan2000, 06:12
Volume (IN)	0.13
Peak Inflow (CFS)	114.44
Time of Peak Inflow	01Jan2000, 02:32
Inflow Volume (AC - FT)	13.49
Maximum Storage (AC - FT)	14.16
Peak Elevation (FT)	4684.89
Discharge Volume (AC - FT)	2.02

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	597.33
Time of Peak Discharge	01Jan2000, 03:38
Volume (IN)	0.76
Precipitation Volume (AC - FT)	389.76
Loss Volume (AC - FT)	243.3
Excess Volume (AC - FT)	146.46
Direct Runoff Volume (AC - FT)	146.18
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	18.58
Time of Peak Discharge	01Jan2000, 08:22

Volume (IN)	0.03
Peak Inflow (CFS)	698.86
Time of Peak Inflow	01Jan2000, 03:34
Inflow Volume (AC - FT)	179.77
Maximum Storage (AC - FT)	172.12
Peak Elevation (FT)	4680.24
Discharge Volume (AC - FT)	8.02

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.9
Initial Abstraction	0.28
Transform: Scs	
Lag	22.2
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	226.36
Time of Peak Discharge	01Jan2000, 02:50
Volume (IN)	0.9
Precipitation Volume (AC - FT)	72.05
Loss Volume (AC - FT)	38.47
Excess Volume (AC - FT)	33.58
Direct Runoff Volume (AC - FT)	33.58
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	86.2
Initial Abstraction	0.32
Transform: Scs	
Lag	46.8
Unitgraph Type	Standard
Results: Da4	
Peak Discharge (CFS)	348.21
Time of Peak Discharge	01Jan2000, 03:18
Volume (IN)	0.81
Precipitation Volume (AC - FT)	174.99
Loss Volume (AC - FT)	101.79
Excess Volume (AC - FT)	73.19
Direct Runoff Volume (AC - FT)	73.18
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di1	
Peak Discharge (CFS)	282.25
Time of Peak Discharge	01Jan2000, 02:52
Volume (IN)	0.9
Precipitation Volume (AC - FT)	92.64
Loss Volume (AC - FT)	49.65
Excess Volume (AC - FT)	42.99
Direct Runoff Volume (AC - FT)	42.99
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	111.31
Time of Peak Discharge	01Jan2000, 06:34
Volume (IN)	0.93
Peak Inflow (CFS)	299.6
Time of Peak Inflow	01Jan2000, 03:50
Inflow Volume (AC - FT)	82.59
Maximum Storage (AC - FT)	54.14
Peak Elevation (FT)	4554.2
Discharge Volume (AC - FT)	44.79

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di2	
Peak Discharge (CFS)	248.59
Time of Peak Discharge	01Jan2000, 02:54
Volume (IN)	0.81
Precipitation Volume (AC - FT)	94.08
Loss Volume (AC - FT)	55.26
Excess Volume (AC - FT)	38.82
Direct Runoff Volume (AC - FT)	38.82
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	5.15
Time of Peak Discharge	01Jan2000, 03:54
Volume (IN)	0.05
Peak Inflow (CFS)	313.32
Time of Peak Inflow	01Jan2000, 03:02
Inflow Volume (AC - FT)	60.7
Maximum Storage (AC - FT)	22.89
Peak Elevation (FT)	4598.46
Discharge Volume (AC - FT)	2.6

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	226.42
Time of Peak Discharge	01Jan2000, 02:42
Volume (IN)	0.97
Precipitation Volume (AC - FT)	62.08
Loss Volume (AC - FT)	30.98
Excess Volume (AC - FT)	31.1
Direct Runoff Volume (AC - FT)	31.1
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	5.15
Time of Peak Discharge	01Jan2000, 03:18
Volume (IN)	0.08
Peak Inflow (CFS)	226.42
Time of Peak Inflow	01Jan2000, 02:46
Inflow Volume (AC - FT)	31.1
Maximum Storage (AC - FT)	11.99
Peak Elevation (FT)	4606.14
Discharge Volume (AC - FT)	2.68

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	2274.41
Time of Peak Discharge	01Jan2000, 03:38
Volume (IN)	0.91
Precipitation Volume (AC - FT)	1173.44
Loss Volume (AC - FT)	619.34
Excess Volume (AC - FT)	554.1
Direct Runoff Volume (AC - FT)	552.63
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	22.52
Time of Peak Discharge	01Jan2000, 08:04
Volume (IN)	0.04

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	10.25
Time of Peak Discharge	01Jan2000, 03:44
Volume (IN)	0.07

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	111.31
Time of Peak Discharge	01Jan2000, 06:34
Volume (IN)	0.93

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	98.39
Time of Peak Discharge	01Jan2000, 03:20
Peak Inflow (CFS)	98.41
Inflow Volume (AC - FT)	21.87

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	184.66
Time of Peak Discharge	01Jan2000, 03:58
Peak Inflow (CFS)	184.69
Inflow Volume (AC - FT)	39.56

Project: Rev3

Simulation Run: Storm Event 15 50y6h

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.9

Executed: 30 March 2022, 13:06

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element		Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1		0.3	140.9	01Jan2000, 02:32	1.06
Reservoir - Da1		0.3	4.56	01Jan2000, 06:14	0.14
Da2		3.6	778.9	01Jan2000, 03:36	0.97
Reservoir - Da2/3		4.3	21	01Jan2000, 08:26	0.04
Da3		0.7	285.87	01Jan2000, 02:48	1.12
Da4		1.7	451.94	01Jan2000, 03:18	1.02
Di1		0.9	354.52	01Jan2000, 02:50	1.12
Reservoir - Di1		0.9	244.24	01Jan2000, 05:24	1.4
Di2		0.9	323.62	01Jan2000, 02:52	1.03
Reservoir - Di2		0.9	5.29	01Jan2000, 03:34	0.06
Di3		0.6	285.23	01Jan2000, 02:42	1.21
Reservoir - Di3		0.6	5.35	01Jan2000, 03:12	0.09
Di4		11.4	2902.03	01Jan2000, 03:38	1.14
Junction - 1		4.6	25.46	01Jan2000, 08:06	0.05
Junction - 2		1.5	10.6	01Jan2000, 03:26	0.07
Junction - 3		0.9	244.24	01Jan2000, 05:24	1.4
Reach - Di3 to Di2	0		137.81	01Jan2000, 03:14	Not specified
Reach - Di2 to Di1	0		279.92	01Jan2000, 03:40	Not specified

Subbasin: Da1

Area (MI²) : 0.3
Downstream : Reservoir - Da1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.8
Initial Abstraction 0.3
Transform: Scs
Lag 7.2
Unitgraph Type Standard

Results: Da1

Peak Discharge (CFS)	140.9
Time of Peak Discharge	01Jan2000, 02:32
Volume (IN)	1.06
Precipitation Volume (AC - FT)	35.36
Loss Volume (AC - FT)	18.35
Excess Volume (AC - FT)	17.01
Direct Runoff Volume (AC - FT)	17.01
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	4.56
Time of Peak Discharge	01Jan2000, 06:14
Volume (IN)	0.14
Peak Inflow (CFS)	140.9
Time of Peak Inflow	01Jan2000, 02:32
Inflow Volume (AC - FT)	17.01
Maximum Storage (AC - FT)	17.51
Peak Elevation (FT)	4686.77
Discharge Volume (AC - FT)	2.29

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	778.9
Time of Peak Discharge	01Jan2000, 03:36
Volume (IN)	0.97
Precipitation Volume (AC - FT)	445.44
Loss Volume (AC - FT)	258.18
Excess Volume (AC - FT)	187.26
Direct Runoff Volume (AC - FT)	186.91
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	21
Time of Peak Discharge	01Jan2000, 08:26

Volume (IN)	0.04
Peak Inflow (CFS)	906.16
Time of Peak Inflow	01Jan2000, 03:32
Inflow Volume (AC - FT)	228.65
Maximum Storage (AC - FT)	219.87
Peak Elevation (FT)	4683.91
Discharge Volume (AC - FT)	9.14

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.9
Initial Abstraction	0.28
Transform: Scs	
Lag	22.2
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	285.87
Time of Peak Discharge	01Jan2000, 02:48
Volume (IN)	1.12
Precipitation Volume (AC - FT)	82.13
Loss Volume (AC - FT)	40.39
Excess Volume (AC - FT)	41.75
Direct Runoff Volume (AC - FT)	41.75
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	86.2
Initial Abstraction	0.32
Transform: Scs	
Lag	46.8
Unitgraph Type	Standard
Results: Da4	
Peak Discharge (CFS)	451.94
Time of Peak Discharge	01Jan2000, 03:18
Volume (IN)	1.02
Precipitation Volume (AC - FT)	200.37
Loss Volume (AC - FT)	107.6
Excess Volume (AC - FT)	92.77
Direct Runoff Volume (AC - FT)	92.75
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di1	
Peak Discharge (CFS)	354.52
Time of Peak Discharge	01Jan2000, 02:50
Volume (IN)	1.12
Precipitation Volume (AC - FT)	106.08
Loss Volume (AC - FT)	52.22
Excess Volume (AC - FT)	53.86
Direct Runoff Volume (AC - FT)	53.86
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	244.24
Time of Peak Discharge	01Jan2000, 05:24
Volume (IN)	1.4
Peak Inflow (CFS)	451.55
Time of Peak Inflow	01Jan2000, 03:30
Inflow Volume (AC - FT)	111.38
Maximum Storage (AC - FT)	63.24
Peak Elevation (FT)	4556.45
Discharge Volume (AC - FT)	67.11

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	323.62
Time of Peak Discharge	01Jan2000, 02:52
Volume (IN)	1.03
Precipitation Volume (AC - FT)	108
Loss Volume (AC - FT)	58.5
Excess Volume (AC - FT)	49.5
Direct Runoff Volume (AC - FT)	49.5
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	5.29
Time of Peak Discharge	01Jan2000, 03:34
Volume (IN)	0.06
Peak Inflow (CFS)	428.04
Time of Peak Inflow	01Jan2000, 03:00
Inflow Volume (AC - FT)	78.73
Maximum Storage (AC - FT)	24.89
Peak Elevation (FT)	4599.21
Discharge Volume (AC - FT)	2.68

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	285.23
Time of Peak Discharge	01Jan2000, 02:42
Volume (IN)	1.21
Precipitation Volume (AC - FT)	71.04
Loss Volume (AC - FT)	32.46
Excess Volume (AC - FT)	38.58
Direct Runoff Volume (AC - FT)	38.58
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	5.35
Time of Peak Discharge	01Jan2000, 03:12
Volume (IN)	0.09
Peak Inflow (CFS)	285.23
Time of Peak Inflow	01Jan2000, 02:46
Inflow Volume (AC - FT)	38.58
Maximum Storage (AC - FT)	13.99
Peak Elevation (FT)	4607
Discharge Volume (AC - FT)	2.75

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	2902.03
Time of Peak Discharge	01Jan2000, 03:38
Volume (IN)	1.14
Precipitation Volume (AC - FT)	1343.68
Loss Volume (AC - FT)	651.03
Excess Volume (AC - FT)	692.65
Direct Runoff Volume (AC - FT)	690.84
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	25.46
Time of Peak Discharge	01Jan2000, 08:06
Volume (IN)	0.05

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	10.6
Time of Peak Discharge	01Jan2000, 03:26
Volume (IN)	0.07

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	244.24
Time of Peak Discharge	01Jan2000, 05:24
Volume (IN)	1.4

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	137.81
Time of Peak Discharge	01Jan2000, 03:14
Peak Inflow (CFS)	137.88
Inflow Volume (AC - FT)	29.23

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	279.92
Time of Peak Discharge	01Jan2000, 03:40
Peak Inflow (CFS)	279.92
Inflow Volume (AC - FT)	57.49

Project: Rev3

Simulation Run: Storm Event 16 100y6h

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.9

Executed: 30 March 2022, 12:34

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious Area	Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	176.6	01Jan2000, 02:32	1.31
Reservoir - Da1	0.3	5.08	01Jan2000, 06:14	0.16
Da2	3.6	1001.11	01Jan2000, 03:34	1.22
Reservoir - Da2/3	4.3	23.51	01Jan2000, 08:28	0.04
Da3	0.7	353.39	01Jan2000, 02:48	1.37
Da4	1.7	569.89	01Jan2000, 03:16	1.26
Di1	0.9	441.89	01Jan2000, 02:50	1.37
Reservoir - Di1	0.9	390.77	01Jan2000, 04:28	1.99
Di2	0.9	405.28	01Jan2000, 02:50	1.27
Reservoir - Di2	0.9	5.41	01Jan2000, 03:24	0.06
Di3	0.6	350.82	01Jan2000, 02:42	1.46
Reservoir - Di3	0.6	87.58	01Jan2000, 03:04	0.18
Di4	11.4	3595.23	01Jan2000, 03:36	1.39
Junction - 1	4.6	28.48	01Jan2000, 08:08	0.05
Junction - 2	1.5	92.82	01Jan2000, 03:04	0.11
Junction - 3	0.9	390.77	01Jan2000, 04:28	1.99
Reach - Di3 to Di2	0	138	01Jan2000, 03:12	Not specified
Reach - Di2 to Di1	0	360.5	01Jan2000, 03:28	Not specified

Subbasin: Da1

Area (MI²) : 0.3
Downstream : Reservoir - Da1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.8
Initial Abstraction 0.3
Transform: Scs
Lag 7.2
Unitgraph Type Standard

Results: Da1

Peak Discharge (CFS)	176.6
Time of Peak Discharge	01Jan2000, 02:32
Volume (IN)	1.31
Precipitation Volume (AC - FT)	40.16
Loss Volume (AC - FT)	19.21
Excess Volume (AC - FT)	20.95
Direct Runoff Volume (AC - FT)	20.95
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	5.08
Time of Peak Discharge	01Jan2000, 06:14
Volume (IN)	0.16
Peak Inflow (CFS)	176.6
Time of Peak Inflow	01Jan2000, 02:32
Inflow Volume (AC - FT)	20.95
Maximum Storage (AC - FT)	21.28
Peak Elevation (FT)	4688.87
Discharge Volume (AC - FT)	2.57

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	1001.11
Time of Peak Discharge	01Jan2000, 03:34
Volume (IN)	1.22
Precipitation Volume (AC - FT)	506.88
Loss Volume (AC - FT)	272.21
Excess Volume (AC - FT)	234.67
Direct Runoff Volume (AC - FT)	234.25
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	23.51
Time of Peak Discharge	01Jan2000, 08:28

Volume (IN)	0.04
Peak Inflow (CFS)	1155.07
Time of Peak Inflow	01Jan2000, 03:30
Inflow Volume (AC - FT)	285.41
Maximum Storage (AC - FT)	275.46
Peak Elevation (FT)	4688.19
Discharge Volume (AC - FT)	10.32

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.9
Initial Abstraction	0.28
Transform: Scs	
Lag	22.2
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	353.39
Time of Peak Discharge	01Jan2000, 02:48
Volume (IN)	1.37
Precipitation Volume (AC - FT)	93.33
Loss Volume (AC - FT)	42.18
Excess Volume (AC - FT)	51.16
Direct Runoff Volume (AC - FT)	51.16
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	86.2
Initial Abstraction	0.32
Transform: Scs	
Lag	46.8
Unitgraph Type	Standard
Results: Da4	

Peak Discharge (CFS)	569.89
Time of Peak Discharge	01Jan2000, 03:16
Volume (IN)	1.26
Precipitation Volume (AC - FT)	227.57
Loss Volume (AC - FT)	112.87
Excess Volume (AC - FT)	114.71
Direct Runoff Volume (AC - FT)	114.68
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di1	
Peak Discharge (CFS)	441.89
Time of Peak Discharge	01Jan2000, 02:50
Volume (IN)	1.37
Precipitation Volume (AC - FT)	120.48
Loss Volume (AC - FT)	54.53
Excess Volume (AC - FT)	65.95
Direct Runoff Volume (AC - FT)	65.95
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	390.77
Time of Peak Discharge	01Jan2000, 04:28
Volume (IN)	1.99
Peak Inflow (CFS)	619.53
Time of Peak Inflow	01Jan2000, 03:16
Inflow Volume (AC - FT)	140.2
Maximum Storage (AC - FT)	64.79
Peak Elevation (FT)	4556.76
Discharge Volume (AC - FT)	95.3

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di2	
Peak Discharge (CFS)	405.28
Time of Peak Discharge	01Jan2000, 02:50
Volume (IN)	1.27
Precipitation Volume (AC - FT)	122.4
Loss Volume (AC - FT)	61.35
Excess Volume (AC - FT)	61.05
Direct Runoff Volume (AC - FT)	61.05
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	5.41
Time of Peak Discharge	01Jan2000, 03:24
Volume (IN)	0.06
Peak Inflow (CFS)	541.39
Time of Peak Inflow	01Jan2000, 02:54
Inflow Volume (AC - FT)	95.57
Maximum Storage (AC - FT)	26.59
Peak Elevation (FT)	4599.85
Discharge Volume (AC - FT)	2.74

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	350.82
Time of Peak Discharge	01Jan2000, 02:42
Volume (IN)	1.46
Precipitation Volume (AC - FT)	80.64
Loss Volume (AC - FT)	33.78
Excess Volume (AC - FT)	46.86
Direct Runoff Volume (AC - FT)	46.86
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	87.58
Time of Peak Discharge	01Jan2000, 03:04
Volume (IN)	0.18
Peak Inflow (CFS)	350.82
Time of Peak Inflow	01Jan2000, 02:46
Inflow Volume (AC - FT)	46.86
Maximum Storage (AC - FT)	15.7
Peak Elevation (FT)	4607.45
Discharge Volume (AC - FT)	5.71

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	3595.23
Time of Peak Discharge	01Jan2000, 03:36
Volume (IN)	1.39
Precipitation Volume (AC - FT)	1526.08
Loss Volume (AC - FT)	679.52
Excess Volume (AC - FT)	846.56
Direct Runoff Volume (AC - FT)	844.48
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	28.48
Time of Peak Discharge	01Jan2000, 08:08
Volume (IN)	0.05

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	92.82
Time of Peak Discharge	01Jan2000, 03:04
Volume (IN)	0.11

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	390.77
Time of Peak Discharge	01Jan2000, 04:28
Volume (IN)	1.99

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	138
Time of Peak Discharge	01Jan2000, 03:12
Peak Inflow (CFS)	138
Inflow Volume (AC - FT)	34.52

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	360.5
Time of Peak Discharge	01Jan2000, 03:28
Peak Inflow (CFS)	360.54
Inflow Volume (AC - FT)	74.22

Project: Rev3

Simulation Run: Storm Event 17 200y6h

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.9

Executed: 10 May 2022, 23:24

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious Area	Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element		Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1		0.3	220.48	01Jan2000, 02:32	1.6
Reservoir - Da1		0.3	5.62	01Jan2000, 06:14	0.18
Da2		3.6	1249.94	01Jan2000, 03:32	1.5
Reservoir - Da2/3		4.3	26.09	01Jan2000, 08:30	0.05
Da3		0.7	433.36	01Jan2000, 02:48	1.66
Da4		1.7	710.99	01Jan2000, 03:14	1.55
Di1		0.9	546.31	01Jan2000, 02:50	1.67
Reservoir - Di1		0.9	548.55	01Jan2000, 04:00	2.58
Di2		0.9	501.78	01Jan2000, 02:50	1.55
Reservoir - Di2		0.9	75.72	01Jan2000, 03:16	0.11
Di3		0.6	425.25	01Jan2000, 02:40	1.77
Reservoir - Di3		0.6	189.86	01Jan2000, 02:58	0.34
Di4		11.4	4413.81	01Jan2000, 03:34	1.68
Junction - 1		4.6	31.6	01Jan2000, 08:12	0.06
Junction - 2		1.5	195.2	01Jan2000, 02:58	0.2
Junction - 3		0.9	548.55	01Jan2000, 04:00	2.58
Reach - Di3 to Di2		0	138	01Jan2000, 03:06	Not specified
Reach - Di2 to Di1		0	384.06	01Jan2000, 03:08	Not specified

Subbasin: Da1

Area (MI²) : 0.3
Downstream : Reservoir - Da1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.8
Initial Abstraction 0.3
Transform: Scs
Lag 7.2
Unitgraph Type Standard

Results: Da1

Peak Discharge (CFS)	220.48
Time of Peak Discharge	01Jan2000, 02:32
Volume (IN)	1.6
Precipitation Volume (AC - FT)	45.6
Loss Volume (AC - FT)	20.04
Excess Volume (AC - FT)	25.56
Direct Runoff Volume (AC - FT)	25.56
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	5.62
Time of Peak Discharge	01Jan2000, 06:14
Volume (IN)	0.18
Peak Inflow (CFS)	220.48
Time of Peak Inflow	01Jan2000, 02:32
Inflow Volume (AC - FT)	25.56
Maximum Storage (AC - FT)	25.71
Peak Elevation (FT)	4691.34
Discharge Volume (AC - FT)	2.87

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	1249.94
Time of Peak Discharge	01Jan2000, 03:32
Volume (IN)	1.5
Precipitation Volume (AC - FT)	574.08
Loss Volume (AC - FT)	285.29
Excess Volume (AC - FT)	288.79
Direct Runoff Volume (AC - FT)	288.3
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	26.09
Time of Peak Discharge	01Jan2000, 08:30

Volume (IN)	0.05
Peak Inflow (CFS)	1437.53
Time of Peak Inflow	01Jan2000, 03:28
Inflow Volume (AC - FT)	350.46
Maximum Storage (AC - FT)	339.28
Peak Elevation (FT)	4693.1
Discharge Volume (AC - FT)	11.53

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.9
Initial Abstraction	0.28
Transform: Scs	
Lag	22.2
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	433.36
Time of Peak Discharge	01Jan2000, 02:48
Volume (IN)	1.66
Precipitation Volume (AC - FT)	106.03
Loss Volume (AC - FT)	43.87
Excess Volume (AC - FT)	62.15
Direct Runoff Volume (AC - FT)	62.15
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	86.2
Initial Abstraction	0.32

Transform: Scs	
Lag	46.8
Unitgraph Type	Standard
Results: Da4	
Peak Discharge (CFS)	710.99
Time of Peak Discharge	01Jan2000, 03:14
Volume (IN)	1.55
Precipitation Volume (AC - FT)	258.4
Loss Volume (AC - FT)	117.91
Excess Volume (AC - FT)	140.49
Direct Runoff Volume (AC - FT)	140.46
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di1	
Peak Discharge (CFS)	546.31
Time of Peak Discharge	01Jan2000, 02:50
Volume (IN)	1.67
Precipitation Volume (AC - FT)	136.8
Loss Volume (AC - FT)	56.73
Excess Volume (AC - FT)	80.07
Direct Runoff Volume (AC - FT)	80.07
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	548.55
Time of Peak Discharge	01Jan2000, 04:00
Volume (IN)	2.58
Peak Inflow (CFS)	817.2
Time of Peak Inflow	01Jan2000, 03:06
Inflow Volume (AC - FT)	169.67
Maximum Storage (AC - FT)	66.15
Peak Elevation (FT)	4557.03
Discharge Volume (AC - FT)	124.05

Subbasin: Di2

Area (MI²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	501.78
Time of Peak Discharge	01Jan2000, 02:50
Volume (IN)	1.55
Precipitation Volume (AC - FT)	138.72
Loss Volume (AC - FT)	64.09
Excess Volume (AC - FT)	74.63
Direct Runoff Volume (AC - FT)	74.63
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	75.72
Time of Peak Discharge	01Jan2000, 03:16
Volume (IN)	0.11
Peak Inflow (CFS)	639.78
Time of Peak Inflow	01Jan2000, 02:52
Inflow Volume (AC - FT)	113.43
Maximum Storage (AC - FT)	28.8
Peak Elevation (FT)	4600.34
Discharge Volume (AC - FT)	5.24

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	425.25
Time of Peak Discharge	01Jan2000, 02:40
Volume (IN)	1.77
Precipitation Volume (AC - FT)	91.52
Loss Volume (AC - FT)	35.03
Excess Volume (AC - FT)	56.49
Direct Runoff Volume (AC - FT)	56.49
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	189.86
Time of Peak Discharge	01Jan2000, 02:58
Volume (IN)	0.34
Peak Inflow (CFS)	425.25
Time of Peak Inflow	01Jan2000, 02:44
Inflow Volume (AC - FT)	56.49
Maximum Storage (AC - FT)	16.91
Peak Elevation (FT)	4607.78
Discharge Volume (AC - FT)	11.04

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	4413.81
Time of Peak Discharge	01Jan2000, 03:34
Volume (IN)	1.68
Precipitation Volume (AC - FT)	1732.8
Loss Volume (AC - FT)	706.57
Excess Volume (AC - FT)	1026.23
Direct Runoff Volume (AC - FT)	1023.8
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	31.6
Time of Peak Discharge	01Jan2000, 08:12
Volume (IN)	0.06

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	195.2
Time of Peak Discharge	01Jan2000, 02:58
Volume (IN)	0.2

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	548.55
Time of Peak Discharge	01Jan2000, 04:00
Volume (IN)	2.58

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	138
Time of Peak Discharge	01Jan2000, 03:06
Peak Inflow (CFS)	138
Inflow Volume (AC - FT)	38.79

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	384.06
Time of Peak Discharge	01Jan2000, 03:08
Peak Inflow (CFS)	380
Inflow Volume (AC - FT)	89.56

Project: Rev3

Simulation Run: Storm Event 18 500y6h

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.9

Executed: 11 May 2022, 15:23

Global Parameter Summary - Subbasin

Area (MI²)			
Element Name	Area (MI²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2/3		
Da3	Reservoir - Da2/3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	
Di3	16.8	Standard	

Global Parameter Summary - Reach

Downstream													
Element Name		Downstream											
Reach - Di3 to Di2 Reservoir - Di2													
Reach - Di2 to Di1 Reservoir - Di1													
Route: Muskingum Cunge													
Element Name	Method	Channel	Length (FT)	Energy Slope (FT/FT)	Mannings n	Bottom Width (FT)	Side Slope (FT/FT)	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	276.77	01Jan2000, 02:32	2.03
Reservoir - Da1	0.3	44.64	01Jan2000, 05:38	0.55
Da2	3.6	1631.55	01Jan2000, 03:30	1.93
Reservoir - Da2/3	4.3	381.42	01Jan2000, 06:56	0.24
Da3	0.7	552.13	01Jan2000, 02:46	2.11
Da4	1.7	917.22	01Jan2000, 03:14	1.97
Di1	0.9	695.88	01Jan2000, 02:48	2.12
Reservoir - Di1	0.9	667.78	01Jan2000, 03:38	3.36
Di2	0.9	649.41	01Jan2000, 02:50	2
Reservoir - Di2	0.9	270.63	01Jan2000, 03:08	0.33
Di3	0.6	540.01	01Jan2000, 02:40	2.23
Reservoir - Di3	0.6	335.74	01Jan2000, 02:52	0.64
Di4	11.4	5658.58	01Jan2000, 03:34	2.14
Junction - 1	4.6	392.83	01Jan2000, 06:56	0.26
Junction - 2	1.5	523.37	01Jan2000, 03:02	0.45
Junction - 3	0.9	667.78	01Jan2000, 03:38	3.36
Reach - Di3 to Di2	0	138	01Jan2000, 02:58	Not specified
Reach - Di2 to Di1	0	388.29	01Jan2000, 02:56	Not specified

Subbasin: Da1

Area (MI²) : 0.3
Downstream : Reservoir - Da1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.8
Initial Abstraction 0.3
Transform: Scs
Lag 7.2
Unitgraph Type Standard

Results: Da1

Peak Discharge (CFS)	276.77
Time of Peak Discharge	01Jan2000, 02:32
Volume (IN)	2.03
Precipitation Volume (AC - FT)	53.44
Loss Volume (AC - FT)	21.02
Excess Volume (AC - FT)	32.42
Direct Runoff Volume (AC - FT)	32.42
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1

Peak Discharge (CFS)	44.64
Time of Peak Discharge	01Jan2000, 05:38
Volume (IN)	0.55
Peak Inflow (CFS)	276.77
Time of Peak Inflow	01Jan2000, 02:32
Inflow Volume (AC - FT)	32.42
Maximum Storage (AC - FT)	28.04
Peak Elevation (FT)	4691.79
Discharge Volume (AC - FT)	8.75

Subbasin: Da2

Area (MI²) : 3.6

Downstream : Reservoir - Da2/3

Loss Rate: Scs

Percent Impervious Area	0
Curve Number	83.9
Initial Abstraction	0.38

Transform: Scs

Lag	60
Unitgraph Type	Standard

Results: Da2

Peak Discharge (CFS)	1631.55
Time of Peak Discharge	01Jan2000, 03:30
Volume (IN)	1.93
Precipitation Volume (AC - FT)	672
Loss Volume (AC - FT)	301.09
Excess Volume (AC - FT)	370.91
Direct Runoff Volume (AC - FT)	370.31
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da2/3

Downstream : Junction - 1

Results: Reservoir-Da2/3

Peak Discharge (CFS)	381.42
Time of Peak Discharge	01Jan2000, 06:56

Volume (IN)	0.24
Peak Inflow (CFS)	1872.69
Time of Peak Inflow	01Jan2000, 03:26
Inflow Volume (AC - FT)	449.11
Maximum Storage (AC - FT)	407.83
Peak Elevation (FT)	4697.44
Discharge Volume (AC - FT)	55.29

Subbasin: Da3

Area (MI²) : 0.7
Downstream : Reservoir - Da2/3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.9
Initial Abstraction	0.28
Transform: Scs	
Lag	22.2
Unitgraph Type	Standard
Results: Da3	
Peak Discharge (CFS)	552.13
Time of Peak Discharge	01Jan2000, 02:46
Volume (IN)	2.11
Precipitation Volume (AC - FT)	124.69
Loss Volume (AC - FT)	45.9
Excess Volume (AC - FT)	78.79
Direct Runoff Volume (AC - FT)	78.79
Baseflow Volume (AC - FT)	0

Subbasin: Da4

Area (MI²) : 1.7

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	86.2
Initial Abstraction	0.32
Transform: Scs	
Lag	46.8
Unitgraph Type	Standard
Results: Da4	
Peak Discharge (CFS)	917.22
Time of Peak Discharge	01Jan2000, 03:14
Volume (IN)	1.97
Precipitation Volume (AC - FT)	302.83
Loss Volume (AC - FT)	123.88
Excess Volume (AC - FT)	178.95
Direct Runoff Volume (AC - FT)	178.91
Baseflow Volume (AC - FT)	0

Subbasin: Di1

Area (MI²) : 0.9

Downstream : Reservoir - Di1

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	87.8
Initial Abstraction	0.28
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di1	
Peak Discharge (CFS)	695.88
Time of Peak Discharge	01Jan2000, 02:48
Volume (IN)	2.12
Precipitation Volume (AC - FT)	161.28
Loss Volume (AC - FT)	59.4
Excess Volume (AC - FT)	101.88
Direct Runoff Volume (AC - FT)	101.88
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1	
Peak Discharge (CFS)	667.78
Time of Peak Discharge	01Jan2000, 03:38
Volume (IN)	3.36
Peak Inflow (CFS)	1054.52
Time of Peak Inflow	01Jan2000, 02:56
Inflow Volume (AC - FT)	207.79
Maximum Storage (AC - FT)	67.07
Peak Elevation (FT)	4557.21
Discharge Volume (AC - FT)	161.3

Subbasin: Di2

Area (MI²) : 0.9

Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type	Standard
Results: Di2	
Peak Discharge (CFS)	649.41
Time of Peak Discharge	01Jan2000, 02:50
Volume (IN)	2
Precipitation Volume (AC - FT)	163.68
Loss Volume (AC - FT)	67.51
Excess Volume (AC - FT)	96.17
Direct Runoff Volume (AC - FT)	96.17
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	270.63
Time of Peak Discharge	01Jan2000, 03:08
Volume (IN)	0.33
Peak Inflow (CFS)	787.41
Time of Peak Inflow	01Jan2000, 02:52
Inflow Volume (AC - FT)	140.29
Maximum Storage (AC - FT)	31.35
Peak Elevation (FT)	4600.83
Discharge Volume (AC - FT)	15.76

Subbasin: Di3

Area (MI²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	540.01
Time of Peak Discharge	01Jan2000, 02:40
Volume (IN)	2.23
Precipitation Volume (AC - FT)	107.84
Loss Volume (AC - FT)	36.54
Excess Volume (AC - FT)	71.3
Direct Runoff Volume (AC - FT)	71.3
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	335.74
Time of Peak Discharge	01Jan2000, 02:52
Volume (IN)	0.64
Peak Inflow (CFS)	540.01
Time of Peak Inflow	01Jan2000, 02:44
Inflow Volume (AC - FT)	71.3
Maximum Storage (AC - FT)	18.29
Peak Elevation (FT)	4608.14
Discharge Volume (AC - FT)	20.48

Subbasin: Di4

Area (MI²) : 11.4

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	5658.58
Time of Peak Discharge	01Jan2000, 03:34
Volume (IN)	2.14
Precipitation Volume (AC - FT)	2042.88
Loss Volume (AC - FT)	739.4
Excess Volume (AC - FT)	1303.48
Direct Runoff Volume (AC - FT)	1300.51
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	392.83
Time of Peak Discharge	01Jan2000, 06:56
Volume (IN)	0.26

Junction: Junction-2

Results: Junction-2	
Peak Discharge (CFS)	523.37
Time of Peak Discharge	01Jan2000, 03:02
Volume (IN)	0.45

Junction: Junction-3

Results: Junction-3	
Peak Discharge (CFS)	667.78
Time of Peak Discharge	01Jan2000, 03:38
Volume (IN)	3.36

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	950
Energy Slope (FT/FT)	0.01
Mannings n	0.04
Bottom Width (FT)	6
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow

Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di3 to Di2	
Peak Discharge (CFS)	138
Time of Peak Discharge	01Jan2000, 02:58
Peak Inflow (CFS)	138
Inflow Volume (AC - FT)	44.12

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge	
Method	Muskingum Cunge
Channel	Trapezoid
Length (FT)	2690
Energy Slope (FT/FT)	0.02
Mannings n	0.04
Bottom Width (FT)	10
Side Slope (FT/FT)	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200
Maximum Depth Iterations	20
Maximum Route Step Iterations	30
Results: Reach-Di2 to Di1	
Peak Discharge (CFS)	388.29
Time of Peak Discharge	01Jan2000, 02:56
Peak Inflow (CFS)	380
Inflow Volume (AC - FT)	105.86

APPENDIX E-5

TECHNICAL DOCUMENTS, CONTINUED

Preliminary Hydrology Report

Santa Clara Watershed

Washington County

DRAFT

April 2021

Table of Contents

Table of Contents.....	i
Part I. Introduction	1
A. Dammeron Valley.....	3
B. Diamond Valley	4
Part II. Hydrology Analysis	5
C. Site Location and Existing Conditions	5
D. Design Criteria.....	6
E. Precipitation Values	7
F. Drainage Basin Parameters	8
i. Land Use.....	9
ii. Lag Times.....	9
iii. Initial Abstraction.....	10
G. Storm Hydrographs	10
H. Results	10
Appendix A. Exhibits	
Exhibit 1. Dammeron Valley	
Exhibit 2. Diamond Valley	
Exhibit 3. Tributary Basins	
Exhibit 4. Land Use	
Appendix B. Calculations	
Section 1. Soil Data and Curve Numbers	
Section 2. Storm Distributions	
Section 3. Precipitation Values	
Appendix C. Model Output	

Part I. Introduction

Washington County is proposing to install and reestablish a series of detention basins in Dammeron Valley and Diamond Valley in Washington County, Utah and to provide armoring along the Santa Clara River on Shivwits land near Ivins, Utah. The detention basins and armoring will provide flood protection to the local communities and Shivwits tribe farming area. The engineering design is being performed by Alpha Engineering Company (Alpha) out of St. George, Utah.

The project includes the construction of three detention basins on dry washes to the east of Dammeron Valley; the rerouting of existing flows to an adjacent routed channel on the south end of Dammeron Valley; the reestablishment of three existing detention basins in Diamond Valley; the armoring and protection along an existing channel in Diamond Valley; and armoring portions of the south bank of the Santa Clara River just west of the Shivwits tribal community near the Shem Dam. This report is being prepared to analyze the hydrologic design elements associated with the construction and operation of the detention basins and channels at Dammeron Valley and Diamond Valley.

For purposes of this hydrology report, approximated hydraulic features such as auxiliary spillway and top of dam are used to verify the feasibility of the detention basin dam structures and channels. A hydraulic analysis is required to adequately design the hydraulic elements associated with this project, including culvert, channel, spillway, freeboard, and breach analyses. The project locations are shown in **Figure 1**.

This report references the following sources in the analysis of the hydrologic conditions at the Diamond and Dammeron Valley Detention Basin Sites:

- Technical Release 210-60 (TR-60), USDA 2019
- Technical Release 55 (TR-55), USDA 1986
- Technical Release 56 (TR-56), USDA 2014
- Utah Administrative Code Rule R655-11 (UAC), utah.gov 2021
- Hydrometeorological Report 49 (HMR-49), USACE 1984
- PMP Studies by Donald T. Jensen (Jensen), USU 1995 and 2003
- National Engineering Handbook, Section 4 (NEH-4), Mockus 1965 and 1972
- NOAA Atlas 14 (NWS), NWS 2018
- National Land Cover Database (NLCD), MRLC 2011
- National Engineering Handbook Part 630 (NEH), USDA 2019
- Flood Hydrology Manual (USBR), USBR 1989

The following software programs were used in modeling the hydrologic conditions:

- HEC-HMS version 4.8 (HEC-HMS), USACE 2021
- USDA Water Resource Site Analysis version 2005.1.8 (SITES), USDA 2005

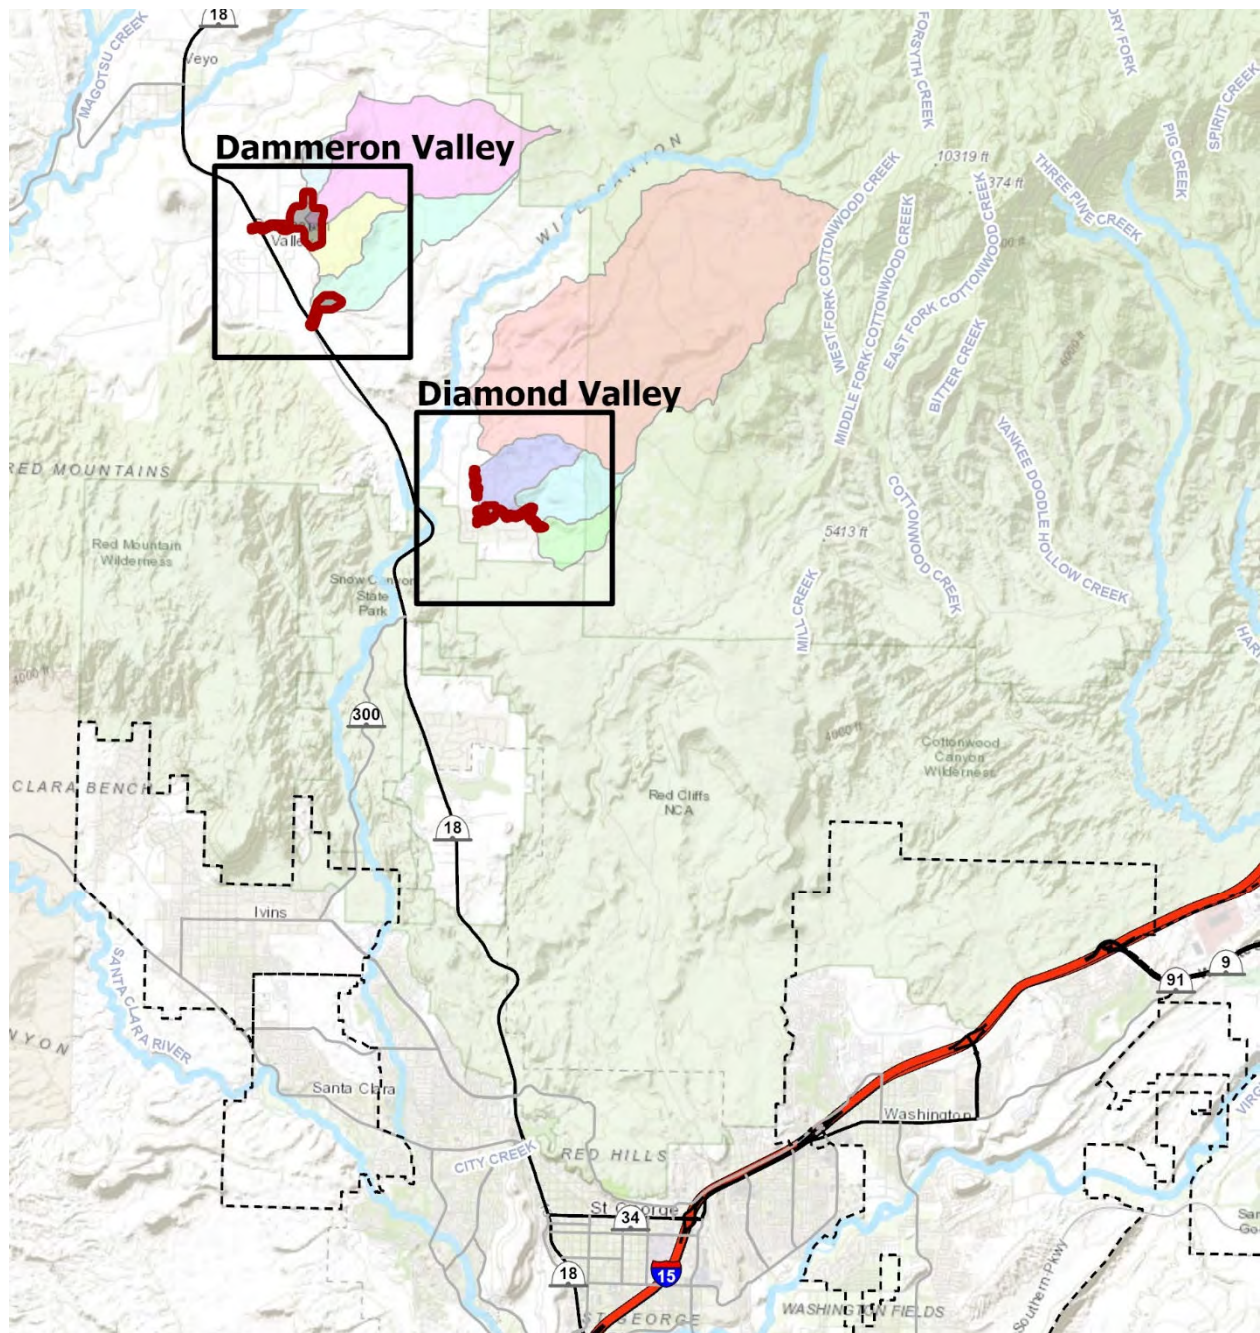


Figure 1 Dammeron Valley and Diamond Valley Location

A. Dammeron Valley

The three detention basins at Dammeron Valley will be new and will include earthen dams with a low-level principal spillway and an auxiliary spillway. The detention basins will not be designed to hold water and will have low-level principal spillways that will drain the basins empty after each storm event. The purpose of the basins is to detain peak flows during large storm events protecting downstream infrastructure. Due to homes located immediately downstream, these dams are classified as High Hazard.

The three detention basins will combine into a single drainage channel that conveys flows through the Dammeron Valley community.

The rerouting of existing flows to an adjacent channel on the south end of Dammeron Valley will include a new channel that will collect flows from the upstream tributary and direct them to an existing channel and culvert location under Highway 18. The Dammeron Valley project elements are shown in **Figure 2**.

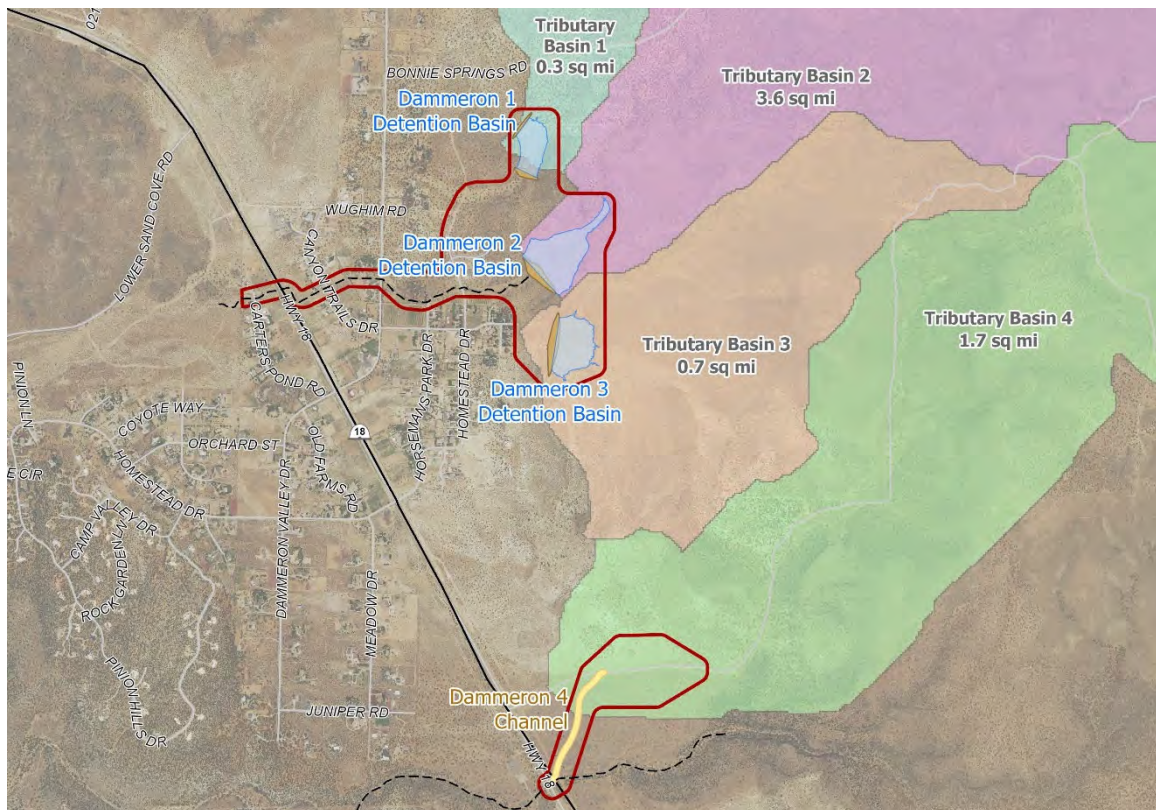


Figure 2 Dammeron Valley Project Elements

B. Diamond Valley

The three detention basins at Dammeron Valley will involve reestablishing existing detention basins and will include earthen dams with a low-level principal spillway and an auxiliary spillway. Two of the detention basins are located above the third detention basin and will also incorporate existing channels as additional auxiliary spillways. The detention basins will not be designed to hold water and will have low-level principal spillways that will drain the basins empty after each storm event. The purpose of the basins is to detain peak flows during large storm events protecting downstream infrastructure. Due to homes located immediately downstream, these dams are classified as High Hazard.

The low-level outlet and new auxiliary spillway for Detention Basins 2 and 3 will discharge into the roadway immediately downstream. The existing channels that will serve as an additional auxiliary for these detention basins will discharge into the detention basin downstream (Detention Basin 3 will discharge into Detention Basin 2 and Detention Basin 2 will discharge into Detention Basin 1). Detention Basin 1 will discharge into the Diamond 4 Channel.

The Diamond Valley project elements, including the portion of existing channel to be armored, are shown in **Figure 3**.

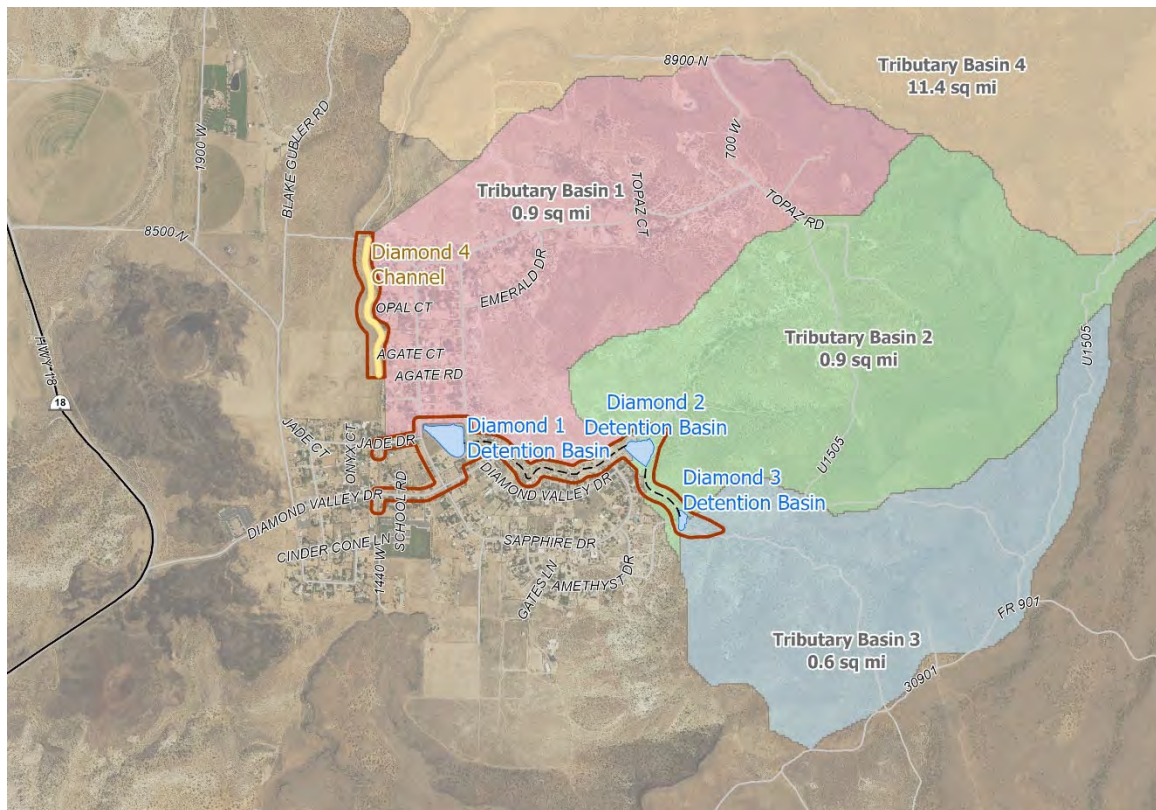


Figure 3 Diamond Valley Project Elements

Part II. Hydrology Analysis

C. Site Location and Existing Conditions

The three Dammeron Valley proposed dams are located approximately ½ mile east of Highway 18 due east of the community of Dammeron Valley in Washington County, Utah, or 37°18'29" North Latitude and 113°39'51" West Longitude. The high-water surface area generated during a storm event with the construction of the three dams is approximately 30 acres and is currently comprised of undisturbed shrub ground cover, natural drainage channels, and dirt roads.

The three Diamond Valley existing detention basins are located approximately 1 mile east of Highway 18 on the east side of the community of Diamond Valley, in Washington County, Utah, or 37°15'05" North Latitude and 113°36'35" West Longitude. The high-water surface area generated with the construction of the three dams is approximately 8 acres and is currently comprised of undisturbed shrub ground cover, natural drainage channels, and dirt roads.

An aerial drone survey was performed across the anticipated footprint of the project and was used to generate a 3D model of the existing surface with an approximate one-foot vertical accuracy and six-inch horizontal accuracy. This surface model was used in designing the different components of the project and are shown at 10-foot contour intervals on **Appendix A, Exhibits 1 and 2**. Exhibits of the tributary drainage basins are shown in **Appendix A, Exhibit 3**.

Using available USGS DEM data, the area upstream of the proposed reservoir was delineated to determine the drainage area tributary to the detention basins and channels. The tributaries are summarized in **Table 1**.

Dam	Tributary Area	Mean Basin Elevation
Dammeron 1 Detention Basin	182 acres	4830'
Dammeron 2 Detention Basin	2,286 acres	5310'
Dammeron 3 Detention Basin	470 acres	4850'
Dammeron 4 Channel	1,104 acres	5150'
Diamond 1 Detention Basin	575 acres	4760'
Diamond 2 Detention Basin	597 acres	4960'
Diamond 3 Detention Basin	386 acres	4980'
Diamond 4 Channel	7,311 acres	5930'

Table 1 Summary of Tributary Areas

The average annual temperature for the area is 53.3°F (NWS, Climate Monitoring) with an average annual precipitation of 15.6 inches (USGS, StreamStats). The Climatic Index calculates to 0.6 (NEH 630, Equation 21-1).

D. Design Criteria

The capacity of the detention basins and channels will be based on the 100-year storm event, and the detention basins will incorporate a low-level outlet at the base elevation of the respective dams. The low-level outlet peak flows will be designed based on downstream capacities of existing drainage infrastructure and coordination with Washington County. The dam structures will further be analyzed as high-hazard dams due to their classification.

The peak allowable flows downstream of the detention basins are summarized in **Table 2**.

Dam	Allowable Flow Downstream
Dammeron 1 Detention Basin	Combined 30 cfs: Based on correspondence with Washington County and available capacity in downstream drainage infrastructure.
Dammeron 2 Detention Basin	
Dammeron 3 Detention Basin	
Diamond 1 Detention Basin	50 cfs: Based on available capacity in Diamond 4 Channel and potential for larger storm events in Diamond 4 Channel.
Diamond 2 Detention Basin	10 cfs: Based on available capacity in downstream roadways.
Diamond 3 Detention Basin	10 cfs: Based on available capacity in downstream roadways.

Table 2 Summary of Peak Allowable Flow Downstream

The hydrographs analyzed in this study, as required by Utah Dam Safety and NRCS, are summarized in **Table 3** and include project-specific hydrographs. The Utah State Engineers Office requires hydrograph analyses for probable maximum flood events (general and local storms) and for 100-year events with saturated soil conditions (UAC, Section 11-4A). The NRCS requires hydrograph analyses for the Principal Spillway, Auxiliary Spillway and Freeboard (TR-60, Part 2), which incorporate probable maximum flood precipitation values. Because the capacity of the detention basins and channels will be based on the 100-year storm event with normal soil saturation conditions, a corresponding project-specific hydrograph will also be analyzed.

Hydrograph	Frequency	Duration	Precipitation
NRCS Required Hydrographs			
Principal Spillway Hydrograph	100-year	10-day	TR-60, Fig 2-1 (NWS)
Auxiliary Spillway Hydrographs	Maximum	6- & 24-hour	TR-60, Fig 2-2
Freeboard Hydrographs	Maximum	6- & 24-hour	TR-60, Fig 2-2
Utah State Required Hydrographs			
SEP Hydrographs	Maximum	6- & 72-hour	Jensen
100-year (AMC III) Hydrographs	100-year	6- & 72-hour	NWS
Project-Specific Hydrograph			
100-year (AMC II) Hydrographs	100-year	24-hour	NWS

Table 3 Summary of Design Hydrographs

Each of the above hydrographs are included in this analysis as separate Storm Events. For purposes of this analysis, **Table 4** assigns numbers to each Storm Event. Storm Events 02 through 10 are not required for a hydrologic analysis of the Dammeron 4 Channel and the Diamond 4 Channel since their basis of design is strictly the 100-year storm event.

	Storm Event	Duration	Frequency	AMC
01	100-year 24-hour	24-hour	100-year	II
02	100-year 6-hour AMC III	6-hour	100-year	III
03	100-year 24-hour AMC III	24-hour	100-year	III
04	Local SEP Hydrograph (SEP-L)	6-hour	Maximum	II
05	General SEP Hydrograph (SEP-G)	72-hour	Maximum	II
06	Principal Spillway Hydrograph (PSH)	10-day	100-year	- ¹
07	Local Auxiliary Spillway Hydrograph (ASH-L)	6-hour	Maximum	II
08	General Auxiliary Spillway Hydrograph (ASH-G)	24-hour	Maximum	II
09	Local Freeboard Hydrograph (FBH-L)	6-hour	Maximum	II
10	General Freeboard Hydrograph (FBH-G)	24-hour	Maximum	II

Table 4 Summary of Storm Events

The 100-year 24-hour Hydrograph (Storm Event 01) will be used to size the capacity of the detention basins. The Principal Spillway Hydrograph (Storm Event 06) will be used in designing the principal spillway (low-level outlet) for each dam. The Local Auxiliary Spillway Hydrograph (Storm Event 07) is used to check the stability of auxiliary spillway(s). The most critical of the Auxiliary Spillway, Freeboard and SEP Hydrographs (Storm Events 02 through 05 and 08 through 10) will be used in designing the auxiliary spillway(s) and establishing the top-of-dam elevation.

For purposes of this report, an approximated auxiliary spillway and top of dam is used to verify the feasibility of the detention basin dam structures. A hydraulic analysis is required to adequately design the auxiliary spillway and top of dam, including comprehensive spillway, freeboard and breach analyses.

E. Precipitation Values

The precipitation values for the 100-year storm events (Storm Events 01 through 03) are taken from NWS. For the PSH (Storm Event 06), see also TR-60, Figure 2-1. The precipitation values at the centroid of each drainage basin were taken for each storm frequency. A summary of these values is included in **Appendix B**.

The precipitation values for the SEP storms (Storm Events 04 and 05) are taken from HMR-49 and Jensen. It is noted that HMR-49 outlines the method used in calculating the Probable Maximum Precipitation (PMP) values for this drainage basin. Jensen has been accepted by the Utah State Engineer's Office and further updates the PMP values. PMP values that have been updated by Jensen are referred to as Spillway Evaluation Precipitation (SEP) values and are used in lieu of the PMP values. Calculations for the SEP values are included in **Appendix B**.

¹ As directed in NEH 630.2102(a)(1), Curve Numbers reflected in NEH 630.2102, Table 21-2, are used for the PSH because the precipitation value exceeds 6 inches.

The precipitation value for the ASH and FBH storm events (Storm Events 07 through 10) are taken from TR-60, Figure 2-2. The precipitation values are calculated using the NWS 100-year and Jensen SEP precipitation values. Calculations for the ASH and FBH values are included in **Appendix B**.

The precipitation values for each storm event are summarized in **Table 5**.

	Storm Event	Da1	Da2	Da3	Da4	Di1	Di2	Di3	Di4
01	100-year 24-hour	2.79	2.95	2.76	2.87	2.78	2.88	2.80	3.11
02	100-year 6-hour AMC III	2.51	2.64	2.50	N/A	2.51	2.55	2.52	N/A
03	100-year 24-hour AMC III	2.79	2.95	2.76	N/A	2.78	2.88	2.80	N/A
04	Local SEP Hydrograph (SEP-L)	11.73	9.30	11.73	N/A	11.73	11.73	11.73	N/A
05	General SEP Hydrograph (SEP-G)	14.10	14.05	14.10	N/A	14.10	14.10	14.10	N/A
06	Principal Spillway Hydrograph (PSH)	6.53	7.15	6.43	N/A	6.54	6.78	6.64	N/A
07	Local Auxiliary Spillway Hydrograph (ASH-L)	4.91	4.37	4.90	N/A	4.91	4.94	4.91	N/A
08	General Auxiliary Spillway Hydrograph (ASH-G)	5.73	5.84	5.71	N/A	6.25	6.31	6.27	N/A
09	Local Freeboard Hydrograph (FBH-L)	11.73	9.30	11.73	N/A	11.73	11.73	11.73	N/A
10	General Freeboard Hydrograph (FBH-G)	14.10	14.05	14.10	N/A	14.10	14.10	14.10	N/A

Table 5 Storm Event and Precipitation Values²

F. Drainage Basin Parameters

The tributary drainage basins for the project range in size from 0.3 square miles to 11.4 square miles. The basin characteristics are summarized in **Tables 6 and 7** and discussed in following sections.

Basin	Area (sq mi)	CN, AMC II/III	Flow Length (ft)	Ave Slope (%)
Dammeron 1 Detention Basin	0.3	86.8/93.8	2,400	17.1%
Dammeron 2 Detention Basin	3.6	83.9/92.3	24,500	13.1%
Dammeron 3 Detention Basin	0.7	87.9/94.4	8,400	12.6%
Dammeron 4 Channel	1.7	86.2/93.5	20,400	13.6%
Diamond 1 Detention Basin	0.9	87.8/94.3	9,900	14.4%
Diamond 2 Detention Basin	0.9	85.8/93.3	9,600	16.2%
Diamond 3 Detention Basin	0.6	88.9/94.9	8,000	19.1%
Diamond 4 Channel	11.4	88.0/94.4	40,700	19.2%

Table 6 Drainage Basin Characteristics

² Precipitation Values are designated in columns 3 through 8 and are reflected in **inches** for drainage basins Da1 (Dammeron 1 Detention Basin), Da2 (Dammeron 2 Detention Basin), Da3 (Dammeron 3 Detention Basin), Da4 (Dammeron 4 Channel), Di1 (Diamond 1 Detention Basin), Di2 (Diamond 2 Detention Basin), Di3 (Diamond 3 Detention Basin), and Di4 (Diamond 4 Channel).

Basin	Lag Time, AMC II/III (hr)	Time of Conc, AMC II/III (hr)	Initial Abst, AMC II/III (in)
Dammeron 1 Detention Basin	0.12/0.09	0.20/0.15	0.30/0.13
Dammeron 2 Detention Basin	1.00/0.72	1.66/1.20	0.38/0.17
Dammeron 3 Detention Basin	0.37/0.28	0.62/0.47	0.28/0.12
Dammeron 4 Channel	0.78/0.58	1.30/0.96	0.32/0.14
Diamond 1 Detention Basin	0.40/0.30	0.67/0.50	0.28/0.12
Diamond 2 Detention Basin	0.40/0.29	0.66/0.49	0.33/0.14
Diamond 3 Detention Basin	0.28/0.22	0.47/0.36	0.25/0.11
Diamond 4 Channel	1.07/0.81	1.78/1.35	0.27/0.12

Table 7 Drainage Basin Parameters

i. Land Use

Land use and soil data were obtained from NLCD and WSS. The basins include larger portions of 42-Evergreen Forest, 52-Shrub/Scrub, and 71-Grasslands/Herbaceous and smaller portions of 21/22-Developed Open Space/Low Intensity. The soil data for the site mainly classifies the basins to be Hydrologic Soil Group D with small portions of Hydrology Soil Group C. An exhibit of the land use and hydrologic soil groups is included in **Appendix A, Exhibit 4**.

Each basin is assigned a Soil Conservation Service Curve Number (CN) that associates the land use with the soil data. As different types of soil cover exist throughout a subbasin, CNs have been prorated on an area-weighted basis. CNs for each subbasin are taken from NEH, Tables 9-2 and 9-5. Because NLCD land use designations do not directly correspond to NEH land cover descriptions, **Table 8** demonstrates how each correspond for this analysis.

NLCD Land Use Designation	NEH Land Cover Designation
21/22-Developed Open Space/Low Intensity	Open Space, Poor (Table 9-5)
42-Evergreen Forest	Pinyon-Juniper, Poor (Table 9-2)
52-Shrub/Scrub	Desert Shrub, Good (Table 9-2)
71-Grasslands/Herbaceous	Grassland, Good (Table 9-3)

Table 8 NLCD Land Use to NEH Land Cover Designations

CNs for the individual subbasins are summarized in **Table 6** and range between 83.9 and 88.9 for AMC II and between 92.3 and 94.9 for AMC III. CNs used for the PSH (Storm Event 06) are modified per NEH 630.2102, Table 21-2, and range between 70.8 and 78.8. NLCD Land Use descriptions and curve number calculations are included in **Appendix B**.

ii. Lag Times

Lag times and times of concentration for the subbasins were calculated using methodology outlined in NEH Chapter 15, which estimates the lag time, TLAG, and time of concentration, T_c, as:

$$TLAG = \frac{I^{0.8} \left(\left(\frac{1000}{CN} - 10 \right) + 1 \right)^{0.7}}{1,900Y^{0.5}}$$

$$T_c = \frac{TLAG}{0.6}$$

Criteria and calculated lag times and times of concentration for the individual subbasins are summarized in **Table 7**.

iii. Initial Abstraction

Initial abstraction depths for the subbasins were calculated using methodology outlined in TR-55, which estimates the initial abstraction depth, I_a , as:

$$I_a = 0.2 \times \left(\frac{1000}{CN} - 10 \right)$$

Initial abstraction depth for the individual subbasins are summarized in **Table 7**.

G. Storm Hydrographs

The PSH Storm Event (Storm Event 06) was modeled using the SITES computer program, which developed the hydrograph (NEH 630.2100). For other storm events, a dimensionless design storm distribution (NEH 630.2103, Figure 21-9) was applied and modeled using HEC-HMS software. The dimensionless storm distribution and calculated storm hydrographs are shown in tabular form with calculations in **Appendix B**.

H. Results

Each of the storm events were setup as separate models using the HEC-HMS computer program, version 4.8. Criterion discussed in this analysis were incorporated into the models. Model output is included in **Appendix C**. The Local Freeboard Hydrograph (and Local SEP Hydrograph, Storm Events 04 and 09) generated the largest flows going into the detention basins. The General Freeboard Hydrograph (and General SEP Hydrograph, Storm Events 05 and 10) generated the largest volumes going into the detention basins. The peak flows generated by each tributary basin for each storm event are summarized in **Table 9**.

	Storm Event	Da1	Da2	Da3	Da4	Di1	Di2	Di3	Di4
01	100-year 24-hour	57	535	130	288	171	162	122	2,225
02	100-year 6-hour AMC III	252	1,945	536	N/A	677	670	500	N/A
03	100-year 24-hour AMC III	75	841	170	N/A	224	224	153	N/A
04	Local SEP Hydrograph (SEP-L)	1,312	6,533	2,658	N/A	3,344	3,275	2,446	N/A
05	General SEP Hydrograph (SEP-G)	136	1,580	317	N/A	407	404	273	N/A
06	Principal Spillway Hydrograph (PSH)	298	2,518	655	N/A	847	860	608	N/A
07	Local Auxiliary Spillway Hydrograph (ASH-L)	475	2,325	941	N/A	1,183	1,120	893	N/A
08	General Auxiliary Spillway Hydrograph (ASH-G)	149	1,520	348	N/A	440	434	306	N/A
09	Local Freeboard Hydrograph (FBH-L)	1,312	6,533	2,658	N/A	3,344	3,275	2,446	N/A
10	General Freeboard Hydrograph (FBH-G)	406	4,406	946	N/A	1,214	1,201	816	N/A

Table 9 Peak Flows by Storm Event³

The total inflow volumes for each storm event are summarized in **Table 10**.

	Storm Event	Da1	Da2	Da3	Da4	Di1	Di2	Di3	Di4
01	100-year 24-hour	25	282	59	142	77	74	55	1,166
02	100-year 6-hour AMC III	30	355	71	N/A	92	89	63	N/A
03	100-year 24-hour AMC III	34	411	80	N/A	104	104	72	N/A
04	Local SEP Hydrograph (SEP-L)	161	1,408	382	N/A	907	478	331	N/A
05	General SEP Hydrograph (SEP-G)	199	2,301	469	N/A	603	590	407	N/A
06	Principal Spillway Hydrograph (PSH)	80	1,013	188	N/A	246	246	171	N/A
07	Local Auxiliary Spillway Hydrograph (ASH-L)	55	516	133	N/A	171	163	118	N/A
08	General Auxiliary Spillway Hydrograph (ASH-G)	68	775	162	N/A	208	202	143	N/A
09	Local Freeboard Hydrograph (FBH-L)	161	1,408	382	N/A	490	478	331	N/A
10	General Freeboard Hydrograph (FBH-G)	199	2,301	469	N/A	603	590	407	N/A

Table 10 Inflow Volume by Storm Event⁴

The required volumes for each detention basin during the 100-year 24-hour Storm Event (Storm Event 01) with the low-level outlet releasing flows per **Table 2** in each detention basin and no other flows being released is summarized in **Table 11**.

Dam	Required Volume
Dammeron 1 Detention Basin	20.7 acre-feet
Dammeron 2 Detention Basin	257.8 acre-feet
Dammeron 3 Detention Basin	52.5 acre-feet
Diamond 1 Detention Basin	103.2 acre-feet
Diamond 2 Detention Basin	10.0 acre-feet
Diamond 3 Detention Basin	7.4 acre-feet

Table 11 Required Volumes for Each Detention Basin

³ Peak Flow values are designated in columns 3 through 8 and are reflected in **cfs** for drainage basins Da1 (Dammeron 1 Detention Basin), Da2 (Dammeron 2 Detention Basin), Da3 (Dammeron 3 Detention Basin), Da4 (Dammeron 4 Channel), Di1 (Diamond 1 Detention Basin), Di2 (Diamond 2 Detention Basin), Di3 (Diamond 3 Detention Basin), and Di4 (Diamond 4 Channel).

⁴ Inflow Volume values are designated in columns 3 through 8 and are reflected in **acre-feet** for drainage basins Da1 (Dammeron 1 Detention Basin), Da2 (Dammeron 2 Detention Basin), Da3 (Dammeron 3 Detention Basin), Da4 (Dammeron 4 Channel), Di1 (Diamond 1 Detention Basin), Di2 (Diamond 2 Detention Basin), Di3 (Diamond 3 Detention Basin), and Di4 (Diamond 4 Channel).

The required flow capacity for the two new channels to adequately convey the 100-year 24-hour Storm Event (Storm Event 01) is summarized in **Table 12**. This table also shows the required flow capacity for existing channels downstream of the detention basins.

Channel	Required Flow Capacity
Dammeron 4 Channel	288 cfs
Existing Dammeron Channel Downstream of Dammeron 1, 2 and 3 Detention Basins	30 cfs
Existing Channel Downstream of Diamond 3 Detention Basin conveying flows into Diamond 2 Detention Basin	109 cfs
Existing Channel Downstream of Diamond 2 Detention Basin conveying flows into Diamond 1 Detention Basin	258 cfs
Existing Channel Downstream of Diamond 1 Detention Basin conveying flows into Diamond 4 Channel	50 cfs
Diamond 4 Channel	2,225 cfs

Table 12 Required Flow Capacity for Each Channel


Appendix A. Exhibits

Exhibit 1. Dammeron Valley

Exhibit 2. Diamond Valley

Exhibit 3. Tributary Basins

Exhibit 4. Land Use

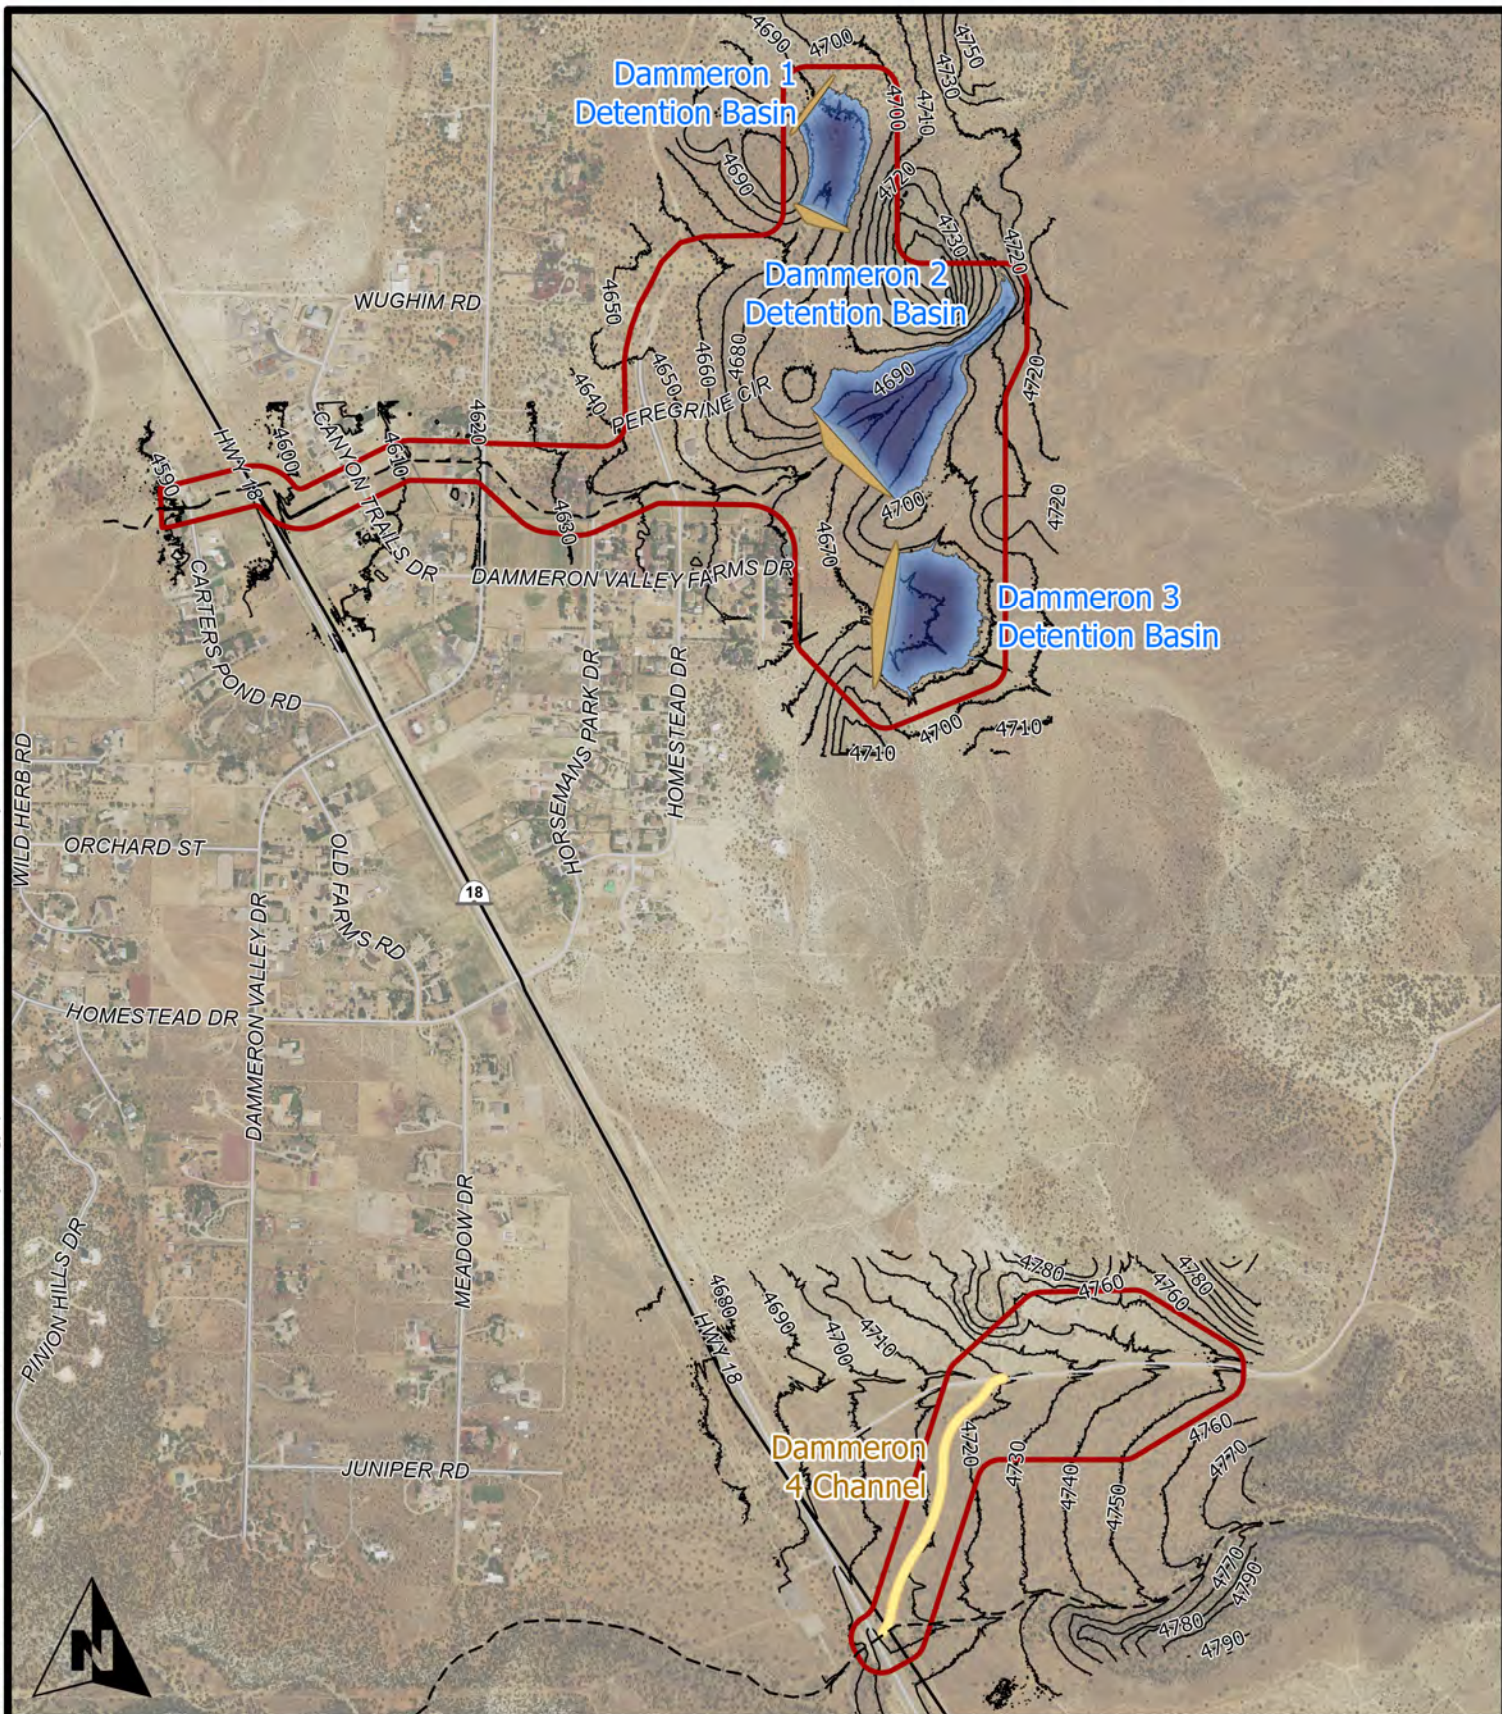

0 300 600 1,200 1,800
Feet

- Project Boundary
- Detention Basin
- Dam
- New Channel
- Existing Grade Contours (10')

ALPHA
ENGINEERING
43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com


Exhibit 1. Dammeron Valley Santa Clara Watershed Hydrology

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 1,200 feet

Date: April 22, 2021



43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Project Boundary
- Detention Basin
- Dam
- New Channel
- Existing Grade Contours (10')


Exhibit 2. Diamond Valley Santa Clara Watershed Hydrology

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 800 feet

Date: April 22, 2021

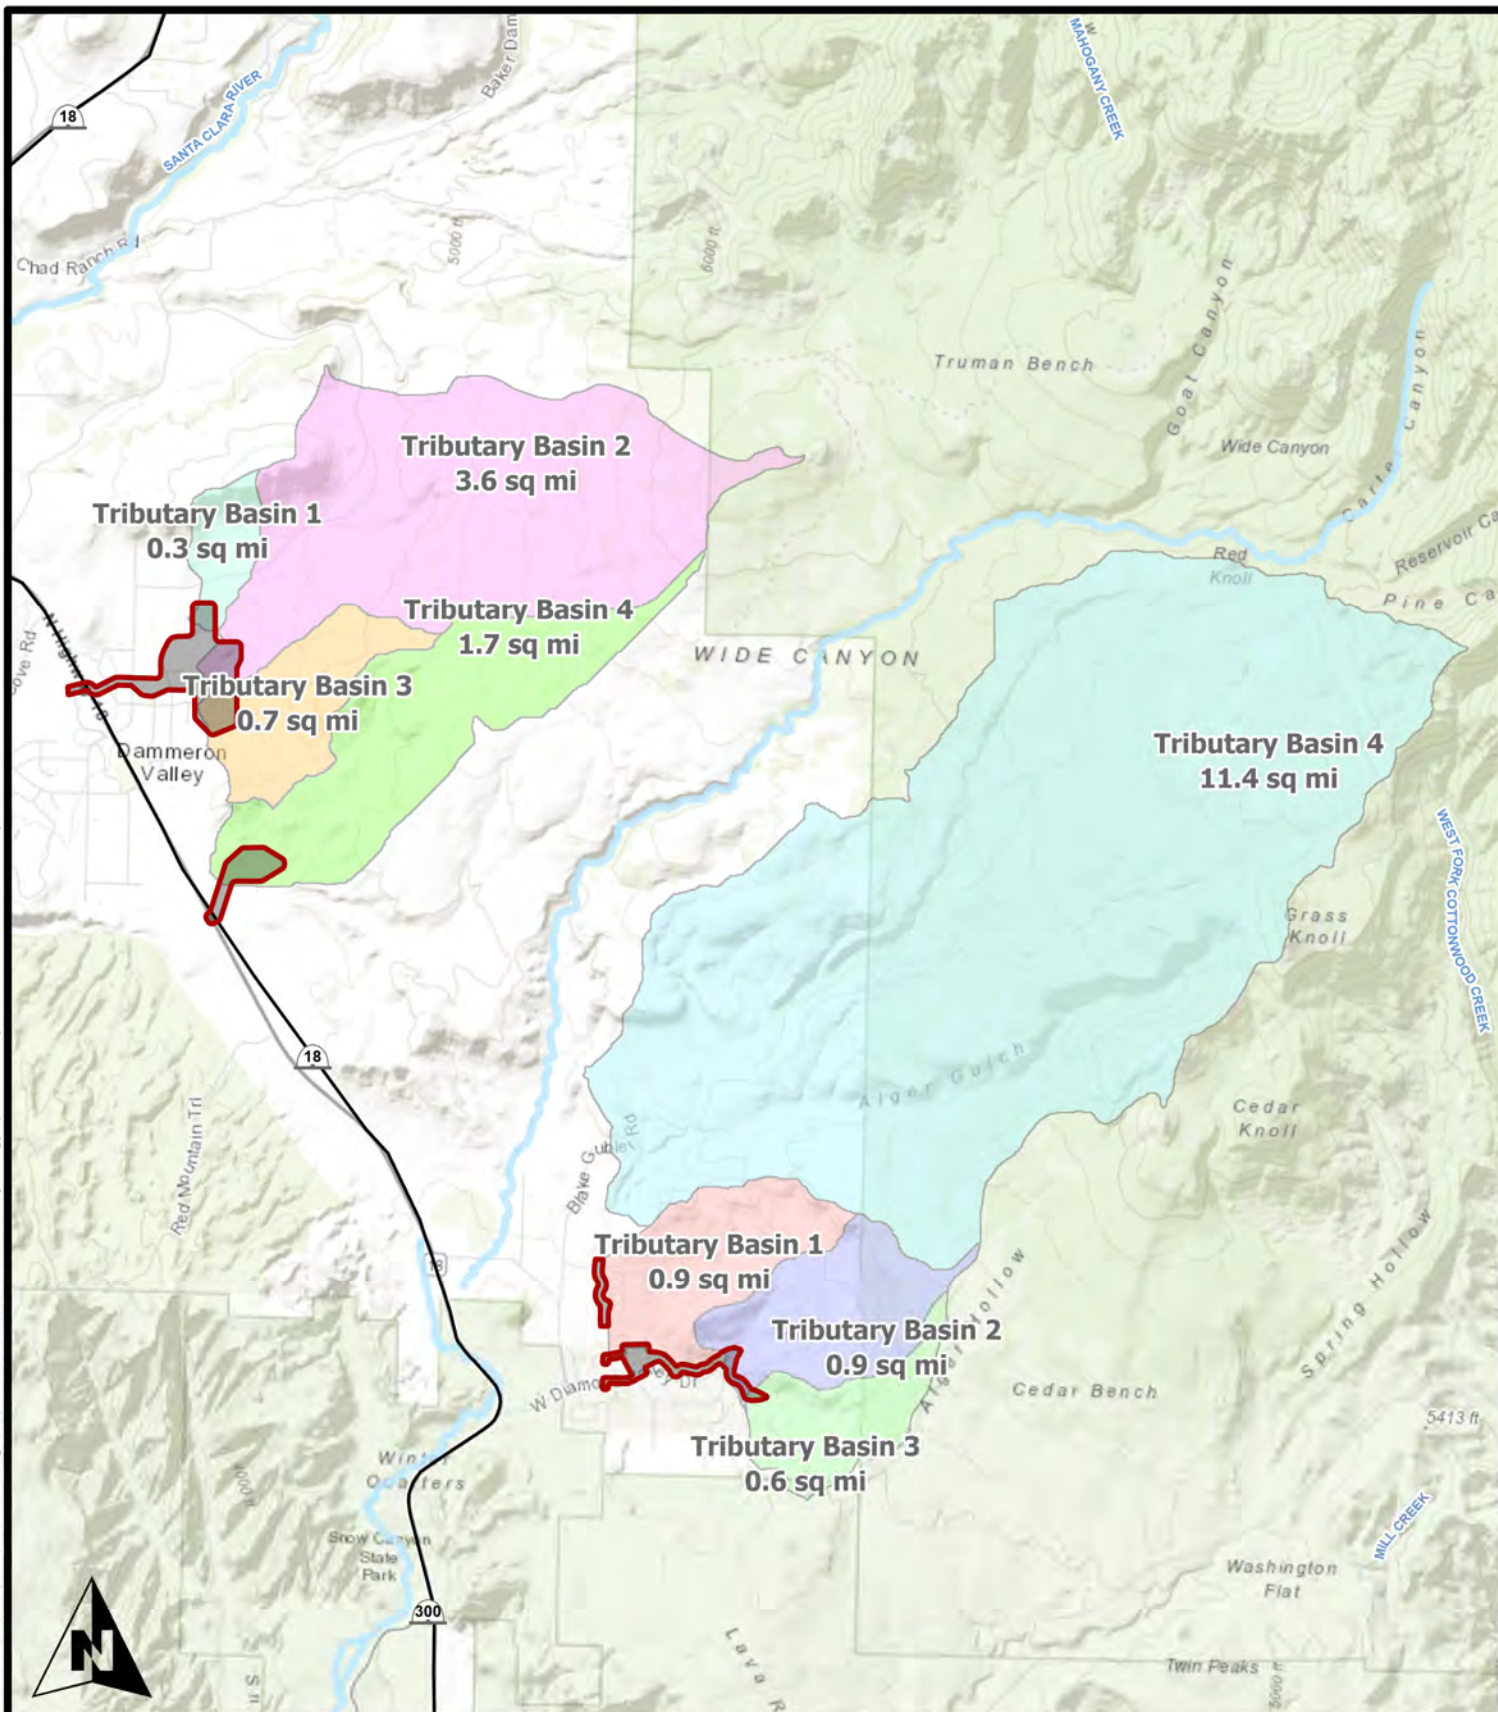

0 1,500 3,000 6,000 9,000
Feet

ALPHA
ENGINEERING
43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Diamond Basin 1 (Di1)
- Diamond Basin 2 (Di2)
- Diamond Basin 3 (Di3)
- Diamond Basin 4 (Di4)
- Dammeron Basin 1 (Da1)
- Dammeron Basin 2 (Da2)
- Dammeron Basin 3 (Da3)
- Dammeron Basin 4 (Da4)


Exhibit 3. Tributary Basins Santa Clara Watershed Hydrology

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 6,000 feet

Date: April 22, 2021

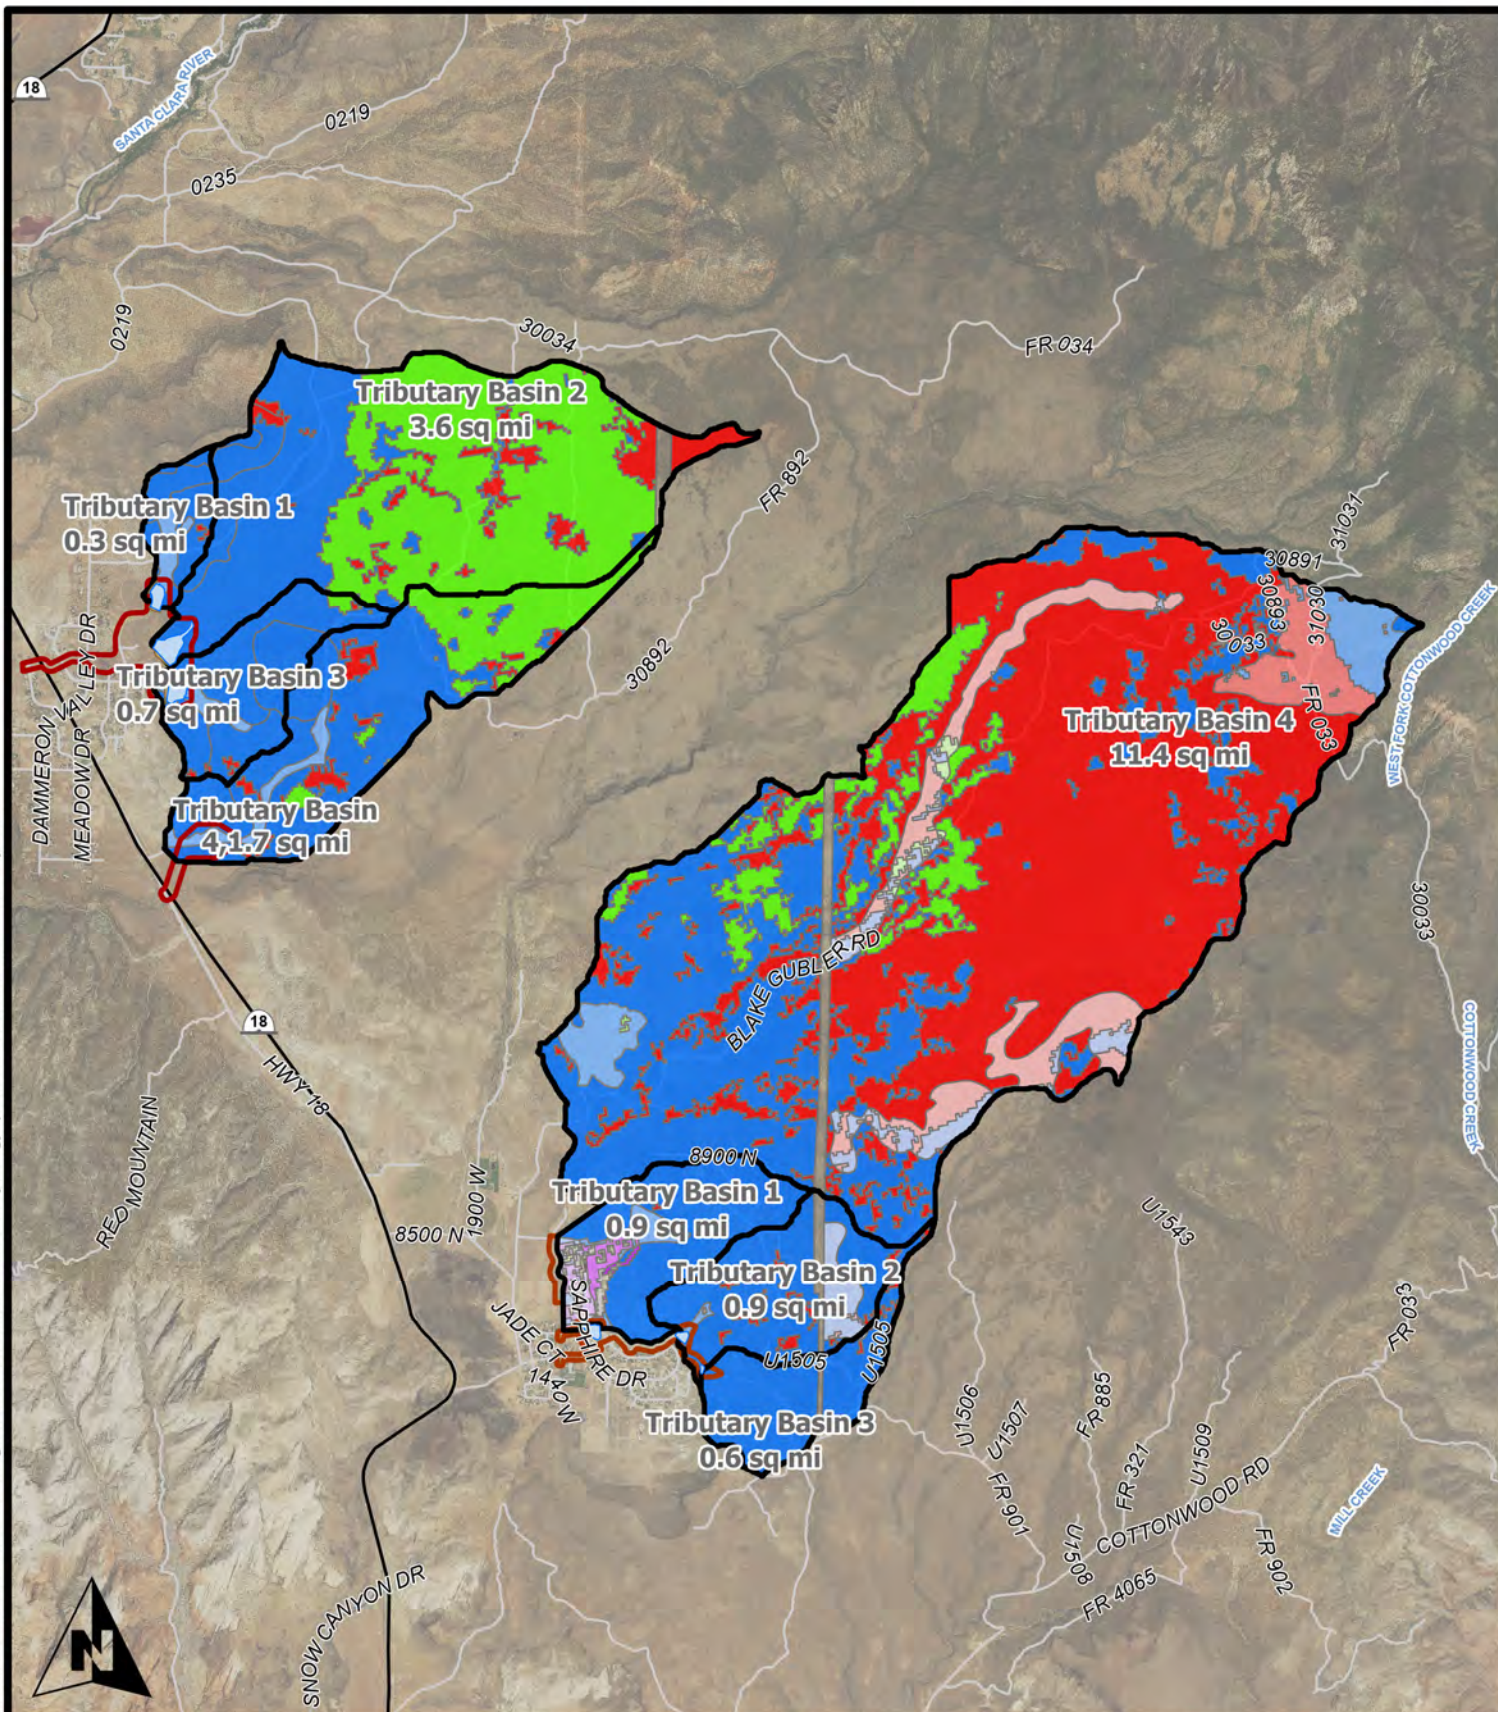

Appendix B. Calculations

Section 1. Soil Data and Curve Numbers

Section 2. Storm Distributions

Section 3. Precipitation Values

Section 1. Soil Data and Curve Numbers

Dammeron Valley Soil Data and Curve Number Calculations

Output

BasinID	Hyd_Group	Id	gridcode	NLCD_Code	Acres
B3	D	10	42	42	1.73
B3	D	12	52	52	53.09
B3	D	10	42	42	4.03
B3	D	12	52	52	71.11
B3	D	12	52	52	92.50
B3	D	10	42	42	1.11
B3	D	12	52	52	195.34
B3	D	13	71	71	9.44
B3	C	12	52	52	41.35
B2	D	10	42	42	9.74
B2	D	12	52	52	49.75
B2	D	10	42	42	163.79
B2	D	12	52	52	686.05
B2	D	13	71	71	1272.84
B2	D	12	52	52	38.02
B2	D	10	42	42	40.99
B2	D	13	71	71	0.00
B1	D	12	52	52	42.62
B1	D	12	52	52	49.68
B1	C	12	52	52	40.05
B1	D	10	42	42	2.22
B1	D	12	52	52	35.04
B1	D	12	52	52	12.61

lookup

NLCD	A	B	C	D
21	68	79	86	89
22	68	79	86	89
23	61	75	83	87
41	36	58	73	80
42	58	75	85	89
52	49	68	79	89
71	39	61	74	80
95	30	55	70	77

Output Breakdown

Basin	gridcode	Soil Group	Area_Acres	Percent of Basin	CN	Weighted_CN
Da1	42 D		2.22	1.22%	89	1.08
	52 C		40.05	21.98%	79	17.36
	52 D		139.96	76.80%	89	68.36
			182.23	100.00%		86.80
Da2	42 D		214.52	9.39%	89	8.35
	52 D		773.82	33.85%	89	30.13
	71 D		1297.37	56.76%	80	45.41
			2285.71	100.00%		83.89
Da3	42 D		6.87	1.46%	89	1.30
	52 C		41.35	8.80%	79	6.95
	52 D		412.04	87.72%	89	78.07
	71 D		9.44	2.01%	80	1.61
			469.7	100.00%		87.94
Da4	42 C		0.06	0.01%	85	0.00
	42 D		73.64	6.67%	89	5.93
	52 C		57.15	5.17%	79	4.09
	52 D		688.54	62.35%	89	55.49
	71 D		284.98	25.80%	80	20.64
			1104.37	100.00%		86.16

Calculation Table

	Area, sq-mi	CN (AMC II)	CN (AMC III)	Average Slope, %	Length, ft	CN (PSH)
Da1	0.3	86.8	93.8	17.13%	2400	75.6
Da2	3.6	83.9	92.3	13.18%	24500	70.8
Da3	0.7	87.9	94.4	12.64%	8400	76.9
Da4	1.7	86.2	93.5	13.62%	20400	74.4
	Lag Time (AMC II), hr	Lag Time (AMC III), hr	Tc (AMC II), hr	Tc (AMC III), hr	Initial Abst (AMC II), in	Initial Abst (AMC III), in
Da1	0.12	0.09	0.20	0.15	0.30	0.13
Da2	1.00	0.72	1.66	1.20	0.38	0.17
Da3	0.37	0.28	0.62	0.47	0.28	0.12
Da4	0.78	0.58	1.30	0.96	0.32	0.14

Diamond Valley Soil Data and Curve Number Calculations

Output

FID	Hyd_Group	BasinID	NLCD_Code	Acres
0		B2	52	0.85148197
1		B4	52	0.41308501
2 B		B1	42	385.970001
3 B		B1	52	136.703003
4 B		B1	71	22.8894005
5 B		B2	21	29.5407009
6 B		B2	22	11.8734999
7 B		B2	23	0.66717201
8 B		B2	52	11.9146004
9 B		B2	71	1.11
10 B		B3	52	1.32
11 B		B4	42	6.48
12 B		B4	52	67.41
13 C		B1	41	0.67
14 C		B1	42	209.06
15 C		B1	52	239.35
16 C		B1	71	2.00
17 C		B2	21	26.87
18 C		B2	22	11.68
19 C		B2	23	0.71
20 C		B2	52	40.83
21 C		B4	21	0.55
22 C		B4	22	0.01
23 C		B4	52	9.26
24 D		B1	42	3716.86
25 D		B1	52	2069.34
26 D		B1	71	435.60
27 D		B1	95	5.56
28 D		B2	21	4.63
29 D		B2	22	2.24
30 D		B2	23	1.51
31 D		B2	42	1.11
32 D		B2	52	429.65
33 D		B3	42	7.64
34 D		B3	52	368.93
35 D		B4	21	0.26
36 D		B4	22	0.17
37 D		B4	42	35.96
38 D		B4	52	448.00

vlookup

NLCD	A	B	C	D
21	68	79	86	89
22	68	79	86	89
23	61	75	83	87
41	36	58	73	80
42	58	75	85	89
52	49	68	79	89
71	39	61	74	80
95	30	55	70	77

Output Breakdown

Basin	gridcode	Soil Group	Area_Acres	ercent of Bas	CN	Weighted_CN
Di1	21 C		29.35	5.10%	86	4.39
	21 D		4.63	0.80%	89	0.72
	22 C		14.36	2.50%	86	2.15
	22 D		3.57	0.62%	89	0.55
	23 C		1.35	0.23%	83	0.19
	23 D		2.85	0.50%	87	0.43
	42 D		3.78	0.66%	89	0.58
	52 C		40.83	7.10%	79	5.61
	52 D		469.94	81.70%	89	72.71
	71 B		4.56	0.79%	61	0.48
Total			575.22			87.82
Di3	42 D		8.94	2.32%	89	2.06
	52 B		1.32	0.34%	68	0.23
	52 D		375.25	97.34%	89	86.63
Total			385.51			88.93

Di2	21 C	0.55	0.09%	86	0.08
	21 D	0.26	0.04%	89	0.04
	22 C	0.01	0.00%	86	0.00
	22 D	0.17	0.03%	89	0.03
	42 B	6.48	1.09%	75	0.81
	42 D	35.96	6.02%	89	5.36
	52 B	67.41	11.29%	68	7.68
	52 C	40.83	6.84%	79	5.40
52 D		445.50	74.60%	89	66.40
Total		597.17			85.79
Di4	41 C	0.67	0.01%	73	0.01
	42 C	246.33	3.37%	85	2.86
	42 D	3924.31	53.68%	89	47.77
	52 C	244.11	3.34%	79	2.64
	52 D	2435.34	33.31%	89	29.65
	71 C	3.57	0.05%	74	0.04
	71 D	449.15	6.14%	80	4.91
	95 D	7.56	0.10%	77	0.08
Total		7311.04			87.96

Calculation Table

	Area, sq-mi	CN (AMC II)	CN (AMC III)	Average Slope, %	Length, ft	CN (PSH)
Di1	0.9	87.8	94.3	14.47%	9900	76.8
Di2	0.9	85.8	93.3	16.26%	9600	73.6
Di3	0.6	88.9	94.9	19.13%	8000	78.8
Di4	11.4	88.0	94.4	19.26%	40700	77.0
	Lag Time (AMC II), hr	Lag Time (AMC III), hr	Tc (AMC II), hr	Tc (AMC III), hr	Initial Abst (AMC II), in	Initial Abst (AMC III), in
Di1	0.40	0.30	0.67	0.50	0.28	0.12
Di2	0.40	0.29	0.66	0.49	0.33	0.14
Di3	0.28	0.22	0.47	0.36	0.25	0.11
Di4	1.07	0.81	1.78	1.35	0.27	0.12

Section 2. Storm Distributions


100-yr 6-hr Hydrograph

Time Step

0.25 hrs
15 min

Interval Time, hr	Unit Hydrograph	Dammeron 1 Detention Basin	Dammeron 2 Detention Basin	Dammeron 3 Detention Basin	Diamond 1 Detention Basin	Diamond 2 Detention Basin	Diamond 3 Detention Basin
		P = 2.51 in	P = 2.64 in	P = 2.50 in	P = 2.51 in	P = 2.55 in	P = 2.52 in
0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00
0.25	0.017	0.04	0.04	0.04	0.04	0.04	0.04
0.50	0.037	0.09	0.10	0.09	0.09	0.10	0.09
0.75	0.058	0.15	0.15	0.15	0.15	0.15	0.15
1.00	0.078	0.20	0.21	0.20	0.20	0.20	0.20
1.25	0.101	0.25	0.27	0.25	0.25	0.26	0.25
1.50	0.130	0.33	0.34	0.33	0.33	0.33	0.33
1.75	0.172	0.43	0.45	0.43	0.43	0.44	0.43
2.00	0.260	0.65	0.69	0.65	0.65	0.66	0.66
2.25	0.410	1.03	1.08	1.03	1.03	1.05	1.03
2.50	0.563	1.41	1.49	1.41	1.41	1.44	1.42
2.75	0.658	1.65	1.74	1.65	1.65	1.68	1.66
3.00	0.700	1.76	1.85	1.75	1.76	1.79	1.76
3.25	0.738	1.85	1.95	1.84	1.85	1.88	1.86
3.50	0.772	1.94	2.04	1.93	1.94	1.97	1.94
3.75	0.803	2.01	2.12	2.01	2.01	2.05	2.02
4.00	0.830	2.08	2.19	2.08	2.08	2.12	2.09
4.25	0.855	2.15	2.26	2.14	2.15	2.18	2.15
4.50	0.880	2.21	2.32	2.20	2.21	2.24	2.22
4.75	0.901	2.26	2.38	2.25	2.26	2.30	2.27
5.00	0.922	2.31	2.43	2.30	2.31	2.35	2.32
5.25	0.943	2.37	2.49	2.36	2.37	2.40	2.38
5.50	0.963	2.42	2.54	2.41	2.42	2.46	2.43
5.75	0.983	2.47	2.60	2.46	2.47	2.51	2.48
6.00	1.000	2.51	2.64	2.50	2.51	2.55	2.52

(NEH 630, Chapter 21, Figure 21-9)

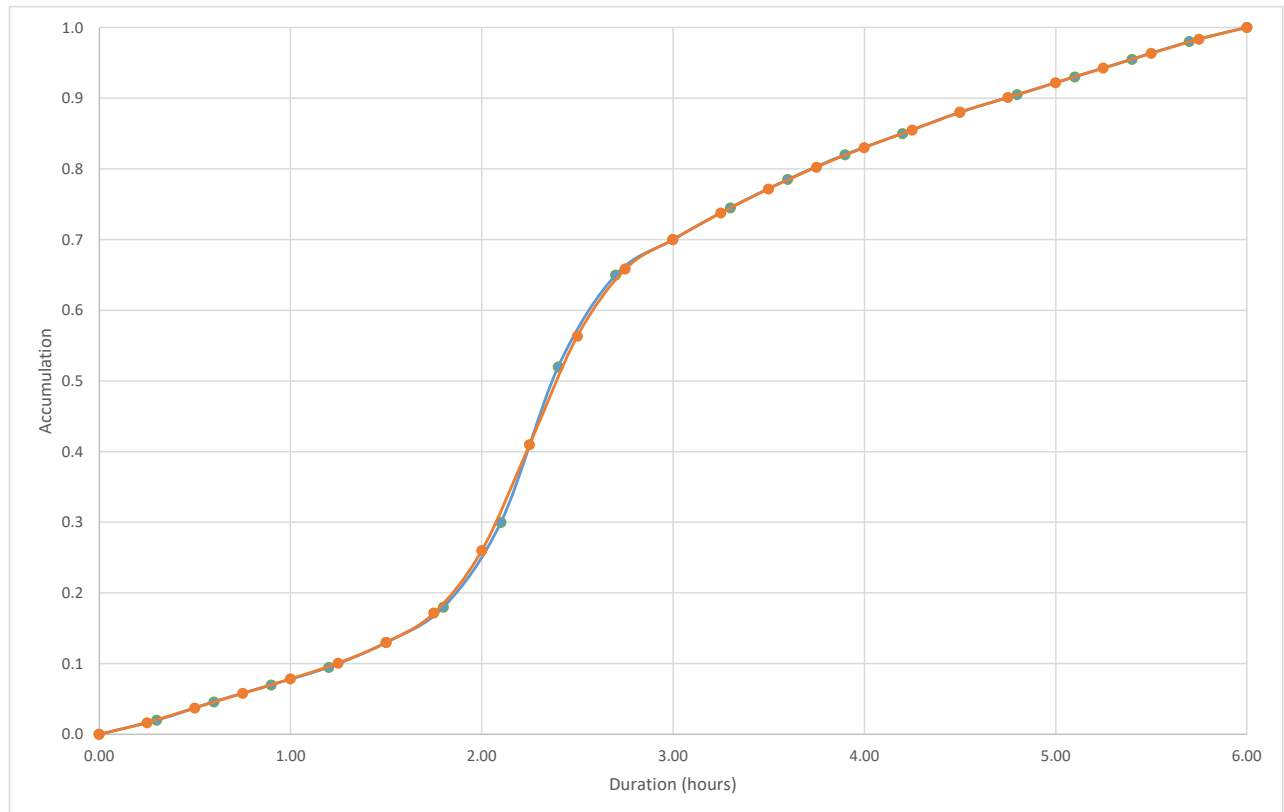


100-yr 24-hr Hydrograph

Time Step

1 hrs
60 min

Interval Time, hr	Unit Hydrograph	Dammeron 1 Detention Basin P = 2.79 in	Dammeron 2 Detention Basin P = 2.95 in	Dammeron 3 Detention Basin P = 2.76 in	Dammeron 4 Channel P = 2.87 in	Diamond 1 Detention Basin P = 2.78 in	Diamond 2 Detention Basin P = 2.88 in	Diamond 3 Detention Basin P = 2.80 in	Diamond 4 Channel P = 3.11 in
0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1.00	0.017	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
2.00	0.037	0.10	0.11	0.10	0.11	0.10	0.11	0.10	0.12
3.00	0.058	0.16	0.17	0.16	0.17	0.16	0.17	0.16	0.18
4.00	0.078	0.22	0.23	0.22	0.22	0.22	0.23	0.22	0.24
5.00	0.101	0.28	0.30	0.28	0.29	0.28	0.29	0.28	0.31
6.00	0.130	0.36	0.38	0.36	0.37	0.36	0.37	0.36	0.40
7.00	0.172	0.48	0.51	0.47	0.49	0.48	0.49	0.48	0.53
8.00	0.260	0.73	0.77	0.72	0.75	0.72	0.75	0.73	0.81
9.00	0.410	1.14	1.21	1.13	1.18	1.14	1.18	1.15	1.28
10.00	0.563	1.57	1.66	1.55	1.62	1.57	1.62	1.58	1.75
11.00	0.658	1.84	1.94	1.82	1.89	1.83	1.90	1.84	2.05
12.00	0.700	1.95	2.07	1.93	2.01	1.95	2.02	1.96	2.18
13.00	0.738	2.06	2.18	2.04	2.12	2.05	2.12	2.07	2.29
14.00	0.772	2.15	2.28	2.13	2.21	2.15	2.22	2.16	2.40
15.00	0.803	2.24	2.37	2.21	2.30	2.23	2.31	2.25	2.50
16.00	0.830	2.32	2.45	2.29	2.38	2.31	2.39	2.32	2.58
17.00	0.855	2.39	2.52	2.36	2.45	2.38	2.46	2.39	2.66
18.00	0.880	2.46	2.60	2.43	2.53	2.45	2.53	2.46	2.74
19.00	0.901	2.51	2.66	2.49	2.59	2.50	2.59	2.52	2.80
20.00	0.922	2.57	2.72	2.54	2.65	2.56	2.65	2.58	2.87
21.00	0.943	2.63	2.78	2.60	2.70	2.62	2.71	2.64	2.93
22.00	0.963	2.69	2.84	2.66	2.76	2.68	2.77	2.70	3.00
23.00	0.983	2.74	2.90	2.71	2.82	2.73	2.83	2.75	3.06
24.00	1.000	2.79	2.95	2.76	2.87	2.78	2.88	2.80	3.11

(NEH 630, Chapter 21, Figure 21-9)

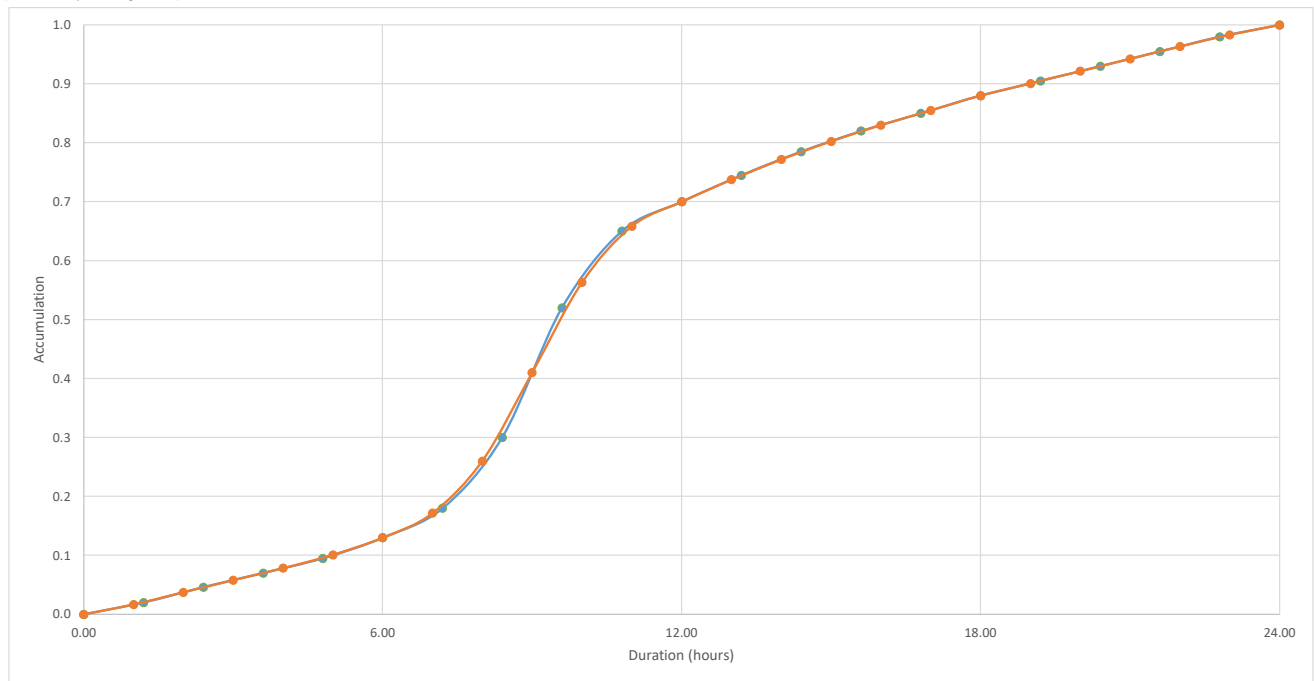


SEP Local (6-hr) Hydrograph

Time Step
0.25 hrs
15 min

Interval Time, hr	Unit Hydrograph	Dammeron 1 Detention Basin	Dammeron 2 Detention Basin	Dammeron 3 Detention Basin	Diamond 1 Detention Basin	Diamond 2 Detention Basin	Diamond 3 Detention Basin
		P = 11.73 in	P = 9.30 in	P = 11.73 in	P = 11.73 in	P = 11.73 in	P = 11.73 in
0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00
0.25	0.017	0.20	0.16	0.20	0.20	0.20	0.20
0.50	0.037	0.44	0.35	0.44	0.44	0.44	0.44
0.75	0.058	0.68	0.54	0.68	0.68	0.68	0.68
1.00	0.078	0.92	0.73	0.92	0.92	0.92	0.92
1.25	0.101	1.18	0.94	1.18	1.18	1.18	1.18
1.50	0.130	1.52	1.21	1.52	1.52	1.52	1.52
1.75	0.172	2.01	1.60	2.01	2.01	2.01	2.01
2.00	0.260	3.05	2.42	3.05	3.05	3.05	3.05
2.25	0.410	4.81	3.81	4.81	4.81	4.81	4.81
2.50	0.563	6.61	5.24	6.61	6.61	6.61	6.61
2.75	0.658	7.72	6.12	7.72	7.72	7.72	7.72
3.00	0.700	8.21	6.51	8.21	8.21	8.21	8.21
3.25	0.738	8.65	6.86	8.65	8.65	8.65	8.65
3.50	0.772	9.05	7.18	9.05	9.05	9.05	9.05
3.75	0.803	9.41	7.46	9.41	9.41	9.41	9.41
4.00	0.830	9.74	7.72	9.74	9.74	9.74	9.74
4.25	0.855	10.03	7.95	10.03	10.03	10.03	10.03
4.50	0.880	10.32	8.18	10.32	10.32	10.32	10.32
4.75	0.901	10.57	8.38	10.57	10.57	10.57	10.57
5.00	0.922	10.81	8.57	10.81	10.81	10.81	10.81
5.25	0.943	11.06	8.77	11.06	11.06	11.06	11.06
5.50	0.963	11.30	8.96	11.30	11.30	11.30	11.30
5.75	0.983	11.53	9.15	11.53	11.53	11.53	11.53
6.00	1.000	11.73	9.30	11.73	11.73	11.73	11.73

(NEH 630, Chapter 21, Figure 21-9)

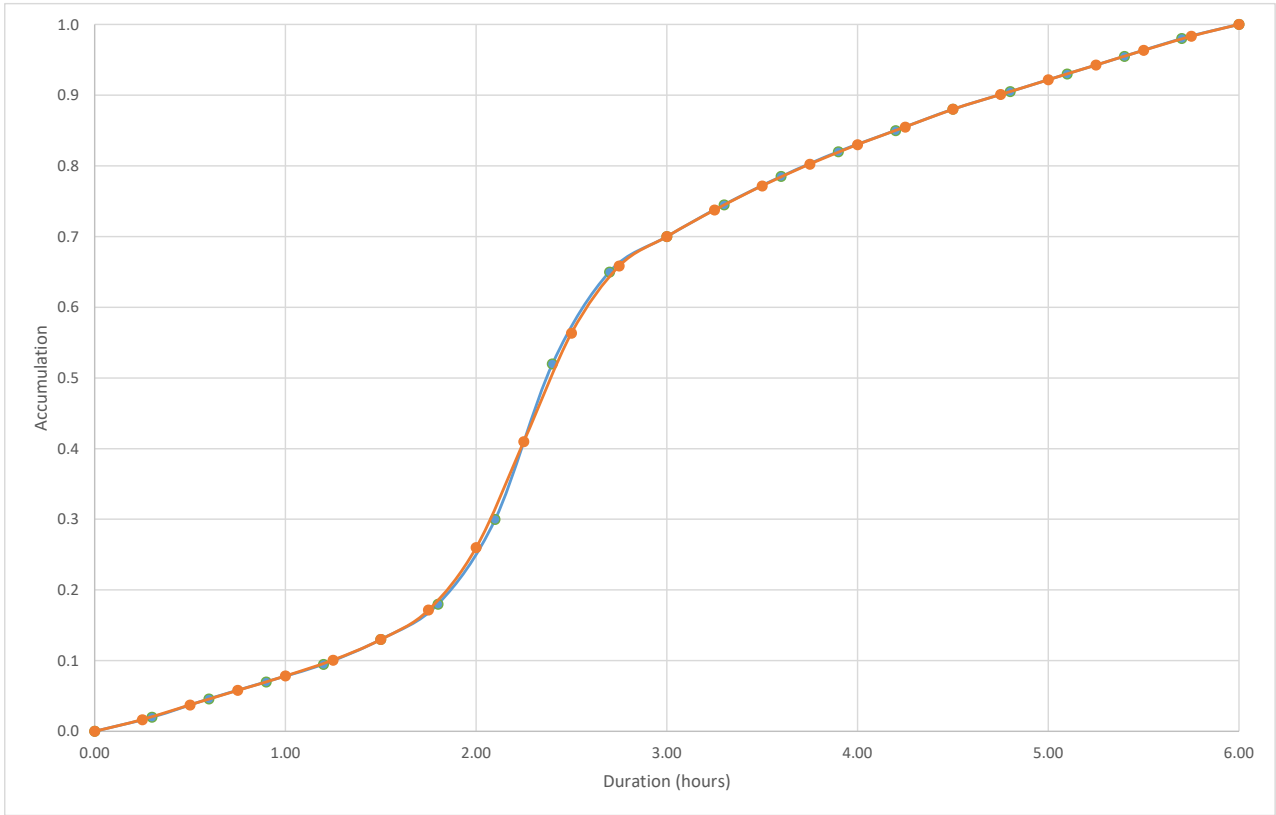


SEP General (72-hr) Hydrograph

Time Step

3 hrs
180 min

Interval Time, hr	Unit Hydrograph	Dammeron 1 Detention Basin	Dammeron 2 Detention Basin	Dammeron 3 Detention Basin	Diamond 1 Detention Basin	Diamond 2 Detention Basin	Diamond 3 Detention Basin
		P = 14.10 in	P = 14.05 in	P = 14.10 in	P = 14.10 in	P = 14.10 in	P = 14.10 in
0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00
3.00	0.017	0.24	0.23	0.24	0.24	0.24	0.24
6.00	0.037	0.53	0.52	0.53	0.53	0.53	0.53
9.00	0.058	0.82	0.81	0.82	0.82	0.82	0.82
12.00	0.078	1.10	1.10	1.10	1.10	1.10	1.10
15.00	0.101	1.42	1.42	1.42	1.42	1.42	1.42
18.00	0.130	1.83	1.83	1.83	1.83	1.83	1.83
21.00	0.172	2.42	2.41	2.42	2.42	2.42	2.42
24.00	0.260	3.67	3.65	3.67	3.67	3.67	3.67
27.00	0.410	5.78	5.76	5.78	5.78	5.78	5.78
30.00	0.563	7.94	7.91	7.94	7.94	7.94	7.94
33.00	0.658	9.28	9.25	9.28	9.28	9.28	9.28
36.00	0.700	9.87	9.84	9.87	9.87	9.87	9.87
39.00	0.738	10.40	10.36	10.40	10.40	10.40	10.40
42.00	0.772	10.88	10.84	10.88	10.88	10.88	10.88
45.00	0.803	11.32	11.28	11.32	11.32	11.32	11.32
48.00	0.830	11.70	11.66	11.70	11.70	11.70	11.70
51.00	0.855	12.06	12.01	12.06	12.06	12.06	12.06
54.00	0.880	12.41	12.36	12.41	12.41	12.41	12.41
57.00	0.901	12.70	12.66	12.70	12.70	12.70	12.70
60.00	0.922	13.00	12.95	13.00	13.00	13.00	13.00
63.00	0.943	13.29	13.24	13.29	13.29	13.29	13.29
66.00	0.963	13.58	13.53	13.58	13.58	13.58	13.58
69.00	0.983	13.87	13.82	13.87	13.87	13.87	13.87
72.00	1.000	14.10	14.05	14.10	14.10	14.10	14.10

(NEH 630, Chapter 21, Figure 21-9)

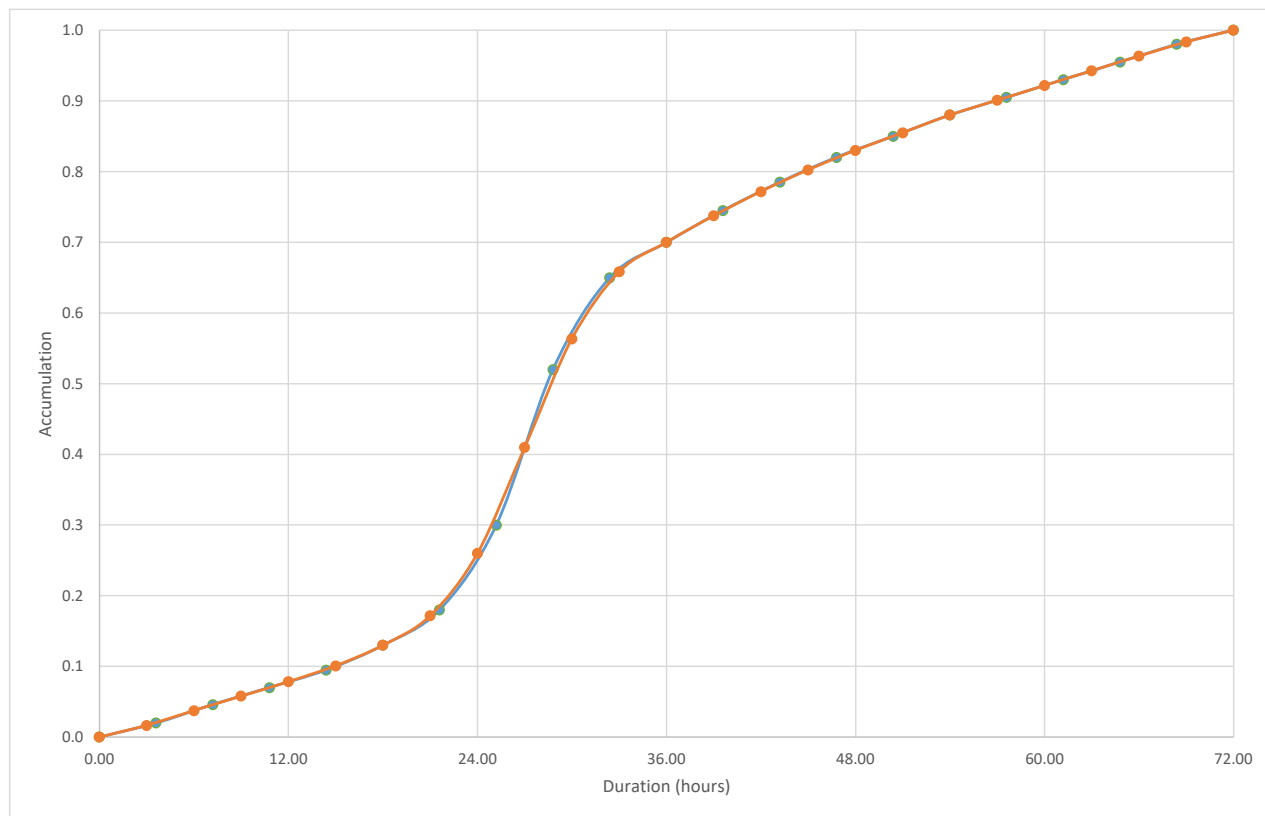

Principal Spillway (10-day) Hydrograph

Time Step

1 hrs
60 min


Interval Time, hr	Unit Hydrograph	Dammeron 1 Detention Basin	Dammeron 2 Detention Basin	Dammeron 3 Detention Basin	Diamond 1 Detention Basin	Diamond 2 Detention Basin	Diamond 3 Detention Basin
		P = 6.53 in	P = 7.15 in	P = 6.43 in	P = 6.54 in	P = 6.78 in	P = 6.64 in
0.0	0.000	0.00	0.00	0.00	0.00	0.00	0.00
1.0	0.001	0.01	0.01	0.01	0.01	0.01	0.01
2.0	0.002	0.01	0.02	0.01	0.01	0.01	0.01
3.0	0.003	0.02	0.02	0.02	0.02	0.02	0.02
4.0	0.004	0.03	0.03	0.03	0.03	0.03	0.03
5.0	0.005	0.03	0.04	0.03	0.03	0.04	0.03
6.0	0.006	0.04	0.05	0.04	0.04	0.04	0.04
7.0	0.007	0.05	0.05	0.05	0.05	0.05	0.05
8.0	0.008	0.05	0.06	0.05	0.05	0.06	0.06
9.0	0.010	0.06	0.07	0.06	0.06	0.06	0.06
10.0	0.011	0.07	0.08	0.07	0.07	0.07	0.07
11.0	0.012	0.08	0.08	0.08	0.08	0.08	0.08
12.0	0.013	0.08	0.09	0.08	0.08	0.09	0.08
13.0	0.014	0.09	0.10	0.09	0.09	0.09	0.09
14.0	0.015	0.10	0.11	0.10	0.10	0.10	0.10
15.0	0.016	0.11	0.12	0.10	0.11	0.11	0.11
16.0	0.017	0.11	0.12	0.11	0.11	0.12	0.11
17.0	0.018	0.12	0.13	0.12	0.12	0.12	0.12
18.0	0.020	0.13	0.14	0.13	0.13	0.13	0.13
19.0	0.021	0.14	0.15	0.13	0.14	0.14	0.14
20.0	0.022	0.14	0.16	0.14	0.14	0.15	0.15
21.0	0.023	0.15	0.17	0.15	0.15	0.16	0.15
22.0	0.024	0.16	0.17	0.16	0.16	0.16	0.16
23.0	0.026	0.17	0.18	0.16	0.17	0.17	0.17
24.0	0.027	0.17	0.19	0.17	0.17	0.18	0.18
25.0	0.028	0.18	0.20	0.18	0.18	0.19	0.19
26.0	0.029	0.19	0.21	0.19	0.19	0.20	0.19
27.0	0.030	0.20	0.22	0.20	0.20	0.21	0.20
28.0	0.032	0.21	0.23	0.20	0.21	0.21	0.21
29.0	0.033	0.21	0.24	0.21	0.22	0.22	0.22
30.0	0.034	0.22	0.24	0.22	0.22	0.23	0.23
31.0	0.035	0.23	0.25	0.23	0.23	0.24	0.24
32.0	0.037	0.24	0.26	0.24	0.24	0.25	0.24
33.0	0.038	0.25	0.27	0.24	0.25	0.26	0.25
34.0	0.039	0.26	0.28	0.25	0.26	0.27	0.26
35.0	0.041	0.27	0.29	0.26	0.27	0.28	0.27
36.0	0.042	0.27	0.30	0.27	0.27	0.28	0.28
37.0	0.043	0.28	0.31	0.28	0.28	0.29	0.29
38.0	0.045	0.29	0.32	0.29	0.29	0.30	0.30
39.0	0.046	0.30	0.33	0.30	0.30	0.31	0.31
40.0	0.048	0.31	0.34	0.31	0.31	0.32	0.32
41.0	0.049	0.32	0.35	0.31	0.32	0.33	0.32
42.0	0.050	0.33	0.36	0.32	0.33	0.34	0.33
43.0	0.052	0.34	0.37	0.33	0.34	0.35	0.34
44.0	0.053	0.35	0.38	0.34	0.35	0.36	0.35
45.0	0.055	0.36	0.39	0.35	0.36	0.37	0.36
46.0	0.056	0.37	0.40	0.36	0.37	0.38	0.37
47.0	0.058	0.38	0.41	0.37	0.38	0.39	0.38
48.0	0.059	0.39	0.42	0.38	0.39	0.40	0.39
49.0	0.061	0.40	0.43	0.39	0.40	0.41	0.40
50.0	0.062	0.41	0.44	0.40	0.41	0.42	0.41
51.0	0.064	0.42	0.46	0.41	0.42	0.43	0.42
52.0	0.065	0.43	0.47	0.42	0.43	0.44	0.43
53.0	0.067	0.44	0.48	0.43	0.44	0.45	0.44
54.0	0.068	0.45	0.49	0.44	0.45	0.46	0.45

55.0	0.070	0.46	0.50	0.45	0.46	0.47	0.46
56.0	0.072	0.47	0.51	0.46	0.47	0.49	0.48
57.0	0.073	0.48	0.52	0.47	0.48	0.50	0.49
58.0	0.075	0.49	0.54	0.48	0.49	0.51	0.50
59.0	0.077	0.50	0.55	0.49	0.50	0.52	0.51
60.0	0.078	0.51	0.56	0.50	0.51	0.53	0.52
61.0	0.080	0.52	0.57	0.52	0.52	0.54	0.53
62.0	0.082	0.53	0.59	0.53	0.54	0.56	0.54
63.0	0.084	0.55	0.60	0.54	0.55	0.57	0.56
64.0	0.086	0.56	0.61	0.55	0.56	0.58	0.57
65.0	0.087	0.57	0.62	0.56	0.57	0.59	0.58
66.0	0.089	0.58	0.64	0.57	0.58	0.60	0.59
67.0	0.091	0.59	0.65	0.59	0.60	0.62	0.60
68.0	0.093	0.61	0.67	0.60	0.61	0.63	0.62
69.0	0.095	0.62	0.68	0.61	0.62	0.64	0.63
70.0	0.097	0.63	0.69	0.62	0.63	0.66	0.64
71.0	0.099	0.65	0.71	0.64	0.65	0.67	0.66
72.0	0.101	0.66	0.72	0.65	0.66	0.68	0.67
73.0	0.103	0.67	0.74	0.66	0.67	0.70	0.68
74.0	0.105	0.69	0.75	0.68	0.69	0.71	0.70
75.0	0.107	0.70	0.77	0.69	0.70	0.73	0.71
76.0	0.110	0.72	0.78	0.70	0.72	0.74	0.73
77.0	0.112	0.73	0.80	0.72	0.73	0.76	0.74
78.0	0.114	0.74	0.81	0.73	0.74	0.77	0.76
79.0	0.116	0.76	0.83	0.75	0.76	0.79	0.77
80.0	0.119	0.77	0.85	0.76	0.78	0.80	0.79
81.0	0.121	0.79	0.86	0.78	0.79	0.82	0.80
82.0	0.123	0.81	0.88	0.79	0.81	0.84	0.82
83.0	0.126	0.82	0.90	0.81	0.82	0.85	0.84
84.0	0.128	0.84	0.92	0.83	0.84	0.87	0.85
85.0	0.131	0.85	0.94	0.84	0.86	0.89	0.87
86.0	0.134	0.87	0.96	0.86	0.87	0.91	0.89
87.0	0.136	0.89	0.97	0.88	0.89	0.92	0.91
88.0	0.139	0.91	0.99	0.89	0.91	0.94	0.92
89.0	0.142	0.93	1.01	0.91	0.93	0.96	0.94
90.0	0.145	0.94	1.03	0.93	0.95	0.98	0.96
91.0	0.148	0.96	1.06	0.95	0.97	1.00	0.98
92.0	0.151	0.98	1.08	0.97	0.99	1.02	1.00
93.0	0.154	1.00	1.10	0.99	1.01	1.04	1.02
94.0	0.157	1.03	1.12	1.01	1.03	1.07	1.04
95.0	0.160	1.05	1.15	1.03	1.05	1.09	1.07
96.0	0.164	1.07	1.17	1.05	1.07	1.11	1.09
97.0	0.167	1.09	1.20	1.08	1.09	1.13	1.11
98.0	0.171	1.12	1.22	1.10	1.12	1.16	1.14
99.0	0.175	1.14	1.25	1.12	1.14	1.19	1.16
100.0	0.179	1.17	1.28	1.15	1.17	1.21	1.19
101.0	0.183	1.19	1.31	1.18	1.20	1.24	1.21
102.0	0.187	1.22	1.34	1.20	1.22	1.27	1.24
103.0	0.191	1.25	1.37	1.23	1.25	1.30	1.27
104.0	0.196	1.28	1.40	1.26	1.28	1.33	1.30
105.0	0.201	1.31	1.44	1.29	1.31	1.36	1.33
106.0	0.206	1.35	1.47	1.32	1.35	1.40	1.37
107.0	0.211	1.38	1.51	1.36	1.38	1.43	1.40
108.0	0.217	1.42	1.55	1.40	1.42	1.47	1.44
109.0	0.223	1.46	1.60	1.44	1.46	1.51	1.48
110.0	0.230	1.50	1.64	1.48	1.50	1.56	1.53
111.0	0.237	1.55	1.69	1.52	1.55	1.61	1.57
112.0	0.245	1.60	1.75	1.57	1.60	1.66	1.62
113.0	0.253	1.65	1.81	1.63	1.66	1.72	1.68
114.0	0.263	1.71	1.88	1.69	1.72	1.78	1.74
115.0	0.274	1.79	1.96	1.76	1.79	1.85	1.82
116.0	0.286	1.87	2.05	1.84	1.87	1.94	1.90
117.0	0.302	1.97	2.16	1.94	1.97	2.05	2.00

118.0	0.322	2.11	2.31	2.07	2.11	2.19	2.14
119.0	0.355	2.32	2.54	2.28	2.32	2.40	2.36
120.0	0.615	4.02	4.40	3.95	4.02	4.17	4.08
121.0	0.663	4.33	4.74	4.27	4.34	4.50	4.40
122.0	0.688	4.49	4.92	4.43	4.50	4.67	4.57
123.0	0.706	4.61	5.05	4.54	4.62	4.79	4.69
124.0	0.720	4.70	5.15	4.63	4.71	4.88	4.78
125.0	0.732	4.78	5.23	4.70	4.78	4.96	4.86
126.0	0.742	4.84	5.30	4.77	4.85	5.03	4.93
127.0	0.751	4.90	5.37	4.83	4.91	5.09	4.99
128.0	0.759	4.95	5.43	4.88	4.96	5.14	5.04
129.0	0.766	5.00	5.48	4.93	5.01	5.19	5.09
130.0	0.773	5.05	5.53	4.97	5.06	5.24	5.13
131.0	0.779	5.09	5.57	5.01	5.10	5.28	5.17
132.0	0.785	5.13	5.61	5.05	5.14	5.32	5.21
133.0	0.791	5.16	5.65	5.08	5.17	5.36	5.25
134.0	0.796	5.20	5.69	5.12	5.21	5.40	5.29
135.0	0.801	5.23	5.73	5.15	5.24	5.43	5.32
136.0	0.806	5.26	5.76	5.18	5.27	5.46	5.35
137.0	0.810	5.29	5.79	5.21	5.30	5.49	5.38
138.0	0.815	5.32	5.82	5.24	5.33	5.52	5.41
139.0	0.819	5.35	5.85	5.26	5.35	5.55	5.44
140.0	0.823	5.37	5.88	5.29	5.38	5.58	5.46
141.0	0.827	5.40	5.91	5.32	5.41	5.60	5.49
142.0	0.830	5.42	5.94	5.34	5.43	5.63	5.51
143.0	0.834	5.45	5.96	5.36	5.45	5.65	5.54
144.0	0.837	5.47	5.99	5.38	5.48	5.68	5.56
145.0	0.841	5.49	6.01	5.41	5.50	5.70	5.58
146.0	0.844	5.51	6.03	5.43	5.52	5.72	5.60
147.0	0.847	5.53	6.06	5.45	5.54	5.74	5.63
148.0	0.850	5.55	6.08	5.47	5.56	5.77	5.65
149.0	0.853	5.57	6.10	5.49	5.58	5.79	5.67
150.0	0.856	5.59	6.12	5.51	5.60	5.81	5.69
151.0	0.859	5.61	6.14	5.52	5.62	5.82	5.70
152.0	0.862	5.63	6.16	5.54	5.64	5.84	5.72
153.0	0.865	5.65	6.18	5.56	5.65	5.86	5.74
154.0	0.867	5.66	6.20	5.58	5.67	5.88	5.76
155.0	0.870	5.68	6.22	5.59	5.69	5.90	5.78
156.0	0.872	5.70	6.24	5.61	5.71	5.91	5.79
157.0	0.875	5.71	6.26	5.63	5.72	5.93	5.81
158.0	0.877	5.73	6.27	5.64	5.74	5.95	5.83
159.0	0.880	5.74	6.29	5.66	5.75	5.96	5.84
160.0	0.882	5.76	6.31	5.67	5.77	5.98	5.86
161.0	0.884	5.78	6.32	5.69	5.78	6.00	5.87
162.0	0.887	5.79	6.34	5.70	5.80	6.01	5.89
163.0	0.889	5.80	6.36	5.72	5.81	6.03	5.90
164.0	0.891	5.82	6.37	5.73	5.83	6.04	5.92
165.0	0.893	5.83	6.39	5.74	5.84	6.06	5.93
166.0	0.895	5.85	6.40	5.76	5.86	6.07	5.95
167.0	0.898	5.86	6.42	5.77	5.87	6.09	5.96
168.0	0.900	5.87	6.43	5.78	5.88	6.10	5.97
169.0	0.902	5.89	6.45	5.80	5.90	6.11	5.99
170.0	0.904	5.90	6.46	5.81	5.91	6.13	6.00
171.0	0.906	5.91	6.47	5.82	5.92	6.14	6.01
172.0	0.907	5.93	6.49	5.83	5.93	6.15	6.03
173.0	0.909	5.94	6.50	5.85	5.95	6.17	6.04
174.0	0.911	5.95	6.52	5.86	5.96	6.18	6.05
175.0	0.913	5.96	6.53	5.87	5.97	6.19	6.06
176.0	0.915	5.97	6.54	5.88	5.98	6.20	6.07
177.0	0.917	5.99	6.55	5.89	6.00	6.22	6.09
178.0	0.918	6.00	6.57	5.91	6.01	6.23	6.10
179.0	0.920	6.01	6.58	5.92	6.02	6.24	6.11
180.0	0.922	6.02	6.59	5.93	6.03	6.25	6.12

181.0	0.924	6.03	6.60	5.94	6.04	6.26	6.13
182.0	0.925	6.04	6.62	5.95	6.05	6.27	6.14
183.0	0.927	6.05	6.63	5.96	6.06	6.29	6.16
184.0	0.929	6.06	6.64	5.97	6.07	6.30	6.17
185.0	0.930	6.07	6.65	5.98	6.08	6.31	6.18
186.0	0.932	6.09	6.66	5.99	6.09	6.32	6.19
187.0	0.934	6.10	6.67	6.00	6.11	6.33	6.20
188.0	0.935	6.11	6.69	6.01	6.11	6.34	6.21
189.0	0.937	6.12	6.70	6.02	6.13	6.35	6.22
190.0	0.938	6.13	6.71	6.03	6.14	6.36	6.23
191.0	0.940	6.14	6.72	6.04	6.15	6.37	6.24
192.0	0.941	6.15	6.73	6.05	6.16	6.38	6.25
193.0	0.943	6.16	6.74	6.06	6.17	6.39	6.26
194.0	0.944	6.16	6.75	6.07	6.17	6.40	6.27
195.0	0.946	6.17	6.76	6.08	6.18	6.41	6.28
196.0	0.947	6.18	6.77	6.09	6.19	6.42	6.29
197.0	0.949	6.19	6.78	6.10	6.20	6.43	6.30
198.0	0.950	6.20	6.79	6.11	6.21	6.44	6.31
199.0	0.951	6.21	6.80	6.12	6.22	6.45	6.32
200.0	0.953	6.22	6.81	6.13	6.23	6.46	6.33
201.0	0.954	6.23	6.82	6.13	6.24	6.47	6.34
202.0	0.955	6.24	6.83	6.14	6.25	6.48	6.34
203.0	0.957	6.25	6.84	6.15	6.26	6.49	6.35
204.0	0.958	6.26	6.85	6.16	6.27	6.50	6.36
205.0	0.960	6.27	6.86	6.17	6.28	6.51	6.37
206.0	0.961	6.27	6.87	6.18	6.28	6.51	6.38
207.0	0.962	6.28	6.88	6.19	6.29	6.52	6.39
208.0	0.963	6.29	6.89	6.19	6.30	6.53	6.40
209.0	0.965	6.30	6.90	6.20	6.31	6.54	6.41
210.0	0.966	6.31	6.91	6.21	6.32	6.55	6.41
211.0	0.967	6.32	6.92	6.22	6.33	6.56	6.42
212.0	0.969	6.32	6.92	6.23	6.33	6.57	6.43
213.0	0.970	6.33	6.93	6.24	6.34	6.57	6.44
214.0	0.971	6.34	6.94	6.24	6.35	6.58	6.45
215.0	0.972	6.35	6.95	6.25	6.36	6.59	6.46
216.0	0.973	6.36	6.96	6.26	6.37	6.60	6.46
217.0	0.975	6.36	6.97	6.27	6.37	6.61	6.47
218.0	0.976	6.37	6.98	6.27	6.38	6.62	6.48
219.0	0.977	6.38	6.99	6.28	6.39	6.62	6.49
220.0	0.978	6.39	6.99	6.29	6.40	6.63	6.49
221.0	0.979	6.39	7.00	6.30	6.40	6.64	6.50
222.0	0.981	6.40	7.01	6.30	6.41	6.65	6.51
223.0	0.982	6.41	7.02	6.31	6.42	6.66	6.52
224.0	0.983	6.42	7.03	6.32	6.43	6.66	6.53
225.0	0.984	6.42	7.03	6.33	6.43	6.67	6.53
226.0	0.985	6.43	7.04	6.33	6.44	6.68	6.54
227.0	0.986	6.44	7.05	6.34	6.45	6.69	6.55
228.0	0.987	6.45	7.06	6.35	6.46	6.69	6.56
229.0	0.988	6.45	7.07	6.36	6.46	6.70	6.56
230.0	0.989	6.46	7.07	6.36	6.47	6.71	6.57
231.0	0.991	6.47	7.08	6.37	6.48	6.72	6.58
232.0	0.992	6.48	7.09	6.38	6.49	6.72	6.58
233.0	0.993	6.48	7.10	6.38	6.49	6.73	6.59
234.0	0.994	6.49	7.11	6.39	6.50	6.74	6.60
235.0	0.995	6.50	7.11	6.40	6.51	6.74	6.61
236.0	0.996	6.50	7.12	6.40	6.51	6.75	6.61
237.0	0.997	6.51	7.13	6.41	6.52	6.76	6.62
238.0	0.998	6.52	7.13	6.42	6.53	6.77	6.63
239.0	0.999	6.52	7.14	6.42	6.53	6.77	6.63
240.0	1.000	6.53	7.15	6.43	6.54	6.78	6.64

* SITES Output

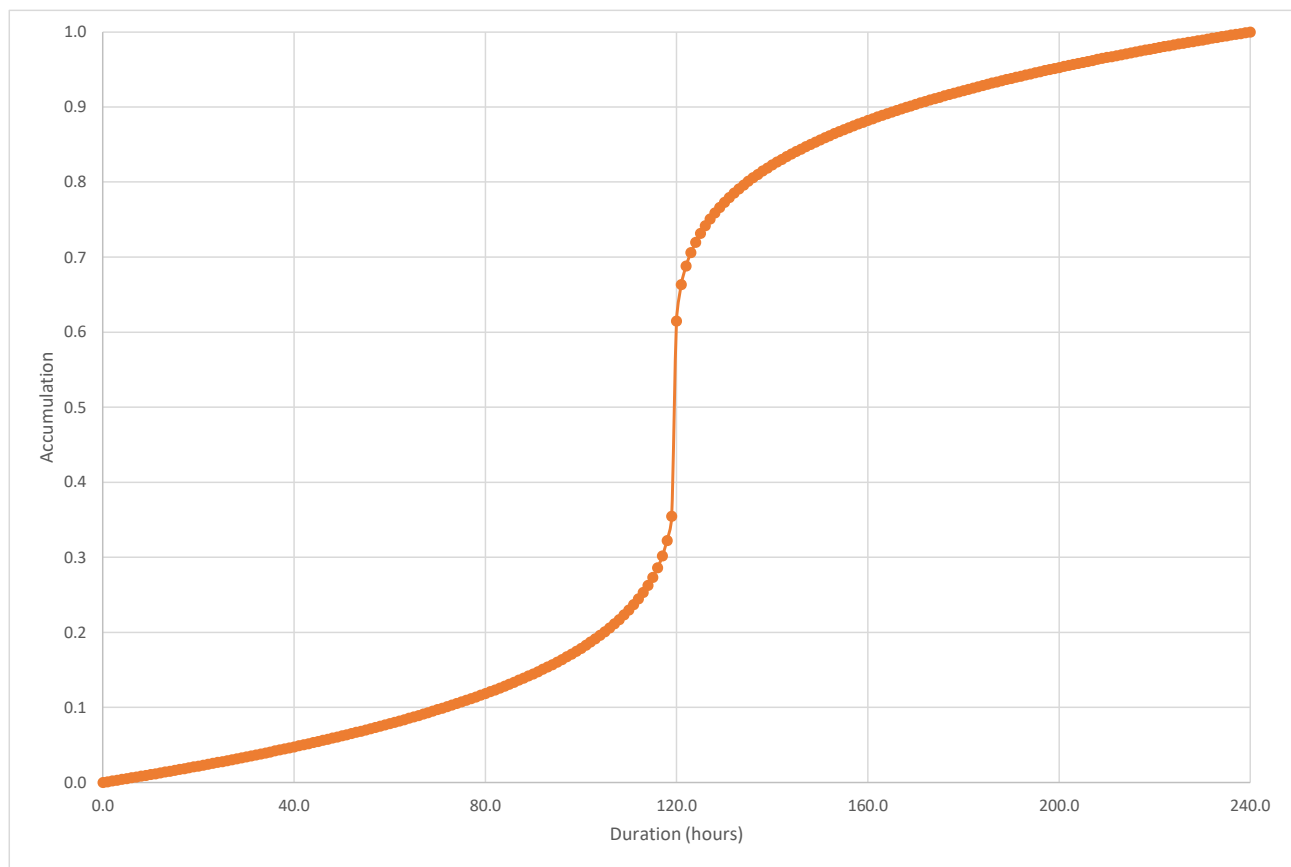

Auxiliary Spillway Local (6-hr) Hydrograph


Time Step

0.25 hrs

15 min

Interval Time, hr	Unit Hydrograph	Dammon 1 Detention Basin	Dammon 2 Detention Basin	Dammon 3 Detention Basin	Diamond 1 Detention Basin	Diamond 2 Detention Basin	Diamond 3 Detention Basin
		P = 4.91 in	P = 4.37 in	P = 4.90 in	P = 4.91 in	P = 4.94 in	P = 4.91 in
0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00
0.25	0.017	0.08	0.07	0.08	0.08	0.08	0.08
0.50	0.037	0.18	0.16	0.18	0.18	0.18	0.18
0.75	0.058	0.28	0.25	0.28	0.28	0.29	0.28
1.00	0.078	0.38	0.34	0.38	0.38	0.39	0.38
1.25	0.101	0.50	0.44	0.49	0.50	0.50	0.50
1.50	0.130	0.64	0.57	0.64	0.64	0.64	0.64
1.75	0.172	0.84	0.75	0.84	0.84	0.85	0.84
2.00	0.260	1.28	1.14	1.27	1.28	1.28	1.28
2.25	0.410	2.01	1.79	2.01	2.01	2.03	2.01
2.50	0.563	2.77	2.46	2.76	2.77	2.78	2.77
2.75	0.658	3.23	2.88	3.23	3.23	3.25	3.23
3.00	0.700	3.44	3.06	3.43	3.44	3.46	3.44
3.25	0.738	3.62	3.22	3.61	3.62	3.64	3.62
3.50	0.772	3.79	3.37	3.78	3.79	3.81	3.79
3.75	0.803	3.94	3.51	3.93	3.94	3.96	3.94
4.00	0.830	4.08	3.63	4.07	4.08	4.10	4.08
4.25	0.855	4.20	3.74	4.19	4.20	4.22	4.20
4.50	0.880	4.32	3.85	4.31	4.32	4.35	4.32
4.75	0.901	4.42	3.94	4.41	4.42	4.45	4.42
5.00	0.922	4.53	4.03	4.52	4.53	4.55	4.53
5.25	0.943	4.63	4.12	4.62	4.63	4.66	4.63
5.50	0.963	4.73	4.21	4.72	4.73	4.76	4.73
5.75	0.983	4.83	4.30	4.82	4.83	4.86	4.83
6.00	1.000	4.91	4.37	4.90	4.91	4.94	4.91

(NEH 630, Chapter 21, Figure 21-9)

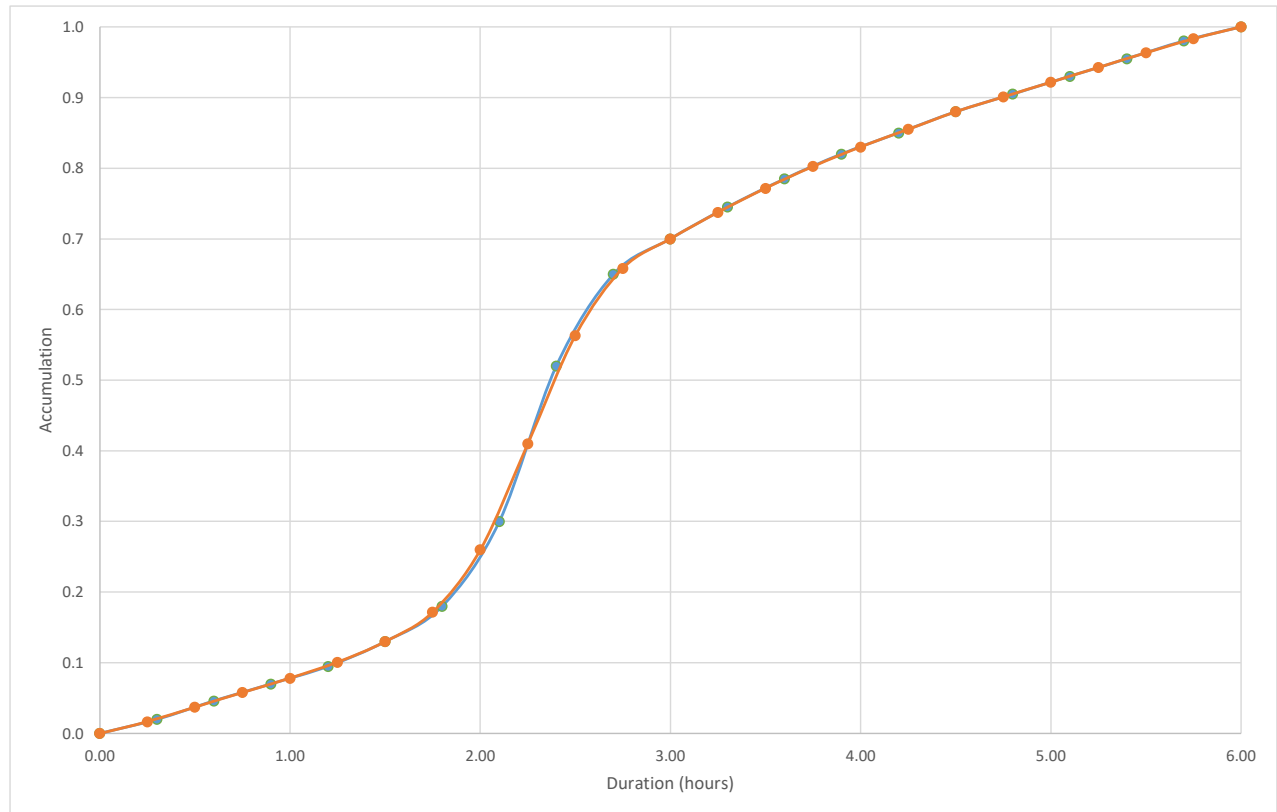


Auxiliary Spillway General (24-hr) Hydrograph

Time Step

1 hrs
60 min

Interval Time, hr	Unit Hydrograph	Dammeron 1 Detention Basin	Dammeron 2 Detention Basin	Dammeron 3 Detention Basin	Diamond 1 Detention Basin	Diamond 2 Detention Basin	Diamond 3 Detention Basin
		P = 5.73 in	P = 5.84 in	P = 5.71 in	P = 5.72 in	P = 5.80 in	P = 5.74 in
0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00
1.00	0.017	0.10	0.10	0.10	0.10	0.10	0.10
2.00	0.037	0.21	0.22	0.21	0.21	0.22	0.21
3.00	0.058	0.33	0.34	0.33	0.33	0.34	0.33
4.00	0.078	0.45	0.46	0.45	0.45	0.45	0.45
5.00	0.101	0.58	0.59	0.58	0.58	0.58	0.58
6.00	0.130	0.74	0.76	0.74	0.74	0.75	0.75
7.00	0.172	0.98	1.00	0.98	0.98	1.00	0.99
8.00	0.260	1.49	1.52	1.48	1.49	1.51	1.49
9.00	0.410	2.35	2.39	2.34	2.35	2.38	2.35
10.00	0.563	3.23	3.29	3.22	3.22	3.27	3.23
11.00	0.658	3.77	3.84	3.76	3.77	3.82	3.78
12.00	0.700	4.01	4.09	4.00	4.00	4.06	4.02
13.00	0.738	4.23	4.31	4.21	4.22	4.28	4.23
14.00	0.772	4.42	4.51	4.41	4.41	4.48	4.43
15.00	0.803	4.60	4.69	4.58	4.59	4.65	4.61
16.00	0.830	4.76	4.85	4.74	4.75	4.81	4.76
17.00	0.855	4.90	4.99	4.88	4.89	4.96	4.91
18.00	0.880	5.04	5.14	5.02	5.03	5.10	5.05
19.00	0.901	5.16	5.26	5.14	5.15	5.22	5.17
20.00	0.922	5.28	5.38	5.26	5.27	5.35	5.29
21.00	0.943	5.40	5.50	5.38	5.39	5.47	5.41
22.00	0.963	5.52	5.63	5.50	5.51	5.59	5.53
23.00	0.983	5.63	5.74	5.61	5.62	5.70	5.64
24.00	1.000	5.73	5.84	5.71	5.72	5.80	5.74

(NEH 630, Chapter 21, Figure 21-9)

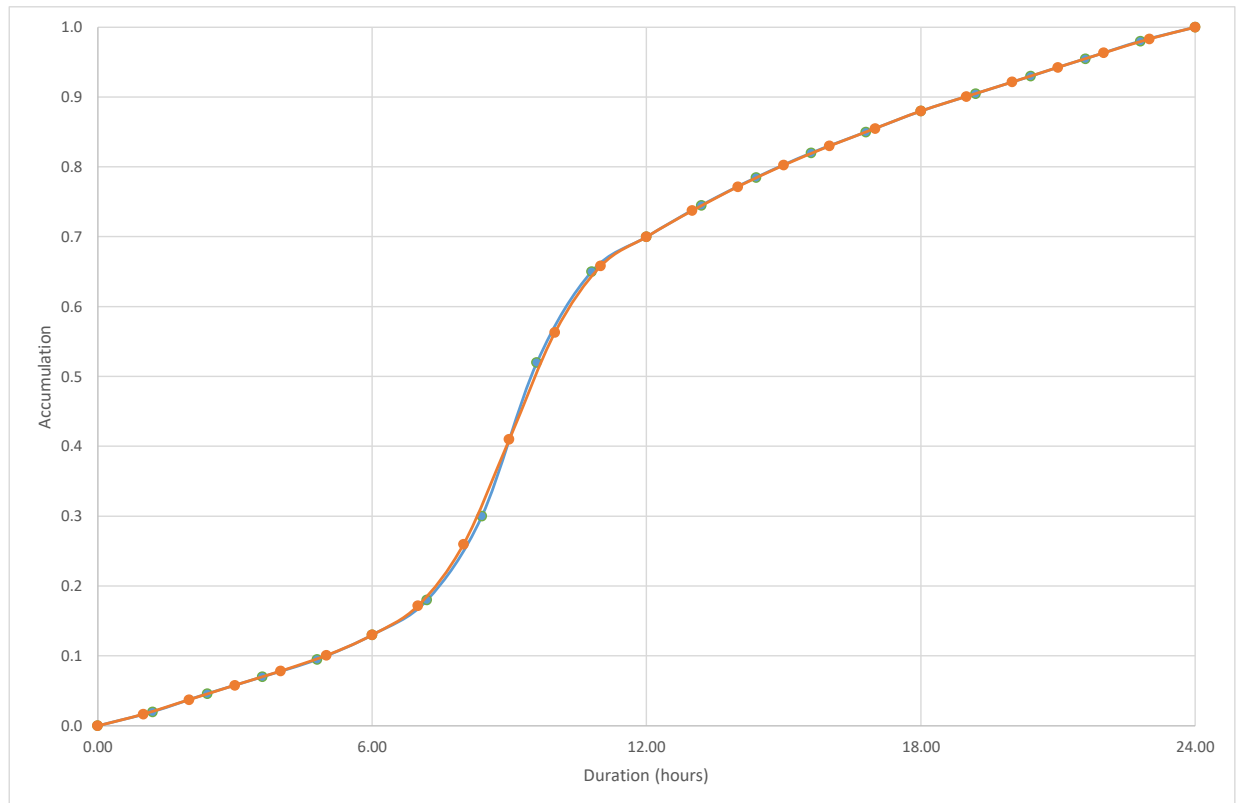

Freeboard Local (6-hr) Hydrograph


Time Step

0.25 hrs

15 min

Interval Time, hr	Unit Hydrograph	Dammeron 1 Detention Basin	Dammeron 2 Detention Basin	Dammeron 3 Detention Basin	Diamond 1 Detention Basin	Diamond 2 Detention Basin	Diamond 3 Detention Basin
		P = 11.73 in	P = 9.30 in	P = 11.73 in	P = 11.73 in	P = 11.73 in	P = 11.73 in
0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00
0.25	0.017	0.20	0.16	0.20	0.20	0.20	0.20
0.50	0.037	0.44	0.35	0.44	0.44	0.44	0.44
0.75	0.058	0.68	0.54	0.68	0.68	0.68	0.68
1.00	0.078	0.92	0.73	0.92	0.92	0.92	0.92
1.25	0.101	1.18	0.94	1.18	1.18	1.18	1.18
1.50	0.130	1.52	1.21	1.52	1.52	1.52	1.52
1.75	0.172	2.01	1.60	2.01	2.01	2.01	2.01
2.00	0.260	3.05	2.42	3.05	3.05	3.05	3.05
2.25	0.410	4.81	3.81	4.81	4.81	4.81	4.81
2.50	0.563	6.61	5.24	6.61	6.61	6.61	6.61
2.75	0.658	7.72	6.12	7.72	7.72	7.72	7.72
3.00	0.700	8.21	6.51	8.21	8.21	8.21	8.21
3.25	0.738	8.65	6.86	8.65	8.65	8.65	8.65
3.50	0.772	9.05	7.18	9.05	9.05	9.05	9.05
3.75	0.803	9.41	7.46	9.41	9.41	9.41	9.41
4.00	0.830	9.74	7.72	9.74	9.74	9.74	9.74
4.25	0.855	10.03	7.95	10.03	10.03	10.03	10.03
4.50	0.880	10.32	8.18	10.32	10.32	10.32	10.32
4.75	0.901	10.57	8.38	10.57	10.57	10.57	10.57
5.00	0.922	10.81	8.57	10.81	10.81	10.81	10.81
5.25	0.943	11.06	8.77	11.06	11.06	11.06	11.06
5.50	0.963	11.30	8.96	11.30	11.30	11.30	11.30
5.75	0.983	11.53	9.15	11.53	11.53	11.53	11.53
6.00	1.000	11.73	9.30	11.73	11.73	11.73	11.73

(NEH 630, Chapter 21, Figure 21-9)

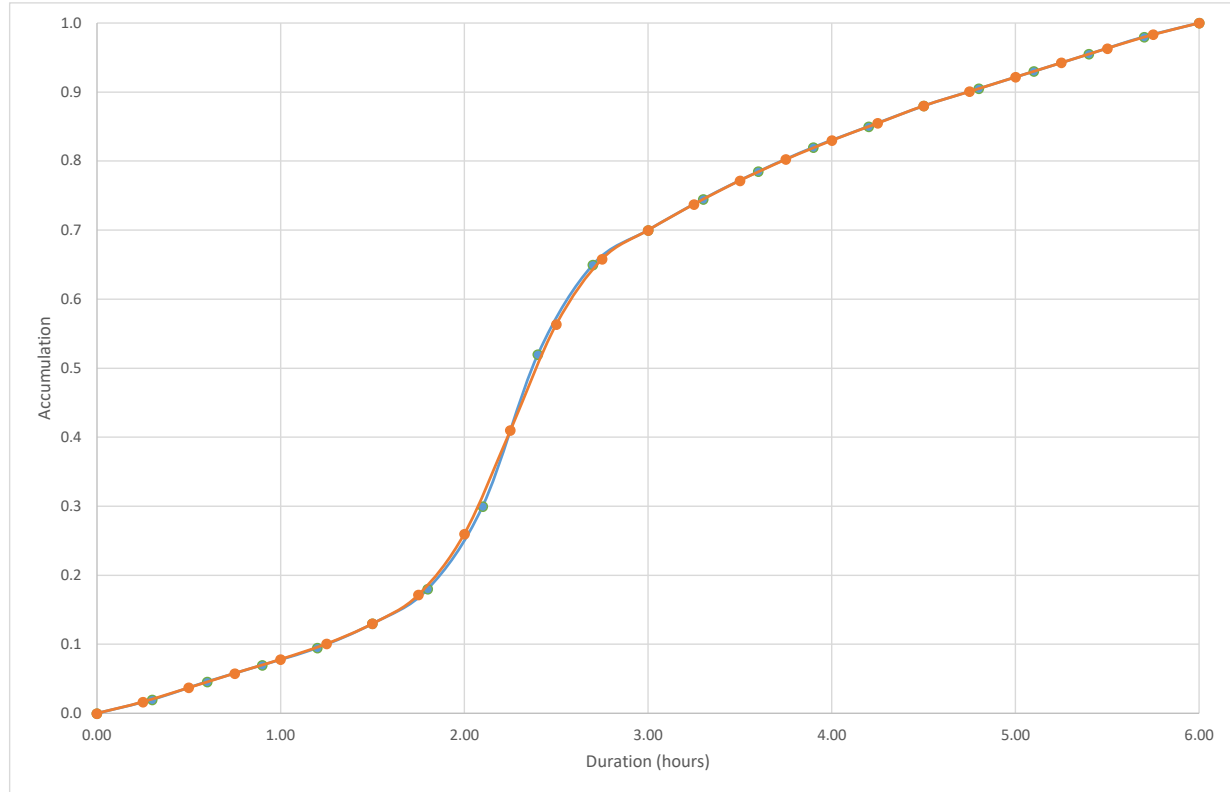


Freeboard General (24-hr) Hydrograph

Time Step

1 hrs
60 min

Interval Time, hr	Unit Hydrograph	Dammeron 1 Detention Basin	Dammeron 2 Detention Basin	Dammeron 3 Detention Basin	Diamond 1 Detention Basin	Diamond 2 Detention Basin	Diamond 3 Detention Basin
		P = 14.10 in	P = 14.05 in	P = 14.10 in	P = 14.10 in	P = 14.10 in	P = 14.10 in
0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00
1.00	0.017	0.24	0.23	0.24	0.24	0.24	0.24
2.00	0.037	0.53	0.52	0.53	0.53	0.53	0.53
3.00	0.058	0.82	0.81	0.82	0.82	0.82	0.82
4.00	0.078	1.10	1.10	1.10	1.10	1.10	1.10
5.00	0.101	1.42	1.42	1.42	1.42	1.42	1.42
6.00	0.130	1.83	1.83	1.83	1.83	1.83	1.83
7.00	0.172	2.42	2.41	2.42	2.42	2.42	2.42
8.00	0.260	3.67	3.65	3.67	3.67	3.67	3.67
9.00	0.410	5.78	5.76	5.78	5.78	5.78	5.78
10.00	0.563	7.94	7.91	7.94	7.94	7.94	7.94
11.00	0.658	9.28	9.25	9.28	9.28	9.28	9.28
12.00	0.700	9.87	9.84	9.87	9.87	9.87	9.87
13.00	0.738	10.40	10.36	10.40	10.40	10.40	10.40
14.00	0.772	10.88	10.84	10.88	10.88	10.88	10.88
15.00	0.803	11.32	11.28	11.32	11.32	11.32	11.32
16.00	0.830	11.70	11.66	11.70	11.70	11.70	11.70
17.00	0.855	12.06	12.01	12.06	12.06	12.06	12.06
18.00	0.880	12.41	12.36	12.41	12.41	12.41	12.41
19.00	0.901	12.70	12.66	12.70	12.70	12.70	12.70
20.00	0.922	13.00	12.95	13.00	13.00	13.00	13.00
21.00	0.943	13.29	13.24	13.29	13.29	13.29	13.29
22.00	0.963	13.58	13.53	13.58	13.58	13.58	13.58
23.00	0.983	13.87	13.82	13.87	13.87	13.87	13.87
24.00	1.000	14.10	14.05	14.10	14.10	14.10	14.10

(NEH 630, Chapter 21, Figure 21-9)

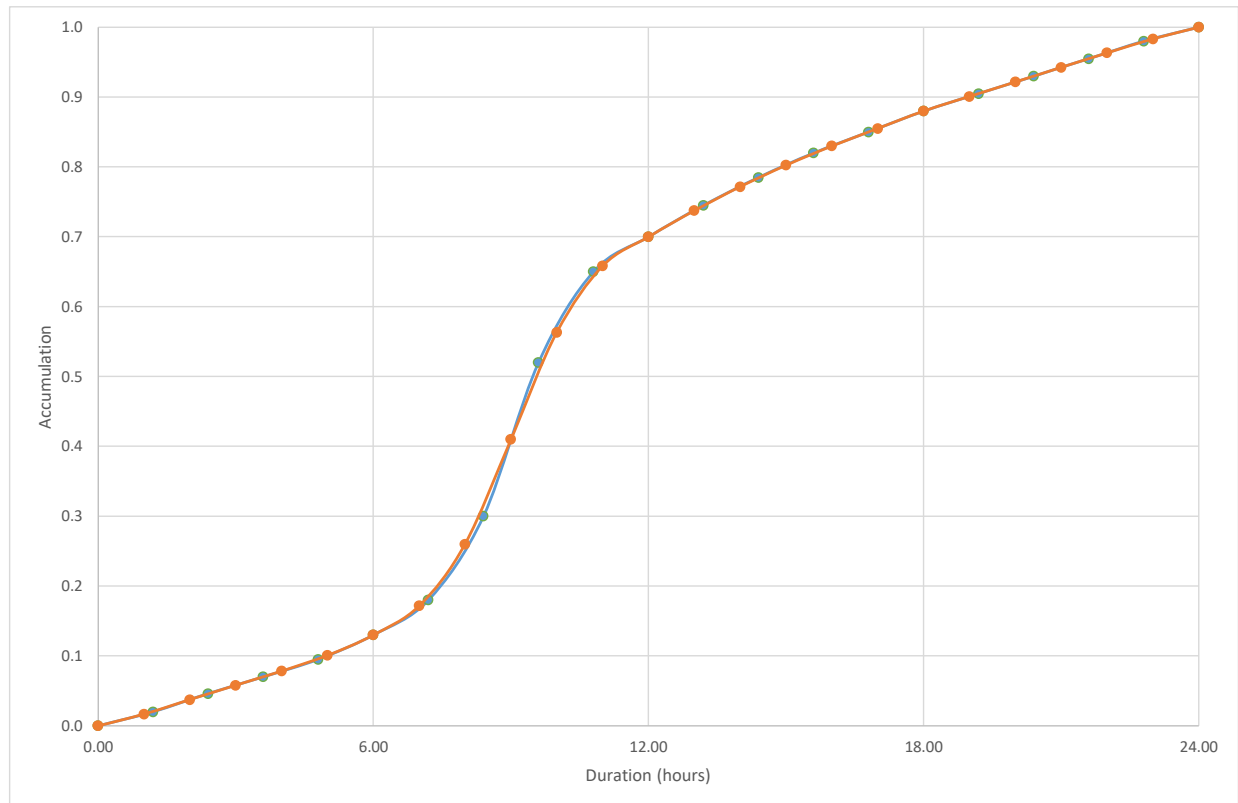

Section 3. Precipitation Values

Precipitation Value - 100-yr Hydrographs (Storm Events 01 through 03)

Description: The NOAA Precipitation Value is taken from the NOAA Precipitation Frequency Data Server (PFDS). The precipitation value for entire the basin area is taken by using the PFDS value at the drainage basin centroid.

NOAA

100-year Point Precipitation Value

	6-hour	24-hour	72-hour	10-day
Dammeron 1 Detention Basin	2.51	2.79	3.63	6.53
Dammeron 2 Detention Basin	2.64	2.95	3.83	7.15
Dammeron 3 Detention Basin	2.50	2.76	3.58	6.43
Dammeron 4 Channel	2.55	2.87	3.73	6.69
Diamond 1 Detention Basin	2.51	2.78	3.62	6.54
Diamond 2 Detention Basin	2.55	2.88	3.75	6.78
Diamond 3 Detention Basin	2.52	2.80	3.66	6.64
Diamond 4 Channel	2.74	3.11	4.07	7.66

Precipitation Value - Local SEP Hydrograph (Storm Event 04)

Description: The Local SEP Value is the Probable Maximum Precipitation to occur ever for a period of 6 hours. It involves evaluation of the average PMP and the areal distribution of the PMP within the drainage area using methods outlined in HMR 49. Donald T. Jensen with Utah State University was commissioned to provide an update to HMR 49 resulting in the *Probable Maximum Precipitation Estimates for Short-Duration, Small-Area Storms in Utah*. The study uses the 1-hour Point PMP Value for 1 mi², taken from HMR 49, and applies updated reduction factors for elevation, duration, and area to adjust the value to match the characteristics of the drainage basin.

Local SEP Initial Precipitation Value (1-hr, 1-mi²):
10.2 in (Fig. 4.5. HMR 49, 1984)

Duration and Areal Variation:
Duration: 6 hrs

Dam	Area	Depth-Area-Duration Value ¹	Local SEP Value
Dammeron 1 Detention Basin	0.3 sq-mi	115.0%	11.73 in
Dammeron 2 Detention Basin	3.6 sq-mi	91.2%	9.30 in
Dammeron 3 Detention Basin	0.7 sq-mi	115.0%	11.73 in
Diamond 1 Detention Basin	0.9 sq-mi	115.0%	11.73 in
Diamond 2 Detention Basin	0.9 sq-mi	115.0%	11.73 in
Diamond 3 Detention Basin	0.6 sq-mi	115.0%	11.73 in

¹ Table 15. *Probable Maximum Precipitation for Short-Duration, Short-Area Storms in Utah*, Jensen. 1995, 2002

Precipitation Value - General SEP Hydrograph (Storm Event 05)

Description

The General SEP Value is the Probable Maximum Precipitation to occur ever for a period of 72 hours. It involves evaluation of the Convergence PMP (precipitation resulting from atmospheric processes not affected by terrain) and the Orographic PMP (precipitation resulting from atmospheric processes affected by terrain) using methods outlined in HMR 49. Convergence and orographic precipitation can occur simultaneously. Donald T. Jensen with Utah State University was commissioned to provide an update to HMR 49 resulting in the *2002 Update for Probable Maximum Precipitation, Utah, 72-Hour Estimates, Areas to 5,000 mi²*. The study updates the 72-hour Point PMP Value for 10 mi², as shown in Figure 1 of the said study, from which the SEP value is calculated. This point value includes adjustments from barrier and elevation variations and the orographic component. An area reduction factor is applied to adjust the value to match the size of the drainage basin.

General SEP

Point PMP 72-hr Precipitation Value:

14.1 in

(Fig. 1. *2002 Update for Probably Maximum Precipitation, Utah, 72-Hour Estimates, Areas to 5,000 mi²*, Jensen. 2003)

Areal Variation

Dam	Area	Depth-Area Value ¹	General SEP Value
Dammeron 1 Detention Basin	0.3 sq-mi	100.0%	14.10 in
Dammeron 2 Detention Basin	3.6 sq-mi	99.6%	14.05 in
Dammeron 3 Detention Basin	0.7 sq-mi	100.0%	14.10 in
Diamond 1 Detention Basin	0.9 sq-mi	100.0%	14.10 in
Diamond 2 Detention Basin	0.9 sq-mi	100.0%	14.10 in
Diamond 3 Detention Basin	0.6 sq-mi	100.0%	14.10 in

¹ Table 1. *2002 Update for Probably Maximum Precipitation, Utah, 72-Hour Estimates, Areas to 5,000 mi²*, Jensen. 2003

Precipitation Value - Principal Spillway Hydrographs (Storm Event 06)

Description

The PSH Storm Event is the precipitation event used to design the principal spillway as determined by the equations set forth in TR-60, Table Figure 2-1, using the 100-year precipitation value.

10-Day PSH

Dam	10-day P100	10-day PSH Value ¹
Dammeron 1 Detention Basin	6.53 in	6.53 in
Dammeron 2 Detention Basin	7.15 in	7.15 in
Dammeron 3 Detention Basin	6.43 in	6.43 in
Diamond 1 Detention Basin	6.54 in	6.54 in
Diamond 2 Detention Basin	6.78 in	6.78 in
Diamond 3 Detention Basin	6.64 in	6.64 in

¹ TR-60, Figure 2-1

Precipitation Value - Auxiliary Spillway Hydrographs (Storm Events 07 and 08)

Description

The ASH Storm Events are the maximum precipitation events used to design the auxiliary spillway and top of dam elevation as determined by the equations set forth in TR-60, Table Figure 2-2, using the SEP precipitation value and the 100-year precipitation value.

Local ASH

Dam	Local P100	Local SEP (PMP)	Local ASH Value ¹
Dammeron 1 Detention Basin	2.51 in	11.73 in	4.91 in
Dammeron 2 Detention Basin	2.64 in	9.30 in	4.37 in
Dammeron 3 Detention Basin	2.50 in	11.73 in	4.90 in
Diamond 1 Detention Basin	2.51 in	11.73 in	4.91 in
Diamond 2 Detention Basin	2.55 in	11.73 in	4.94 in
Diamond 3 Detention Basin	2.52 in	11.73 in	4.91 in

¹ TR-60, Figure 2-2

General ASH

Dam	General P100	General SEP (PMP)	General ASH Value ¹
Dammeron 1 Detention Basin	2.79 in	14.10 in	5.73 in
Dammeron 2 Detention Basin	2.95 in	14.05 in	5.84 in
Dammeron 3 Detention Basin	2.76 in	14.10 in	5.71 in
Diamond 1 Detention Basin	2.78 in	14.10 in	5.72 in
Diamond 2 Detention Basin	2.88 in	14.10 in	5.80 in
Diamond 3 Detention Basin	2.80 in	14.10 in	5.74 in

¹ TR-60, Figure 2-2

Precipitation Value - Freeboard Hydrographs (Storm Events 09 and 10)

Description

The FBH Storm Events are the maximum precipitation events used to design the spillway and top of dam elevation as determined by the equations set forth in TR-60, Table Figure 2-2, using the PMP precipitation value (and applying a duration reduction factor for the 24-hour General FBH).

Local FBH

Dam	Local P100	Local SEP (PMP)	Local FBH Value ¹
Dammeron 1 Detention Basin	2.51 in	11.73 in	11.73 in
Dammeron 2 Detention Basin	2.64 in	9.30 in	9.30 in
Dammeron 3 Detention Basin	2.50 in	11.73 in	11.73 in
Diamond 1 Detention Basin	2.51 in	11.73 in	11.73 in
Diamond 2 Detention Basin	2.55 in	11.73 in	11.73 in
Diamond 3 Detention Basin	2.52 in	11.73 in	11.73 in

¹ TR-60, Figure 2-2

General FBH

Dam	General P100	General SEP (PMP)	General FBH Value ¹
Dammeron 1 Detention Basin	2.79 in	14.10 in	14.10 in
Dammeron 2 Detention Basin	2.95 in	14.05 in	14.05 in
Dammeron 3 Detention Basin	2.76 in	14.10 in	14.10 in
Diamond 1 Detention Basin	2.78 in	14.10 in	14.10 in
Diamond 2 Detention Basin	2.88 in	14.10 in	14.10 in
Diamond 3 Detention Basin	2.80 in	14.10 in	14.10 in

¹ TR-60, Figure 2-2

Appendix C. Model Output

Project: Santa Clara E A

Simulation Run: Storm Event 01

Simulation Start: 31 December 1999, 24:00

Simulation End: 2 January 2000, 03:00

HMS Version: 4.8

Executed: 23 April 2021, 02:27

Global Parameter Summary - Subbasin

Area (ft²)			
Element Name	Area (ft²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2		
Da3	Reservoir - Da3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious Area	Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	

Di3	16.8 Standard
Di4	64.2 Standard

Global Parameter Summary - Reach

Downstream														
Element Name		Downstream												
Reach - Di3 to Di2 Reservoir - Di2														
Reach - Di2 to Di1 Reservoir - Di1														
Route: Muskingum Cunge														
Element Name	Method	Channel	Length (ft)	Energy Slope	Mannings n	Bottom Width	Side Slope	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations	
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30	
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30	

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	57.25	01Jan2000, 10:00	1.55
Reservoir - Da1	0.3	3.57	02Jan2000, 00:10	0.31
Da2	3.6	534.86	01Jan2000, 10:40	1.47
Reservoir - Da2	3.6	20.82	02Jan2000, 01:42	0.13
Da3	0.7	130.31	01Jan2000, 10:06	1.59
Reservoir - Da3	0.7	6.05	02Jan2000, 00:34	0.22
Da4	1.7	287.91	01Jan2000, 10:24	1.57
Di1	0.9	170.81	01Jan2000, 10:06	1.61
Reservoir - Di1	0.9	52.92	01Jan2000, 23:22	1.54
Di2	0.9	162.26	01Jan2000, 10:08	1.55
Reservoir - Di2	0.9	10.82	01Jan2000, 10:14	0.33
Di3	0.6	122.39	01Jan2000, 10:04	1.71
Reservoir - Di3	0.6	9.74	01Jan2000, 10:10	0.45
Di4	11.4	2225.38	01Jan2000, 10:38	1.92
Junction - 1	4.6	30.38	02Jan2000, 01:22	0.16
Junction - 2	1.5	20.56	01Jan2000, 10:12	0.38
Junction - 3	2.4	71.77	01Jan2000, 23:04	0.81
Reach - Di3 to Di2	0	109.1	01Jan2000, 10:12	Not specified
Reach - Di2 to Di1	0	258.33	01Jan2000, 10:18	Not specified

Subbasin: Da1

Area (ft²) : 0.3
Downstream : Reservoir - Da1

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	86.8
Initial Abstraction	0.3

Transform: Scs
Lag 7.2
Unitgraph Type Standard
Results: Da1
Peak Discharge (CFS) 57.25
Time of Peak Discharge 01Jan2000, 10:00
Volume (IN) 1.55
Precipitation Volume (AC - FT) 44.64
Loss Volume (AC - FT) 19.91
Excess Volume (AC - FT) 24.73
Direct Runoff Volume (AC - FT) 24.73
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1
Peak Discharge (CFS) 3.57
Time of Peak Discharge 02Jan2000, 00:10
Volume (IN) 0.31
Peak Inflow (CFS) 57.25
Time of Peak Inflow 01Jan2000, 10:00
Inflow Volume (AC - FT) 24.73
Maximum Storage (AC - FT) 20.66
Peak Elevation (FT) 4691.77
Discharge Volume (AC - FT) 4.89

Subbasin: Da2

Area (ft²) : 3.6
Downstream : Reservoir - Da2

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 83.9
Initial Abstraction 0.38
Transform: Scs
Lag 60
Unitgraph Type Standard
Results: Da2
Peak Discharge (CFS) 534.86
Time of Peak Discharge 01Jan2000, 10:40
Volume (IN) 1.47
Precipitation Volume (AC - FT) 566.4
Loss Volume (AC - FT) 283.9
Excess Volume (AC - FT) 282.5
Direct Runoff Volume (AC - FT) 282.39
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da2

Downstream : Junction - 1

Results: Reservoir-Da2

Peak Discharge (CFS)	20.82
Time of Peak Discharge	02Jan2000, 01:42
Volume (IN)	0.13
Peak Inflow (CFS)	534.86
Time of Peak Inflow	01Jan2000, 10:40
Inflow Volume (AC - FT)	282.39
Maximum Storage (AC - FT)	257.79
Peak Elevation (FT)	4696.98
Discharge Volume (AC - FT)	25.89

Subbasin: Da3

Area (ft²) : 0.7

Downstream : Reservoir - Da3

Loss Rate: Scs

Percent Impervious Area 0

Curve Number 87.9

Initial Abstraction 0.28

Transform: Scs

Lag 22.2

Unitgraph Type Standard

Results: Da3

Peak Discharge (CFS)	130.31
Time of Peak Discharge	01Jan2000, 10:06
Volume (IN)	1.59
Precipitation Volume (AC - FT)	103.04
Loss Volume (AC - FT)	43.5
Excess Volume (AC - FT)	59.54
Direct Runoff Volume (AC - FT)	59.54
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da3

Downstream : Junction - 1

Results: Reservoir-Da3

Peak Discharge (CFS)	6.05
Time of Peak Discharge	02Jan2000, 00:34
Volume (IN)	0.22
Peak Inflow (CFS)	130.31
Time of Peak Inflow	01Jan2000, 10:06
Inflow Volume (AC - FT)	59.54
Maximum Storage (AC - FT)	52.54
Peak Elevation (FT)	4687.89
Discharge Volume (AC - FT)	8.1

Subbasin: Da4

Area (ft²) : 1.7

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.2
Initial Abstraction 0.32
Transform: Scs
Lag 46.8
Unitgraph Type Standard
Results: Da4
Peak Discharge (CFS) 287.91
Time of Peak Discharge 01Jan2000, 10:24
Volume (IN) 1.57
Precipitation Volume (AC - FT) 260.21
Loss Volume (AC - FT) 118.18
Excess Volume (AC - FT) 142.03
Direct Runoff Volume (AC - FT) 142.02
Baseflow Volume (AC - FT) 0

Subbasin: Di1

Area (ft²) : 0.9
Downstream : Reservoir - Di1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 87.8
Initial Abstraction 0.28
Transform: Scs
Lag 24
Unitgraph Type Standard
Results: Di1
Peak Discharge (CFS) 170.81
Time of Peak Discharge 01Jan2000, 10:06
Volume (IN) 1.61
Precipitation Volume (AC - FT) 133.44
Loss Volume (AC - FT) 56.31
Excess Volume (AC - FT) 77.13
Direct Runoff Volume (AC - FT) 77.13
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1
Peak Discharge (CFS) 52.92
Time of Peak Discharge 01Jan2000, 23:22
Volume (IN) 1.54
Peak Inflow (CFS) 425.38
Time of Peak Inflow 01Jan2000, 10:12
Inflow Volume (AC - FT) 166.14
Maximum Storage (AC - FT) 103.15
Peak Elevation (FT) 4552.26
Discharge Volume (AC - FT) 73.72

Subbasin: Di2

Area (ft²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	162.26
Time of Peak Discharge	01Jan2000, 10:08
Volume (IN)	1.55
Precipitation Volume (AC - FT)	138.24
Loss Volume (AC - FT)	64.01
Excess Volume (AC - FT)	74.23
Direct Runoff Volume (AC - FT)	74.23
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	10.82
Time of Peak Discharge	01Jan2000, 10:14
Volume (IN)	0.33
Peak Inflow (CFS)	270.98
Time of Peak Inflow	01Jan2000, 10:12
Inflow Volume (AC - FT)	111.23
Maximum Storage (AC - FT)	10.04
Peak Elevation (FT)	4599.04
Discharge Volume (AC - FT)	15.97

Subbasin: Di3

Area (ft²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	122.39
Time of Peak Discharge	01Jan2000, 10:04

Volume (IN)	1.71
Precipitation Volume (AC - FT)	89.6
Loss Volume (AC - FT)	34.82
Excess Volume (AC - FT)	54.78
Direct Runoff Volume (AC - FT)	54.78
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	9.74
Time of Peak Discharge	01Jan2000, 10:10
Volume (IN)	0.45
Peak Inflow (CFS)	122.39
Time of Peak Inflow	01Jan2000, 10:08
Inflow Volume (AC - FT)	54.78
Maximum Storage (AC - FT)	7.37
Peak Elevation (FT)	4606.37
Discharge Volume (AC - FT)	14.34

Subbasin: Di4

Area (ft²) : 11.4

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	2225.38
Time of Peak Discharge	01Jan2000, 10:38
Volume (IN)	1.92
Precipitation Volume (AC - FT)	1890.88
Loss Volume (AC - FT)	724.3
Excess Volume (AC - FT)	1166.58
Direct Runoff Volume (AC - FT)	1165.99
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	30.38
Time of Peak Discharge	02Jan2000, 01:22
Volume (IN)	0.16

Junction: Junction-2

Results: Junction-2

Peak Discharge (CFS) 20.56
Time of Peak Discharge 01Jan2000, 10:12
Volume (IN) 0.38

Junction: Junction-3

Results: Junction-3

Peak Discharge (CFS) 71.77
Time of Peak Discharge 01Jan2000, 23:04
Volume (IN) 0.81

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	950
Energy Slope	0.01
Mannings n	0.04
Bottom Width	6
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30

Results: Reach-Di3 to Di2

Peak Discharge (CFS) 109.1
Time of Peak Discharge 01Jan2000, 10:12
Peak Inflow (CFS) 109.14
Inflow Volume (AC - FT) 37

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	2690
Energy Slope	0.02
Mannings n	0.04
Bottom Width	10
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200

Maximum Depth Iterations 20

Maximum Route Step Iterations 30

Results: Reach-Di2 to Di1

Peak Discharge (CFS) 258.33

Time of Peak Discharge 01Jan2000, 10:18

Peak Inflow (CFS) 258.37

Inflow Volume (AC - FT) 88.98

Project: Santa Clara E A

Simulation Run: Storm Event 02

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.8

Executed: 23 April 2021, 02:27

Global Parameter Summary - Subbasin

Area (ft²)			
Element Name	Area (ft²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2		
Da3	Reservoir - Da3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious Area	Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	

Di3	16.8 Standard
Di4	64.2 Standard

Global Parameter Summary - Reach

Downstream														
Element Name		Downstream												
Reach - Di3 to Di2 Reservoir - Di2														
Reach - Di2 to Di1 Reservoir - Di1														
Route: Muskingum Cunge														
Element Name	Method	Channel	Length (ft)	Energy Slope	Mannings n	Bottom Width	Side Slope	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations	
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30	
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30	

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	251.88	01Jan2000, 02:30	1.86
Reservoir - Da1	0.3	50.35	01Jan2000, 04:16	0.59
Da2	3.6	1944.49	01Jan2000, 03:08	1.85
Reservoir - Da2	3.6	571.86	01Jan2000, 05:14	0.51
Da3	0.7	536.12	01Jan2000, 02:38	1.91
Reservoir - Da3	0.7	99.55	01Jan2000, 04:44	0.51
Da4	1.7	1005.93	01Jan2000, 02:58	1.83
Di1	0.9	676.83	01Jan2000, 02:40	1.91
Reservoir - Di1	0.9	242.71	01Jan2000, 06:12	1.01
Di2	0.9	670.41	01Jan2000, 02:40	1.86
Reservoir - Di2	0.9	416.56	01Jan2000, 02:44	0.56
Di3	0.6	500.02	01Jan2000, 02:36	1.97
Reservoir - Di3	0.6	350.55	01Jan2000, 02:38	0.72
Di4	11.4	6042.93	01Jan2000, 03:12	1.91
Junction - 1	4.6	703.57	01Jan2000, 05:14	0.51
Junction - 2	1.5	758.44	01Jan2000, 02:42	0.62
Junction - 3	2.4	791.01	01Jan2000, 02:42	0.77
Reach - Di3 to Di2	0	138	01Jan2000, 02:40	Not specified
Reach - Di2 to Di1	0	386.55	01Jan2000, 02:28	Not specified

Subbasin: Da1

Area (ft²) : 0.3	
Downstream : Reservoir - Da1	
Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	86.8
Initial Abstraction	0.3

Transform: Scs
Lag 7.2
Unitgraph Type Standard
Results: Da1
Peak Discharge (CFS) 251.88
Time of Peak Discharge 01Jan2000, 02:30
Volume (IN) 1.86
Precipitation Volume (AC - FT) 40.16
Loss Volume (AC - FT) 10.36
Excess Volume (AC - FT) 29.8
Direct Runoff Volume (AC - FT) 29.8
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1
Peak Discharge (CFS) 50.35
Time of Peak Discharge 01Jan2000, 04:16
Volume (IN) 0.59
Peak Inflow (CFS) 251.88
Time of Peak Inflow 01Jan2000, 02:30
Inflow Volume (AC - FT) 29.8
Maximum Storage (AC - FT) 21.62
Peak Elevation (FT) 4692.31
Discharge Volume (AC - FT) 9.49

Subbasin: Da2

Area (ft²) : 3.6
Downstream : Reservoir - Da2

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 83.9
Initial Abstraction 0.38
Transform: Scs
Lag 60
Unitgraph Type Standard
Results: Da2
Peak Discharge (CFS) 1944.49
Time of Peak Discharge 01Jan2000, 03:08
Volume (IN) 1.85
Precipitation Volume (AC - FT) 506.88
Loss Volume (AC - FT) 152.37
Excess Volume (AC - FT) 354.51
Direct Runoff Volume (AC - FT) 354.48
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da2

Downstream : Junction - 1

Results: Reservoir-Da2

Peak Discharge (CFS)	571.86
Time of Peak Discharge	01Jan2000, 05:14
Volume (IN)	0.51
Peak Inflow (CFS)	1944.49
Time of Peak Inflow	01Jan2000, 03:08
Inflow Volume (AC - FT)	354.48
Maximum Storage (AC - FT)	266.94
Peak Elevation (FT)	4697.64
Discharge Volume (AC - FT)	97.1

Subbasin: Da3

Area (ft²) : 0.7

Downstream : Reservoir - Da3

Loss Rate: Scs

Percent Impervious Area 0

Curve Number 87.9

Initial Abstraction 0.28

Transform: Scs

Lag 22.2

Unitgraph Type Standard

Results: Da3

Peak Discharge (CFS)	536.12
Time of Peak Discharge	01Jan2000, 02:38
Volume (IN)	1.91
Precipitation Volume (AC - FT)	93.33
Loss Volume (AC - FT)	22.21
Excess Volume (AC - FT)	71.13
Direct Runoff Volume (AC - FT)	71.13
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da3

Downstream : Junction - 1

Results: Reservoir-Da3

Peak Discharge (CFS)	99.55
Time of Peak Discharge	01Jan2000, 04:44
Volume (IN)	0.51
Peak Inflow (CFS)	536.12
Time of Peak Inflow	01Jan2000, 02:38
Inflow Volume (AC - FT)	71.13
Maximum Storage (AC - FT)	54.97
Peak Elevation (FT)	4688.49
Discharge Volume (AC - FT)	18.89

Subbasin: Da4

Area (ft²) : 1.7

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.2
Initial Abstraction 0.32
Transform: Scs
Lag 46.8
Unitgraph Type Standard
Results: Da4
Peak Discharge (CFS) 1005.93
Time of Peak Discharge 01Jan2000, 02:58
Volume (IN) 1.83
Precipitation Volume (AC - FT) 227.57
Loss Volume (AC - FT) 61.43
Excess Volume (AC - FT) 166.15
Direct Runoff Volume (AC - FT) 166.15
Baseflow Volume (AC - FT) 0

Subbasin: Di1

Area (ft²) : 0.9
Downstream : Reservoir - Di1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 87.8
Initial Abstraction 0.28
Transform: Scs
Lag 24
Unitgraph Type Standard
Results: Di1
Peak Discharge (CFS) 676.83
Time of Peak Discharge 01Jan2000, 02:40
Volume (IN) 1.91
Precipitation Volume (AC - FT) 120.48
Loss Volume (AC - FT) 28.92
Excess Volume (AC - FT) 91.56
Direct Runoff Volume (AC - FT) 91.56
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1
Peak Discharge (CFS) 242.71
Time of Peak Discharge 01Jan2000, 06:12
Volume (IN) 1.01
Peak Inflow (CFS) 1056.84
Time of Peak Inflow 01Jan2000, 02:40
Inflow Volume (AC - FT) 184.03
Maximum Storage (AC - FT) 152.12
Peak Elevation (FT) 4557.48
Discharge Volume (AC - FT) 48.42

Subbasin: Di2

Area (ft²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	670.41
Time of Peak Discharge	01Jan2000, 02:40
Volume (IN)	1.86
Precipitation Volume (AC - FT)	122.4
Loss Volume (AC - FT)	33.28
Excess Volume (AC - FT)	89.12
Direct Runoff Volume (AC - FT)	89.12
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	416.56
Time of Peak Discharge	01Jan2000, 02:44
Volume (IN)	0.56
Peak Inflow (CFS)	808.41
Time of Peak Inflow	01Jan2000, 02:42
Inflow Volume (AC - FT)	125.54
Maximum Storage (AC - FT)	14.06
Peak Elevation (FT)	4601.31
Discharge Volume (AC - FT)	26.72

Subbasin: Di3

Area (ft²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	500.02
Time of Peak Discharge	01Jan2000, 02:36

Volume (IN)	1.97
Precipitation Volume (AC - FT)	80.64
Loss Volume (AC - FT)	17.58
Excess Volume (AC - FT)	63.06
Direct Runoff Volume (AC - FT)	63.06
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	350.55
Time of Peak Discharge	01Jan2000, 02:38
Volume (IN)	0.72
Peak Inflow (CFS)	500.02
Time of Peak Inflow	01Jan2000, 02:40
Inflow Volume (AC - FT)	63.06
Maximum Storage (AC - FT)	10.72
Peak Elevation (FT)	4608.17
Discharge Volume (AC - FT)	23.06

Subbasin: Di4

Area (ft²) : 11.4

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	6042.93
Time of Peak Discharge	01Jan2000, 03:12
Volume (IN)	1.91
Precipitation Volume (AC - FT)	1526.08
Loss Volume (AC - FT)	361.92
Excess Volume (AC - FT)	1164.16
Direct Runoff Volume (AC - FT)	1163.89
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	703.57
Time of Peak Discharge	01Jan2000, 05:14
Volume (IN)	0.51

Junction: Junction-2

Results: Junction-2

Peak Discharge (CFS) 758.44
Time of Peak Discharge 01Jan2000, 02:42
Volume (IN) 0.62

Junction: Junction-3

Results: Junction-3

Peak Discharge (CFS) 791.01
Time of Peak Discharge 01Jan2000, 02:42
Volume (IN) 0.77

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	950
Energy Slope	0.01
Mannings n	0.04
Bottom Width	6
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30

Results: Reach-Di3 to Di2

Peak Discharge (CFS) 138
Time of Peak Discharge 01Jan2000, 02:40
Peak Inflow (CFS) 138
Inflow Volume (AC - FT) 36.41

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	2690
Energy Slope	0.02
Mannings n	0.04
Bottom Width	10
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200

Maximum Depth Iterations 20

Maximum Route Step Iterations 30

Results: Reach-Di2 to Di1

Peak Discharge (CFS) 386.55

Time of Peak Discharge 01Jan2000, 02:28

Peak Inflow (CFS) 380

Inflow Volume (AC - FT) 92.4

Project: Santa Clara E A

Simulation Run: Storm Event 03

Simulation Start: 31 December 1999, 24:00

Simulation End: 2 January 2000, 03:00

HMS Version: 4.8

Executed: 23 April 2021, 02:26

Global Parameter Summary - Subbasin

Area (ft²)			
Element Name	Area (ft²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2		
Da3	Reservoir - Da3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious Area	Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	

Di3	16.8 Standard
Di4	64.2 Standard

Global Parameter Summary - Reach

Downstream														
Element Name		Downstream												
Reach - Di3 to Di2 Reservoir - Di2														
Reach - Di2 to Di1 Reservoir - Di1														
Route: Muskingum Cunge														
Element Name	Method	Channel	Length (ft)	Energy Slope	Mannings n	Bottom Width	Side Slope	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations	
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30	
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30	

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	74.57	01Jan2000, 10:00	2.13
Reservoir - Da1	0.3	16.58	01Jan2000, 13:14	0.86
Da2	3.6	841.16	01Jan2000, 10:16	2.14
Reservoir - Da2	3.6	213.51	01Jan2000, 14:28	0.8
Da3	0.7	170.52	01Jan2000, 10:02	2.16
Reservoir - Da3	0.7	34.7	01Jan2000, 14:38	0.76
Da4	1.7	399.11	01Jan2000, 10:10	2.1
Di1	0.9	223.93	01Jan2000, 10:02	2.17
Reservoir - Di1	0.9	98.5	01Jan2000, 15:48	2.22
Di2	0.9	223.55	01Jan2000, 10:02	2.17
Reservoir - Di2	0.9	11.09	01Jan2000, 10:06	0.37
Di3	0.6	152.92	01Jan2000, 10:00	2.24
Reservoir - Di3	0.6	12.01	01Jan2000, 10:06	0.49
Di4	11.4	2671.19	01Jan2000, 10:20	2.18
Junction - 1	4.6	264.38	01Jan2000, 14:30	0.8
Junction - 2	1.5	23.11	01Jan2000, 10:06	0.42
Junction - 3	2.4	117.53	01Jan2000, 15:48	1.1
Reach - Di3 to Di2	0	138	01Jan2000, 10:08	Not specified
Reach - Di2 to Di1	0	349.47	01Jan2000, 10:10	Not specified

Subbasin: Da1

Area (ft²) : 0.3	
Downstream : Reservoir - Da1	
Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	86.8
Initial Abstraction	0.3

Transform: Scs
Lag 7.2
Unitgraph Type Standard
Results: Da1
Peak Discharge (CFS) 74.57
Time of Peak Discharge 01Jan2000, 10:00
Volume (IN) 2.13
Precipitation Volume (AC - FT) 44.64
Loss Volume (AC - FT) 10.55
Excess Volume (AC - FT) 34.09
Direct Runoff Volume (AC - FT) 34.09
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1
Peak Discharge (CFS) 16.58
Time of Peak Discharge 01Jan2000, 13:14
Volume (IN) 0.86
Peak Inflow (CFS) 74.57
Time of Peak Inflow 01Jan2000, 10:00
Inflow Volume (AC - FT) 34.09
Maximum Storage (AC - FT) 21.26
Peak Elevation (FT) 4692.13
Discharge Volume (AC - FT) 13.83

Subbasin: Da2

Area (ft²) : 3.6
Downstream : Reservoir - Da2

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 83.9
Initial Abstraction 0.38
Transform: Scs
Lag 60
Unitgraph Type Standard
Results: Da2
Peak Discharge (CFS) 841.16
Time of Peak Discharge 01Jan2000, 10:16
Volume (IN) 2.14
Precipitation Volume (AC - FT) 566.4
Loss Volume (AC - FT) 155.84
Excess Volume (AC - FT) 410.56
Direct Runoff Volume (AC - FT) 410.55
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da2

Downstream : Junction - 1

Results: Reservoir-Da2

Peak Discharge (CFS)	213.51
Time of Peak Discharge	01Jan2000, 14:28
Volume (IN)	0.8
Peak Inflow (CFS)	841.16
Time of Peak Inflow	01Jan2000, 10:16
Inflow Volume (AC - FT)	410.55
Maximum Storage (AC - FT)	262.44
Peak Elevation (FT)	4697.32
Discharge Volume (AC - FT)	154.15

Subbasin: Da3

Area (ft²) : 0.7

Downstream : Reservoir - Da3

Loss Rate: Scs

Percent Impervious Area 0

Curve Number 87.9

Initial Abstraction 0.28

Transform: Scs

Lag 22.2

Unitgraph Type Standard

Results: Da3

Peak Discharge (CFS)	170.52
Time of Peak Discharge	01Jan2000, 10:02
Volume (IN)	2.16
Precipitation Volume (AC - FT)	103.04
Loss Volume (AC - FT)	22.56
Excess Volume (AC - FT)	80.48
Direct Runoff Volume (AC - FT)	80.48
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da3

Downstream : Junction - 1

Results: Reservoir-Da3

Peak Discharge (CFS)	34.7
Time of Peak Discharge	01Jan2000, 14:38
Volume (IN)	0.76
Peak Inflow (CFS)	170.52
Time of Peak Inflow	01Jan2000, 10:02
Inflow Volume (AC - FT)	80.48
Maximum Storage (AC - FT)	53.89
Peak Elevation (FT)	4688.22
Discharge Volume (AC - FT)	28.42

Subbasin: Da4

Area (ft²) : 1.7

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.2
Initial Abstraction 0.32
Transform: Scs
Lag 46.8
Unitgraph Type Standard
Results: Da4
Peak Discharge (CFS) 399.11
Time of Peak Discharge 01Jan2000, 10:10
Volume (IN) 2.1
Precipitation Volume (AC - FT) 252.96
Loss Volume (AC - FT) 62.62
Excess Volume (AC - FT) 190.34
Direct Runoff Volume (AC - FT) 190.34
Baseflow Volume (AC - FT) 0

Subbasin: Di1

Area (ft²) : 0.9
Downstream : Reservoir - Di1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 87.8
Initial Abstraction 0.28
Transform: Scs
Lag 24
Unitgraph Type Standard
Results: Di1
Peak Discharge (CFS) 223.93
Time of Peak Discharge 01Jan2000, 10:02
Volume (IN) 2.17
Precipitation Volume (AC - FT) 133.44
Loss Volume (AC - FT) 29.4
Excess Volume (AC - FT) 104.04
Direct Runoff Volume (AC - FT) 104.04
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1
Peak Discharge (CFS) 98.5
Time of Peak Discharge 01Jan2000, 15:48
Volume (IN) 2.22
Peak Inflow (CFS) 572.13
Time of Peak Inflow 01Jan2000, 10:04
Inflow Volume (AC - FT) 236.93
Maximum Storage (AC - FT) 146.12
Peak Elevation (FT) 4557.16
Discharge Volume (AC - FT) 106.7

Subbasin: Di2

Area (ft²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	223.55
Time of Peak Discharge	01Jan2000, 10:02
Volume (IN)	2.17
Precipitation Volume (AC - FT)	138.24
Loss Volume (AC - FT)	34.03
Excess Volume (AC - FT)	104.21
Direct Runoff Volume (AC - FT)	104.21
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	11.09
Time of Peak Discharge	01Jan2000, 10:06
Volume (IN)	0.37
Peak Inflow (CFS)	361.55
Time of Peak Inflow	01Jan2000, 10:04
Inflow Volume (AC - FT)	156.73
Maximum Storage (AC - FT)	10.76
Peak Elevation (FT)	4599.76
Discharge Volume (AC - FT)	17.7

Subbasin: Di3

Area (ft²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	152.92
Time of Peak Discharge	01Jan2000, 10:00

Volume (IN)	2.24
Precipitation Volume (AC - FT)	89.6
Loss Volume (AC - FT)	17.85
Excess Volume (AC - FT)	71.75
Direct Runoff Volume (AC - FT)	71.75
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	12.01
Time of Peak Discharge	01Jan2000, 10:06
Volume (IN)	0.49
Peak Inflow (CFS)	152.92
Time of Peak Inflow	01Jan2000, 10:04
Inflow Volume (AC - FT)	71.75
Maximum Storage (AC - FT)	8.09
Peak Elevation (FT)	4607.04
Discharge Volume (AC - FT)	15.84

Subbasin: Di4

Area (ft²) : 11.4

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	2671.19
Time of Peak Discharge	01Jan2000, 10:20
Volume (IN)	2.18
Precipitation Volume (AC - FT)	1696.32
Loss Volume (AC - FT)	368.07
Excess Volume (AC - FT)	1328.25
Direct Runoff Volume (AC - FT)	1328.17
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	264.38
Time of Peak Discharge	01Jan2000, 14:30
Volume (IN)	0.8

Junction: Junction-2

Results: Junction-2

Peak Discharge (CFS) 23.11
Time of Peak Discharge 01Jan2000, 10:06
Volume (IN) 0.42

Junction: Junction-3

Results: Junction-3

Peak Discharge (CFS) 117.53
Time of Peak Discharge 01Jan2000, 15:48
Volume (IN) 1.1

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	950
Energy Slope	0.01
Mannings n	0.04
Bottom Width	6
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30

Results: Reach-Di3 to Di2

Peak Discharge (CFS) 138
Time of Peak Discharge 01Jan2000, 10:08
Peak Inflow (CFS) 138
Inflow Volume (AC - FT) 52.52

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	2690
Energy Slope	0.02
Mannings n	0.04
Bottom Width	10
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200

Maximum Depth Iterations 20

Maximum Route Step Iterations 30

Results: Reach-Di2 to Di1

Peak Discharge (CFS) 349.47

Time of Peak Discharge 01Jan2000, 10:10

Peak Inflow (CFS) 349.51

Inflow Volume (AC - FT) 132.86

Project: Santa Clara E A

Simulation Run: Storm Event 04

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.8

Executed: 23 April 2021, 02:25

Global Parameter Summary - Subbasin

Area (ft²)			
Element Name	Area (ft²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2		
Da3	Reservoir - Da3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	

Di3	16.8 Standard
Di4	64.2 Standard

Global Parameter Summary - Reach

Downstream														
Element Name		Downstream												
Reach - Di3 to Di2 Reservoir - Di2														
Reach - Di2 to Di1 Reservoir - Di1														
Route: Muskingum Cunge														
Element Name	Method	Channel	Length (ft)	Energy Slope	Mannings n	Bottom Width	Side Slope	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations	
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30	
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30	

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	1312.24	01Jan2000, 02:30	10.09
Reservoir - Da1	0.3	1306.32	01Jan2000, 02:32	8.81
Da2	3.6	6533.46	01Jan2000, 03:24	7.33
Reservoir - Da2	3.6	6057.94	01Jan2000, 03:42	5.98
Da3	0.7	2657.47	01Jan2000, 02:42	10.22
Reservoir - Da3	0.7	2032.06	01Jan2000, 03:02	8.81
Da4	1.7	4804.31	01Jan2000, 03:08	10
Di1	0.9	3344.14	01Jan2000, 02:44	10.21
Reservoir - Di1	0.9	2934.27	01Jan2000, 03:04	10.79
Di2	0.9	3275.07	01Jan2000, 02:44	9.95
Reservoir - Di2	0.9	2974.93	01Jan2000, 02:50	7.63
Di3	0.6	2446.04	01Jan2000, 02:38	10.35
Reservoir - Di3	0.6	2119.49	01Jan2000, 02:46	8.29
Di4	11.4	27796.15	01Jan2000, 03:26	10.22
Junction - 1	4.6	7912.97	01Jan2000, 03:30	6.59
Junction - 2	1.5	5080.73	01Jan2000, 02:48	7.89
Junction - 3	2.4	7834.66	01Jan2000, 02:54	8.98
Reach - Di3 to Di2	0	138	01Jan2000, 01:52	Not specified
Reach - Di2 to Di1	0	381.34	01Jan2000, 01:44	Not specified

Subbasin: Da1

Area (ft²) : 0.3	
Downstream : Reservoir - Da1	
Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	86.8
Initial Abstraction	0.3

Transform: Scs
Lag 7.2
Unitgraph Type Standard
Results: Da1
Peak Discharge (CFS) 1312.24
Time of Peak Discharge 01Jan2000, 02:30
Volume (IN) 10.09
Precipitation Volume (AC - FT) 187.68
Loss Volume (AC - FT) 26.27
Excess Volume (AC - FT) 161.41
Direct Runoff Volume (AC - FT) 161.41
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1
Peak Discharge (CFS) 1306.32
Time of Peak Discharge 01Jan2000, 02:32
Volume (IN) 8.81
Peak Inflow (CFS) 1312.24
Time of Peak Inflow 01Jan2000, 02:30
Inflow Volume (AC - FT) 161.41
Maximum Storage (AC - FT) 26.71
Peak Elevation (FT) 4694.85
Discharge Volume (AC - FT) 140.99

Subbasin: Da2

Area (ft²) : 3.6
Downstream : Reservoir - Da2

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 83.9
Initial Abstraction 0.38
Transform: Scs
Lag 60
Unitgraph Type Standard
Results: Da2
Peak Discharge (CFS) 6533.46
Time of Peak Discharge 01Jan2000, 03:24
Volume (IN) 7.33
Precipitation Volume (AC - FT) 1785.6
Loss Volume (AC - FT) 376.17
Excess Volume (AC - FT) 1409.43
Direct Runoff Volume (AC - FT) 1407.63
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da2

Downstream : Junction - 1

Results: Reservoir-Da2

Peak Discharge (CFS)	6057.94
Time of Peak Discharge	01Jan2000, 03:42
Volume (IN)	5.98
Peak Inflow (CFS)	6533.46
Time of Peak Inflow	01Jan2000, 03:24
Inflow Volume (AC - FT)	1407.63
Maximum Storage (AC - FT)	317.9
Peak Elevation (FT)	4700.13
Discharge Volume (AC - FT)	1147.85

Subbasin: Da3

Area (ft²) : 0.7

Downstream : Reservoir - Da3

Loss Rate: Scs

Percent Impervious Area 0

Curve Number 87.9

Initial Abstraction 0.28

Transform: Scs

Lag 22.2

Unitgraph Type Standard

Results: Da3

Peak Discharge (CFS)	2657.47
Time of Peak Discharge	01Jan2000, 02:42
Volume (IN)	10.22
Precipitation Volume (AC - FT)	437.92
Loss Volume (AC - FT)	56.33
Excess Volume (AC - FT)	381.59
Direct Runoff Volume (AC - FT)	381.59
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da3

Downstream : Junction - 1

Results: Reservoir-Da3

Peak Discharge (CFS)	2032.06
Time of Peak Discharge	01Jan2000, 03:02
Volume (IN)	8.81
Peak Inflow (CFS)	2657.47
Time of Peak Inflow	01Jan2000, 02:42
Inflow Volume (AC - FT)	381.59
Maximum Storage (AC - FT)	99.41
Peak Elevation (FT)	4691.4
Discharge Volume (AC - FT)	329.06

Subbasin: Da4

Area (ft²) : 1.7

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.2
Initial Abstraction 0.32
Transform: Scs
Lag 46.8
Unitgraph Type Standard
Results: Da4
Peak Discharge (CFS) 4804.31
Time of Peak Discharge 01Jan2000, 03:08
Volume (IN) 10
Precipitation Volume (AC - FT) 1063.52
Loss Volume (AC - FT) 156.3
Excess Volume (AC - FT) 907.22
Direct Runoff Volume (AC - FT) 907.08
Baseflow Volume (AC - FT) 0

Subbasin: Di1

Area (ft²) : 0.9
Downstream : Reservoir - Di1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 87.8
Initial Abstraction 0.28
Transform: Scs
Lag 24
Unitgraph Type Standard
Results: Di1
Peak Discharge (CFS) 3344.14
Time of Peak Discharge 01Jan2000, 02:44
Volume (IN) 10.21
Precipitation Volume (AC - FT) 563.04
Loss Volume (AC - FT) 72.92
Excess Volume (AC - FT) 490.12
Direct Runoff Volume (AC - FT) 490.12
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1
Peak Discharge (CFS) 2934.27
Time of Peak Discharge 01Jan2000, 03:04
Volume (IN) 10.79
Peak Inflow (CFS) 3724.14
Time of Peak Inflow 01Jan2000, 02:44
Inflow Volume (AC - FT) 657.14
Maximum Storage (AC - FT) 205.14
Peak Elevation (FT) 4560.03
Discharge Volume (AC - FT) 517.89

Subbasin: Di2

Area (ft²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	3275.07
Time of Peak Discharge	01Jan2000, 02:44
Volume (IN)	9.95
Precipitation Volume (AC - FT)	563.04
Loss Volume (AC - FT)	85.21
Excess Volume (AC - FT)	477.83
Direct Runoff Volume (AC - FT)	477.83
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	2974.93
Time of Peak Discharge	01Jan2000, 02:50
Volume (IN)	7.63
Peak Inflow (CFS)	3413.07
Time of Peak Inflow	01Jan2000, 02:46
Inflow Volume (AC - FT)	540.01
Maximum Storage (AC - FT)	31.1
Peak Elevation (FT)	4603.8
Discharge Volume (AC - FT)	366.16

Subbasin: Di3

Area (ft²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	2446.04
Time of Peak Discharge	01Jan2000, 02:38

Volume (IN)	10.35
Precipitation Volume (AC - FT)	375.36
Loss Volume (AC - FT)	44.04
Excess Volume (AC - FT)	331.32
Direct Runoff Volume (AC - FT)	331.32
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3

Peak Discharge (CFS)	2119.49
Time of Peak Discharge	01Jan2000, 02:46
Volume (IN)	8.29
Peak Inflow (CFS)	2446.04
Time of Peak Inflow	01Jan2000, 02:42
Inflow Volume (AC - FT)	331.32
Maximum Storage (AC - FT)	27.33
Peak Elevation (FT)	4610.73
Discharge Volume (AC - FT)	265.16

Subbasin: Di4

Area (ft²) : 11.4

Loss Rate: Scs

Percent Impervious Area 0

Curve Number 88

Initial Abstraction 0.27

Transform: Scs

Lag 64.2

Unitgraph Type Standard

Results: Di4

Peak Discharge (CFS)	27796.15
Time of Peak Discharge	01Jan2000, 03:26
Volume (IN)	10.22
Precipitation Volume (AC - FT)	7131.84
Loss Volume (AC - FT)	905.09
Excess Volume (AC - FT)	6226.75
Direct Runoff Volume (AC - FT)	6215.3
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1

Peak Discharge (CFS) 7912.97

Time of Peak Discharge 01Jan2000, 03:30

Volume (IN) 6.59

Junction: Junction-2

Results: Junction-2

Peak Discharge (CFS) 5080.73
Time of Peak Discharge 01Jan2000, 02:48
Volume (IN) 7.89

Junction: Junction-3

Results: Junction-3

Peak Discharge (CFS) 7834.66
Time of Peak Discharge 01Jan2000, 02:54
Volume (IN) 8.98

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	950
Energy Slope	0.01
Mannings n	0.04
Bottom Width	6
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30

Results: Reach-Di3 to Di2

Peak Discharge (CFS) 138
Time of Peak Discharge 01Jan2000, 01:52
Peak Inflow (CFS) 138
Inflow Volume (AC - FT) 62.18

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	2690
Energy Slope	0.02
Mannings n	0.04
Bottom Width	10
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200

Maximum Depth Iterations 20

Maximum Route Step Iterations 30

Results: Reach-Di2 to Di1

Peak Discharge (CFS) 381.34

Time of Peak Discharge 01Jan2000, 01:44

Peak Inflow (CFS) 380

Inflow Volume (AC - FT) 166.98

Project: Santa Clara E A

Simulation Run: Storm Event 05

Simulation Start: 31 December 1999, 24:00

Simulation End: 4 January 2000, 03:00

HMS Version: 4.8

Executed: 23 April 2021, 02:24

Global Parameter Summary - Subbasin

Area (ft²)			
Element Name	Area (ft²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2		
Da3	Reservoir - Da3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	

Di3	16.8 Standard
Di4	64.2 Standard

Global Parameter Summary - Reach

Downstream														
Element Name		Downstream												
Reach - Di3 to Di2 Reservoir - Di2														
Reach - Di2 to Di1 Reservoir - Di1														
Route: Muskingum Cunge														
Element Name	Method	Channel	Length (ft)	Energy Slope	Mannings n	Bottom Width	Side Slope	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations	
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30	
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30	

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	135.45	02Jan2000, 06:00	12.43
Reservoir - Da1	0.3	135.4	02Jan2000, 06:00	11.16
Da2	3.6	1579.63	02Jan2000, 06:06	11.99
Reservoir - Da2	3.6	1579.02	02Jan2000, 06:10	10.64
Da3	0.7	317.07	02Jan2000, 06:00	12.57
Reservoir - Da3	0.7	316.94	02Jan2000, 06:02	11.17
Da4	1.7	761.62	02Jan2000, 06:02	12.35
Di1	0.9	407.43	02Jan2000, 06:00	12.56
Reservoir - Di1	0.9	786.98	02Jan2000, 06:04	25.36
Di2	0.9	403.66	02Jan2000, 06:00	12.29
Reservoir - Di2	0.9	161.5	02Jan2000, 06:02	2.58
Di3	0.6	273	02Jan2000, 06:00	12.7
Reservoir - Di3	0.6	134.92	02Jan2000, 06:00	3.58
Di4	11.4	5139.33	02Jan2000, 06:04	12.59
Junction - 1	4.6	2030	02Jan2000, 06:02	10.76
Junction - 2	1.5	296.4	02Jan2000, 06:02	2.98
Junction - 3	2.4	1083.38	02Jan2000, 06:02	11.37
Reach - Di3 to Di2	0	138	02Jan2000, 00:12	Not specified
Reach - Di2 to Di1	0	380.49	02Jan2000, 00:32	Not specified

Subbasin: Da1

Area (ft²) : 0.3	
Downstream : Reservoir - Da1	
Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	86.8
Initial Abstraction	0.3

Transform: Scs
Lag 7.2
Unitgraph Type Standard
Results: Da1
Peak Discharge (CFS) 135.45
Time of Peak Discharge 02Jan2000, 06:00
Volume (IN) 12.43
Precipitation Volume (AC - FT) 225.6
Loss Volume (AC - FT) 26.72
Excess Volume (AC - FT) 198.88
Direct Runoff Volume (AC - FT) 198.88
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1
Peak Discharge (CFS) 135.4
Time of Peak Discharge 02Jan2000, 06:00
Volume (IN) 11.16
Peak Inflow (CFS) 135.45
Time of Peak Inflow 02Jan2000, 06:00
Inflow Volume (AC - FT) 198.88
Maximum Storage (AC - FT) 22.24
Peak Elevation (FT) 4692.62
Discharge Volume (AC - FT) 178.59

Subbasin: Da2

Area (ft²) : 3.6
Downstream : Reservoir - Da2

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 83.9
Initial Abstraction 0.38
Transform: Scs
Lag 60
Unitgraph Type Standard
Results: Da2
Peak Discharge (CFS) 1579.63
Time of Peak Discharge 02Jan2000, 06:06
Volume (IN) 11.99
Precipitation Volume (AC - FT) 2697.6
Loss Volume (AC - FT) 396.04
Excess Volume (AC - FT) 2301.55
Direct Runoff Volume (AC - FT) 2301.36
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da2

Downstream : Junction - 1

Results: Reservoir-Da2

Peak Discharge (CFS)	1579.02
Time of Peak Discharge	02Jan2000, 06:10
Volume (IN)	10.64
Peak Inflow (CFS)	1579.63
Time of Peak Inflow	02Jan2000, 06:06
Inflow Volume (AC - FT)	2301.36
Maximum Storage (AC - FT)	275.87
Peak Elevation (FT)	4698.28
Discharge Volume (AC - FT)	2043.63

Subbasin: Da3

Area (ft²) : 0.7

Downstream : Reservoir - Da3

Loss Rate: Scs

Percent Impervious Area 0

Curve Number 87.9

Initial Abstraction 0.28

Transform: Scs

Lag 22.2

Unitgraph Type Standard

Results: Da3

Peak Discharge (CFS)	317.07
Time of Peak Discharge	02Jan2000, 06:00
Volume (IN)	12.57
Precipitation Volume (AC - FT)	526.4
Loss Volume (AC - FT)	57.19
Excess Volume (AC - FT)	469.21
Direct Runoff Volume (AC - FT)	469.21
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da3

Downstream : Junction - 1

Results: Reservoir-Da3

Peak Discharge (CFS)	316.94
Time of Peak Discharge	02Jan2000, 06:02
Volume (IN)	11.17
Peak Inflow (CFS)	317.07
Time of Peak Inflow	02Jan2000, 06:00
Inflow Volume (AC - FT)	469.21
Maximum Storage (AC - FT)	57.39
Peak Elevation (FT)	4689.1
Discharge Volume (AC - FT)	417

Subbasin: Da4

Area (ft²) : 1.7

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.2
Initial Abstraction 0.32
Transform: Scs
Lag 46.8
Unitgraph Type Standard
Results: Da4
Peak Discharge (CFS) 761.62
Time of Peak Discharge 02Jan2000, 06:02
Volume (IN) 12.35
Precipitation Volume (AC - FT) 1278.4
Loss Volume (AC - FT) 159.06
Excess Volume (AC - FT) 1119.34
Direct Runoff Volume (AC - FT) 1119.33
Baseflow Volume (AC - FT) 0

Subbasin: Di1

Area (ft²) : 0.9
Downstream : Reservoir - Di1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 87.8
Initial Abstraction 0.28
Transform: Scs
Lag 24
Unitgraph Type Standard
Results: Di1
Peak Discharge (CFS) 407.43
Time of Peak Discharge 02Jan2000, 06:00
Volume (IN) 12.56
Precipitation Volume (AC - FT) 676.8
Loss Volume (AC - FT) 74.04
Excess Volume (AC - FT) 602.76
Direct Runoff Volume (AC - FT) 602.76
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1
Peak Discharge (CFS) 786.98
Time of Peak Discharge 02Jan2000, 06:04
Volume (IN) 25.36
Peak Inflow (CFS) 787.43
Time of Peak Inflow 02Jan2000, 06:00
Inflow Volume (AC - FT) 1351.03
Maximum Storage (AC - FT) 166.07
Peak Elevation (FT) 4558.21
Discharge Volume (AC - FT) 1217.52

Subbasin: Di2

Area (ft²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	403.66
Time of Peak Discharge	02Jan2000, 06:00
Volume (IN)	12.29
Precipitation Volume (AC - FT)	676.8
Loss Volume (AC - FT)	86.76
Excess Volume (AC - FT)	590.04
Direct Runoff Volume (AC - FT)	590.04
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	161.5
Time of Peak Discharge	02Jan2000, 06:02
Volume (IN)	2.58
Peak Inflow (CFS)	541.66
Time of Peak Inflow	02Jan2000, 06:02
Inflow Volume (AC - FT)	878.39
Maximum Storage (AC - FT)	12.58
Peak Elevation (FT)	4600.68
Discharge Volume (AC - FT)	123.73

Subbasin: Di3

Area (ft²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	273
Time of Peak Discharge	02Jan2000, 06:00

Volume (IN)	12.7
Precipitation Volume (AC - FT)	451.2
Loss Volume (AC - FT)	44.65
Excess Volume (AC - FT)	406.55
Direct Runoff Volume (AC - FT)	406.55
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	134.92
Time of Peak Discharge	02Jan2000, 06:00
Volume (IN)	3.58
Peak Inflow (CFS)	273
Time of Peak Inflow	02Jan2000, 06:04
Inflow Volume (AC - FT)	406.55
Maximum Storage (AC - FT)	9.39
Peak Elevation (FT)	4607.6
Discharge Volume (AC - FT)	114.67

Subbasin: Di4

Area (ft²) : 11.4

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	5139.33
Time of Peak Discharge	02Jan2000, 06:04
Volume (IN)	12.59
Precipitation Volume (AC - FT)	8572.8
Loss Volume (AC - FT)	918.84
Excess Volume (AC - FT)	7653.96
Direct Runoff Volume (AC - FT)	7652.99
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	2030
Time of Peak Discharge	02Jan2000, 06:02
Volume (IN)	10.76

Junction: Junction-2

Results: Junction-2

Peak Discharge (CFS) 296.4
Time of Peak Discharge 02Jan2000, 06:02
Volume (IN) 2.98

Junction: Junction-3

Results: Junction-3

Peak Discharge (CFS) 1083.38
Time of Peak Discharge 02Jan2000, 06:02
Volume (IN) 11.37

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	950
Energy Slope	0.01
Mannings n	0.04
Bottom Width	6
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30

Results: Reach-Di3 to Di2

Peak Discharge (CFS) 138
Time of Peak Discharge 02Jan2000, 00:12
Peak Inflow (CFS) 138
Inflow Volume (AC - FT) 288.35

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	2690
Energy Slope	0.02
Mannings n	0.04
Bottom Width	10
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200

Maximum Depth Iterations 20

Maximum Route Step Iterations 30

Results: Reach-Di2 to Di1

Peak Discharge (CFS) 380.49

Time of Peak Discharge 02Jan2000, 00:32

Peak Inflow (CFS) 380

Inflow Volume (AC - FT) 748.26

Project: Santa Clara E A

Simulation Run: Storm Event 06

Simulation Start: 31 December 1999, 24:00

Simulation End: 11 January 2000, 03:00

HMS Version: 4.8

Executed: 23 April 2021, 02:22

Global Parameter Summary - Subbasin

Area (ft²)			
Element Name	Area (ft²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2		
Da3	Reservoir - Da3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious Area	Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	

Di316.8 Standard

Di464.2 Standard

Global Parameter Summary - Reach

Downstream														
Element Name		Downstream												
Reach - Di3 to Di2 Reservoir - Di2														
Reach - Di2 to Di1 Reservoir - Di1														
Route: Muskingum Cunge														
Element Name	Method	Channel	Length (ft)	Energy Slope	Mannings n	Bottom Width	Side Slope	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations	
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30	
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30	

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	298.2	05Jan2000, 24:00	5.01
Reservoir - Da1	0.3	296.76	05Jan2000, 24:00	4.33
Da2	3.6	2518.19	06Jan2000, 00:36	5.27
Reservoir - Da2	3.6	2460.06	06Jan2000, 00:44	3.98
Da3	0.7	654.86	06Jan2000, 00:04	5.03
Reservoir - Da3	0.7	624.8	06Jan2000, 00:12	3.94
Da4	1.7	1259.56	06Jan2000, 00:24	4.94
Di1	0.9	847.03	06Jan2000, 00:06	5.12
Reservoir - Di1	0.9	555.88	06Jan2000, 01:10	8.38
Di2	0.9	859.93	06Jan2000, 00:06	5.13
Reservoir - Di2	0.9	613.43	06Jan2000, 00:08	3.07
Di3	0.6	607.65	06Jan2000, 00:02	5.35
Reservoir - Di3	0.6	466.88	06Jan2000, 00:04	3.54
Di4	11.4	7383.52	06Jan2000, 00:40	5.14
Junction - 1	4.6	2797.32	06Jan2000, 00:42	4
Junction - 2	1.5	1075.68	06Jan2000, 00:06	3.26
Junction - 3	2.4	1131.29	06Jan2000, 00:06	5.18
Reach - Di3 to Di2	0	138	05Jan2000, 23:44	Not specified
Reach - Di2 to Di1	0	384.43	05Jan2000, 23:30	Not specified

Subbasin: Da1

Area (ft²) : 0.3

Downstream : Reservoir - Da1

Loss Rate: Scs

Percent Impervious Area 0

Curve Number86.8

Initial Abstraction0.3

Transform: Scs
Lag 7.2
Unitgraph Type Standard
Results: Da1
Peak Discharge (CFS) 298.2
Time of Peak Discharge 05Jan2000, 24:00
Volume (IN) 5.01
Precipitation Volume (AC - FT) 104.48
Loss Volume (AC - FT) 24.36
Excess Volume (AC - FT) 80.12
Direct Runoff Volume (AC - FT) 80.12
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1
Peak Discharge (CFS) 296.76
Time of Peak Discharge 05Jan2000, 24:00
Volume (IN) 4.33
Peak Inflow (CFS) 298.2
Time of Peak Inflow 05Jan2000, 24:00
Inflow Volume (AC - FT) 80.12
Maximum Storage (AC - FT) 23.11
Peak Elevation (FT) 4693.06
Discharge Volume (AC - FT) 69.28

Subbasin: Da2

Area (ft²) : 3.6
Downstream : Reservoir - Da2

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 83.9
Initial Abstraction 0.38
Transform: Scs
Lag 60
Unitgraph Type Standard
Results: Da2
Peak Discharge (CFS) 2518.19
Time of Peak Discharge 06Jan2000, 00:36
Volume (IN) 5.27
Precipitation Volume (AC - FT) 1372.8
Loss Volume (AC - FT) 360.03
Excess Volume (AC - FT) 1012.77
Direct Runoff Volume (AC - FT) 1012.75
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da2

Downstream : Junction - 1

Results: Reservoir-Da2

Peak Discharge (CFS)	2460.06
Time of Peak Discharge	06Jan2000, 00:44
Volume (IN)	3.98
Peak Inflow (CFS)	2518.19
Time of Peak Inflow	06Jan2000, 00:36
Inflow Volume (AC - FT)	1012.75
Maximum Storage (AC - FT)	282.1
Peak Elevation (FT)	4698.72
Discharge Volume (AC - FT)	765.07

Subbasin: Da3

Area (ft²) : 0.7

Downstream : Reservoir - Da3

Loss Rate: Scs

Percent Impervious Area 0

Curve Number 87.9

Initial Abstraction 0.28

Transform: Scs

Lag 22.2

Unitgraph Type Standard

Results: Da3

Peak Discharge (CFS)	654.86
Time of Peak Discharge	06Jan2000, 00:04
Volume (IN)	5.03
Precipitation Volume (AC - FT)	240.05
Loss Volume (AC - FT)	52.45
Excess Volume (AC - FT)	187.61
Direct Runoff Volume (AC - FT)	187.61
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da3

Downstream : Junction - 1

Results: Reservoir-Da3

Peak Discharge (CFS)	624.8
Time of Peak Discharge	06Jan2000, 00:12
Volume (IN)	3.94
Peak Inflow (CFS)	654.86
Time of Peak Inflow	06Jan2000, 00:04
Inflow Volume (AC - FT)	187.61
Maximum Storage (AC - FT)	59.95
Peak Elevation (FT)	4689.74
Discharge Volume (AC - FT)	147.06

Subbasin: Da4

Area (ft²) : 1.7

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.2
Initial Abstraction 0.32
Transform: Scs
Lag 46.8
Unitgraph Type Standard
Results: Da4
Peak Discharge (CFS) 1259.56
Time of Peak Discharge 06Jan2000, 00:24
Volume (IN) 4.94
Precipitation Volume (AC - FT) 592.05
Loss Volume (AC - FT) 144.41
Excess Volume (AC - FT) 447.64
Direct Runoff Volume (AC - FT) 447.64
Baseflow Volume (AC - FT) 0

Subbasin: Di1

Area (ft²) : 0.9
Downstream : Reservoir - Di1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 87.8
Initial Abstraction 0.28
Transform: Scs
Lag 24
Unitgraph Type Standard
Results: Di1
Peak Discharge (CFS) 847.03
Time of Peak Discharge 06Jan2000, 00:06
Volume (IN) 5.12
Precipitation Volume (AC - FT) 313.92
Loss Volume (AC - FT) 68.02
Excess Volume (AC - FT) 245.9
Direct Runoff Volume (AC - FT) 245.9
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1
Peak Discharge (CFS) 555.88
Time of Peak Discharge 06Jan2000, 01:10
Volume (IN) 8.38
Peak Inflow (CFS) 1227.03
Time of Peak Inflow 06Jan2000, 00:06
Inflow Volume (AC - FT) 402.11
Maximum Storage (AC - FT) 160.85
Peak Elevation (FT) 4557.94
Discharge Volume (AC - FT) 402.08

Subbasin: Di2

Area (ft²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	859.93
Time of Peak Discharge	06Jan2000, 00:06
Volume (IN)	5.13
Precipitation Volume (AC - FT)	325.44
Loss Volume (AC - FT)	79.06
Excess Volume (AC - FT)	246.38
Direct Runoff Volume (AC - FT)	246.38
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	613.43
Time of Peak Discharge	06Jan2000, 00:08
Volume (IN)	3.07
Peak Inflow (CFS)	997.93
Time of Peak Inflow	06Jan2000, 00:08
Inflow Volume (AC - FT)	304.07
Maximum Storage (AC - FT)	14.98
Peak Elevation (FT)	4601.71
Discharge Volume (AC - FT)	147.21

Subbasin: Di3

Area (ft²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	607.65
Time of Peak Discharge	06Jan2000, 00:02

Volume (IN)	5.35
Precipitation Volume (AC - FT)	212.48
Loss Volume (AC - FT)	41.42
Excess Volume (AC - FT)	171.06
Direct Runoff Volume (AC - FT)	171.06
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3

Peak Discharge (CFS)	466.88
Time of Peak Discharge	06Jan2000, 00:04
Volume (IN)	3.54
Peak Inflow (CFS)	607.65
Time of Peak Inflow	06Jan2000, 00:06
Inflow Volume (AC - FT)	171.06
Maximum Storage (AC - FT)	11.31
Peak Elevation (FT)	4608.42
Discharge Volume (AC - FT)	113.29

Subbasin: Di4

Area (ft²) : 11.4

Loss Rate: Scs

Percent Impervious Area 0

Curve Number 88

Initial Abstraction 0.27

Transform: Scs

Lag 64.2

Unitgraph Type Standard

Results: Di4

Peak Discharge (CFS)	7383.52
Time of Peak Discharge	06Jan2000, 00:40
Volume (IN)	5.14
Precipitation Volume (AC - FT)	3970.24
Loss Volume (AC - FT)	844.95
Excess Volume (AC - FT)	3125.29
Direct Runoff Volume (AC - FT)	3125.18
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1

Peak Discharge (CFS) 2797.32

Time of Peak Discharge 06Jan2000, 00:42

Volume (IN) 4

Junction: Junction-2

Results: Junction-2

Peak Discharge (CFS) 1075.68
Time of Peak Discharge 06Jan2000, 00:06
Volume (IN) 3.26

Junction: Junction-3

Results: Junction-3

Peak Discharge (CFS) 1131.29
Time of Peak Discharge 06Jan2000, 00:06
Volume (IN) 5.18

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	950
Energy Slope	0.01
Mannings n	0.04
Bottom Width	6
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30

Results: Reach-Di3 to Di2

Peak Discharge (CFS) 138
Time of Peak Discharge 05Jan2000, 23:44
Peak Inflow (CFS) 138
Inflow Volume (AC - FT) 57.69

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	2690
Energy Slope	0.02
Mannings n	0.04
Bottom Width	10
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200

Maximum Depth Iterations 20
Maximum Route Step Iterations 30
Results: Reach-Di2 to Di1
Peak Discharge (CFS) 384.43
Time of Peak Discharge 05Jan2000, 23:30
Peak Inflow (CFS) 380
Inflow Volume (AC - FT) 156.21

Project: Santa Clara E A

Simulation Run: Storm Event 07

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.8

Executed: 23 April 2021, 02:21

Global Parameter Summary - Subbasin

Area (ft²)			
Element Name	Area (ft²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2		
Da3	Reservoir - Da3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious Area	Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	

Di3	16.8 Standard
Di4	64.2 Standard

Global Parameter Summary - Reach

Downstream														
Element Name		Downstream												
Reach - Di3 to Di2 Reservoir - Di2														
Reach - Di2 to Di1 Reservoir - Di1														
Route: Muskingum Cunge														
Element Name	Method	Channel	Length (ft)	Energy Slope	Mannings n	Bottom Width	Side Slope	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations	
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30	
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30	

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	474.65	01Jan2000, 02:32	3.47
Reservoir - Da1	0.3	330.12	01Jan2000, 02:46	2.2
Da2	3.6	2324.75	01Jan2000, 03:28	2.69
Reservoir - Da2	3.6	1432.7	01Jan2000, 04:32	1.34
Da3	0.7	940.91	01Jan2000, 02:44	3.56
Reservoir - Da3	0.7	599.38	01Jan2000, 03:10	2.16
Da4	1.7	1619.14	01Jan2000, 03:12	3.4
Di1	0.9	1183.36	01Jan2000, 02:46	3.56
Reservoir - Di1	0.9	653.22	01Jan2000, 04:38	3.45
Di2	0.9	1120	01Jan2000, 02:48	3.39
Reservoir - Di2	0.9	870.53	01Jan2000, 02:50	1.55
Di3	0.6	892.46	01Jan2000, 02:38	3.68
Reservoir - Di3	0.6	745.44	01Jan2000, 02:42	1.97
Di4	11.4	9656.43	01Jan2000, 03:30	3.58
Junction - 1	4.6	1746.25	01Jan2000, 04:32	1.52
Junction - 2	1.5	1581.32	01Jan2000, 02:46	1.72
Junction - 3	2.4	1622.05	01Jan2000, 02:46	2.37
Reach - Di3 to Di2	0	138	01Jan2000, 02:34	Not specified
Reach - Di2 to Di1	0	388.98	01Jan2000, 02:24	Not specified

Subbasin: Da1

Area (ft²) : 0.3

Downstream : Reservoir - Da1

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	86.8
Initial Abstraction	0.3

Transform: Scs
Lag 7.2
Unitgraph Type Standard
Results: Da1
Peak Discharge (CFS) 474.65
Time of Peak Discharge 01Jan2000, 02:32
Volume (IN) 3.47
Precipitation Volume (AC - FT) 78.56
Loss Volume (AC - FT) 23.1
Excess Volume (AC - FT) 55.46
Direct Runoff Volume (AC - FT) 55.46
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1
Peak Discharge (CFS) 330.12
Time of Peak Discharge 01Jan2000, 02:46
Volume (IN) 2.2
Peak Inflow (CFS) 474.65
Time of Peak Inflow 01Jan2000, 02:32
Inflow Volume (AC - FT) 55.46
Maximum Storage (AC - FT) 23.27
Peak Elevation (FT) 4693.13
Discharge Volume (AC - FT) 35.12

Subbasin: Da2

Area (ft²) : 3.6
Downstream : Reservoir - Da2

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 83.9
Initial Abstraction 0.38
Transform: Scs
Lag 60
Unitgraph Type Standard
Results: Da2
Peak Discharge (CFS) 2324.75
Time of Peak Discharge 01Jan2000, 03:28
Volume (IN) 2.69
Precipitation Volume (AC - FT) 839.04
Loss Volume (AC - FT) 321.75
Excess Volume (AC - FT) 517.29
Direct Runoff Volume (AC - FT) 516.52
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da2

Downstream : Junction - 1

Results: Reservoir-Da2

Peak Discharge (CFS)	1432.7
Time of Peak Discharge	01Jan2000, 04:32
Volume (IN)	1.34
Peak Inflow (CFS)	2324.75
Time of Peak Inflow	01Jan2000, 03:28
Inflow Volume (AC - FT)	516.52
Maximum Storage (AC - FT)	274.73
Peak Elevation (FT)	4698.2
Discharge Volume (AC - FT)	257.75

Subbasin: Da3

Area (ft²) : 0.7

Downstream : Reservoir - Da3

Loss Rate: Scs

Percent Impervious Area 0

Curve Number 87.9

Initial Abstraction 0.28

Transform: Scs

Lag 22.2

Unitgraph Type Standard

Results: Da3

Peak Discharge (CFS)	940.91
Time of Peak Discharge	01Jan2000, 02:44
Volume (IN)	3.56
Precipitation Volume (AC - FT)	182.93
Loss Volume (AC - FT)	50.05
Excess Volume (AC - FT)	132.89
Direct Runoff Volume (AC - FT)	132.89
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da3

Downstream : Junction - 1

Results: Reservoir-Da3

Peak Discharge (CFS)	599.38
Time of Peak Discharge	01Jan2000, 03:10
Volume (IN)	2.16
Peak Inflow (CFS)	940.91
Time of Peak Inflow	01Jan2000, 02:44
Inflow Volume (AC - FT)	132.89
Maximum Storage (AC - FT)	59.76
Peak Elevation (FT)	4689.69
Discharge Volume (AC - FT)	80.48

Subbasin: Da4

Area (ft²) : 1.7

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.2
Initial Abstraction 0.32
Transform: Scs
Lag 46.8
Unitgraph Type Standard
Results: Da4
Peak Discharge (CFS) 1619.14
Time of Peak Discharge 01Jan2000, 03:12
Volume (IN) 3.4
Precipitation Volume (AC - FT) 445.17
Loss Volume (AC - FT) 136.63
Excess Volume (AC - FT) 308.54
Direct Runoff Volume (AC - FT) 308.49
Baseflow Volume (AC - FT) 0

Subbasin: Di1

Area (ft²) : 0.9
Downstream : Reservoir - Di1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 87.8
Initial Abstraction 0.28
Transform: Scs
Lag 24
Unitgraph Type Standard
Results: Di1
Peak Discharge (CFS) 1183.36
Time of Peak Discharge 01Jan2000, 02:46
Volume (IN) 3.56
Precipitation Volume (AC - FT) 235.68
Loss Volume (AC - FT) 64.74
Excess Volume (AC - FT) 170.94
Direct Runoff Volume (AC - FT) 170.94
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1
Peak Discharge (CFS) 653.22
Time of Peak Discharge 01Jan2000, 04:38
Volume (IN) 3.45
Peak Inflow (CFS) 1563.36
Time of Peak Inflow 01Jan2000, 02:46
Inflow Volume (AC - FT) 303.4
Maximum Storage (AC - FT) 163.13
Peak Elevation (FT) 4558.06
Discharge Volume (AC - FT) 165.51

Subbasin: Di2

Area (ft²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	1120
Time of Peak Discharge	01Jan2000, 02:48
Volume (IN)	3.39
Precipitation Volume (AC - FT)	237.12
Loss Volume (AC - FT)	74.29
Excess Volume (AC - FT)	162.83
Direct Runoff Volume (AC - FT)	162.83
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	870.53
Time of Peak Discharge	01Jan2000, 02:50
Volume (IN)	1.55
Peak Inflow (CFS)	1258
Time of Peak Inflow	01Jan2000, 02:50
Inflow Volume (AC - FT)	213.47
Maximum Storage (AC - FT)	16.05
Peak Elevation (FT)	4602.16
Discharge Volume (AC - FT)	74.35

Subbasin: Di3

Area (ft²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	892.46
Time of Peak Discharge	01Jan2000, 02:38

Volume (IN)	3.68
Precipitation Volume (AC - FT)	157.12
Loss Volume (AC - FT)	39.51
Excess Volume (AC - FT)	117.61
Direct Runoff Volume (AC - FT)	117.61
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3

Peak Discharge (CFS)	745.44
Time of Peak Discharge	01Jan2000, 02:42
Volume (IN)	1.97
Peak Inflow (CFS)	892.46
Time of Peak Inflow	01Jan2000, 02:42
Inflow Volume (AC - FT)	117.61
Maximum Storage (AC - FT)	12.55
Peak Elevation (FT)	4608.95
Discharge Volume (AC - FT)	63.17

Subbasin: Di4

Area (ft²) : 11.4

Loss Rate: Scs

Percent Impervious Area 0

Curve Number 88

Initial Abstraction 0.27

Transform: Scs

Lag 64.2

Unitgraph Type Standard

Results: Di4

Peak Discharge (CFS)	9656.43
Time of Peak Discharge	01Jan2000, 03:30
Volume (IN)	3.58
Precipitation Volume (AC - FT)	2985.28
Loss Volume (AC - FT)	804.94
Excess Volume (AC - FT)	2180.34
Direct Runoff Volume (AC - FT)	2175.79
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1

Peak Discharge (CFS) 1746.25

Time of Peak Discharge 01Jan2000, 04:32

Volume (IN) 1.52

Junction: Junction-2

Results: Junction-2

Peak Discharge (CFS) 1581.32
Time of Peak Discharge 01Jan2000, 02:46
Volume (IN) 1.72

Junction: Junction-3

Results: Junction-3

Peak Discharge (CFS) 1622.05
Time of Peak Discharge 01Jan2000, 02:46
Volume (IN) 2.37

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	950
Energy Slope	0.01
Mannings n	0.04
Bottom Width	6
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30

Results: Reach-Di3 to Di2

Peak Discharge (CFS) 138
Time of Peak Discharge 01Jan2000, 02:34
Peak Inflow (CFS) 138
Inflow Volume (AC - FT) 50.64

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	2690
Energy Slope	0.02
Mannings n	0.04
Bottom Width	10
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200

Maximum Depth Iterations 20

Maximum Route Step Iterations 30

Results: Reach-Di2 to Di1

Peak Discharge (CFS) 388.98

Time of Peak Discharge 01Jan2000, 02:24

Peak Inflow (CFS) 380

Inflow Volume (AC - FT) 132.4

Project: Santa Clara E A

Simulation Run: Storm Event 08

Simulation Start: 31 December 1999, 24:00

Simulation End: 2 January 2000, 03:00

HMS Version: 4.8

Executed: 23 April 2021, 02:20

Global Parameter Summary - Subbasin

Area (ft²)			
Element Name	Area (ft²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2		
Da3	Reservoir - Da3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious Area	Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	

Di3	16.8 Standard
Di4	64.2 Standard

Global Parameter Summary - Reach

Downstream														
Element Name		Downstream												
Reach - Di3 to Di2 Reservoir - Di2														
Reach - Di2 to Di1 Reservoir - Di1														
Route: Muskingum Cunge														
Element Name	Method	Channel	Length (ft)	Energy Slope	Mannings n	Bottom Width	Side Slope	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations	
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30	
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30	

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	149.14	01Jan2000, 10:00	4.24
Reservoir - Da1	0.3	148.44	01Jan2000, 10:02	2.97
Da2	3.6	1520.45	01Jan2000, 10:32	4.04
Reservoir - Da2	3.6	1352.53	01Jan2000, 11:10	2.7
Da3	0.7	347.57	01Jan2000, 10:04	4.33
Reservoir - Da3	0.7	332.1	01Jan2000, 10:14	2.93
Da4	1.7	771.85	01Jan2000, 10:18	4.17
Di1	0.9	440.33	01Jan2000, 10:04	4.33
Reservoir - Di1	0.9	660.79	01Jan2000, 11:12	6.73
Di2	0.9	434	01Jan2000, 10:04	4.2
Reservoir - Di2	0.9	190.66	01Jan2000, 10:08	0.9
Di3	0.6	305.8	01Jan2000, 10:02	4.47
Reservoir - Di3	0.6	166.93	01Jan2000, 10:04	1.32
Di4	11.4	5121.68	01Jan2000, 10:32	4.37
Junction - 1	4.6	1663	01Jan2000, 11:08	2.75
Junction - 2	1.5	357.03	01Jan2000, 10:06	1.07
Junction - 3	2.4	769.72	01Jan2000, 11:04	3.19
Reach - Di3 to Di2	0	138	01Jan2000, 08:42	Not specified
Reach - Di2 to Di1	0	381.31	01Jan2000, 08:38	Not specified

Subbasin: Da1

Area (ft²) : 0.3	
Downstream : Reservoir - Da1	
Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	86.8
Initial Abstraction	0.3

Transform: Scs
Lag 7.2
Unitgraph Type Standard
Results: Da1
Peak Discharge (CFS) 149.14
Time of Peak Discharge 01Jan2000, 10:00
Volume (IN) 4.24
Precipitation Volume (AC - FT) 91.68
Loss Volume (AC - FT) 23.81
Excess Volume (AC - FT) 67.87
Direct Runoff Volume (AC - FT) 67.87
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1
Peak Discharge (CFS) 148.44
Time of Peak Discharge 01Jan2000, 10:02
Volume (IN) 2.97
Peak Inflow (CFS) 149.14
Time of Peak Inflow 01Jan2000, 10:00
Inflow Volume (AC - FT) 67.87
Maximum Storage (AC - FT) 22.32
Peak Elevation (FT) 4692.66
Discharge Volume (AC - FT) 47.57

Subbasin: Da2

Area (ft²) : 3.6
Downstream : Reservoir - Da2

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 83.9
Initial Abstraction 0.38
Transform: Scs
Lag 60
Unitgraph Type Standard
Results: Da2
Peak Discharge (CFS) 1520.45
Time of Peak Discharge 01Jan2000, 10:32
Volume (IN) 4.04
Precipitation Volume (AC - FT) 1121.28
Loss Volume (AC - FT) 345.58
Excess Volume (AC - FT) 775.7
Direct Runoff Volume (AC - FT) 775.45
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da2

Downstream : Junction - 1

Results: Reservoir-Da2

Peak Discharge (CFS)	1352.53
Time of Peak Discharge	01Jan2000, 11:10
Volume (IN)	2.7
Peak Inflow (CFS)	1520.45
Time of Peak Inflow	01Jan2000, 10:32
Inflow Volume (AC - FT)	775.45
Maximum Storage (AC - FT)	274.1
Peak Elevation (FT)	4698.15
Discharge Volume (AC - FT)	517.56

Subbasin: Da3

Area (ft²) : 0.7

Downstream : Reservoir - Da3

Loss Rate: Scs

Percent Impervious Area 0

Curve Number 87.9

Initial Abstraction 0.28

Transform: Scs

Lag 22.2

Unitgraph Type Standard

Results: Da3

Peak Discharge (CFS)	347.57
Time of Peak Discharge	01Jan2000, 10:04
Volume (IN)	4.33
Precipitation Volume (AC - FT)	213.17
Loss Volume (AC - FT)	51.45
Excess Volume (AC - FT)	161.72
Direct Runoff Volume (AC - FT)	161.72
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da3

Downstream : Junction - 1

Results: Reservoir-Da3

Peak Discharge (CFS)	332.1
Time of Peak Discharge	01Jan2000, 10:14
Volume (IN)	2.93
Peak Inflow (CFS)	347.57
Time of Peak Inflow	01Jan2000, 10:04
Inflow Volume (AC - FT)	161.72
Maximum Storage (AC - FT)	57.53
Peak Elevation (FT)	4689.13
Discharge Volume (AC - FT)	109.48

Subbasin: Da4

Area (ft²) : 1.7

Loss Rate: Scs
 Percent Impervious Area 0
 Curve Number 86.2
 Initial Abstraction 0.32
 Transform: Scs
 Lag 46.8
 Unitgraph Type Standard
 Results: Da4
 Peak Discharge (CFS) 771.85
 Time of Peak Discharge 01Jan2000, 10:18
 Volume (IN) 4.17
 Precipitation Volume (AC - FT) 519.52
 Loss Volume (AC - FT) 141.02
 Excess Volume (AC - FT) 378.5
 Direct Runoff Volume (AC - FT) 378.49
 Baseflow Volume (AC - FT) 0

Subbasin: Di1

Area (ft²) : 0.9
 Downstream : Reservoir - Di1

Loss Rate: Scs
 Percent Impervious Area 0
 Curve Number 87.8
 Initial Abstraction 0.28
 Transform: Scs
 Lag 24
 Unitgraph Type Standard
 Results: Di1
 Peak Discharge (CFS) 440.33
 Time of Peak Discharge 01Jan2000, 10:04
 Volume (IN) 4.33
 Precipitation Volume (AC - FT) 274.56
 Loss Volume (AC - FT) 66.57
 Excess Volume (AC - FT) 207.99
 Direct Runoff Volume (AC - FT) 207.99
 Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1
 Peak Discharge (CFS) 660.79
 Time of Peak Discharge 01Jan2000, 11:12
 Volume (IN) 6.73
 Peak Inflow (CFS) 820.33
 Time of Peak Inflow 01Jan2000, 10:04
 Inflow Volume (AC - FT) 457.42
 Maximum Storage (AC - FT) 163.3
 Peak Elevation (FT) 4558.07
 Discharge Volume (AC - FT) 322.88

Subbasin: Di2

Area (ft²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	434
Time of Peak Discharge	01Jan2000, 10:04
Volume (IN)	4.2
Precipitation Volume (AC - FT)	278.4
Loss Volume (AC - FT)	76.83
Excess Volume (AC - FT)	201.57
Direct Runoff Volume (AC - FT)	201.57
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	190.66
Time of Peak Discharge	01Jan2000, 10:08
Volume (IN)	0.9
Peak Inflow (CFS)	572
Time of Peak Inflow	01Jan2000, 10:06
Inflow Volume (AC - FT)	298.87
Maximum Storage (AC - FT)	12.78
Peak Elevation (FT)	4600.76
Discharge Volume (AC - FT)	43.02

Subbasin: Di3

Area (ft²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	305.8
Time of Peak Discharge	01Jan2000, 10:02

Volume (IN)	4.47
Precipitation Volume (AC - FT)	183.68
Loss Volume (AC - FT)	40.55
Excess Volume (AC - FT)	143.13
Direct Runoff Volume (AC - FT)	143.13
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	166.93
Time of Peak Discharge	01Jan2000, 10:04
Volume (IN)	1.32
Peak Inflow (CFS)	305.8
Time of Peak Inflow	01Jan2000, 10:06
Inflow Volume (AC - FT)	143.13
Maximum Storage (AC - FT)	9.62
Peak Elevation (FT)	4607.7
Discharge Volume (AC - FT)	42.26

Subbasin: Di4

Area (ft²) : 11.4

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	5121.68
Time of Peak Discharge	01Jan2000, 10:32
Volume (IN)	4.37
Precipitation Volume (AC - FT)	3483.84
Loss Volume (AC - FT)	827.57
Excess Volume (AC - FT)	2656.27
Direct Runoff Volume (AC - FT)	2655.03
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	1663
Time of Peak Discharge	01Jan2000, 11:08
Volume (IN)	2.75

Junction: Junction-2

Results: Junction-2

Peak Discharge (CFS) 357.03
Time of Peak Discharge 01Jan2000, 10:06
Volume (IN) 1.07

Junction: Junction-3

Results: Junction-3

Peak Discharge (CFS) 769.72
Time of Peak Discharge 01Jan2000, 11:04
Volume (IN) 3.19

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	950
Energy Slope	0.01
Mannings n	0.04
Bottom Width	6
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30

Results: Reach-Di3 to Di2

Peak Discharge (CFS) 138
Time of Peak Discharge 01Jan2000, 08:42
Peak Inflow (CFS) 138
Inflow Volume (AC - FT) 97.3

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	2690
Energy Slope	0.02
Mannings n	0.04
Bottom Width	10
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200

Maximum Depth Iterations 20
Maximum Route Step Iterations 30
Results: Reach-Di2 to Di1
Peak Discharge (CFS) 381.31
Time of Peak Discharge 01Jan2000, 08:38
Peak Inflow (CFS) 380
Inflow Volume (AC - FT) 249.39

Project: Santa Clara E A

Simulation Run: Storm Event 09

Simulation Start: 31 December 1999, 24:00

Simulation End: 1 January 2000, 09:00

HMS Version: 4.8

Executed: 23 April 2021, 02:20

Global Parameter Summary - Subbasin

Area (ft²)			
Element Name	Area (ft²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2		
Da3	Reservoir - Da3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious	Area Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	

Di3	16.8 Standard
Di4	64.2 Standard

Global Parameter Summary - Reach

Downstream														
Element Name		Downstream												
Reach - Di3 to Di2 Reservoir - Di2														
Reach - Di2 to Di1 Reservoir - Di1														
Route: Muskingum Cunge														
Element Name	Method	Channel	Length (ft)	Energy Slope	Mannings n	Bottom Width	Side Slope	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations	
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30	
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30	

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	1312.24	01Jan2000, 02:30	10.09
Reservoir - Da1	0.3	1306.32	01Jan2000, 02:32	8.81
Da2	3.6	6533.46	01Jan2000, 03:24	7.33
Reservoir - Da2	3.6	6057.94	01Jan2000, 03:42	5.98
Da3	0.7	2657.47	01Jan2000, 02:42	10.22
Reservoir - Da3	0.7	2032.06	01Jan2000, 03:02	8.81
Da4	1.7	4804.31	01Jan2000, 03:08	10
Di1	0.9	3344.14	01Jan2000, 02:44	10.21
Reservoir - Di1	0.9	2934.27	01Jan2000, 03:04	10.79
Di2	0.9	3275.07	01Jan2000, 02:44	9.95
Reservoir - Di2	0.9	2974.93	01Jan2000, 02:50	7.63
Di3	0.6	2446.04	01Jan2000, 02:38	10.35
Reservoir - Di3	0.6	2119.49	01Jan2000, 02:46	8.29
Di4	11.4	27796.15	01Jan2000, 03:26	10.22
Junction - 1	4.6	7912.97	01Jan2000, 03:30	6.59
Junction - 2	1.5	5080.73	01Jan2000, 02:48	7.89
Junction - 3	2.4	7834.66	01Jan2000, 02:54	8.98
Reach - Di3 to Di2	0	138	01Jan2000, 01:52	Not specified
Reach - Di2 to Di1	0	381.34	01Jan2000, 01:44	Not specified

Subbasin: Da1

Area (ft²) : 0.3	
Downstream : Reservoir - Da1	
Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	86.8
Initial Abstraction	0.3

Transform: Scs
Lag 7.2
Unitgraph Type Standard
Results: Da1
Peak Discharge (CFS) 1312.24
Time of Peak Discharge 01Jan2000, 02:30
Volume (IN) 10.09
Precipitation Volume (AC - FT) 187.68
Loss Volume (AC - FT) 26.27
Excess Volume (AC - FT) 161.41
Direct Runoff Volume (AC - FT) 161.41
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1
Peak Discharge (CFS) 1306.32
Time of Peak Discharge 01Jan2000, 02:32
Volume (IN) 8.81
Peak Inflow (CFS) 1312.24
Time of Peak Inflow 01Jan2000, 02:30
Inflow Volume (AC - FT) 161.41
Maximum Storage (AC - FT) 26.71
Peak Elevation (FT) 4694.85
Discharge Volume (AC - FT) 140.99

Subbasin: Da2

Area (ft²) : 3.6
Downstream : Reservoir - Da2

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 83.9
Initial Abstraction 0.38
Transform: Scs
Lag 60
Unitgraph Type Standard
Results: Da2
Peak Discharge (CFS) 6533.46
Time of Peak Discharge 01Jan2000, 03:24
Volume (IN) 7.33
Precipitation Volume (AC - FT) 1785.6
Loss Volume (AC - FT) 376.17
Excess Volume (AC - FT) 1409.43
Direct Runoff Volume (AC - FT) 1407.63
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da2

Downstream : Junction - 1

Results: Reservoir-Da2

Peak Discharge (CFS)	6057.94
Time of Peak Discharge	01Jan2000, 03:42
Volume (IN)	5.98
Peak Inflow (CFS)	6533.46
Time of Peak Inflow	01Jan2000, 03:24
Inflow Volume (AC - FT)	1407.63
Maximum Storage (AC - FT)	317.9
Peak Elevation (FT)	4700.13
Discharge Volume (AC - FT)	1147.85

Subbasin: Da3

Area (ft²) : 0.7

Downstream : Reservoir - Da3

Loss Rate: Scs

Percent Impervious Area 0

Curve Number 87.9

Initial Abstraction 0.28

Transform: Scs

Lag 22.2

Unitgraph Type Standard

Results: Da3

Peak Discharge (CFS)	2657.47
Time of Peak Discharge	01Jan2000, 02:42
Volume (IN)	10.22
Precipitation Volume (AC - FT)	437.92
Loss Volume (AC - FT)	56.33
Excess Volume (AC - FT)	381.59
Direct Runoff Volume (AC - FT)	381.59
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da3

Downstream : Junction - 1

Results: Reservoir-Da3

Peak Discharge (CFS)	2032.06
Time of Peak Discharge	01Jan2000, 03:02
Volume (IN)	8.81
Peak Inflow (CFS)	2657.47
Time of Peak Inflow	01Jan2000, 02:42
Inflow Volume (AC - FT)	381.59
Maximum Storage (AC - FT)	99.41
Peak Elevation (FT)	4691.4
Discharge Volume (AC - FT)	329.06

Subbasin: Da4

Area (ft²) : 1.7

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.2
Initial Abstraction 0.32
Transform: Scs
Lag 46.8
Unitgraph Type Standard
Results: Da4
Peak Discharge (CFS) 4804.31
Time of Peak Discharge 01Jan2000, 03:08
Volume (IN) 10
Precipitation Volume (AC - FT) 1063.52
Loss Volume (AC - FT) 156.3
Excess Volume (AC - FT) 907.22
Direct Runoff Volume (AC - FT) 907.08
Baseflow Volume (AC - FT) 0

Subbasin: Di1

Area (ft²) : 0.9
Downstream : Reservoir - Di1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 87.8
Initial Abstraction 0.28
Transform: Scs
Lag 24
Unitgraph Type Standard
Results: Di1
Peak Discharge (CFS) 3344.14
Time of Peak Discharge 01Jan2000, 02:44
Volume (IN) 10.21
Precipitation Volume (AC - FT) 563.04
Loss Volume (AC - FT) 72.92
Excess Volume (AC - FT) 490.12
Direct Runoff Volume (AC - FT) 490.12
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1
Peak Discharge (CFS) 2934.27
Time of Peak Discharge 01Jan2000, 03:04
Volume (IN) 10.79
Peak Inflow (CFS) 3724.14
Time of Peak Inflow 01Jan2000, 02:44
Inflow Volume (AC - FT) 657.14
Maximum Storage (AC - FT) 205.14
Peak Elevation (FT) 4560.03
Discharge Volume (AC - FT) 517.89

Subbasin: Di2

Area (ft²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	3275.07
Time of Peak Discharge	01Jan2000, 02:44
Volume (IN)	9.95
Precipitation Volume (AC - FT)	563.04
Loss Volume (AC - FT)	85.21
Excess Volume (AC - FT)	477.83
Direct Runoff Volume (AC - FT)	477.83
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	2974.93
Time of Peak Discharge	01Jan2000, 02:50
Volume (IN)	7.63
Peak Inflow (CFS)	3413.07
Time of Peak Inflow	01Jan2000, 02:46
Inflow Volume (AC - FT)	540.01
Maximum Storage (AC - FT)	31.1
Peak Elevation (FT)	4603.8
Discharge Volume (AC - FT)	366.16

Subbasin: Di3

Area (ft²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	2446.04
Time of Peak Discharge	01Jan2000, 02:38

Volume (IN)	10.35
Precipitation Volume (AC - FT)	375.36
Loss Volume (AC - FT)	44.04
Excess Volume (AC - FT)	331.32
Direct Runoff Volume (AC - FT)	331.32
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	2119.49
Time of Peak Discharge	01Jan2000, 02:46
Volume (IN)	8.29
Peak Inflow (CFS)	2446.04
Time of Peak Inflow	01Jan2000, 02:42
Inflow Volume (AC - FT)	331.32
Maximum Storage (AC - FT)	27.33
Peak Elevation (FT)	4610.73
Discharge Volume (AC - FT)	265.16

Subbasin: Di4

Area (ft²) : 11.4

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	27796.15
Time of Peak Discharge	01Jan2000, 03:26
Volume (IN)	10.22
Precipitation Volume (AC - FT)	7131.84
Loss Volume (AC - FT)	905.09
Excess Volume (AC - FT)	6226.75
Direct Runoff Volume (AC - FT)	6215.3
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	7912.97
Time of Peak Discharge	01Jan2000, 03:30
Volume (IN)	6.59

Junction: Junction-2

Results: Junction-2

Peak Discharge (CFS) 5080.73
Time of Peak Discharge 01Jan2000, 02:48
Volume (IN) 7.89

Junction: Junction-3

Results: Junction-3

Peak Discharge (CFS) 7834.66
Time of Peak Discharge 01Jan2000, 02:54
Volume (IN) 8.98

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	950
Energy Slope	0.01
Mannings n	0.04
Bottom Width	6
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30

Results: Reach-Di3 to Di2

Peak Discharge (CFS) 138
Time of Peak Discharge 01Jan2000, 01:52
Peak Inflow (CFS) 138
Inflow Volume (AC - FT) 62.18

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	2690
Energy Slope	0.02
Mannings n	0.04
Bottom Width	10
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200

Maximum Depth Iterations 20

Maximum Route Step Iterations 30

Results: Reach-Di2 to Di1

Peak Discharge (CFS) 381.34

Time of Peak Discharge 01Jan2000, 01:44

Peak Inflow (CFS) 380

Inflow Volume (AC - FT) 166.98

Project: Santa Clara E A

Simulation Run: Storm Event 10

Simulation Start: 31 December 1999, 24:00

Simulation End: 2 January 2000, 03:00

HMS Version: 4.8

Executed: 23 April 2021, 02:10

Global Parameter Summary - Subbasin

Area (ft²)			
Element Name	Area (ft²)		
Da1	0.3		
Da2	3.6		
Da3	0.7		
Da4	1.7		
Di1	0.9		
Di2	0.9		
Di3	0.6		
Di4	11.4		
Downstream			
Element Name	Downstream		
Da1	Reservoir - Da1		
Da2	Reservoir - Da2		
Da3	Reservoir - Da3		
Di1	Reservoir - Di1		
Di2	Reservoir - Di2		
Di3	Reservoir - Di3		
Loss Rate: Scs			
Element Name	Percent Impervious Area	Curve Number	Initial Abstraction
Da1	0	86.8	0.3
Da2	0	83.9	0.38
Da3	0	87.9	0.28
Da4	0	86.2	0.32
Di1	0	87.8	0.28
Di2	0	85.8	0.33
Di3	0	88.9	0.25
Di4	0	88	0.27
Transform: Scs			
Element Name	Lag	Unitgraph	Type
Da1	7.2	Standard	
Da2	60	Standard	
Da3	22.2	Standard	
Da4	46.8	Standard	
Di1	24	Standard	
Di2	24	Standard	

Di3	16.8 Standard
Di4	64.2 Standard

Global Parameter Summary - Reach

Downstream														
Element Name		Downstream												
Reach - Di3 to Di2 Reservoir - Di2														
Reach - Di2 to Di1 Reservoir - Di1														
Route: Muskingum Cunge														
Element Name	Method	Channel	Length (ft)	Energy Slope	Mannings n	Bottom Width	Side Slope	Initial Variable	Space - Time Method	Index Parameter Type	Index Flow	Maximum Depth Iterations	Maximum Route Step Iterations	
Reach - Di3 to Di2	Muskingum Cunge	Trapezoid	950	0.01	0.04	6	2	Combined Inflow	Automatic DX and DT	Index Flow	100	20	30	
Reach - Di2 to Di1	Muskingum Cunge	Trapezoid	2690	0.02	0.04	10	2	Combined Inflow	Automatic DX and DT	Index Flow	200	20	30	

Global Results Summary

Hydrologic Element	Drainage Area (MI2)	Peak Discharge (CFS)	Time of Peak	Volume (IN)
Da1	0.3	405.71	01Jan2000, 10:00	12.43
Reservoir - Da1	0.3	405.38	01Jan2000, 10:00	11.16
Da2	3.6	4405.78	01Jan2000, 10:24	11.98
Reservoir - Da2	3.6	4400.91	01Jan2000, 10:28	10.64
Da3	0.7	945.46	01Jan2000, 10:02	12.57
Reservoir - Da3	0.7	944.39	01Jan2000, 10:04	11.17
Da4	1.7	2196.07	01Jan2000, 10:14	12.35
Di1	0.9	1213.78	01Jan2000, 10:02	12.56
Reservoir - Di1	0.9	1586.8	01Jan2000, 10:08	20.75
Di2	0.9	1200.54	01Jan2000, 10:02	12.29
Reservoir - Di2	0.9	957.73	01Jan2000, 10:04	5.36
Di3	0.6	816.31	01Jan2000, 10:00	12.7
Reservoir - Di3	0.6	677.84	01Jan2000, 10:02	6.21
Di4	11.4	14279.43	01Jan2000, 10:26	12.58
Junction - 1	4.6	5594.84	01Jan2000, 10:08	10.75
Junction - 2	1.5	1635.08	01Jan2000, 10:02	5.7
Junction - 3	2.4	3220.7	01Jan2000, 10:04	11.34
Reach - Di3 to Di2	0	138	01Jan2000, 06:52	Not specified
Reach - Di2 to Di1	0	380.2	01Jan2000, 07:06	Not specified

Subbasin: Da1

Area (ft²) : 0.3	
Downstream : Reservoir - Da1	
Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	86.8
Initial Abstraction	0.3

Transform: Scs
Lag 7.2
Unitgraph Type Standard
Results: Da1
Peak Discharge (CFS) 405.71
Time of Peak Discharge 01Jan2000, 10:00
Volume (IN) 12.43
Precipitation Volume (AC - FT) 225.6
Loss Volume (AC - FT) 26.72
Excess Volume (AC - FT) 198.88
Direct Runoff Volume (AC - FT) 198.88
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da1

Downstream : Junction - 1

Results: Reservoir-Da1
Peak Discharge (CFS) 405.38
Time of Peak Discharge 01Jan2000, 10:00
Volume (IN) 11.16
Peak Inflow (CFS) 405.71
Time of Peak Inflow 01Jan2000, 10:00
Inflow Volume (AC - FT) 198.88
Maximum Storage (AC - FT) 23.61
Peak Elevation (FT) 4693.3
Discharge Volume (AC - FT) 178.54

Subbasin: Da2

Area (ft²) : 3.6
Downstream : Reservoir - Da2

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 83.9
Initial Abstraction 0.38
Transform: Scs
Lag 60
Unitgraph Type Standard
Results: Da2
Peak Discharge (CFS) 4405.78
Time of Peak Discharge 01Jan2000, 10:24
Volume (IN) 11.98
Precipitation Volume (AC - FT) 2697.6
Loss Volume (AC - FT) 396.04
Excess Volume (AC - FT) 2301.55
Direct Runoff Volume (AC - FT) 2300.94
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Da2

Downstream : Junction - 1

Results: Reservoir-Da2

Peak Discharge (CFS)	4400.91
Time of Peak Discharge	01Jan2000, 10:28
Volume (IN)	10.64
Peak Inflow (CFS)	4405.78
Time of Peak Inflow	01Jan2000, 10:24
Inflow Volume (AC - FT)	2300.94
Maximum Storage (AC - FT)	293.6
Peak Elevation (FT)	4699.54
Discharge Volume (AC - FT)	2042.34

Subbasin: Da3

Area (ft²) : 0.7

Downstream : Reservoir - Da3

Loss Rate: Scs

Percent Impervious Area 0

Curve Number 87.9

Initial Abstraction 0.28

Transform: Scs

Lag 22.2

Unitgraph Type Standard

Results: Da3

Peak Discharge (CFS)	945.46
Time of Peak Discharge	01Jan2000, 10:02
Volume (IN)	12.57
Precipitation Volume (AC - FT)	526.4
Loss Volume (AC - FT)	57.19
Excess Volume (AC - FT)	469.21
Direct Runoff Volume (AC - FT)	469.21
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Da3

Downstream : Junction - 1

Results: Reservoir-Da3

Peak Discharge (CFS)	944.39
Time of Peak Discharge	01Jan2000, 10:04
Volume (IN)	11.17
Peak Inflow (CFS)	945.46
Time of Peak Inflow	01Jan2000, 10:02
Inflow Volume (AC - FT)	469.21
Maximum Storage (AC - FT)	62.17
Peak Elevation (FT)	4690.29
Discharge Volume (AC - FT)	416.85

Subbasin: Da4

Area (ft²) : 1.7

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 86.2
Initial Abstraction 0.32
Transform: Scs
Lag 46.8
Unitgraph Type Standard
Results: Da4
Peak Discharge (CFS) 2196.07
Time of Peak Discharge 01Jan2000, 10:14
Volume (IN) 12.35
Precipitation Volume (AC - FT) 1278.4
Loss Volume (AC - FT) 159.06
Excess Volume (AC - FT) 1119.34
Direct Runoff Volume (AC - FT) 1119.31
Baseflow Volume (AC - FT) 0

Subbasin: Di1

Area (ft²) : 0.9
Downstream : Reservoir - Di1

Loss Rate: Scs
Percent Impervious Area 0
Curve Number 87.8
Initial Abstraction 0.28
Transform: Scs
Lag 24
Unitgraph Type Standard
Results: Di1
Peak Discharge (CFS) 1213.78
Time of Peak Discharge 01Jan2000, 10:02
Volume (IN) 12.56
Precipitation Volume (AC - FT) 676.8
Loss Volume (AC - FT) 74.04
Excess Volume (AC - FT) 602.76
Direct Runoff Volume (AC - FT) 602.76
Baseflow Volume (AC - FT) 0

Reservoir: Reservoir-Di1

Downstream : Junction - 3

Results: Reservoir-Di1
Peak Discharge (CFS) 1586.8
Time of Peak Discharge 01Jan2000, 10:08
Volume (IN) 20.75
Peak Inflow (CFS) 1593.78
Time of Peak Inflow 01Jan2000, 10:02
Inflow Volume (AC - FT) 1132.99
Maximum Storage (AC - FT) 180.89
Peak Elevation (FT) 4558.99
Discharge Volume (AC - FT) 995.95

Subbasin: Di2

Area (ft²) : 0.9
Downstream : Reservoir - Di2

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	85.8
Initial Abstraction	0.33
Transform: Scs	
Lag	24
Unitgraph Type Standard	
Results: Di2	
Peak Discharge (CFS)	1200.54
Time of Peak Discharge	01Jan2000, 10:02
Volume (IN)	12.29
Precipitation Volume (AC - FT)	676.8
Loss Volume (AC - FT)	86.76
Excess Volume (AC - FT)	590.04
Direct Runoff Volume (AC - FT)	590.04
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di2

Downstream : Junction - 2

Results: Reservoir-Di2	
Peak Discharge (CFS)	957.73
Time of Peak Discharge	01Jan2000, 10:04
Volume (IN)	5.36
Peak Inflow (CFS)	1338.54
Time of Peak Inflow	01Jan2000, 10:04
Inflow Volume (AC - FT)	794.01
Maximum Storage (AC - FT)	16.38
Peak Elevation (FT)	4602.31
Discharge Volume (AC - FT)	257.19

Subbasin: Di3

Area (ft²) : 0.6
Downstream : Reservoir - Di3

Loss Rate: Scs	
Percent Impervious Area 0	
Curve Number	88.9
Initial Abstraction	0.25
Transform: Scs	
Lag	16.8
Unitgraph Type Standard	
Results: Di3	
Peak Discharge (CFS)	816.31
Time of Peak Discharge	01Jan2000, 10:00

Volume (IN)	12.7
Precipitation Volume (AC - FT)	451.2
Loss Volume (AC - FT)	44.65
Excess Volume (AC - FT)	406.55
Direct Runoff Volume (AC - FT)	406.55
Baseflow Volume (AC - FT)	0

Reservoir: Reservoir-Di3

Downstream : Junction - 2

Results: Reservoir-Di3	
Peak Discharge (CFS)	677.84
Time of Peak Discharge	01Jan2000, 10:02
Volume (IN)	6.21
Peak Inflow (CFS)	816.31
Time of Peak Inflow	01Jan2000, 10:04
Inflow Volume (AC - FT)	406.55
Maximum Storage (AC - FT)	12.26
Peak Elevation (FT)	4608.83
Discharge Volume (AC - FT)	198.87

Subbasin: Di4

Area (ft²) : 11.4

Loss Rate: Scs	
Percent Impervious Area	0
Curve Number	88
Initial Abstraction	0.27
Transform: Scs	
Lag	64.2
Unitgraph Type Standard	
Results: Di4	
Peak Discharge (CFS)	14279.43
Time of Peak Discharge	01Jan2000, 10:26
Volume (IN)	12.58
Precipitation Volume (AC - FT)	8572.8
Loss Volume (AC - FT)	918.84
Excess Volume (AC - FT)	7653.96
Direct Runoff Volume (AC - FT)	7650.94
Baseflow Volume (AC - FT)	0

Junction: Junction-1

Results: Junction-1	
Peak Discharge (CFS)	5594.84
Time of Peak Discharge	01Jan2000, 10:08
Volume (IN)	10.75

Junction: Junction-2

Results: Junction-2

Peak Discharge (CFS) 1635.08
Time of Peak Discharge 01Jan2000, 10:02
Volume (IN) 5.7

Junction: Junction-3

Results: Junction-3

Peak Discharge (CFS) 3220.7
Time of Peak Discharge 01Jan2000, 10:04
Volume (IN) 11.34

Reach: Reach-Di3 to Di2

Downstream : Reservoir - Di2

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	950
Energy Slope	0.01
Mannings n	0.04
Bottom Width	6
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	100
Maximum Depth Iterations	20
Maximum Route Step Iterations	30

Results: Reach-Di3 to Di2

Peak Discharge (CFS) 138
Time of Peak Discharge 01Jan2000, 06:52
Peak Inflow (CFS) 138
Inflow Volume (AC - FT) 203.96

Reach: Reach-Di2 to Di1

Downstream : Reservoir - Di1

Route: Muskingum Cunge

Method	Muskingum Cunge
Channel	Trapezoid
Length (ft)	2690
Energy Slope	0.02
Mannings n	0.04
Bottom Width	10
Side Slope	2
Initial Variable	Combined Inflow
Space - Time Method	Automatic DX and DT
Index Parameter Type	Index Flow
Index Flow	200

Maximum Depth Iterations 20

Maximum Route Step Iterations 30

Results: Reach-Di2 to Di1

Peak Discharge (CFS) 380.2

Time of Peak Discharge 01Jan2000, 07:06

Peak Inflow (CFS) 380

Inflow Volume (AC - FT) 530.21

REQUEST FOR AQUATIC RESOURCES DELINEATION VERIFICATION

OR JURISDICTIONAL DETERMINATION

A separate jurisdictional determination (JD) is not necessary to process a permit. An Approved Jurisdictional Determination (AJD) is required to definitively determine the extent of waters of the U.S. and is generally used to disclaim jurisdiction over aquatic resources that are not waters of the U.S., in cases where the review area contains no aquatic resources, and in cases when the recipient wishes to challenge the water of the U.S. determination on appeal. Either an Aquatic Resources Delineation Verification or a Preliminary Jurisdictional Determination (PJD) may be used when the recipient wishes to assume that aquatic resources are waters of the U.S. for the purposes of permitting. In some circumstances an AJD may require more information, a greater level of effort, and more time to produce. If you are unsure which product to request, please speak with your project manager or call the Sacramento District's general information line at (916) 557-5250.

I am requesting the product indicated below from the U.S. Army Corps of Engineers, Sacramento District, for the review area located at:

Street Address: Numerous Review Areas in Washington County (see attached location document and maps) City: N/A County: Washington	
State: Utah Zip: N/A Section: see attached Township: see attached Range: see attached	
Latitude (decimal degrees): see attached Longitude (decimal degrees): see attached	
The approximate size of the review area for the JD is 360 acres. (Please attach location map)	
Choose one: ☐ I own the review area ☐ I hold an easement or development rights over the review area ☐ I lease the review area ☐ I plan to purchase the review area ☒ I am an agent/consultant acting on behalf of the requestor ☐ Other:	Choose one product: ☐ I am requesting an Aquatic Resources Delineation Verification ☒ I am requesting an Approved JD ☐ I am requesting a Preliminary JD ☐ I am requesting additional information to inform my decision about which product to request
Reason for request: (check all that apply) ☒ I need information concerning aquatic resources within the review area for planning purposes. ☐ I intend to construct/develop a project or perform activities in this review area which would be designed to avoid all aquatic resources. ☐ I intend to construct/develop a project or perform activities in this review area which would be designed to avoid those aquatic resources determined to be waters of the U.S. ☐ I intend to construct/develop a project or perform activities in this review area which may require authorization from the Corps; this request is accompanied by my permit application. ☐ I intend to construct/develop a project or perform activities in a navigable water of the U.S. which is included on the district's list of navigable waters under Section 10 of the Rivers and Harbors Act of 1899 and/or is subject to the ebb and flow of the tide. ☐ My lender, insurer, investors, local unit of government, etc. has indicated that an aquatic resources delineation verification is inadequate and is requiring a jurisdictional determination. ☐ I intend to contest jurisdiction over particular aquatic resources and request the Corps confirm that these aquatic resources are or are not waters of the U.S. ☐ I believe that the review area may be comprised entirely of dry land. ☒ Other: intend to construct within the review area and need the corp's determination as to what features are jurisdictional	
Attached Information: ☒ Maps depicting the general location and aquatic resources within the review area consistent with Map and Drawing Standards for the South Pacific Division Regulatory Program (Public Notice February 2016, http://www.spd.usace.army.mil/Missions/Regulatory/Public-Notices-and-References/Article/651327/updated-map-and-drawing-standards/) ☒ Aquatic Resources Delineation Report, if available, consistent with the Sacramento District's Minimum Standards for Acceptance (Public Notice January 2016, http://1.usa.gov/1V68lYa)	
By signing below, you are indicating that you have the authority, or are acting as the duly authorized agent of a person or entity with such authority, to and do hereby grant Corps personnel right of entry to legally access the review area. Your signature shall be an affirmation that you possess the requisite property rights for this request on the subject property.	
*Signature: _____ Date: 10/13/2021	
Name: Todd Edwards Company name: Washington County	
Address: 197 East Tabernacle Street St. George, UT 84790	
Telephone: 435-773-3599 Email: todd.edwards@washco.utah.gov	

***Authorities:** Rivers and Harbors Act, Section 10, 33 USC 403; Clean Water Act, Section 404, 33 USC 1344; Marine Protection, Research, and Sanctuaries Act, Section 103, 33 USC 1413; Regulatory Program of the U.S. Army Corps of Engineers; Final Rule for 33 CFR Parts 320-332.

Principal Purpose: The information that you provide will be used in evaluating your request to determine whether there are any aquatic resources within the project area subject to federal jurisdiction under the regulatory authorities referenced above.

Routine Uses: This information may be shared with the Department of Justice and other federal, state, and local government agencies, and the public, and may be made available as part of a public notice as required by federal law. Your name and property location where federal jurisdiction is to be determined will be included in the approved jurisdictional determination (AJD), which will be made available to the public on the District's website and on the Headquarters USACE website.

Disclosure: Submission of requested information is voluntary; however, if information is not provided, the request for an AJD cannot be evaluated nor can an AJD be issued.

APPENDIX E-6

TECHNICAL DOCUMENTS, CONTINUED

Plan of Development

Santa Clara Watershed EA

Geotechnical Investigations Reclamation

Washington County

National Resource Conservation Service



Submitted to
Bureau of Land Management
345 East Riverside Drive
St. George, Utah 84790

Submitted by
Washington County
197 East Tabernacle Street
St. George, Utah 84770

June 2021

Table of Contents

Table of Contents	i
Part I. Introduction	1
A. Background	1
Part II. Purpose and Need for Facility.....	4
Part III. Project Description and Land Ownership.....	5
A. Project Description and Land Ownership	5
B. Right of Way.....	5
C. Government Agencies Involved	5
Part IV. Facility Construction & Design.....	6
A. Schedule.....	6
B. Geotechnical Investigation.....	6
C. Resource Value and Environmental Concerns.....	6
D. Termination and Restoration	6
Appendix A. Best Management Practices	
Appendix B. Test Pit Exhibits	
Appendix C. SF-299	
Appendix D. County Signed Resolution	
Appendix E. BLM Short-Term ROW Application Acceptance	

Part I. Introduction

A. Background



Washington County (County) is proposing to construct three new detention basins and rehabilitate three existing detention basins with associated facilities on property partially owned by the Bureau of Land Management (BLM) located upstream of the Dammeron Valley and Diamond Valley communities in Washington County, Utah. As proposed, the detention basins would be constructed by the County.

The project will protect downstream properties from flood damage during large storm events. The components of the project include (see **Figure 1** and **Figure 2**):

- Dams
- Low Level Outlets (Open)
- Principal Spillways
- Auxiliary Spillways
- Pipelines
- Channel Armoring


The dams will be designed to maximize storage capacity with principal/auxiliary spillways to sustain the improvements during storm events. In order to construct the dam, the County will require access onto BLM property to perform geotechnical investigative test pits and borings (see **Exhibits 1 and 2, Appendix B**).

This Plan of Development (POD) includes descriptions of and guidelines for the reclamation from the geotechnical investigations. The County would perform the investigations and reclamation in conformity with the approved POD.

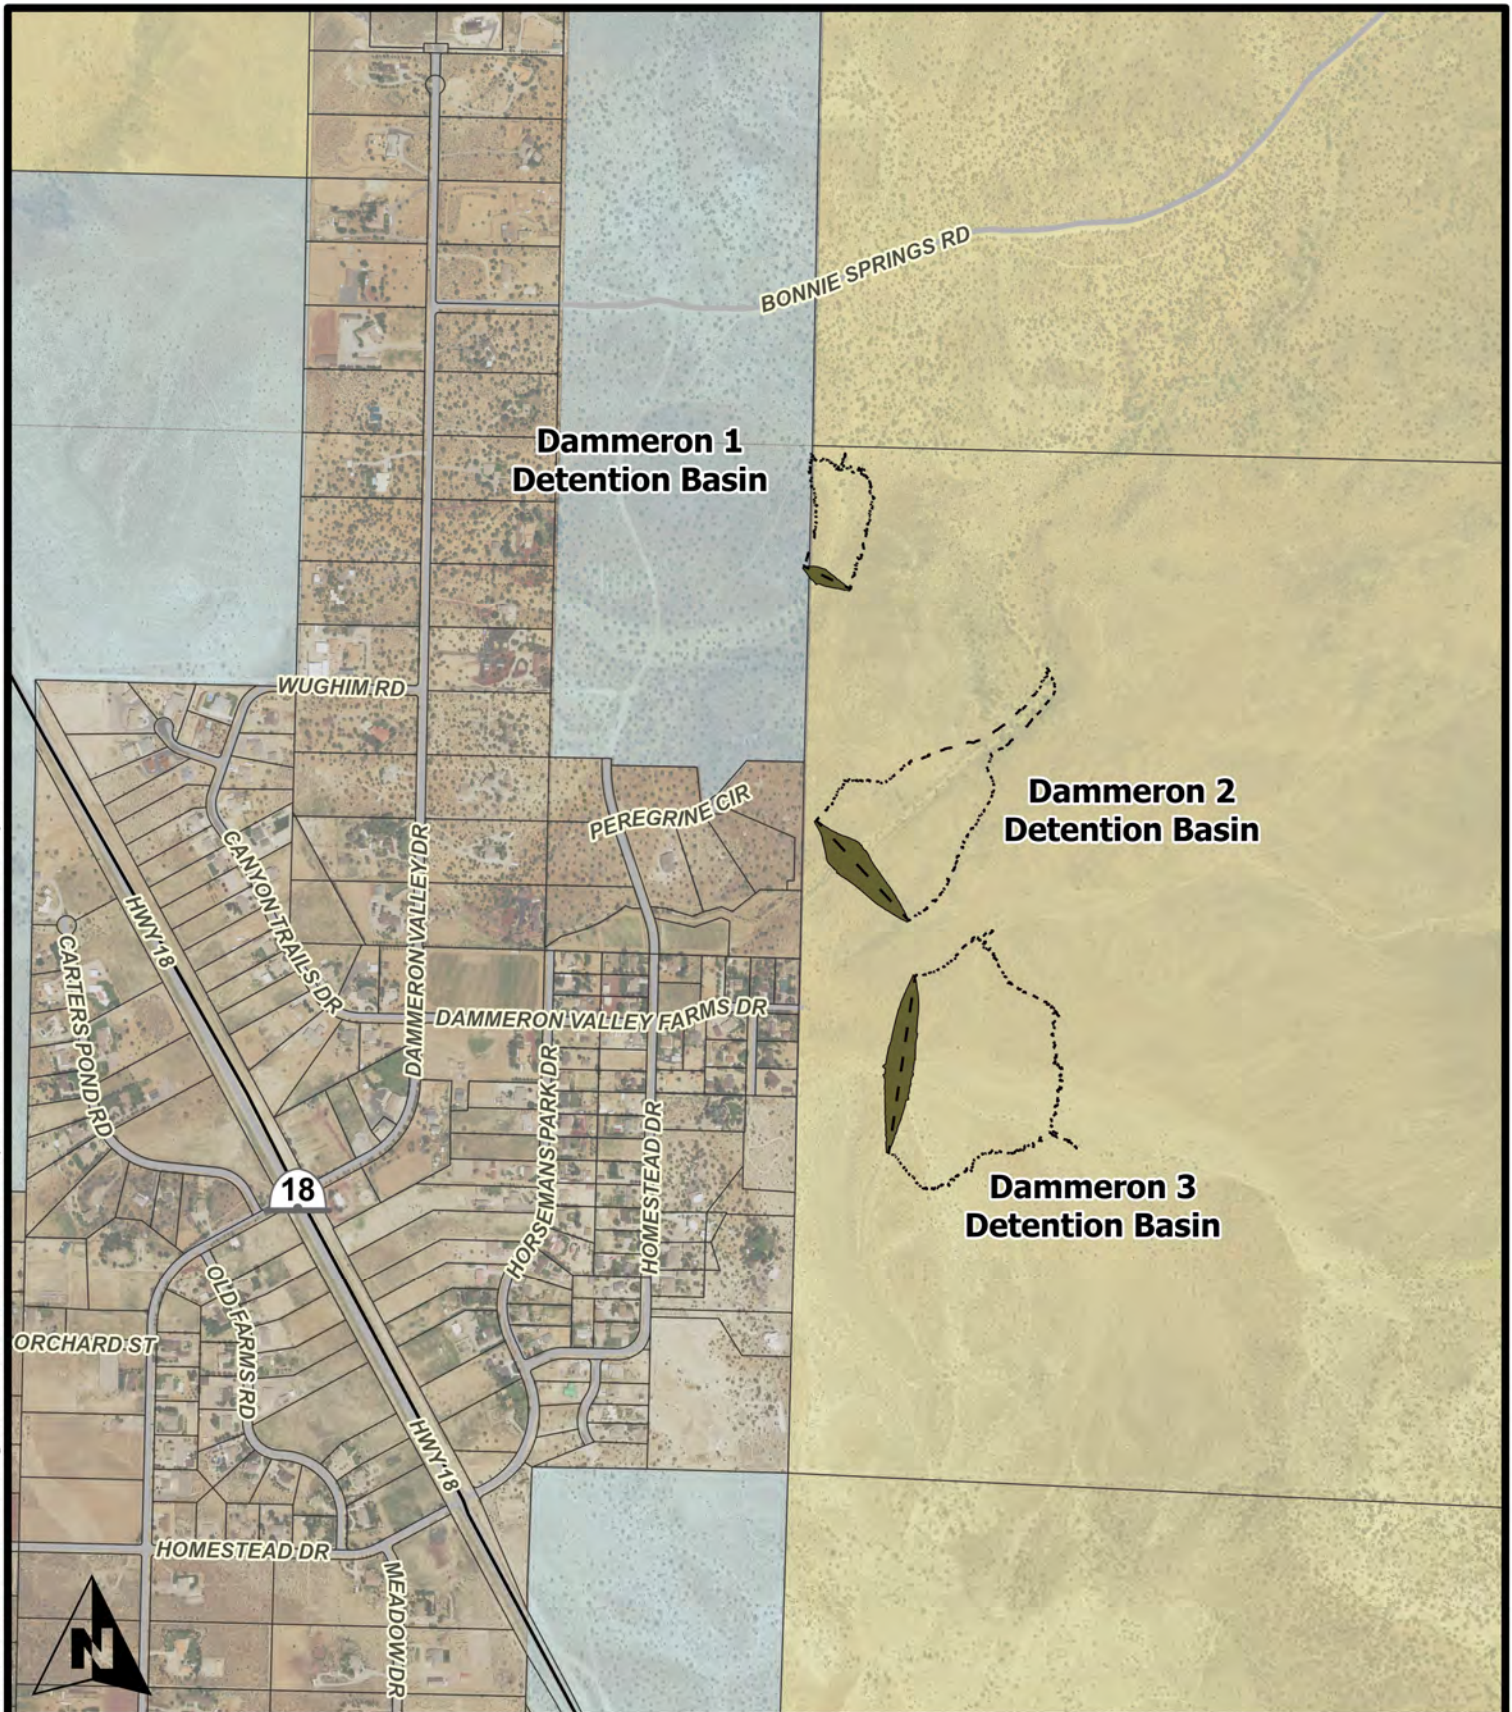

	High Water		Federal
	Dam Location		Private
			State
			Tribal

Dammeron Valley Figure 1	
Spatial Reference:	UT83-SF
Drawn By:	JTM
Scale:	1" = 1,000 feet
Date:	June 2, 2021

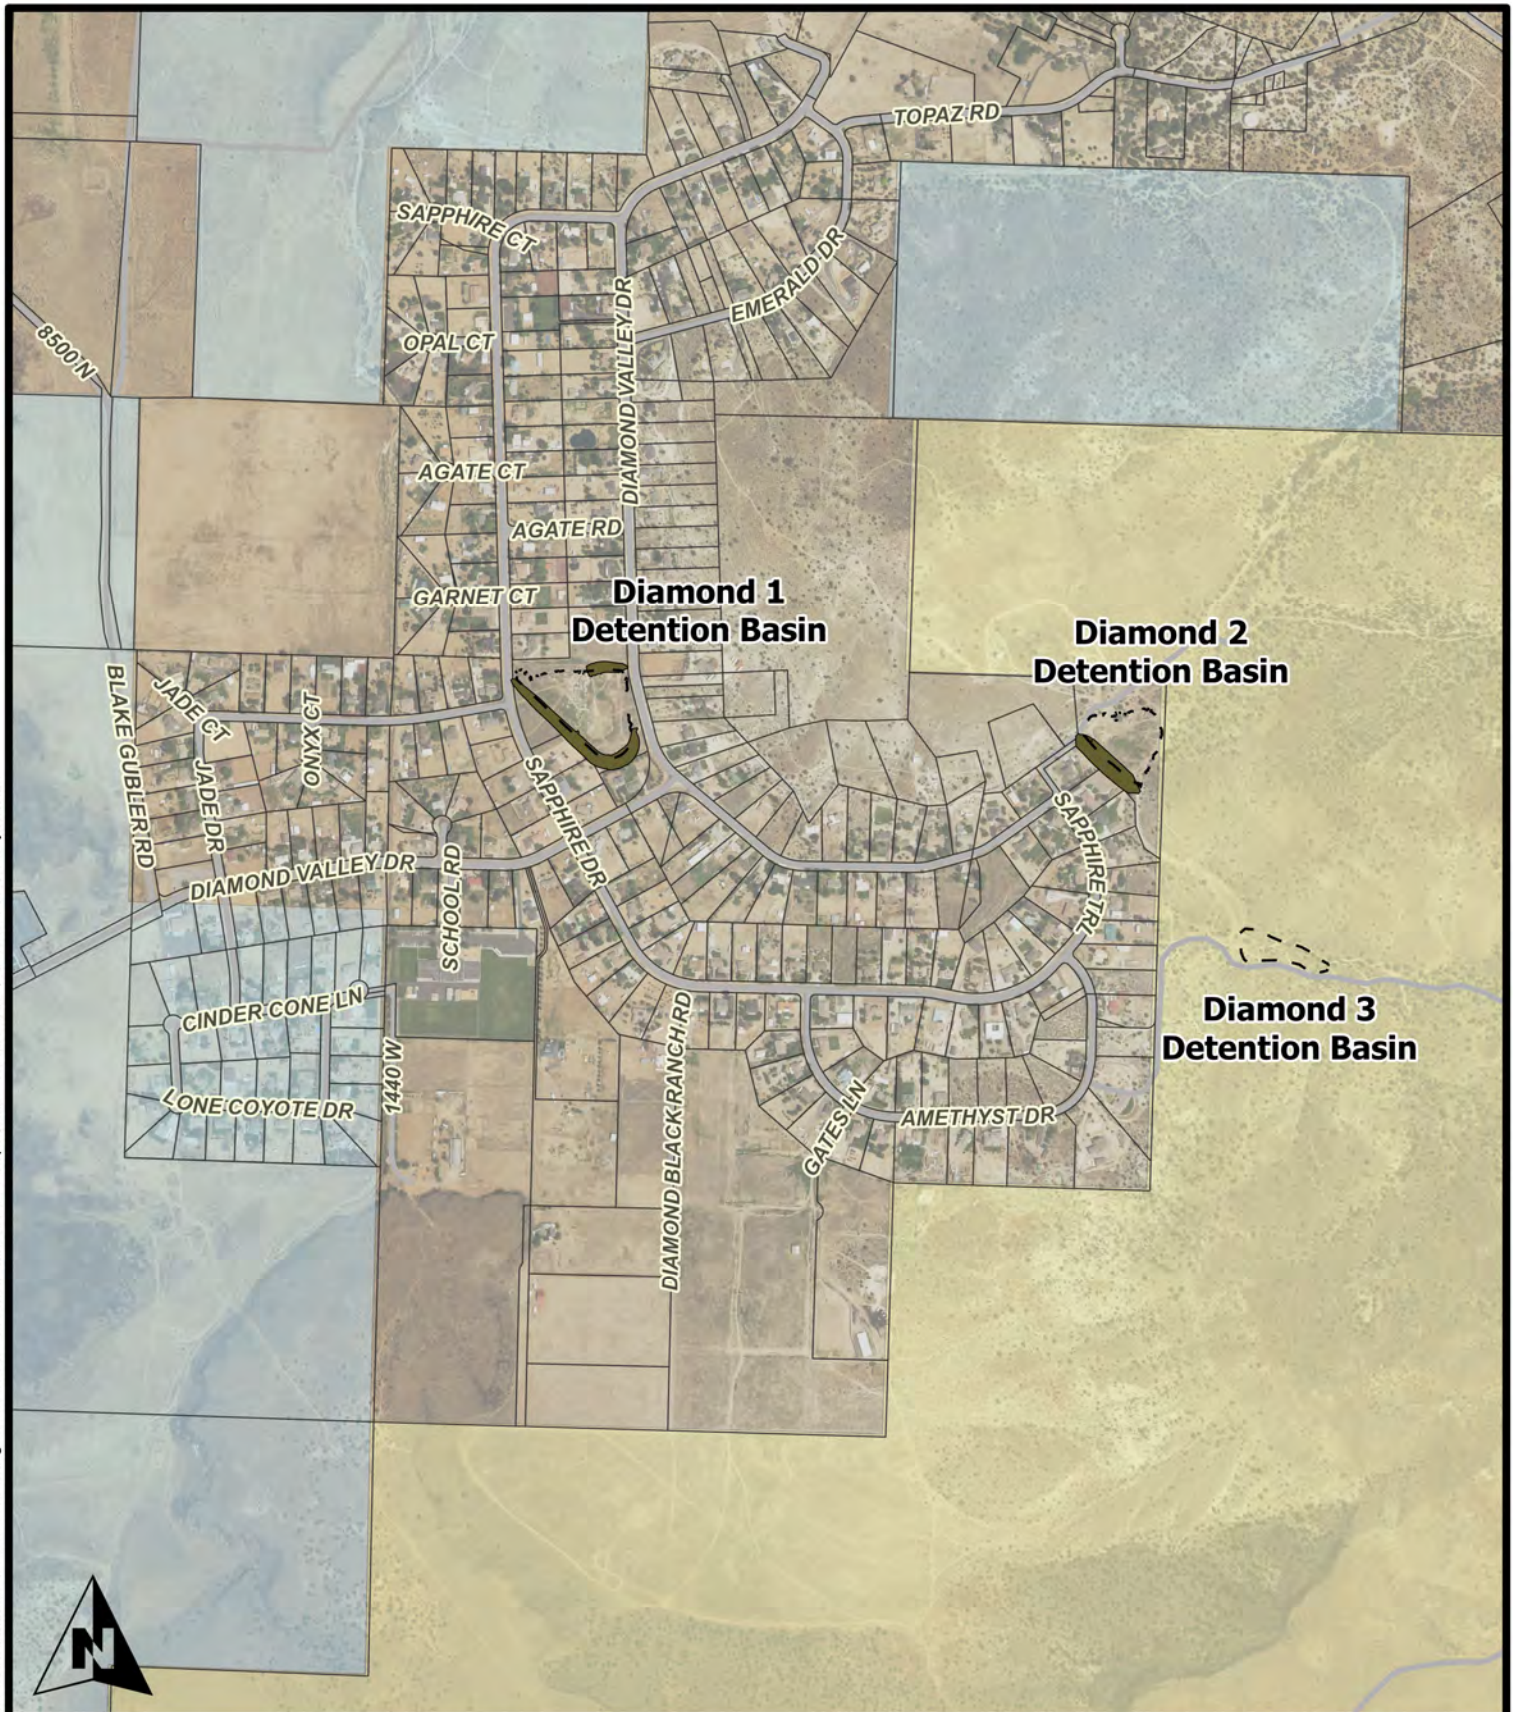

High Water

Dam Location

Land Ownership

- Federal
- Private
- State
- Tribal

Diamond Valley

Figure 2

Spatial Reference: UT83-SF

Drawn By: JTM

Scale: 1" = 1,000 feet

Date: June 2, 2021



ALPHA
ENGINEERING

43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

Part II. Purpose and Need for Facility

The primary purpose of the project is to protect the downstream residents and improvements. This purpose would be achieved by limiting and storing detained flows within the detention basins. Flows will be released from the detention basins at a rate not to exceed the capacity of existing downstream drainage infrastructure.

The three new Dammeron Valley detention basins will be installed on previously undisturbed and non-detained drainage tributary basins. The three existing Diamond Valley detention basins will consist of rehabilitating existing detention basins. The rehabilitated basins are currently filled with sediment deposits and do not provide flood protection as originally intended with the dams. This project will remove the sediment deposits and re-install the dams to bring them up to current safety standards.

As part of this project, improvements will be made to armor existing channels that are downstream of the detention basins. The armoring will protect the existing channels from erosion.

Before final design can be completed on the detention basins, a geotechnical investigation will be required. The investigations will cause disturbance on BLM property. A Standard Form 299 (SF-299) has been submitted to the BLM indicating the investigation requirements. The submitted SF-299 is being attached as **Appendix C**.

Part III. Project Description and Land Ownership

A. Project Description and Land Ownership

The proposed detention basins and appurtenant elements are located on privately- and BLM-owned lands. Permanent facilities would consist of six earthen dams, principal and auxiliary spillways, and pipelines. The project layout with land ownership is shown on **Figures 2a and 2b**.

B. Right of Way

The submitted SF-299 (**Appendix C**) indicates the Right of Way requirements for the project geotechnical investigations. The County has received resolution approval from the County Commission to proceed with the work and filing of SF-299 (**Appendix D**). A short-term ROW has been applied for and accepted by the BLM (**Appendix E**).

C. Government Agencies Involved

The government agencies potentially involved include:

- Washington County
- Natural Resource Conservation Service
- Bureau of Land Management
- Community of Dammeron Valley
- Community of Diamond Valley
- Utah State Division of Water Rights, Dam Safety

Part IV. Facility Construction & Design

A. Schedule

Construction would commence after necessary permits are obtained for the geotechnical investigations and are expected to last approximately four weeks. Construction of the detention basins is expected to occur in 2022.

B. Geotechnical Investigation

The scope of work and field activities are summarized in **Exhibits 1 and 2 (Appendix A)** and the attached SF-299 (**Appendix C**).

C. Resource Value and Environmental Concerns

The environmental concerns are discussed in the attached SF-299 (**Appendix C**). Best Management Practices (**Appendix A**) will be followed during the investigations.

D. Termination and Restoration

After the geotechnical investigations have been completed or if the project is to be terminated or abandoned after the site has been disturbed, a joint inspection would be held with the authorized officer(s) of the BLM prior to termination. The County will make all feasible efforts to restore the conditions to the original environment where any disturbance has taken place. This will include re-contouring the ground to existing conditions and re-seeding with an approved seed mix. The joint inspection will identify additional restoration measures that may be required in determining an acceptable and specific rehabilitation plan for the area.

Appendix A. Best Management Practices

Best Management Practices

As part of standard operating procedures, standard BMPs would be implemented throughout the project in order to reduce potential adverse environmental impacts. Most of the impacts are short term and generally occur during the construction period. Project design and implementation of site-specific or selectively recommended BMPs would minimize the effect of the project where the potential for long-term, adverse impacts may occur.

STANDARD BMPs	
1.	All construction vehicle movement outside of the right-of-way would be restricted to pre-designated access, contractor acquired access, or public roads.
2.	The limits of construction activities would be predetermined, with activity restricted to and confined within those limits. No paint or permanent discoloring agents would be applied to rocks or vegetation to indicate survey or construction activity limits. The right-of-way boundary would be flagged in environmentally sensitive areas described in the plan of development to alert construction personnel that those areas would be avoided.
3.	In construction areas where re-contouring is not required, vegetation would be left in place wherever possible to avoid excessive root damage and allow for re-sprouting.
4.	In construction areas where ground disturbance is significant or where re-contouring is required, surface restoration would occur as required by the landowner or land management agency. The method of restoration typically would consist of returning disturbed areas to their natural contour (to the extent practical) and reseeding or re-vegetating with native plants. Seed viability would be tested and seed mixes would be certified to contain no noxious weeds.
5.	Prior to construction, all construction personnel would be instructed on the protection of cultural, paleontological, and ecological resources. To assist in this effort, the construction contract would address (a) federal and state laws regarding antiquities, fossils, and plants and wildlife, including collection and removal; and (b) the importance of these resources and the purpose and necessity of protecting them.
6.	An initial intensive cultural resource inventory survey would be conducted prior to construction. Impact avoidance and mitigation measures developed in consultation with appropriate land management and regulatory agencies and other interested parties would be implemented subsequent to the completion of the NEPA compliance document.
7.	Any cultural and/or paleontological resource discovered during construction by the COUNTY or any person working on their behalf on public or federal land would be reported immediately to the authorized officer. The County would suspend operations in the area until an evaluation is completed to prevent the loss of cultural or scientific values.
8.	All construction and maintenance activities would be conducted in a manner that would minimize disturbance to vegetation, drainage channels, and intermittent and perennial stream banks. In addition, dust-control measures would be utilized as necessary during construction in sensitive areas. Any used existing roads would be left in a condition equal to or better than their condition prior to construction.

STANDARD BMPs	
9.	All requirements of those entities having jurisdiction over air quality matters would be adhered to and any necessary permits for construction activities would be obtained. Open burning of construction trash (cleared trees, etc.) would not be allowed on BLM- or USFS-administered lands.
10.	Fences and gates, if damaged or destroyed by construction activities, would be repaired or replaced to their original pre-disturbed condition as required by the landowner or the land management agency. Temporary gates would be installed only with the permission of the landowner or the land management agency.
11.	Totally enclosed containment would be provided for all hazardous materials (if needed) and trash. All construction waste including trash, litter, garbage, other solid waste, petroleum products, and other potentially hazardous materials would be removed to a disposal facility authorized to accept such materials.
12.	Third-party environmental contractors would be used throughout the construction effort, from clearing through rehabilitation.
13.	The County would trim trees in preference to cutting trees, and would cut trees in preference to bulldozing them.
14.	Construction holes left open overnight would be covered to prevent livestock or wildlife from harm.
15.	The contractor would clean off-road equipment (power or high-pressure cleaning) of all mud, dirt, and plant parts prior to moving equipment onto public land.

ADDITIONAL STIPULATIONS

The following additional stipulations would be implemented throughout the construction and operation of the project and would be included as part of the standard operating procedures.

STIPULATIONS – STANDARD OPERATING PROCEDURES	
1.	County would construct, operate, and maintain the facilities, improvements, and structures within this ROW in strict conformity with the plan of development as it is approved. Any relocation, additional construction, or use that is not in accord with the approved plan of development would not be initiated without the prior written approval of the authorized officer. A copy of the complete ROW grant or acknowledgment, including all stipulations and approved plan of development, would be made available on the ROW area during construction, operation, and maintenance to the authorized officer. Noncompliance with the above shall be grounds for an immediate temporary suspension of activities if it constitutes a threat to public health and safety or a material threat to the environment.
2.	This plan of development describes in detail the construction, operation, maintenance of the ROW and its associated improvements and/or facilities. An approved plan of development may be referred to for interpretation of the right-of-way grant.
3.	County would contact the authorized officer at least 10 days prior to the anticipated start of construction and/or any surface-disturbing activities. The authorized officer may require and



STIPULATIONS – STANDARD OPERATING PROCEDURES

schedule a preconstruction conference with the County prior to commencement of construction and/or surface-disturbing activities on the ROW. The County, its contractor(s), or agents involved with the construction and/or surface-disturbing activities on the ROW should attend this conference to review the stipulations of the grant and the plan(s) of development.
4. County would designate a representative(s) who would have the authority to act upon and implement instructions from the authorized officer within a reasonable time when construction or other surface-disturbing activities are underway.
5. County would protect all survey monuments found within the right-of-way. Survey monuments include but are not limited to General Land Office and BLM Cadastral Survey Corners, reference corners, witness points, U.S. Coastal and Geodetic benchmarks and triangulation stations, military control monuments, and recognizable civil (both public and private) survey monuments. In the event of obliteration or disturbance of any of the above, the County would immediately report the incident, in writing, to the authorized officer and the respective installing authority, if known. Where General Land Office or BLM ROW monuments or references are obliterated during operations, County shall secure the services of a registered land surveyor or a BLM cadastral surveyor to restore the disturbed monuments and references using surveying procedures found in the <i>Manual of Surveying Instructions for the Survey of the Public Lands of the United States</i>, latest edition. County shall record such survey in the appropriate county and send a copy to the authorized officer. If the BLM cadastral surveyors or other federal surveyors are used to restore the disturbed survey monument, County would be responsible for the survey cost.
6. The County or the successor in interest shall comply with Title VI of the Civil Rights Act of 1964 (42 U.S.C. 2000d et. seq.) and the regulations of the Secretary of Interior issued pursuant hereto.
7. County would mark the exterior boundaries of the ROW with a stake and/or lath. The intervals may be varied at the time of staking at the discretion of the authorized officer. The tops of the stakes and/or laths would be painted and the laths flagged in a distinctive color as determined by the holder. The survey station numbers would be marked on the boundary stakes and/or laths at the entrance to and exit from public land. Holder would maintain all boundary stakes and/or laths in place until final cleanup and restoration are completed and approved by the authorized officer. The stakes and/or laths would then be removed at the direction of the authorized officer.
8. County would conduct all activities associated with the construction, operation, and maintenance of the right-of-way within the authorized limits of the ROW and approved plan of development.
9. County would survey and clearly mark the centerline and/or exterior limits of the ROW, as determined by the authorized officer.
10. All design, material, and construction, operation, maintenance, and termination practices would be in accordance with safe and proven engineering practices.
11. County would inform the authorized officer within 48 hours of any accidents on federal lands that require reporting to the Department of Transportation as required by 49 CFR Part 195.
12. During conditions of extreme fire danger, operations may be suspended or limited in certain areas.
13. County would be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2803.1-4. County would be held to a standard of strict liability for damage or injury to the

STIPULATIONS – STANDARD OPERATING PROCEDURES
United States resulting from fire or soil movement (including landslides and slumps as well as wind and water-caused movement of particles) caused or substantially aggravated by any of the following within the ROW or permit area: • Activities of the holder including but not limited to construction, operation and maintenance of the facility. • Activities of other parties acting under color of authority from the County, including but not limited to: - land clearing - earth-disturbing and earth-moving work - blasting
14. Within 30 days of completion, County would submit to the authorized officer, as-built drawings and a certification of construction verifying that the facility has been constructed (and tested) in accordance with the design, plans, specifications, and applicable laws and regulations.
15. Construction sites would be maintained in a sanitary condition at all times; waste materials at those sites would be disposed of promptly at an appropriate waste disposal site. “Waste” means all discarded matter including but not limited to human waste, debris, garbage, refuse, oil drums, petroleum products, ashes, and equipment.
16. Prior to preconstruction activities on the subject parcel, County would identify all noxious weeds present. A list of the weeds would be provided to the authorized officer. A determination would be made by the authorized officer of any noxious weeds that may require flagging for treatment. County shall treat the noxious weeds as required by the authorized officer.
17. County would clean off-road equipment (power or high-pressure cleaning) of all mud, dirt, and plant parts prior to moving equipment onto public land authorized under this lease.
18. Gravel and/or fill material to be placed in relatively weed-free areas must come from weed-free sources. Prior to obtaining gravel and/or fill material, the authorized officer would inspect the source for weeds and determine adequacy of site.
19. County would identify a road maintenance program, which would include monitoring for noxious weeds. If County identifies any noxious weeds, County would notify the authorized officer immediately. A treatment program would be identified and County would be responsible for weed abatement.

Appendix B. Test Pit Exhibits

P:\308-10 Washington County - Santa Clara Watershed Plan EADrawings\GIS\ArcGIS Pro\Santa Clara EA Scoping.aprx, Damm Testing Exhibit, 6/3/2021 9:51 AM jmadson

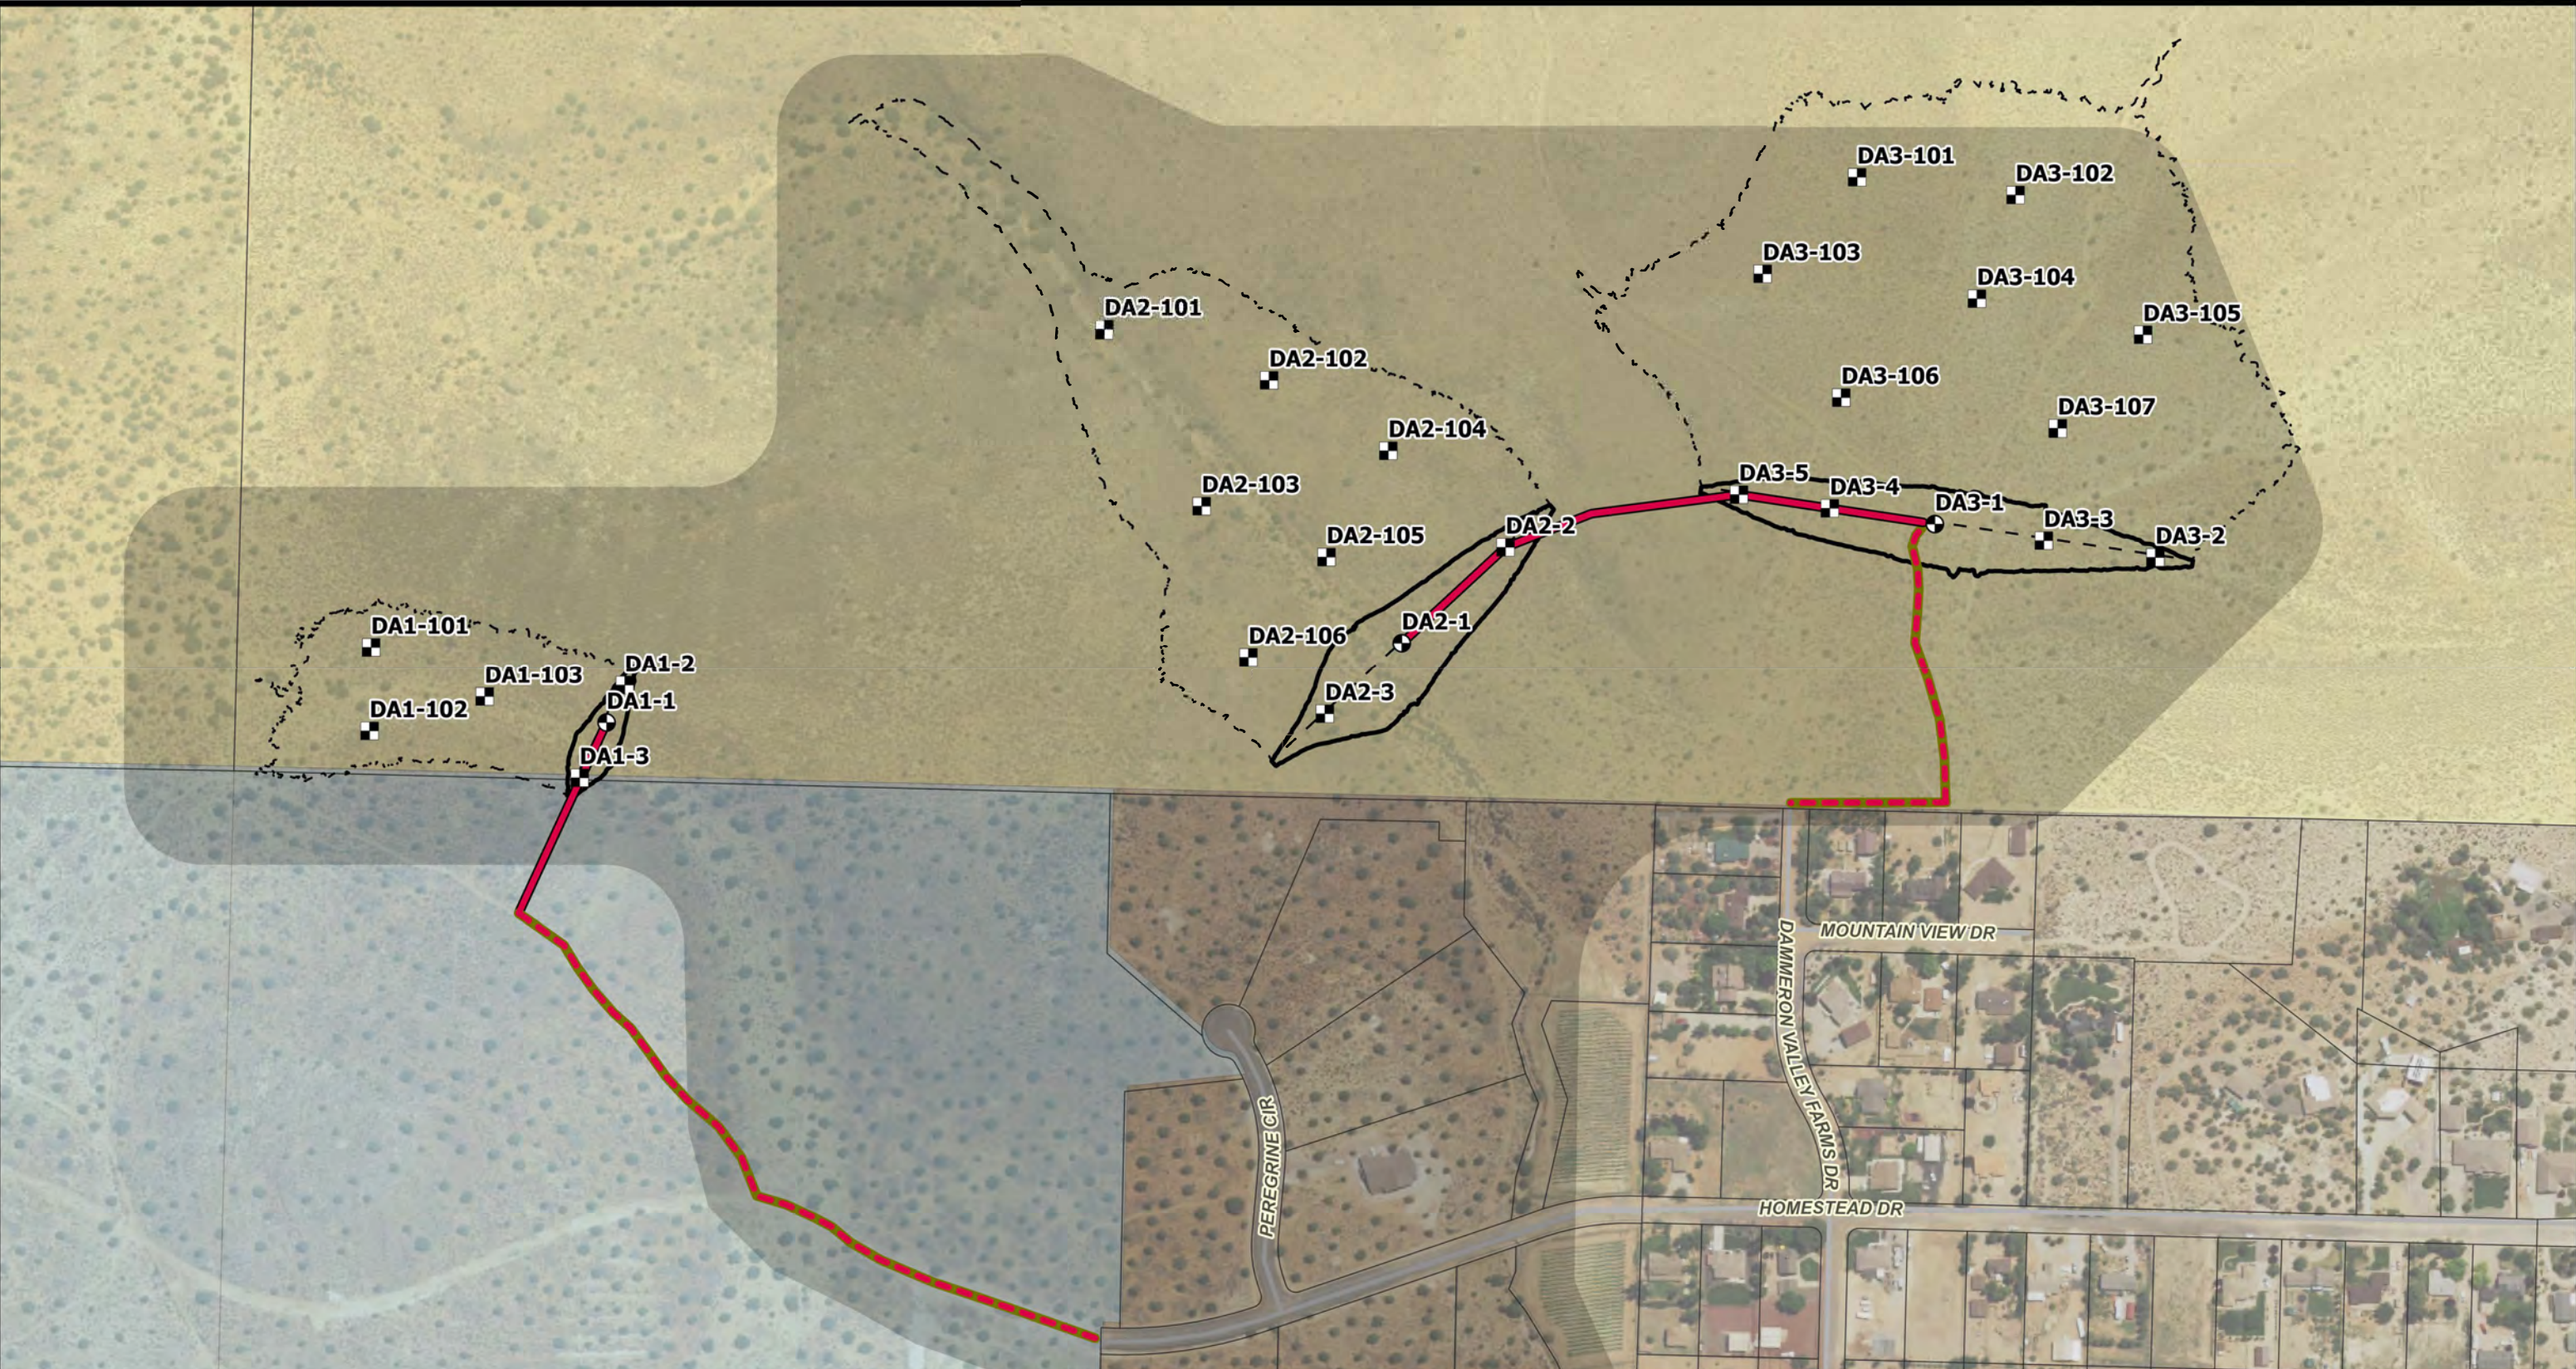

ALPHA ENGINEERING
43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Proposed Boring Location
- Proposed Test Pit Location
- New Road
- Existing Road
- High Water
- Dam Location

- EA Boundary
- Land Ownership
 - Federal
 - Private
 - State
 - Tribal





Exhibit 1

Dammeron Valley Test Hole Locations

Santa Clara Watershed EA

Spatial Reference:	Utah State Plane NAD 83, feet
Drawn By:	JTM
Scale:	1" = 300 feet
Date:	April 2, 2021

P:\308-10 Washington County - Santa Clara Watershed Plan EADrawings\GIS\ArcGIS Pro\Santa Clara EA Scoping.aprx - Diam Testing Exhibit_ 6/3/2021 10:05 AM jmadson

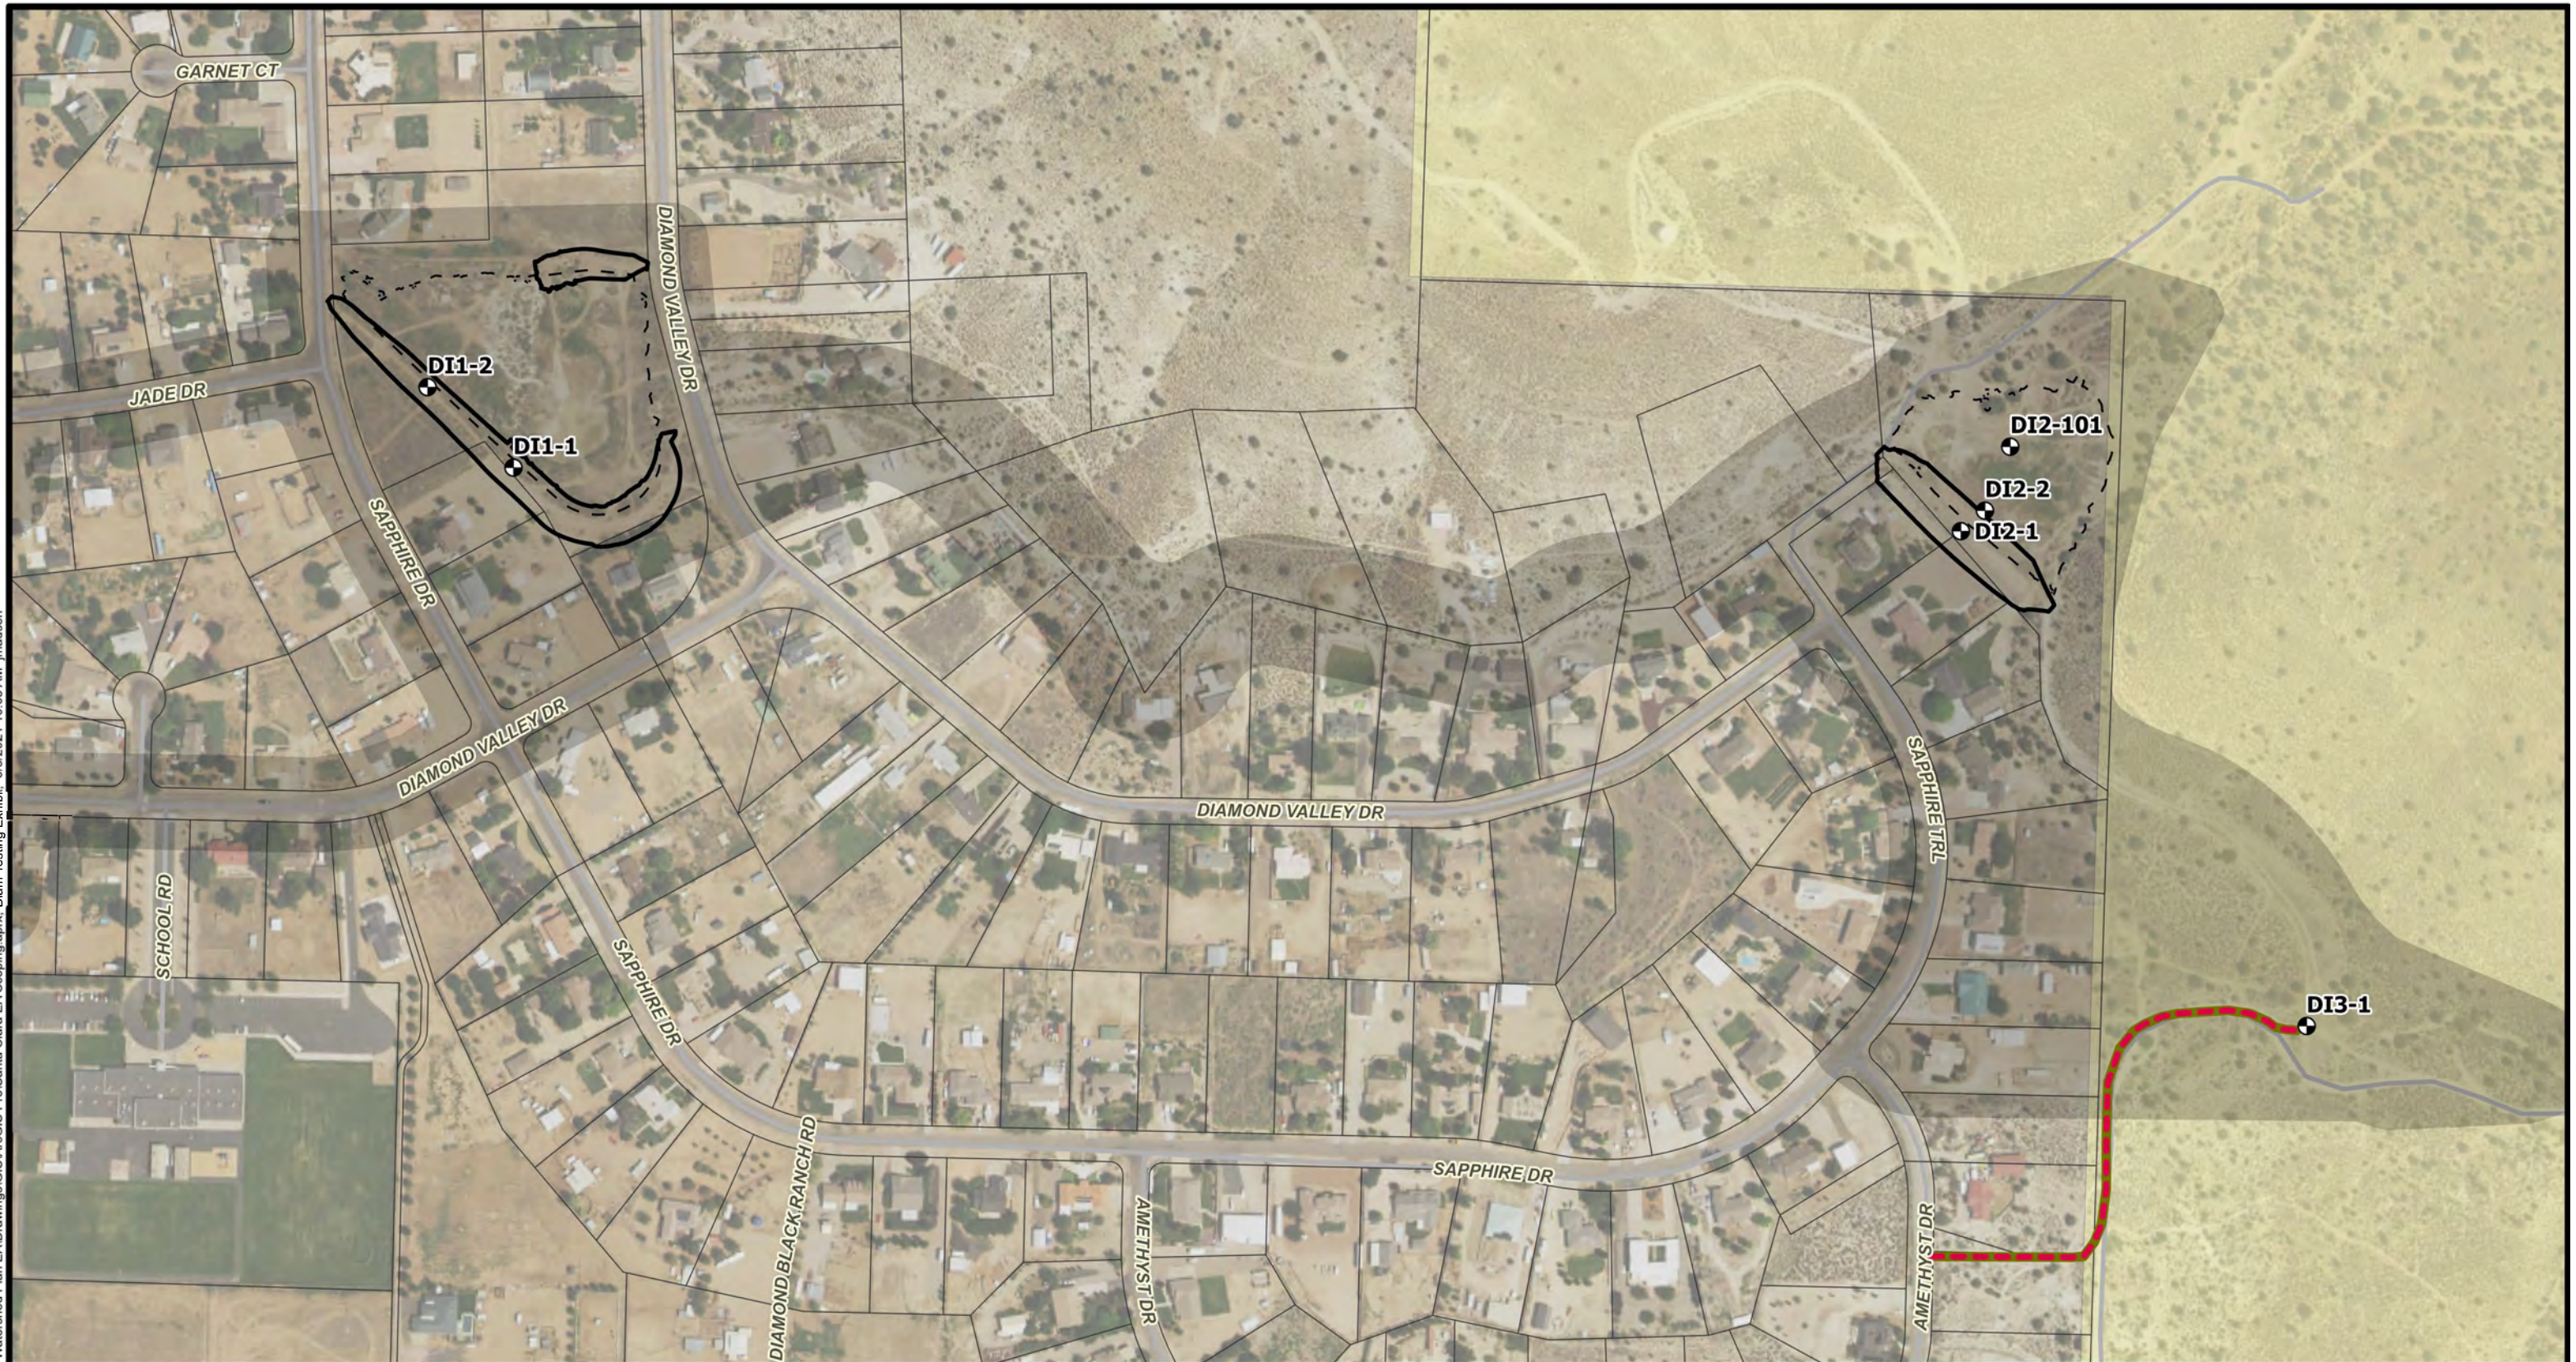

ALPHA
ENGINEERING
43 South 100 East, Suite 100 • St George, Utah 84770
T: 435.628.6500 • F: 435.628.6553 • alphaengineering.com

- Proposed Boring Location
- New Road
- Existing Road
- High Water
- Dam Location
- EA Boundary

- Land Ownership
- Federal
 - Private
 - State
 - Tribal



Exhibit 2

Diamond Valley Test Hole Locations

Santa Clara Watershed EA

Spatial Reference: Utah State Plane NAD 83, feet
Drawn By: JTM
Scale: 1" = 300 feet
Date: April 2, 2021

Appendix C. SF-299

APPLICATION FOR TRANSPORTATION, UTILITY SYSTEMS, TELECOMMUNICATIONS AND FACILITIES
ON FEDERAL LANDS AND PROPERTYFORM APPROVED
OMB Control Number: 0596-0249
Expiration Date: 2/28/2023

FOR AGENCY USE ONLY

NOTE: Before completing and filing the application for an authorization (easement, right-of-way, lease, license or permit), the applicant should completely review this package, including instructions, and schedule a pre-application meeting with representatives of the agency responsible for processing the application. Each agency may have specific and unique requirements to be met in preparing and processing the application. Many times, with the help of the agency representative, the application can be completed at the pre-application meeting.

Application Number

Date Filed

1. Name and address of applicant

Washington County
c/o Todd Edwards, City Engineer
197 East Tabernacle
St. George, Utah 84770

2. Name and address of authorized agent if different from item 1

Alpha Engineering
c/o Brent Gardner
43 South 100 East
Suite 100
St. George, Utah 84770

3. Applicant telephone number and email:

(435) 256-6333
todd.edwards@washco.utah.gov

Authorized agent telephone number and email:
(435) 628-6500 brentgardner@alphaengineer.com

4. As applicant are you? (check one)

- a. ☐ Individual
b. ☐ Corporation*
c. ☐ Partnership/Association*
d. ☐ State Government/State Agency
e. ☒ Local Government
f. ☐ Federal Agency

* If checked, complete supplemental page

5. Specify what application is for: (check one)

- a. ☒ New authorization
b. ☐ Renewing existing authorization number
c. ☐ Amend existing authorization number
d. ☐ Assign existing authorization number
e. ☐ Existing use for which no authorization has been received *
f. ☐ Other*

* If checked, provide details under item 7

6. If an individual, or partnership, are you a citizen(s) of the United States? ☐ Yes ☐ No

7. Project description (describe in detail): (a) Type of use or occupancy, (e.g., canal, pipeline, road, telecommunications); (b) related structures and facilities; (c) physical specifications (Length, width, grading, etc.); (d) term of days/years needed; (e) time of year of use or operation; (f) Volume or amount of product to be transported; (g) duration and timing of construction; and (h) temporary work areas needed for activity/construction (Attach additional sheets, if additional space is needed.)

- a) The proposed use is for drilling and test pits to examine soil conditions for three potential future debris basins in the Dammeron Valley area and one potential site in Diamond Valley.
b) Drill rig and trackhoe will be mobilized to the debris basin sites.
c) One bore will be done on the Diamond Valley site on BLM Ground (see attached map). There are 24 proposed test pit sites (20'x20') and 3 bore sites proposed in the Dammeron Valley area (see attached map).
d) The easement will be temporary for drilling and access to the drilling and test pit sites. Should be completed within 60 days of approval.
e) During the fall of 2021.
f) Drill rig and trackhoe to perform test pits and borings will be the only material needed.
g) It is estimated to be completed within 60 days of the permit being issued.
h) Figures attached show locations and temporary access roads. The test pits will disturb an area approximately 20'x20' in size. The drill rig will bore holes approximately 4" in diameter with minimal surface disturbance.

8. Attach a map covering area and show location of project proposal.

9. State or Local government approval: ☐ Attached ☐ Applied for ☒ Not Required10. Nonrefundable application fee: ☐ Attached ☐ Not required ☒ To be determined by agency11. Does project cross international boundary or affect international waterways? ☐ Yes ☒ No (if "yes," indicate on map)

12. Give statement of your technical and financial capability to construct, operate, maintain, and terminate system for which authorization is being requested.

Washington County has partnered with the NRCS to fund this project and therefore can meet all financial and operational obligations. They have performed multiple projects locally that are located on property managed by the BLM.

13a. Describe other alternative locations considered.

Washington County has evaluated multiple debris basin sites in the area. Coordination with BLM was made on the sites chosen. It may be found during the drilling and test pit exploration that these sites are not suitable for the debris basins. Other alternatives may be considered at that point in time.

b. Why were these alternatives not selected?

The alternatives at this point are not suitable for dams or dam sites are too large.

c. Give explanation as to why it is necessary to use or occupy Federal assets (lands or buildings).

The debris basins sites chosen serve a larger area affected by flooding. Exploration of the sites will determine the suitability of the soils.

14. List authorizations and pending applications filed for similar projects which may provide information to the authorizing agency. (Specify number, date, code, or name)

Washington County has other authorizations in the general area for other projects which are on file.

15. Provide statement of need for project, including the economic feasibility and items such as: (a) cost of proposal (construction, operation, and maintenance); (b) estimated cost of next best alternative; and (c) expected public benefits.

a) The estimated cost for drilling and test pits is \$95,000.

b) The next best alternative is \$130,000.

c) Exploration will determine feasibility of the sites.

16. Describe probable effects on the population in the area, including the social and economic aspects, and the rural lifestyles.

The proposed debris basins will provide flood protection and routing of storms through multiple subdivisions and homes.

17. Describe likely environmental effects that the proposed project will have on: (a) air quality; (b) visual impact; (c) surface and ground water quality and quantity; (d) the control or structural change on any stream or other body of water; (e) existing noise levels; and (f) the surface of the land, including vegetation, permafrost, soil, and soil stability; and, (g) historic or archaeological resources or properties.

a) The project will have no long term impacts on air quality. b) The drill holes and test pit will be below ground. c) The project will have no long term impacts on water quality. d) The exploration will not change ephemeral stream. e) Noise levels will temporarily increase for a few weeks. f) The project will have little effect to vegetation. g) No archaeological sites are visible.

18. Describe the probable effects that the proposed project will have on (a) populations of fish, plant life, wildlife, and marine life, including threatened and endangered species; and (b) marine mammals, including hunting, capturing, collecting, or killing these animals.

We anticipate no probable effects on fish, wildlife, or marine life or hunting, capturing or killing of these animals. There will be minimal disturbance to plant life with the placement of access roads on previously disturbed trails.

19. State whether any hazardous material, as defined in this paragraph, would be used, produced, transported or stored on or in a federal building or federal lands or would be used in connection with the proposed use or occupancy. "Hazardous material" shall mean (a) any hazardous substance under section 101(14) of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA), 42 U.S.C. § 9601(14); (b) any pollutant or contaminant under section 101(33) of CERCLA, 42 U.S.C. § 9601(33); (c) any petroleum product or its derivative, including fuel oil, and waste oils; and (d) any hazardous substance, extremely hazardous substance, toxic substance, hazardous waste, ignitable, reactive or corrosive materials, pollutant, contaminant, element, compound, mixture, solution or substance that may pose a present or potential hazard to human health or the environment under any applicable environmental laws. The holder shall not store any hazardous materials at the site without prior written approval from the authorized officer. This approval shall not be unreasonably withheld. If the authorized officer provides approval, this permit shall include (or in the case of approval provided after this permit is issued, shall be amended to include) specific terms addressing the storage of hazardous materials, including the specific type of materials to be stored, the volume, the type of storage, and a spill plan. Such terms shall be proposed by the holder and are subject to approval by the authorized officer.

It is anticipated that no hazardous materials will be stored on site.

20. Name all the Federal Department(s)/Agency(ies) where this application is being filed.

Bureau of Land Management

I HEREBY CERTIFY, That I am of legal age and authorized to do business in the State and that I have personally examined the information contained in the application and believe that the information submitted is correct to the best of my knowledge.

Signature of Applicant

Todd Edwards

Digitally signed by Todd Edwards

Date: 2021.05.19 15:51:43 -06'00'

Date

May 19, 2021

Title 18, U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious, or fraudulent statements or representations as to any matter within its jurisdiction.

GENERAL INFORMATION
ALASKA NATIONAL INTEREST LANDS

This application will be used when applying for a right-of-way, permit, license, lease, or certificate for the use of Federal lands which lie within conservation system units and National Recreation or Conservation Areas as defined in the Alaska National Interest Lands Conservation Act. Conservation system units include the National Park System, National Wildlife Refuge System, National Wild and Scenic Rivers System, National Trails System, National Wilderness Preservation System, and National Forest Monuments.

Transportation utility systems telecommunication installations facility uses for which the application may be used are:

1. Canals, ditches, flumes, laterals, pipes, pipelines, tunnels, and other systems for the transportation of water.
2. Pipelines and other systems for the transportation of liquids other than water, including oil, natural gas, synthetic liquid and gaseous fuels, and any refined product produced therefrom.
3. Pipelines, slurry and emulsion systems, and conveyor belts for transportation of solid materials.
4. Systems for the transmission and distribution of electric energy.
5. Wired and wireless systems for transmission or reception of radio, television, telephone, telegraph, and other electronic signals, and other means of communications.
6. Improved right-of-way for snow machines, air cushion vehicles, and all-terrain vehicles.
7. Roads, highways, railroads, tunnels, tramways, airports, landing strips, docks, and other systems of general transportation.

This application must be filed simultaneously with each Federal department or agency requiring authorization to establish and operate your proposal.

In Alaska, the following agencies will help the applicant file an application and identify the other agencies the applicant should contact and possibly file with:

Department of Agriculture
Regional Forester, Forest Service (USFS)
P.O. Box 21628
Juneau, Alaska 99802-1628
Telephone: (907) 586-7847
(or a local Forest Service Office)

Department of the Interior
Bureau of Indian Affairs (BIA)
Alaska Regional Office
709 West 9th Street
Juneau, Alaska 99802
Telephone: (907) 586-7177

Department of the Interior
Alaska State Office
Bureau of Land Management
222 West 7th Avenue #13
Anchorage, Alaska 99513
Public Room: 907-271-5960
FAX: 907-271-3684
(or a local BLM Office)

U.S. Fish & Wildlife Service (FWS)
Office of the Regional Director
1011 East Tudor Road
Anchorage, Alaska 99503
Telephone: (907) 786-3440

National Park Service (NPS)
Alaska Regional Office
240 West 5th Avenue
Anchorage, Alaska 99501
Telephone: (907) 644-3510

Note - Filings with any Interior agency may be filed with any office noted above or with the Office of the Secretary of the Interior, Regional Environmental Officer, P.O. Box 120, 1675 C Street, Anchorage, Alaska 99513.

Department of Transportation
Federal Aviation Administration
Alaska Region AAL-4, 222 West 7th Ave., Box 14
Anchorage, Alaska 99513-7587
Telephone: (907) 271-5285

NOTE - The Department of Transportation has established the above central filing point for agencies within that Department. Affected agencies are: Federal Aviation Administration (FAA), Coast Guard (USCG), Federal Highway Administration (FHWA), Federal Railroad Administration (FRA).

OTHER THAN ALASKA NATIONAL INTEREST LANDS

Use of this form is not limited to National Interest Conservation Lands of Alaska.

Individual department/agencies may authorize the use of this form by applicants for transportation, utility systems, telecommunication installations and facilities on other Federal lands outside those areas described above.

For proposals located outside of Alaska, applications will be filed at the local agency office or at a location specified by the responsible Federal agency.

SPECIFIC INSTRUCTIONS
(Items not listed are self-explanatory)

- 7 Attach preliminary site and facility construction plans. The responsible agency will provide instructions whenever specific plans are required.
- 8 Generally, the map must show the section(s), township(s), and range(s) within which the project is to be located. Show the proposed location of the project on the map as accurately as possible. Some agencies require detailed survey maps. The responsible agency will provide additional instructions.
- 9, 10, and 12 The responsible agency will provide additional instructions.
- 13 Providing information on alternate locations in as much detail as possible, discussing why certain locations were rejected and why it is necessary to use Federal assets will assist the agency(ies) in processing your application and reaching a final decision. Include only reasonable alternate locations as related to current technology and economics.
- 14 The responsible agency will provide instructions.
- 15 Generally, a simple statement of the purpose of the proposal will be sufficient. However, major proposals located in critical or sensitive areas may require a full analysis with additional specific information. The responsible agency will provide additional instructions.
- 16 through 19 Providing this information with as much detail as possible will assist the Federal agency(ies) in processing the application and reaching a decision. When completing these items, you should use a sound judgment in furnishing relevant information. For example, if the project is not near a stream or other body of water, do not address this subject. The responsible agency will provide additional instructions.

Application must be signed by the applicant or applicant's authorized representative.

EFFECT OF NOT PROVIDING INFORMATION

Disclosure of the information is voluntary. If all the information is not provided, the proposal or application may be rejected.

DATA COLLECTION STATEMENT

The Federal agencies collect this information from proponents and applicants requesting a right-of-way, permit, license, lease, or certification for use of Federal assets. The Federal agencies use this information to evaluate a proponent's or applicant's proposal to use Federal assets.

BURDEN STATEMENT

According to the Paperwork Reduction Act of 1995, an agency may not conduct or sponsor, and a person is not required to respond to a collection of information unless it displays a valid OMB control number. The valid OMB control number for this information collection is 0596-0249. The time required to complete this information collection is estimated to average 8 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. The authority to collect this information is derived from 47 U.S.C. 1455(c)(3) and 16 U.S.C. 3210.

USDA NONDISCRIMINATION STATEMENT

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or part of an individual's income is derived from any public assistance. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at 202-720-2600 (voice and TDD).

To file a complaint of discrimination, write USDA, Director, Office of Civil Rights, 1400 Independence Avenue, SW, Washington, DC 20250-9410 or call toll free (866) 632-9992 (voice). TDD users can contact USDA through local relay or the Federal relay at (800) 877-8339 (TDD) or (866) 377-8642 (relay voice). USDA is an equal opportunity provider and employer.

The Privacy Act of 1974 (5 U.S.C. 552a) and the Freedom of Information Act (5 U.S.C. 552) govern the confidentiality to be provided for information received by the Forest Service.

SUPPLEMENTAL

NOTE: The responsible agency(ies) will provide instructions	CHECK APPROPRIATE BLOCK	
	ATTACHED	FILED *
I - PRIVATE CORPORATIONS		
a. Articles of Incorporation	☐	☐
b. Corporation Bylaws	☐	☐
c. A certification from the State showing the corporation is in good standing and is entitled to operate within the State	☐	☐
d. Copy of resolution authorizing filing	☐	☐
e. The name and address of each shareholder owning 3 percent or more of the shares, together with the number and percentage of any class of voting shares of the entity which such shareholder is authorized to vote and the name and address of each affiliate of the entity together with, in the case of an affiliate controlled by the entity, the number of shares and the percentage of any class of voting stock of that affiliate owned, directly or indirectly, by that entity, and in the case of an affiliate which controls that entity, the number of shares and the percentage of any class of voting stock of that entity owned, directly or indirectly, by the affiliate.	☐	☐
f. If application is for an oil or gas pipeline, describe any related right-of-way or temporary use permit applications, and identify previous applications.	☐	☐
g. If application is for an oil and gas pipeline, identify all Federal lands by agency impacted by proposal.	☐	☐
II - PUBLIC CORPORATIONS		
a. Copy of law forming corporation	☐	☒
b. Proof of organization	☐	☒
c. Copy of Bylaws	☐	☒
d. Copy of resolution authorizing filing	☐	☒
e. If application is for an oil or gas pipeline, provide information required by item "I - f" and "I - g" above.	☐	☐
III - PARTNERSHIP OR OTHER UNINCORPORATED ENTITY		
a. Articles of association, if any	☐	☐
b. If one partner is authorized to sign, resolution authorizing action is	☐	☐
c. Name and address of each participant, partner, association, or other	☐	☐
d. If application is for an oil or gas pipeline, provide information required by item "I - f" and "I - g" above.	☐	☐

* If the required information is already filed with the agency processing this application and is current, check block entitled "Filed." Provide the file identification information (e.g., number, date, code, name). If not on file or current, attach the requested information.

Appendix D. County Signed Resolution

RESOLUTION NO. R-2021-2776

**A RESOLUTION AUTHORIZING FILING OF BUREAU OF LAND MANAGEMENT
(BLM) STANDARD FORM 299, AN APPLICATION BY WASHINGTON COUNTY TO
DRILL TEST PITS ON BLM LAND**

(Re: Potential Future Construction of Detention Basins in Dammeron Valley and Diamond Valley)

WHEREAS, Washington County (the County) Public Works Department is reviewing potential locations for detention basins in Dammeron Valley and Diamond Valley, and wants to perform soils testing on various sites by drilling test pits;

WHEREAS, some of the proposed drilling and test pit sites are located on BLM property, and the County needs to apply for permission to perform the work through the BLM application process (Application Standard Form 299 attached);

WHEREAS, it is in the best interest of the residents of Washington County that the attached Application be executed and submitted;

NOW, THEREFORE, BE IT RESOLVED BY THE WASHINGTON COUNTY COMMISSION that the attached Application Standard Form 299 shall be executed and submitted to the BLM, and the Public Works Department is further authorized to submit any additional or supplemental information requested by the BLM to support the Application.


VOTED UPON AND PASSED BY THE WASHINGTON COUNTY COMMISSION AT A REGULAR MEETING OF THE WASHINGTON COUNTY COMMISSION HELD ON THE 1st day of JUNE, 2021.

WASHINGTON COUNTY



GIL ALMQUIST, Chair
Washington County Commission

ATTEST:


Kim M. Hafen
Washington County Clerk-Auditor

Commissioner Almquist voted Aye
Commissioner Cox voted Aye
Commissioner Iverson voted Aye

Approved as to form:


Deputy County Attorney

Appendix E. BLM Short-Term ROW Application Acceptance



United States Department of the Interior



BUREAU OF LAND MANAGEMENT
Color Country District Office-St George Field Office
345 E Riverside Dr
St George UT 84790

<https://www.blm.gov/office/st-george-field-office>

June 2, 2021

In Reply Refer To:
2920 (UTC030)
UTU-95649

DECISION

Washington County
Attn: Todd Edwards, City Engineer
197 East Tabernacle
St. George, UT 84770

Permit Application
Serial No. UTU-95649

Application Accepted

On May 19, 2021, you filed an application for a short-term Right-of-Way (ROW) to conduct soil testing using drilling and pits on lands administered by the BLM- St. George Field Office. After further examination, your request is more appropriate for a 2920 Land Use Permit and will be processed accordingly. Your application has been accepted and assigned serial number UTU-95593. The following public lands are affected by your application:

(Diamond Valley)
Salt Lake Meridian, Utah
T. 41 S, R. 16 W.,
sec. 1, NE $\frac{1}{4}$ SW $\frac{1}{4}$.

(Dammeron Valley)
Salt Lake Meridian, Utah
T. 40 S, R. 16 W.,
sec. 16, W $\frac{1}{2}$.

Processing Fee Category

According to Federal regulations contained in 43 CFR 2804.14, BLM is required to be reimbursed for the costs incurred in processing an application. In accordance with 43 CFR 2804.16, we have determined that Washington County is exempt from paying cost recovery fees for this application.

Our goal is to process your application in 60 days or less. BLM regulations at 43 CFR 2804.25 state that the BLM will notify you if processing the application will take more than 60 days. At this time we anticipate the processing time for this application to be 60-90 days.

If you have any questions regarding your application, please contact Shawwna Dao by email at sdao@blm.gov.

Sincerely,

Shawwna E. Dao
acting for Keith Rigtrup
Field Office Manager

INTERIOR REGION 7 • UPPER COLORADO BASIN

COLORADO, NEW MEXICO, UTAH, WYOMING

APPENDIX E-7A

TECHNICAL DOCUMENTS, CONTINUED

Draft - For Review

GEOTECHNICAL INVESTIGATION REPORT
FOR PRELIMINARY DESIGN

**SANTA CLARA WATERSHED
DETENTION BASINS**

Washington County, Utah

*Prepared for:
Alpha Engineering Company*

December 2021

RB&G
ENGINEERING, INC.



December 17, 2021

Alpha Engineering Company
Attn: Brent Gardner
43 South 100 East, Suite 100
St. George, UT 84770

Re: Santa Clara Watershed Detention Basins
Geotechnical Investigation Report for Preliminary Design

Dear Mr. Gardner:

A Geotechnical Investigation Report for Preliminary Design has been completed for the Santa Clara Watershed Detention Basins to be located in Washington County, Utah. The results of this study are summarized in the report transmitted herewith.

We appreciate the opportunity of providing this service for you. If there are any questions relating to the information contained herein, please call.

Sincerely,

RB&G ENGINEERING, INC.

Brandon D. Horrocks, P.E.

GEOTECHNICAL INVESTIGATION REPORT
FOR PRELIMINARY DESIGN

**Santa Clara Watershed
Detention Basins**

Washington County, Utah

*Prepared for:
Alpha Engineering Company*

December 2021

RB&G ENGINEERING, INC.

Table of Contents

TABLE OF CONTENTS	I
1.INTRODUCTION	1
2.GEOLOGIC AND EXISTING SITE CONDITIONS	2
2.1 REGIONAL GEOLOGY	2
2.2 DAMMERON VALLEY	4
2.3 DIAMOND VALLEY	5
2.4 GEOLOGIC HAZARDS	6
3.FIELD AND LABORATORY TESTING PROCEDURES	7
4.SUBSURFACE SOIL AND WATER CONDITIONS	10
4.1 DAMMERON 1 DETENTION BASIN	10
4.2 DAMMERON 2 DETENTION BASIN	12
4.3 DAMMERON 3 DETENTION BASIN	13
4.4 DIAMOND 1 DETENTION BASIN	14
4.5 DIAMOND 2 DETENTION BASIN	14
4.6 DIAMOND 3 DETENTION BASIN	15
5. PRELIMINARY ANALYSES AND DESIGN RECOMMENDATIONS	16
5.1 SEDIMENTATION	16
5.1.1 Sediment Yield Classification Procedure	16
5.1.2 Sediment Yield Rate Map	17
5.1.3 Strand and Pemberton Method	17
5.1.4 Recommended Sediment Yield	17
5.2 AVAILABLE BORROW MATERIALS	19
5.3 FOUNDATION TREATMENT	20
5.3.1 Dammeron Valley Sites	20
5.3.1 Diamond Valley Sites	21
5.4 EMBANKMENT DESIGN	21
5.5 SEISMIC HAZARDS AND LIQUEFACTION	23
5.6 SPILLWAY AND APPURTENANT DESIGN RECOMMENDATIONS	23
6.COST ESTIMATES	24
7.ADDITIONAL STUDIES REQUIRED FOR FINAL DESIGN	24
8. LIMITATIONS	25

Figures

Figure 1, Vicinity Map

Figure 2, Dammeron Valley Site Plan

Figure 3, Diamond Valley Site Plan

Figure 4a-c, Geologic Maps

Figure 5, Conceptual Embankment Cross Section – Bedrock More Than 10' Below Existing Ground Surface

Figure 6, Conceptual Embankment Cross Section – Bedrock Within 10' of Existing Ground Surface

Figure 7, Conceptual Alternative Embankment Cross Section – 2H:1V Downstream Slope

Appendix A – Concept Design Drawings

Dammeron Valley Detention Basins – Conceptual Designs

Diamond Valley Detention Basins – Conceptual Designs

Appendix B – Test Hole Logs and Photos

Descriptive Correlations of Relative Density and Consistency

Unified Soil Classification System

Test Hole Logs

Sample Photos

Appendix C - Laboratory Testing

Summary of Test Data Table

Consolidation Tests

Direct Shear Tests

Moisture-Density Relationship Tests

Appendix D – Sedimentation Calculations

SANTA CLARA WATERSHED
DETENTION BASINS

GEOTECHNICAL INVESTIGATION REPORT
FOR
PRELIMINARY DESIGN
WASHINGTON COUNTY, UTAH

1. INTRODUCTION

This report describes the results of geotechnical investigations performed for the Santa Clara Watershed Plan - Environmental Assessment (EA). The proposed watershed improvement project is being sponsored by Washington County and is being funded by the National Resources Conservation Service (NRCS).

The purpose of this study was to evaluate subsurface conditions at locations where new and rehabilitated detention basins are being considered in Diamond Valley and Dammeron Valley, in Washington County, Utah. The recommendations provided in this report are intended for preliminary evaluations of the project. It is anticipated that additional geotechnical investigation and analyses will be performed during final design of the project.

One objective of the project is to reduce the impacts of flooding within developed areas in Diamond Valley and Dammeron Valley. Detention basins are being considered to reduce flood risk at the locations shown on the Vicinity Map on Figure 1.

Construction of three new detention basins in Dammeron Valley is being considered for the project. The locations of the planned detention basins are shown on Figure 2. It is envisioned that earthfill dams will be constructed to create the detention basins. Conceptual design of the detention basins is summarized in the table below:

Table 1.1 – Proposed Dammeron Valley Detention Basins

Detention Basin	Approx. Storage Capacity (ac-ft)	Maximum Dam Height* (ft)
Dammeron 1	21	23
Dammeron 2	258	38
Dammeron 3	53	23

*Assumes dam crest will be 5 feet above the auxiliary spillway

Rehabilitation of three existing detention basins is being considered in Diamond Valley. These detention basins are shown as Existing Diamond 1, Diamond 2, and Diamond 3 Detention Basins on Figure 3. Conceptual designs provided to us indicate that the rehabilitated Diamond 1 and Diamond 2 detention basins will be approximately equal in size to the existing basins. It is our understanding that the dam for the Diamond 3 basin will primarily function as a diversion to route storm flows to the northwest into the Diamond 2 detention basin. The planned size of the Diamond 3 dam had not been determined when this report was prepared. We have assumed that the Diamond 3 dam will be less than 20 feet high.

Drawings illustrating the conceptual design of the planned detention basins are included in Appendix A of this report.

This report uses the terms “left” and “right” to designate areas along the proposed detention basin dam alignments. Where used, these terms are from a reference point of looking in a downstream direction, i.e., the southern abutment of the Dammeron 3 Detention Basin dam is the left abutment.

2. GEOLOGIC AND EXISTING SITE CONDITIONS

2.1 Regional Geology

The project area is located near the southwestern corner of Utah and is located within the transition zone between the Basin and Range Physiographic Province to the west and the Colorado Plateau Province to the east. The Basin and Range province is typified by a series of northerly trending uplifted mountain ranges and down dropped valleys (horsts and grabens) created by normal faulting resulting from extensional forces. The Colorado Plateau to the east is an area of much greater stability with significantly less seismic activity.

The transitional zone is an area of relatively complex geology with bedrock varying in age from the Proterozoic (greater than 542million years ago (mya)) as seen in the Beaver Dam

Mountains to the west, to younger Quaternary age (less than 0.5 mya) basalt flows. Most of the colorful red-rock scenery is found in the Triassic and Jurassic age sedimentary deposits. The region owes the majority of its present-day structure to geological events younger than ~100 mya (later Cretaceous).

The region went through a period of compressional activity which pushed and compressed western Utah toward eastern Utah, generating folds and overthrust faulting. Periods of compressional activity occurred during the Sevier Orogeny (~100 mya) and Laramide Orogeny (70 mya). During the Tertiary period (Oligocene - early Miocene) a large igneous intrusion pushed up into the southwestern Utah overlying bedrock as a large shallow mushroom shaped intrusion (20.5 mya). This created an uplifted dome where the overlying fractured rock more readily eroded away leaving behind the Pine Valley Mountains. The Pine Valley laccolith is the largest lacolith in America (Cook, 1957, 1960b, Biek and others, 2007). During this time compressional forces began to be replaced by extensional forces resulting in volcanism and Basin and Range faulting.

The transition zone is broken up by numerous northerly trending faults. This zone of faults makeup the southern end of the Intermountain Seismic Belt (ISB) which trends from western Montana into northern Arizona (Smith and Arabasz, 1991). This relatively narrow belt generates a significant amount of seismic activity with numerous active and potentially active faults. The ISB within southwestern Utah is generally considered to be constrained on the east side by the Hurricane fault zone and on the west side by the Gunlock and Grand Wash fault zone. The Gunlock fault, Washington fault, and Hurricane fault are located about 5.5 miles west, 14 miles southeast, and 20 miles east of the project area, respectively.

Dammeron and Diamond valleys are located southwest of the Pine Valley mountains and east of the Gunlock Fault. Several basalt flows and cinder cones are present within the vicinity of the project area. Volcanism in the region is inactive; however, seismic activity continues. Since 1962, Basin and Range extensional faulting has generated 5 earthquakes with magnitudes of at least 5 within 50 miles of the project area¹. The second largest earthquake recorded in Utah since 1850, which occurred in Pine Valley in November 1902 had an estimated magnitude of 6.3. The Pine Valley earthquake epicenter was about 8.5 miles northeast of Dammeron Valley.

¹ *Utah Earthquakes (1850-2016) and Quaternary Faults*; Bowman, S.D. and Arabasz, W.J.; Utah Geological Survey Map 277, 2017.

2.2 Dammeron Valley

The topography in the Dammeron Valley area generally slopes towards the southwest. The Dammeron Valley detention basins are planned to be constructed across drainages at the locations shown on Figure 2. The topography at the proposed dam alignments slopes down towards the drainage channels at a rate of between about 5 and 20%. The drainage channel grades within the proposed detention basin are generally less than about 5%.

The surficial geology, as mapped by R. F. Biek et. al.² for the proposed Dammeron Valley detention basins is shown on Figure 4a.

The western portion of the Dammeron 1 detention basin and dam is located in an area mapped as Quaternary alluvial and eolian deposits (Qae), consisting of gravel, sand, and silt deposited in small channels and alluvial flats, with some windblown deposits. The Cretaceous age Cedar Mountain Formation (Kcm) is mapped near the right abutment of the dam alignment. Cedar Mountain Formation bedrock may underlie the alluvium on the western side of the planned detention basin.

The southeastern portion of the Dammeron 1 detention basin and the majority of the dam is within an area mapped as Quaternary age Dameron³ Valley East lava flow and cinder cone (Qbde). The thickness of the lava flow is generally 10 to 20 feet thick. The lava flow deposits were encountered in test holes performed for the detention basin and are shown on the logs as basalt deposits.

As shown on Figure 4a, Dammeron 2 Detention Basin is in an area mapped as Quaternary age Dameron Valley and Saddle Mountain lava flows and cinder cones (Qbde and Qbsm). As stated above, the Dameron Valley lava flow deposit is typically 10 to 20 feet thick. The Saddle Mountain deposit is typically 20 to 40 feet thick.

The northern end of the proposed Dammeron 3 detention basin and dam is in an area mapped as Dameron Valley lava flow and cinder cone deposits. The central portion of the dam and basin is in an area mapped as Quaternary alluvium and colluvium (Qac).

Fingers of the Jurassic age Co-op Creek Limestone Member of the Carmel Formation (Jcc) are mapped near the south end of the proposed alignment. The Jcc formation consists of limestone and may also contain calcareous shale, platy limestone, fine grained sandstone, and some gypsiferous mudstone and siltstone.

² *Geologic Map of the St. George and East Part of the Clover Mountains 30'x60' Quadrangles, Washington and Iron Counties, Utah*; Biek, R. F. et. al.; 2009.

³ Spelling of the lava flow as shown on the geologic map.

2.3 Diamond Valley

The existing Diamond 1 and 2 detention basins shown in Figure 3 are retained by dams with maximum heights of about 10 and 15 feet, respectively. It appears that about 10 feet of native soil materials have been excavated from within the Diamond 1 basin to increase the storage capacity. It is our understanding that the existing Diamond 3 site also functions as a small detention basin. It appears that the Diamond 3 basin was constructed by creating a small berm using materials excavated from within the basin. We have been unable to find any construction drawings or other records of construction for the existing detention basins during this study.

As stated previously, the planned Diamond 3 dam will direct flows towards the Diamond 2 detention basin. Outflows from the Diamond 2 detention basin currently flow within a man-made channel in a westerly direction to the Diamond 1 detention basin. It is our understanding that the existing Diamond 1 basin does not currently have an outflow channel.

The Diamond Valley community is built predominately on alluvial valley fill deposits. Along the north and east sides of the study area are hills of Jurassic to Cretaceous age bedrock which appears to dip down gently toward the northeast at about 3 degrees.

As shown on Figure 4b, the existing Diamond 1 Detention Basin is in an area mapped as Quaternary alluvial and eolian deposits (Qae), consisting of gravel, sand, and silt deposited in small channels and alluvial flats. The east side of the basin is near the mapped boundary of the Jurassic age Sinawava Member of the Temple Cap Sandstone (Jts) formation, which contains mudstone, siltstone and silty sandstone materials.

Diamond 2 Detention Basin is within an old faulted wash. The majority of the existing dam footprint and basin are in an area mapped as Holocene to upper Pleistocene age alluvial and colluvial deposits (Qac), described as clay to boulder sized sediment. The material underlying the upper portion of the existing dam abutments and upper portion of the basin is mapped as Co-op Creek Limestone (Jcc). The fault line which trends northeast/southwest through the center of the dam and basin is the Wide Canyon Fault. This fault is listed on the Utah Quaternary Fault and Fold Database, but it is not listed on the USGS Quaternary Fault and Fold Database. The fault is believed to older than 750,000 years old and is not considered to be active.

The proposed Diamond 3 Detention Basin is in an area mapped similar to the Diamond 2 site, with Co-op Creek Limestone mapped near both abutments and alluvial and colluvial deposits mapped in the center of the dam and basin.

The Utah Geologic Survey published a series of Geologic Hazard maps for the St. George–Hurricane Metropolitan Area in 2008. Most of the project area is beyond the northern limit of the 2008 study area; however, Diamond 3 Detention Basin is within the study area. The hazard map shows the area as having a high risk for flooding associated with flash floods and debris flows, and reducing this risk is the primary purpose of the proposed project. Rock fall hazard, with rock debris usually less than 1.5 feet in size, is shown as moderate due to the existing relatively steep slopes in the Diamond 3 basin area. Soils in this area are classified by the NRCS as having a low susceptibility for expansive volumetric changes. The bedrock units are classified as having a moderate shrink/swell susceptibility, with collapse potential which can be greater than 3%. While the soils in this area are not mapped as having a significant amount of gypsum, the bedrock unit surrounding the area does contain some medium-thin beds and veins of gypsum which could also be found in the alluvial material.

The area is mapped as being surrounded by hard bedrock on the geologic hazard maps, while the bottom of the basin is mapped as having buried bedrock likely more than 10 feet deep. The map identifies the alluvial deposits (Qac) as being susceptible to hazards associated with piping and erosion of the soil.

2.4 Geologic Hazards

The Dammeron Valley and Diamond Valley areas are subject to flash flooding and debris flows and reducing the risk of these hazards is the primary purpose of the Santa Clara Watershed project. Design recommendations for the detention basins are discussed in Section 5 of this report.

In addition to flooding and debris flow, the potential geologic hazards which appear to pose the greatest risk to the proposed detention basins are surface and internal erosion. Design recommendations to mitigate these risks are also discussed in Section 5 of this report. Based on the results of geotechnical investigations, which are discussed in Sections 3 and 4 of this report, the risk of inadequate debris basin performance due to soil or rock volumetric changes (shrinkage, collapse, or swell) and dissolution of soluble minerals (gypsum) appears to be low.

A probabilistic seismic hazard analysis was performed using the USGS Dynamic: Conterminous U.S Unified Hazard Tool. The Peak Ground Acceleration (PGA) in the project area for Site Class B/C boundary conditions is 0.30g for an earthquake event having a return period of 5,000 years. Seismic considerations are not expected to significantly control the

design of the detention basins planned for this project. Additional discussion of seismic hazards is included in Section 5 of this report.

3. FIELD AND LABORATORY TESTING PROCEDURES

Subsurface investigations for the project were performed at the locations shown on Figures 2 and 3. Test hole logs and sample photos are included in Appendix B. The test hole numbers shown on the site plan and logs have a prefix DA1, DA2 or DA3 (Dammeron Valley 1,2, or 3) and DI1, DI2, or DI3 (Diamond Valley 1, 2, or 3) to indicate the basin where the hole was performed. The test holes were numbered in accordance with NRCS standards, with test holes XXX-1 through 99 performed along the proposed dam alignment and test holes XXX-101 through 199 performed within the proposed detention basins to investigate potential borrow areas.

Investigations performed for this study assumed that earthfill materials would be obtained from within the proposed detention basins or from previously developed commercial sources. We envision that the majority of the materials to be used for construction of detention dams will be obtained from within the basins, and processed filter and drain materials will be obtained from commercial sources. Riprap may be obtained from a combination of available materials within the basins or commercial sources. The subsurface testing program was developed in coordination with the project sponsor and funding agency considering the planned construction, the detail required for conceptual level EA design, and funding constraints.

The borings were drilled using a CME 55 rotary drill rig. A tri-cone rock bit and HW or NW casing, with water as the drilling fluid, were used to advance the borings through overburden materials. Drilling and sampling were performed using NWJ drilling rods.

Disturbed samples were obtained within overburden materials by driving a 2- or 2.5-inch outside diameter split spoon sampling tube through a distance of 18 inches using a 140-pound weight dropped from a distance of 30 inches. The sampler size is indicated on the boring logs. Based on energy evaluations conducted approximately annually in general accordance with ASTM D4633, the automatic trip hammer used for sampling with the CME-55 drill rig delivers an average energy greater than 80 percent of the theoretical maximum energy.

The number of hammer blows required to drive the sampling spoon through each 6 inches of penetration is shown on the boring logs. The sum of the last two blow counts, which represents

the number of blows recorded while driving the sampling spoon through 12 inches, is defined as the penetration value, N .

Penetration values corrected for sampler size, overburden, and hammer energy provide a good indication of the in-place density of sandy soils; however, they only provide an indication of the relative stiffness of cohesive material, since the penetration resistance of materials of this type is a function of moisture content. Considerable care must be exercised when interpreting the penetration value in gravelly-type soils, particularly where the size of the granular particles exceeds the inside diameter of the sampling spoon. The penetration value generally provides a good indication of the in-place density of gravelly-type material if the spoon can be driven through the full 18 inches with reasonable sample recovery.

Corrections applied to the blow counts to determine the corrected standard penetration, $(N_1)_{60}$ values, shown on the boring logs were as follows:

- Sampler size correction for 2.5-inch OD sampler (where applicable): multiply by 0.938.
- Hammer energy correction from 80% hammer energy ratio to 60% standard energy ratio: multiply by 1.33.
- Overburden correction: multiply by $C_N = (P_a / \sigma'_v)^{0.5} \leq 1.7$
where: P_a = atmospheric pressure, approximated as 2000 psf,
 σ'_v = effective vertical stress, calculated using assumed average total soil unit weights of 120 pcf, and hydrostatic pore pressure calculated from the measured or estimated groundwater level.

The Standard Penetration Test (SPT) corrections listed above are basic corrections based on generalized interpretations and assumptions. Different and/or additional corrections may be appropriate for specific design applications.

Relatively undisturbed samples were obtained at select locations by pushing a thin-walled sampling tube into the subsurface material using the hydraulic pressure on the drill rig. The locations at which the undisturbed samples were obtained are shown on the boring logs.

Miniature vane shear and pocket penetrometer tests were performed on some of the cohesive samples retrieved from the borings. Miniature vane shear tests, which provide an indication of undrained shear strength, were generally performed on samples with strengths less than about 1,000 psf. Pocket penetrometer tests, which provide an indication of the unconfined compressive strength, were performed on some of the stiffer samples obtained.

Relative stiffness and density descriptors noted on the boring logs were determined from the field and laboratory tests following the descriptive correlations of relative density and consistency table included in Appendix B. In describing the stiffness of cohesive soils, preference was given to torvane and pocket penetrometer test results prior to SPT blow counts.

Each sample obtained in the field was classified according to the Unified Soil Classification System. The symbol designating soil type according to this system is presented on the boring logs. A description of the Unified Soil Classification System is included in Appendix B, and the meanings of the various symbols shown on the logs can be obtained from this figure.

Bedrock materials encountered within the borings were continuously cored using an NQ wireline system. The percent of the core run recovered and the Rock Quality Designation (RQD) values measured during the subsurface investigations are shown on the boring logs. The RQD is the percentage of intact core pieces at least 4 inches in length recovered from a single core run. A correlation of rock quality with RQD values is provided in Appendix B.

Constant head open-hole permeability testing was performed within subsurface materials during the investigations. The tests were performed by drilling ahead of the casing, filling the casing with water, and recording the rate at which water was added to maintain the water level at the top of the casing. Permeability values were calculated using the methods described in *Design of Small Dams* (USBR, 1987).

Test pits were excavated using a John Deere 160 excavator operated by Probitas Inc. The test pits were excavated to depths between 10 and 15 feet below the existing ground surface except where excavation was impractical due to the presence of bedrock or dense gravelly materials.

Laboratory testing was performed in accordance with ASTM International standards, except that tests to determine water soluble solids were performed in accordance with a Bureau of Reclamation standard since ASTM does not have a comparable test method. Tests performed during the investigations include:

- Moisture Content (ASTM D2216)
- Sieve Analysis (ASTM C117, C136)
- Atterberg Limits (ASTM D4318)
- Unconfined Compression (ASTM D7012)
- Dispersive Clay (Pinhole, ASTM D4647)
- Consolidation (ASTM D2435)
- Direct Shear (ASTM D3080)

- Moisture Density Relationship (Proctor, ASTM D698)
- Permeability (ASTM D5084)
- Water Soluble Solids (USBR 5450)

The results of the laboratory testing are included in Appendix C.

4. SUBSURFACE SOIL AND WATER CONDITIONS

Ground water was not encountered within any of the test holes performed for this study, except that water was measured 28 feet below the ground surface in Boring DA1-1. The water measured in Boring DA1-1 may have been influenced by drill water used during the drilling work.

As shown on the test hole logs, cobbles and boulders were encountered in many of the test holes. The test results discussed below do not generally include the cobble and boulder size fractions of the materials. Estimates of the sizes and fractions of the cobbles and boulders are shown on test pit logs.

4.1 Dammeron 1 Detention Basin

The Dammeron 1 Detention Basin dam alignment was investigated by drilling Boring DA1-1 near the bottom of the drainage channel to a depth of 30 feet below the existing ground surface, excavating Test Pit DA1-2 within the left abutment area, and excavating Test Pit DA1-3 within the right abutment area. Test Pits DA1-101 through -103 were excavated within the proposed basin to investigate potential borrow materials.

Basalt rock was encountered about 6 and 3 feet below the ground surface in DA1-1 and DA1-2, respectfully. Bedrock was not encountered within the other test holes performed at this site.

Recovery, which was between 19 and 100%, and RQD values, which were between 0 and 57%, measured from the basalt core obtained from Boring DA1-1 indicate the rock quality is very poor to fair, and is highly fractured and/or fissured. The hydraulic conductivity values calculated from the permeability tests were between 210 and 3,300 ft/yr.. Basalt deposits are generally highly fractured and fissured due to the volcanic deposition and cooling process. In our experience, the hydraulic conductivity values are relatively low to moderate compared to other basalt deposits. It appears likely that many of the fractures/fissures at this site are infilled with soil or other mineral deposits. Laboratory testing performed on samples of the basalt are summarized below:

Table 4-1 DA1 Site - Basalt Rock Properties

Soil Property	No. of Tests	Range	Average
Dry Unit Weight (pcf)	2	136.3 – 139.1	137.7
Moisture Content (%)	2	0.4 – 0.5	0.5
Unconfined Compressive Strength (psi)	2	4,840 – 8,730	6,785
In-Situ Hydraulic Conductivity (ft/yr)	5	210 – 3,300	1,400

The overburden soils encountered in the test holes at this site were predominantly mixtures of sands and gravels with low to medium plastic fines; however, deposits of fat clay (CH) several feet thick were encountered in Test Pits DA1-101 and 102. Laboratory testing performed on samples of overburden are summarized below:

Table 4-2 DA1 Site Overburden Material Properties

Soil Property	No. of Tests	Range	Average
Fat Clay Samples			
Moisture Content (%)	2	15.0 – 19.5	17.3
Liquid Limit (%)	2	53 – 55	54
Plasticity Index (%)	2	27 – 34	31
Gravel Content (%)	2	1 - 2	2
Sand Content (%)	2	7 – 22	15
Silt/Clay Content (%)	2	77 -91	84
Dispersive Clay	2	Non-Dispersive (ND-1 & ND-2)	N/A
Sand and Gravel Samples			
Moisture Content (%)	5	2.6 – 14.4	8.2
Liquid Limit (%)	4	24 – 62	38
	1	Non-plastic	N/A
Plasticity Index (%)	4	4 – 37	15
Gravel Content (%)	5	6 – 41	23
Sand Content (%)	5	37 – 60	52
Silt/Clay Content (%)	5	16 – 40	25
Water Soluble Solids (%)	3	0.27 – 1.15	0.57
Dispersive Clay	2	Non-Dispersive (ND-1)	N/A
In-Situ Hydraulic Conductivity (ft/yr)	2	32 - 650	340
Laboratory Hydraulic Conductivity – Remolded and Compacted Sample (cm/sec)	2	2.62×10^{-8} – 1.09×10^{-5}	5.5×10^{-6}
Moisture Density Relationship – Standard			
Maximum Laboratory Density (pcf)	2	102.3 – 106.6	104.5
Optimum Moisture Content		16.3 – 20.8	18.6
Direct Shear Friction Angle – Remolded and Compacted Sample	2	24.5 – 28.0	26.3
Cohesion		4.5 – 7.2	5.9

4.2 Dammeron 2 Detention Basin

The Dammeron 2 Detention Basin dam alignment was investigated by drilling Boring DA2-1 near the bottom of the drainage channel to a depth of 30 feet below the existing ground surface, excavating Test Pit DA2-2 within the left abutment area, and excavating Test Pit DA2-3 within the right abutment area. Test Pits DA2-101 through -106 were excavated within the proposed basin to investigate potential borrow materials.

The overburden soils encountered in the test holes along the dam alignment were predominantly mixtures of sands and gravels with non-plastic fines. Laboratory testing performed on samples of overburden are summarized below:

Table 4-3 DA2 Site Overburden Material Properties

Soil Property	No. of Tests	Range	Average
Moisture Content (%)	3	6.1 – 14.4	10.0
Liquid Limit (%)	1	33	33
	4	Non-plastic	N/A
Plasticity Index (%)	1	13	13
Gravel Content (%)	5	17 – 46	37
Sand Content (%)	5	31 – 53	45
Silt/Clay Content (%)	5	4 – 39	18
Water Soluble Solids (%)	1	0.1	0.1
Dispersive Clay	1	Non-Dispersive (ND-1)	N/A
In-Situ Hydraulic Conductivity (ft/yr)	5	52 – 520	270
Maximum Laboratory Density (pcf)	2	84.3 – 100.2	92.3
Optimum Moisture Content	2	20.2 – 32.5	26.4
Moisture Density Relationship – Standard			
Maximum Laboratory Density (pcf)	2	81.1 – 100.2	90.7
Optimum Moisture Content		20.2 – 35.1	27.7

Basalt rock was encountered 22 feet below the ground surface in DA2-1. Bedrock was not encountered within the other test holes performed along the dam alignment; however, basalt rock was encountered within 2 feet of the ground surface within all six test pits excavated within the proposed basin.

Recovery, which was between 28 and 100%, and RQD values, which were between 0 and 92%, measured from the basalt core obtained from Boring DA2-1 indicate the rock is relatively intact to highly fractured and/or fissured. A hydraulic conductivity test was performed within

the zone between 20 and 27 feet below the ground surface. The hydraulic conductivity of the zone could not be determined because the flow into the formation exceeded the capacity of the pumping equipment being used (17.7 gal/min).

The basalt core obtained from a depth of 25 feet in Boring DA2-1 had a moisture content of 0.7%, dry unit weight of 170.2 pcf, and unconfined compressive strength of 14,630 psi.

4.3 Dammeron 3 Detention Basin

The Dammeron 3 Detention Basin dam alignment was investigated by drilling Boring DA3-1 near the bottom of the drainage channel to a depth of 32.5 feet below the existing ground surface and excavating Test Pits DA3-2 through -5 at the locations shown on Figure 2. Test Pits DA3-101 through -107 were excavated within the proposed basin to investigate potential borrow materials.

The overburden soils encountered in the test holes were predominantly mixtures of sands and gravels with low to medium plastic fines. Clay layers up to about 4 feet thick were encountered at the ground surface in several of the test pits. Laboratory testing performed on samples of overburden are summarized below:

Table 4-4 DA3 Site Overburden Material Properties

Soil Property	No. of Tests	Range	Average
Moisture Content (%)	14	2.6 – 10.1	6.4
Liquid Limit (%)	10	20 – 57	33
	8	Non-plastic	N/A
Plasticity Index (%)	10	4 – 34	15
Gravel Content (%)	18	1 – 60	25
Sand Content (%)	18	2 – 71	43
Silt/Clay Content (%)	18	5 – 97	32
Water Soluble Solids (%)	8	0.1 – 2.96	0.66
Dispersive Clay	5	Non-Dispersive (ND-1)	N/A
	1	Dispersive (D-1)	N/A
In-Situ Hydraulic Conductivity (ft/yr)	6	0 – 850	110
Laboratory Hydraulic Conductivity – Remolded and Compacted Sample (cm/sec)	2	6.91×10^{-7} – 5.23×10^{-5}	2.65×10^{-5}
Maximum Laboratory Density (pcf)	8	96.8 – 128.7	110.5
Optimum Moisture Content	8	8.7 – 20.6	14.7
Direct Shear Friction Angle – Remolded and Compacted Sample Cohesion	2	28.0 – 29.7	28.9
		0 – 1.9	1.0
Swell Potential from Consolidation Test	1	0.1%	0.1%

4.4 Diamond 1 Detention Basin

The Diamond 1 Detention Basin dam alignment was investigated by drilling Borings DI1-1 and -2 through the existing embankment at the locations shown on Figure 3. It is our understanding that there are no drawings from construction of the existing detention basin, and the project conceptual design includes removing and reconstructing the existing embankment. It is likely that the reconstructed embankment will be slightly upstream of the existing embankment due to property constraints.

The soil materials encountered at the site predominantly consisted of sandy and clayey soils. Laboratory testing performed on samples from this site are summarized below:

Table 4-5 DI1 Site Material Properties

Soil Property	No. of Tests	Range	Average
Moisture Content (%)	7	8.4 – 13.8	11.2
In-Situ Dry Unit Weight (pcf)	4	101.7 – 124.3	111.8
Liquid Limit (%)	6	17 – 28	24
	1	Non-plastic	N/A
Plasticity Index (%)	6	3 – 12	8
Gravel Content (%)	7	0 – 1	0
Sand Content (%)	7	17 – 64	42
Silt/Clay Content (%)	7	35 – 83	58
Water Soluble Solids (%)	2	0.36 – 0.39	0.38
Dispersive Clay	2	Non-Dispersive (ND-2)	N/A
In-Situ Hydraulic Conductivity (ft/yr)	10	5 – 780	230
Swell/Collapse Potential from Consolidation Test	2	<0.1%	<0.1%

4.5 Diamond 2 Detention Basin

It is our understanding that there are no drawings from construction of the existing Diamond 2 Detention Basin, and the project conceptual design includes removing the existing embankment and constructing a new embankment upstream of the existing. Moving the embankment is envisioned due to property constraints. The Diamond 2 Detention Basin dam alignment was investigated by drilling Boring DI2-1 through the existing embankment, drilling DI2-2 at the assumed alignment of the new embankment, and drilling DI2-101 within the detention basin at the locations shown on Figure 3.

The soil materials encountered at the site predominantly consisted of clayey materials; however, gravelly materials were encountered within Boring DI2-101. Laboratory testing performed on samples from this site are summarized below:

Table 4-6 DI2 Site Material Properties

Soil Property	No. of Tests	Range	Average
Clayey Samples			
Moisture Content (%)	7	8.0 – 26.6	14.8
In-Situ Dry Unit Weight (pcf)	1	100.7	100.7
Liquid Limit (%)	7	24 – 30	26
Plasticity Index (%)	7	9 – 15	11
Gravel Content (%)	7	0 – 10	5
Sand Content (%)	7	42 – 51	45
Silt/Clay Content (%)	7	46 – 56	50
Water Soluble Solids (%)	1	0.35	0.35
Dispersive Clay	2	Non-Dispersive (ND-1)	N/A
In-Situ Hydraulic Conductivity (ft/yr)	6	42 – 6,400	1,400
Gravel Sample			
Moisture Content (%)	1	8.7	8.7
Liquid Limit (%)	1	Non-plastic	N/A
Gravel Content (%)	1	65	65
Sand Content (%)	1	25	25
Silt/Clay Content (%)	1	10	10
Water Soluble Solids (%)	1	0.09	0.09

4.6 Diamond 3 Detention Basin

The proposed Diamond 3 Detention Basin dam alignment was investigated by drilling Boring DI3-1 at the location shown on Figure 3. The soil materials encountered at the site consisted predominantly of clayey materials. Laboratory testing performed on samples from this site are summarized below:

Table 4-7 DI3 Site Material Properties

Soil Property	No. of Tests	Range	Average
Moisture Content (%)	2	15.1 – 24.0	19.6
In-Situ Dry Unit Weight (pcf)	1	98.8	98.8
Liquid Limit (%)	2	32 – 34	33
Plasticity Index (%)	2	18	18
Gravel Content (%)	2	0 – 35	18
Sand Content (%)	2	29 – 35	32
Silt/Clay Content (%)	2	36 – 65	51
Swell/Collapse Potential from Consolidation Test	1	<0.1%	<0.1%
In-Situ Hydraulic Conductivity (ft/yr)	6	5 – 4,800	2,300

Based on discussions with Mr. John Cazier, who has lived in Diamond Valley for about 30 years and is the current Water Manager for the Diamond Valley Acres Water Company, we understand that a detention basin was constructed at this site by the Bureau of Land Management at least 30 years ago. From site observations, it appears that the detention basin was created by constructing a berm a few feet high using soils excavated from within the basin. The relatively high hydraulic conductivity values within the upper 15 feet of Boring DI3-1 may, in part, be due to the presence of recently (less than 100 years) deposited sediments. However, from site topography and observations, we believe it is unlikely that the recent sediments are 15 feet deep. Mr. Crazier reported that less than 5 feet of sediment has accumulated within the basin.

5. PRELIMINARY ANALYSES AND DESIGN RECOMMENDATIONS

The analyses and design recommendations presented in this section are intended to be used for conceptual design and EA level project cost estimates. Additional investigations and analyses will be required during final design of the project.

5.1 Sedimentation

As discussed previously in this report, the proposed locations of the sediment basins are subject to flash floods and debris flows. Initial estimates of sediment accumulation have been developed for preliminary design of the project. Sedimentation was estimated using historical data conveyed by the Diamond Valley Water Manager and the following three methods:

- 1968 Pacific Southwest Inter-Agency Committee Sediment Yield Classification Procedure,
- 1973 USDA Soil Conservation Service Sediment Yield Rate Map, and
- 1982 Strand and Pemberton method developed for the semiarid climate of the southwestern United States.

5.1.1 Sediment Yield Classification Procedure

The Pacific Southwest Inter-Agency Committee developed a sediment yield classification procedure that estimates sediment yield as a function of nine individual drainage basin characteristics. Each characteristic is given a subjective numerical rating based on observation and experience. Sediment yield per unit area of drainage basin is estimated based on the category determined by the sum of the classification ratings.

The classifications estimated for the Dammeron and Diamond Valley sites are shown in the calculations included in Appendix D. Based on the analyses performed, we estimate that average annual sediment yields within the project area will be 0.2-0.5 ac-ft/mi².

5.1.2 Sediment Yield Rate Map

An estimated sediment yield rate map for the State of Utah was prepared by the USDA Soil Conservation Service in 1973. This map is a general area map with cautions that it is not to be used for specific sites since large variations may occur in the delineated areas. A copy of the map with the project area enlarged is included in Appendix D. The Dammeron Valley sites are in an area mapped as Yield Class 3 (0.5 – 1.0 ac-ft/mi² per year) and Yield Class 5 (0.1 – 0.2 ac-ft/mi² per year). The Diamond Valley sites are in an area mapped as Yield Class 3 (0.5 – 1.0 ac-ft/mi² per year) and Yield Class 4 (0.2 – 0.5 ac-ft/mi² per year).

5.1.3 Strand and Pemberton Method

An empirical method to estimate sediment yield within the semiarid western United States was developed by Stand and Pemberton in 1982. The estimated sediment yield is calculated using the following equation:

$$Q = 1.84A_d^{-0.24}$$

Where Q = annual sediment yield, acre-feet/mi²
 A_d = drainage area, square miles

This method results in estimated annual average sediment yield rates between 1.4 and 2.5 ac-ft/mi². The sediment yield rates calculated using this method are significantly higher than the rates estimated by the methods described above.

5.1.4 Recommended Sediment Yield

Based upon the analyses performed, we recommend that the design of the Dammeron Valley detention basins assume the average annual sediment yield will be 0.5 ac-ft/mi². This value is the upper value estimated using the Sediment Yield Classification Procedure, which considered site specific characteristics of the Dammeron Valley project drainage basins. The sediment yield rates calculated using the Strand and Pemberton method are significantly higher than the rates estimated by the other two methods described above and, in our opinion, are less credible than those estimated using site specific data.

Actual sediment accumulation within detention basins is dependent upon the volume of sediment transported (sediment yield), the characteristics of the sediment load, the flow velocity through the detention basin, and other factors. The detention basins planned for

this project will have low-level un-gated principal spillways. Gravel and sand particles will likely be retained within the basins; however, fine clay particles will likely remain in suspension and be transported through the basin spillways.

The existing alluvial materials within the proposed basin footprints are likely representative of the sediment materials which will accumulate within the basins during the life of the facilities. As described in Section 4 of this report, the existing overburden soils at the Dammeron Valley sites were predominantly granular soils. Laboratory testing performed on samples obtained from the Dammeron Valley sites had an average of 32% fines passing a No. 200 sieve. Since it is likely that the majority of the fines will not be deposited within the detention basins, we recommend a trap efficiency of 70% be assumed for the Dammeron Valley detention basins.

We were unable to locate written records providing indication for sediment accumulation at the existing Diamond Valley sites. Based on verbal reports from Mr. Crazier, we understand that sediment accumulation in the existing detention basins has not significantly reduced the basin capacities. We understand that soil materials have been borrowed from the DI1 and DI2 sites periodically, but the primary purpose of the borrow work was to obtain materials for use at other sites. The borrow has not been considered necessary to remove accumulated sediments. Based on our analyses and reported historical sediment accumulation, we recommend that an annual sediment yield of 0.25 ac-ft/mi² be assumed for the Diamond Valley detention basins.

From aerial photos, it appears that the area at the DI3 basin where sediments have accumulated is about 0.35 acres. Assuming an average sediment depth of 5 feet results in a total estimated sediment accumulation of 1.8 ac-ft. We understand the DI3 basin has been in place for at least 30 years.

The materials at the Diamond Valley sites had more fine-grained soils compared to the Dammeron Valley sites. Laboratory testing performed on samples obtained from the Diamond Valley sites, neglecting the existing embankment soils, had an average of 54% fines passing a No. 200 sieve. We recommend that a trap efficiency of 50% be assumed for the Diamond 1 and 2 Detention Basins.

It is our understanding that the Diamond 3 Detention Basin will function as a diversion structure, and outflows from the basin will be approximately equal to inflows during design storm events. We recommend that the Diamond 3 Detention Basin be designed assuming

that 25% of the sediment load will be trapped in the basin, 25% will be trapped in the Diamond 2 Detention Basin, and 50% will be transported through the basins without being trapped.

Based on the analyses and recommendations described above, we recommend the design of the detention basins assume the following sediment accumulation rates:

Table 5-1 Recommended Design Sediment Accumulation

Site	Approx. Drainage Basin Area (mi ²)	Estimated Average Annual Sediment Accumulation (ac-ft)	Estimated 50-yr Sediment Accumulation (ac-ft)
Dammeron 1	0.28	0.11	5.5
Dammeron 2	3.6	1.4	70
Dammeron 3	0.73	0.27	14
Diamond 1	0.90	0.11	5.5
Diamond 2	0.93	0.15	7.5*
Diamond 3	0.60	0.04	2.0

*Includes 2 ac-ft from the Diamond 3 drainage area

5.2 Available Borrow Materials

This section describes available borrow materials based on the preliminary investigations that have been performed. Additional investigations to further define the characteristics of available borrow materials should be performed during final design of the project.

Earthfill materials generally having 20 to 80% plastic fines are available for use as borrow from the Dammeron 1 Detention Basin site. As discussed previously in this report, fat clay was encountered in the lower portion of Test Pits DA1-101 and -102. Use of the fat clay for construction of dam embankments is not recommended. We estimate that 20,000 yd³ of earthfill generally having 20 to 80% passing a No. 200 sieve is available for use from the DA1 site. Processing the earthfill materials to remove cobbles and boulders will be required.

Basalt rock, which was not practicable to excavate, was encountered within the test pits performed within the Dammeron 2 Detention Basin site. Assuming the basalt is at least 10 feet thick, we estimate that 85,000 yd³ of basalt is available to borrow for use as riprap or rockfill within the DA2 detention basin site. Assuming that blasting will be required to efficiently borrow the basalt materials, we recommend that all rock needed for construction of the project be borrowed and stockpiled prior to DA2 Detention Basin foundation treatment or

embankment construction. We recommend that the limits of the basalt borrow area be at least 100 feet from the planned footprint of the dam embankment. Investigations to evaluate the quantity and quality of the basalt should be performed during final design. In our experience, basalt deposits in southwestern Utah are suitable for use as riprap.

Earthfill materials, which are predominantly gravelly soils, are available for use as borrow from the Dammeron 3 Detention Basin site. We estimate that 200,000 yd³ of gravelly soil is available to be borrowed from within the DA3 site. Processing the materials to remove cobbles and boulders will be required.

The existing embankment fill at the Diamond 1 and 2 Detention Basin sites, which is predominantly clayey and sandy soil, is suitable for re-use during construction of the embankments. Native deposits encountered within the existing foundations was also predominantly clayey and sandy, and it is likely that additional earthfill materials can be borrowed from within the basins for use as embankment fill. The results of the investigations indicate that less processing to remove oversize rocks will be required at the Diamond Valley sites compared to the Dammeron Valley sites.

5.3 Foundation Treatment

5.3.1 Dammeron Valley Sites

Basalt and other fractured rock within the dam embankment footprints should be treated to prevent internal erosion caused by soil particles migrating into open bedrock features under hydraulic gradients. The risk of internal erosion is reduced where gravelly soils are present on top of the rock materials since investigations indicate few, if any, open bedrock features are large enough to allow movement of gravel size particles. If particle movement begins to occur in areas where gravelly soils are present, the gravel will likely collect near the top of the openings. Sand will nest on the gravelly matrix, then finer particles will nest on the sand.

Conceptual design cross sections for the Dammeron Valley Detention Basins are shown on Figures 5 and 6. Figure 5 is a recommended conceptual cross section for areas where the bedrock is more than 10 feet below the existing ground surface and Figure 6 is a conceptual cross section for areas where the bedrock is within 10 feet of the existing ground surface.

In areas where the bedrock is at least 10 feet below the native ground surface, we recommend that a keyway trench beneath the dam centerline, as shown on Figure 5, be

included in the conceptual design. The keyway trench depth should be equal to the maximum height of the dam divided by five, i.e. the trench depth is 6 feet for a dam with a maximum height of 30 feet. The keyway trench should have side slopes no steeper than 1H:1V with a base width of at least 15 feet.

In areas where the bedrock is within 10 feet of the existing ground surface, we recommend that the overburden soils be removed beneath the center and upstream portions of the dam as shown on Figure 6. For conceptual design, we recommend that it be assumed that a 4-inch thick layer of unreinforced concrete will be constructed on top of the bedrock to mitigate the potential for internal erosion into open rock features. We recommend that this cross section be assumed for the western two-thirds of the DA1 dam and southern one-half of the DA3 dam.

5.3.1 Diamond Valley Sites

We recommend that the cross section shown on Figure 5 be used for conceptual design of the Diamond Valley Detention Basin dams, except that the keyway depth should be as described below.

Hydraulic conductivity test results indicate that the native soils at the DI1 and DI2 sites are relatively impervious. We recommend that a 3-foot deep keyway be included in the conceptual designs for these detention basin dams.

Soils classifying as lean clay were encountered within the upper 14 feet at the Diamond 3 Detention Basin site. The hydraulic conductivities within the upper 15 feet were between 2,500 and 4,800 ft/yr, which are significantly higher than values typically calculated for lean clay soils. The hydraulic conductivities may be an indication of recently deposited soil and/or fissures within the clay deposits. Additional foundation investigations at this site should be performed during final design. Assuming the detention basin dam will be about 15 feet high at this site, we recommend that an 8-foot deep keyway be assumed beneath the DI3 detention basin dam for preliminary design. This recommended conceptual design keyway depth is about 50% of the planned dam height.

5.4 Embankment Design

Considering the foundation conditions and available borrow materials at these sites, we recommend that conceptual design assume that earthfill type embankment dams be constructed, as shown on Figures 5 and 6. It will be noted from the figures that the recommended embankment cross section has a low-permeable soil core and granular shells.

We recommend that the low-permeable core be clayey materials having 20 to 80% passing a No. 200 sieve and shell materials be granular soils having 5 to 50% passing a No. 200 sieve. Many of the samples tested from the Dammeron Valley sites had 20 to 50% plastic fines passing a No. 200 sieve and could be used for either embankment zone.

Materials sampled from Test Pit DA2-2, located on the southeast side of the proposed Dammeron 2 Detention Basin dam, appeared to be from volcanic origin. The moisture-density relationship test (Proctor) performed in the laboratory on a sample obtained from a depth of 6 feet resulted in a maximum dry density of 84.3 pcf and optimum moisture of 32.5%. The material was classified as sand with gravel (SP). The test results indicate high water absorption potential. As noted on Figures 5 and 6, we recommend that earthfill materials have a dry unit weight of at least 90 pcf. This requirement will require use of the higher quality materials available from the project area, which will have better strength characteristics compared to the lighter materials.

For these detention basins, which will not have a normal storage, it is very unlikely that steady-state reservoir full seepage conditions will develop. We recommend that conceptual design of the embankments have 3H:1V (Horizontal:Vertical) upstream and downstream slopes with a toe drain beneath the downstream embankment toe. This cross section is expected to perform satisfactorily for the proposed detention basins.

Consideration has been given to designing downstream slopes as steep as 2H:1V. For downstream embankment slopes steeper than 3H:1V, we recommend that internal drainage be provided, as shown on Figure 7. Evaluations we have performed indicate that the 3H:1V design is more cost efficient; however, the steeper downstream slope with internal drainage option may be the preferred alternative if property limits are not conducive to an embankment with 3H:1V downstream slopes. The 2H:1V with internal drainage option may be the preferred alternative for the Diamond Valley detention basin dams where private property is present at the downstream toes of the existing dams.

We recommend a toe drain, as shown on Figures 5, 6, and 7, be included in the conceptual dam designs. The toe drain will improve the safety of the dams by reducing the risk of saturation within embankment and near-surface foundation materials. The toe drain installed beneath the downstream toe should connect to an outfall which daylight downstream of the dams.

The following embankment crest widths are recommended for the proposed single-purpose detention basin dams. These recommended crest widths meet State of Utah and NRCS design criteria:

Table 5-2 Recommended Embankment Crest Widths

Maximum Height of Dam (H, ft)	Minimum Crest Width (ft)
< 25	12
25 – 45	14
>45	$H/5 + 5$

5.5 Seismic Hazards and Liquefaction

Utah State and NRCS design rules allow seismic design of detention basins to assume the basins will be filled to the lowest ungated outlet or principal spillway. We understand that the principal spillways for these detention basins will be near the bottom of the basins; therefore, the basins will be assumed to be dry for seismic design.

The potential for liquefaction to result in significant strength loss beneath the detention basin dams is low since 1) It is unlikely that the foundation soils will be saturated during an earthquake event, and 2) SPT testing indicated that native soil deposits are generally in a state dense enough to prevent strength loss by liquefaction.

Based on the results of the investigations performed for this study and the intended use of the detention basins, no mitigation of liquefaction or other seismic hazards is necessary at these sites.

5.6 Spillway and Appurtenant Design Recommendations

We understand that each of the proposed detention basins will likely be constructed with a low-level principal spillway conduit and an auxiliary open channel spillway. Where possible, the spillway conduits and channels should be constructed on bedrock to reduce the potential for issues related to settlement and erosion. Foundation conditions at the following locations appear to be favorable for construction of the spillways. Where feasible, we recommend the spillways be located at the locations indicated on the table below:

Table 5-3 Recommended Spillway Locations

Site	Low-Level Principal Spillway	Auxiliary Spillway
Dammeron 1	Near Boring DA1-1	Near left abutment
Dammeron 2	Near Boring DA2-1	Near right abutment
Dammeron 3	Near Test Pit DA3-3	Near left abutment

As indicated above, the spillway locations listed above are suggested for foundation considerations. Hydraulic design considerations may necessitate that alternate locations be considered.

Subsurface investigations indicate that it is not feasible to construct the Diamond Valley spillways on bedrock foundations. Open spillway channels in Diamond Valley will likely need to be armored to protect against erosion. Armoring will likely be required for the Dammeron 2 site as well. Depending upon the properties of the rock formations at the Dammeron 1 and 3 sites, armoring may not be required, but construction of auxiliary spillways may require excavation of rock materials.

6. COST ESTIMATES

It is our understanding that hydraulic evaluations are being performed to refine the detention basin sizes needed to meet the project objectives. Cost estimates for the embankments will be provided when estimated project quantities are better defined. For conceptual design of these detention basins, we recommend the following unit costs be assumed:

Table 5-4 Recommended Assumed Unit Costs

Item	Unit Cost
Excavation, Common	\$10/yd ³
Excavation, Rock	\$25/yd ³
Rock Foundation Treatment	\$40/yd ²
Earthfill, processed to remove oversize rocks (obtained on-site)	\$15/yd ³
Filter Sand and Gravel Drain	\$100/yd ³
Riprap (obtained on-site)	\$50/yd ³
Dental Concrete	\$400/yd ³

7. ADDITIONAL STUDIES REQUIRED FOR FINAL DESIGN

Geotechnical engineering work required for final design of the detention basins includes:

- Additional foundation investigations. Borings are recommended at each abutment of all dams planned for the project. Borings are also recommended at maximum spacing of 200 feet along the dam alignments. Additional test holes will be required to investigate foundation conditions for outlets and spillways.

- Laboratory testing to evaluate properties of foundation and embankment materials.
- Final seepage and stability analyses.
- Final embankment design.
- Final design report.
- Preparation of design drawings and specifications.

We envision that the final design work will be performed after the Environmental Assessment is complete.

8. LIMITATIONS


The information presented herein is based upon the results of limited field and laboratory tests. It should be recognized that soil materials are inherently heterogeneous and that conditions may exist throughout the project area which were not defined during these investigations. This report is intended for conceptual design of the detention basins. Additional or revised recommendations compared to those described in this report may be appropriate as additional investigations and design evaluations are performed for the project.

The information contained in this report is provided for the specific location and purpose of the client and is not intended or considered suitable for reuse by any other person or entity whether for the specified use, or for any other use. Any such unauthorized use by any other party is at that party's sole risk, and RB&G Engineering, Inc. does not accept any liability or responsibility for its use.

APPENDIX E-7B

TECHNICAL DOCUMENTS, CONTINUED

FIGURES

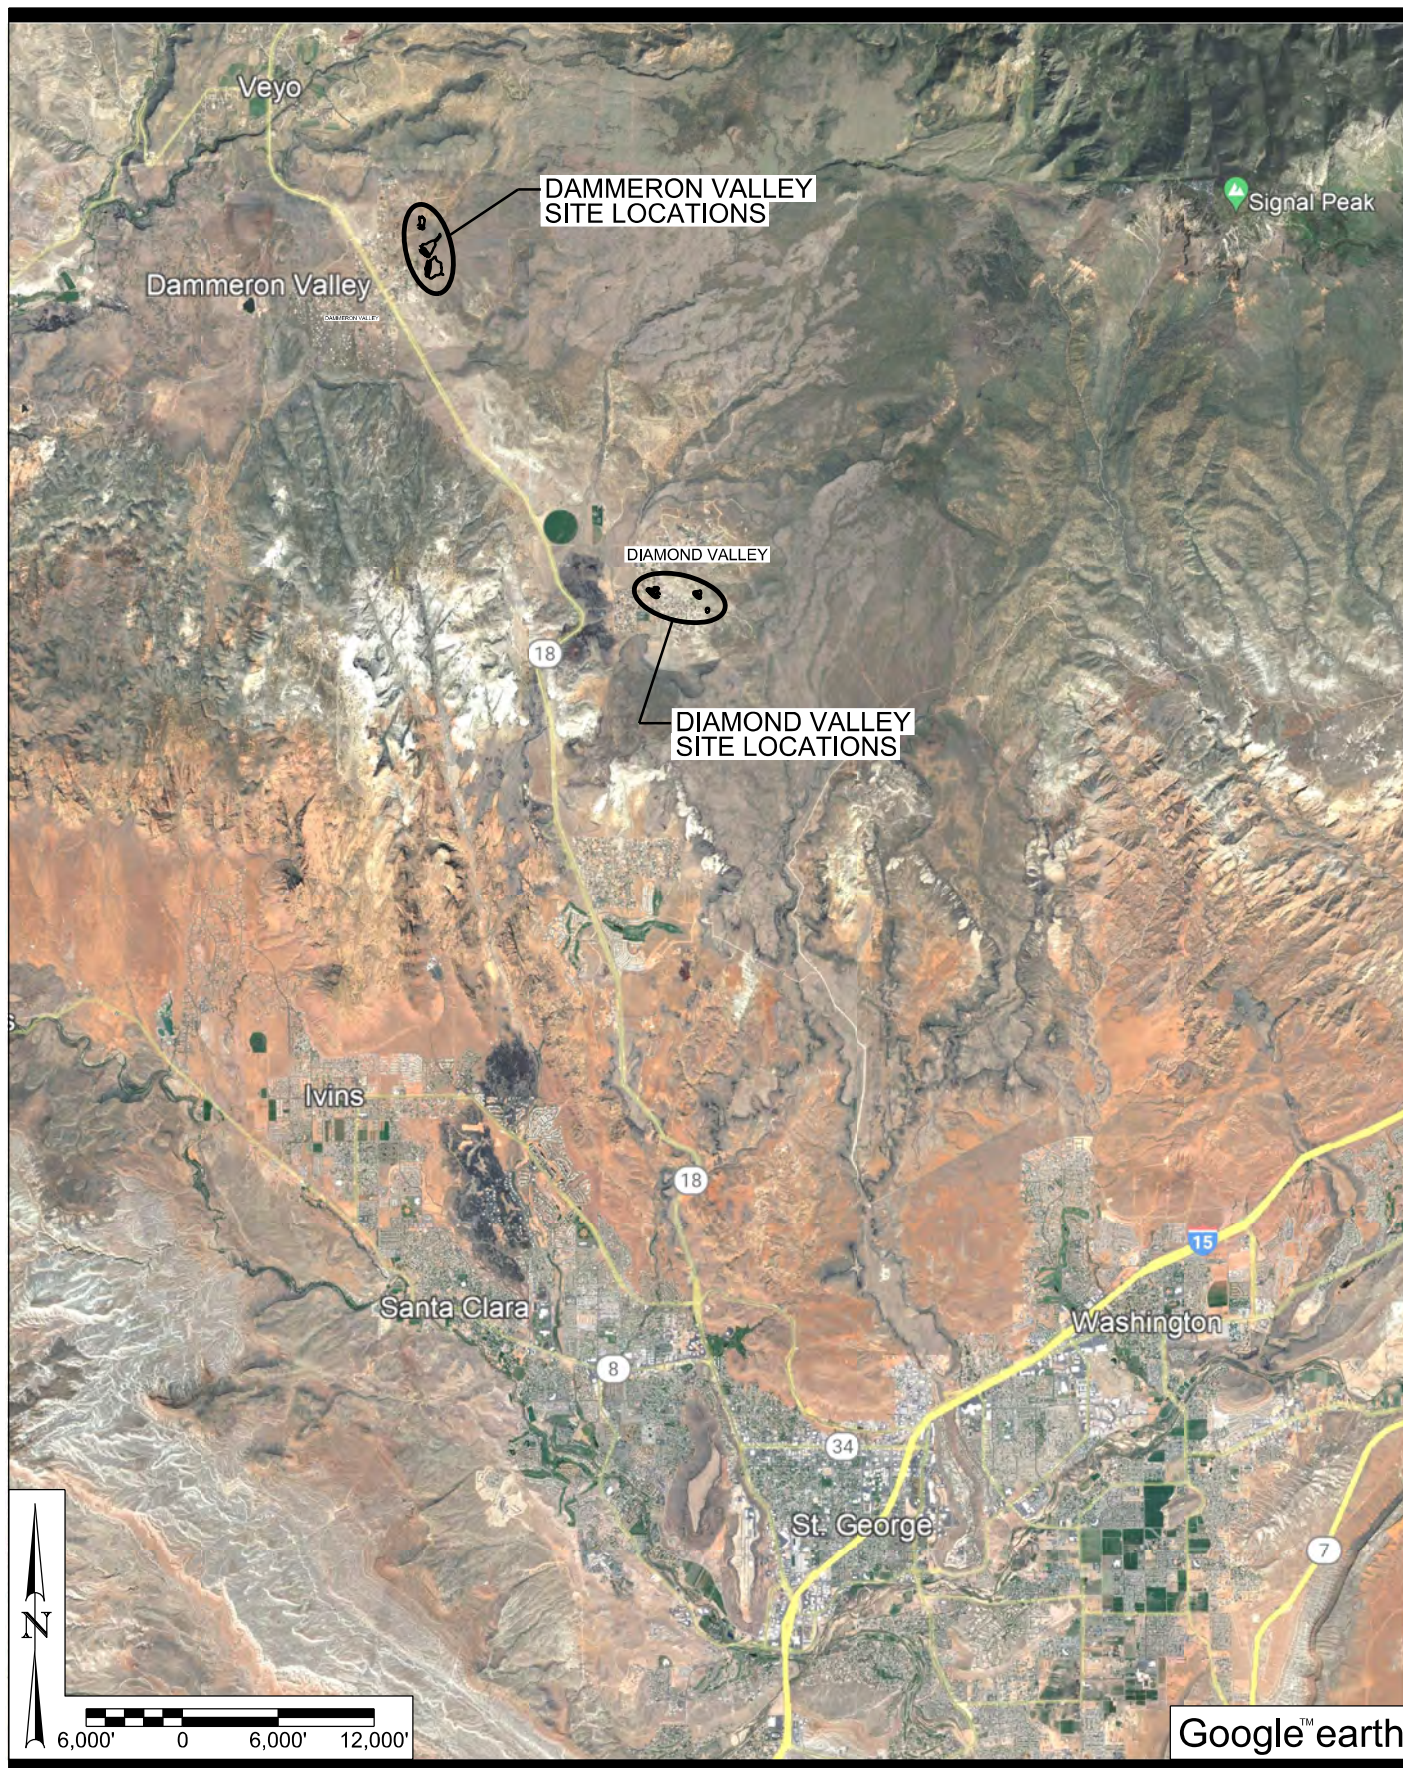



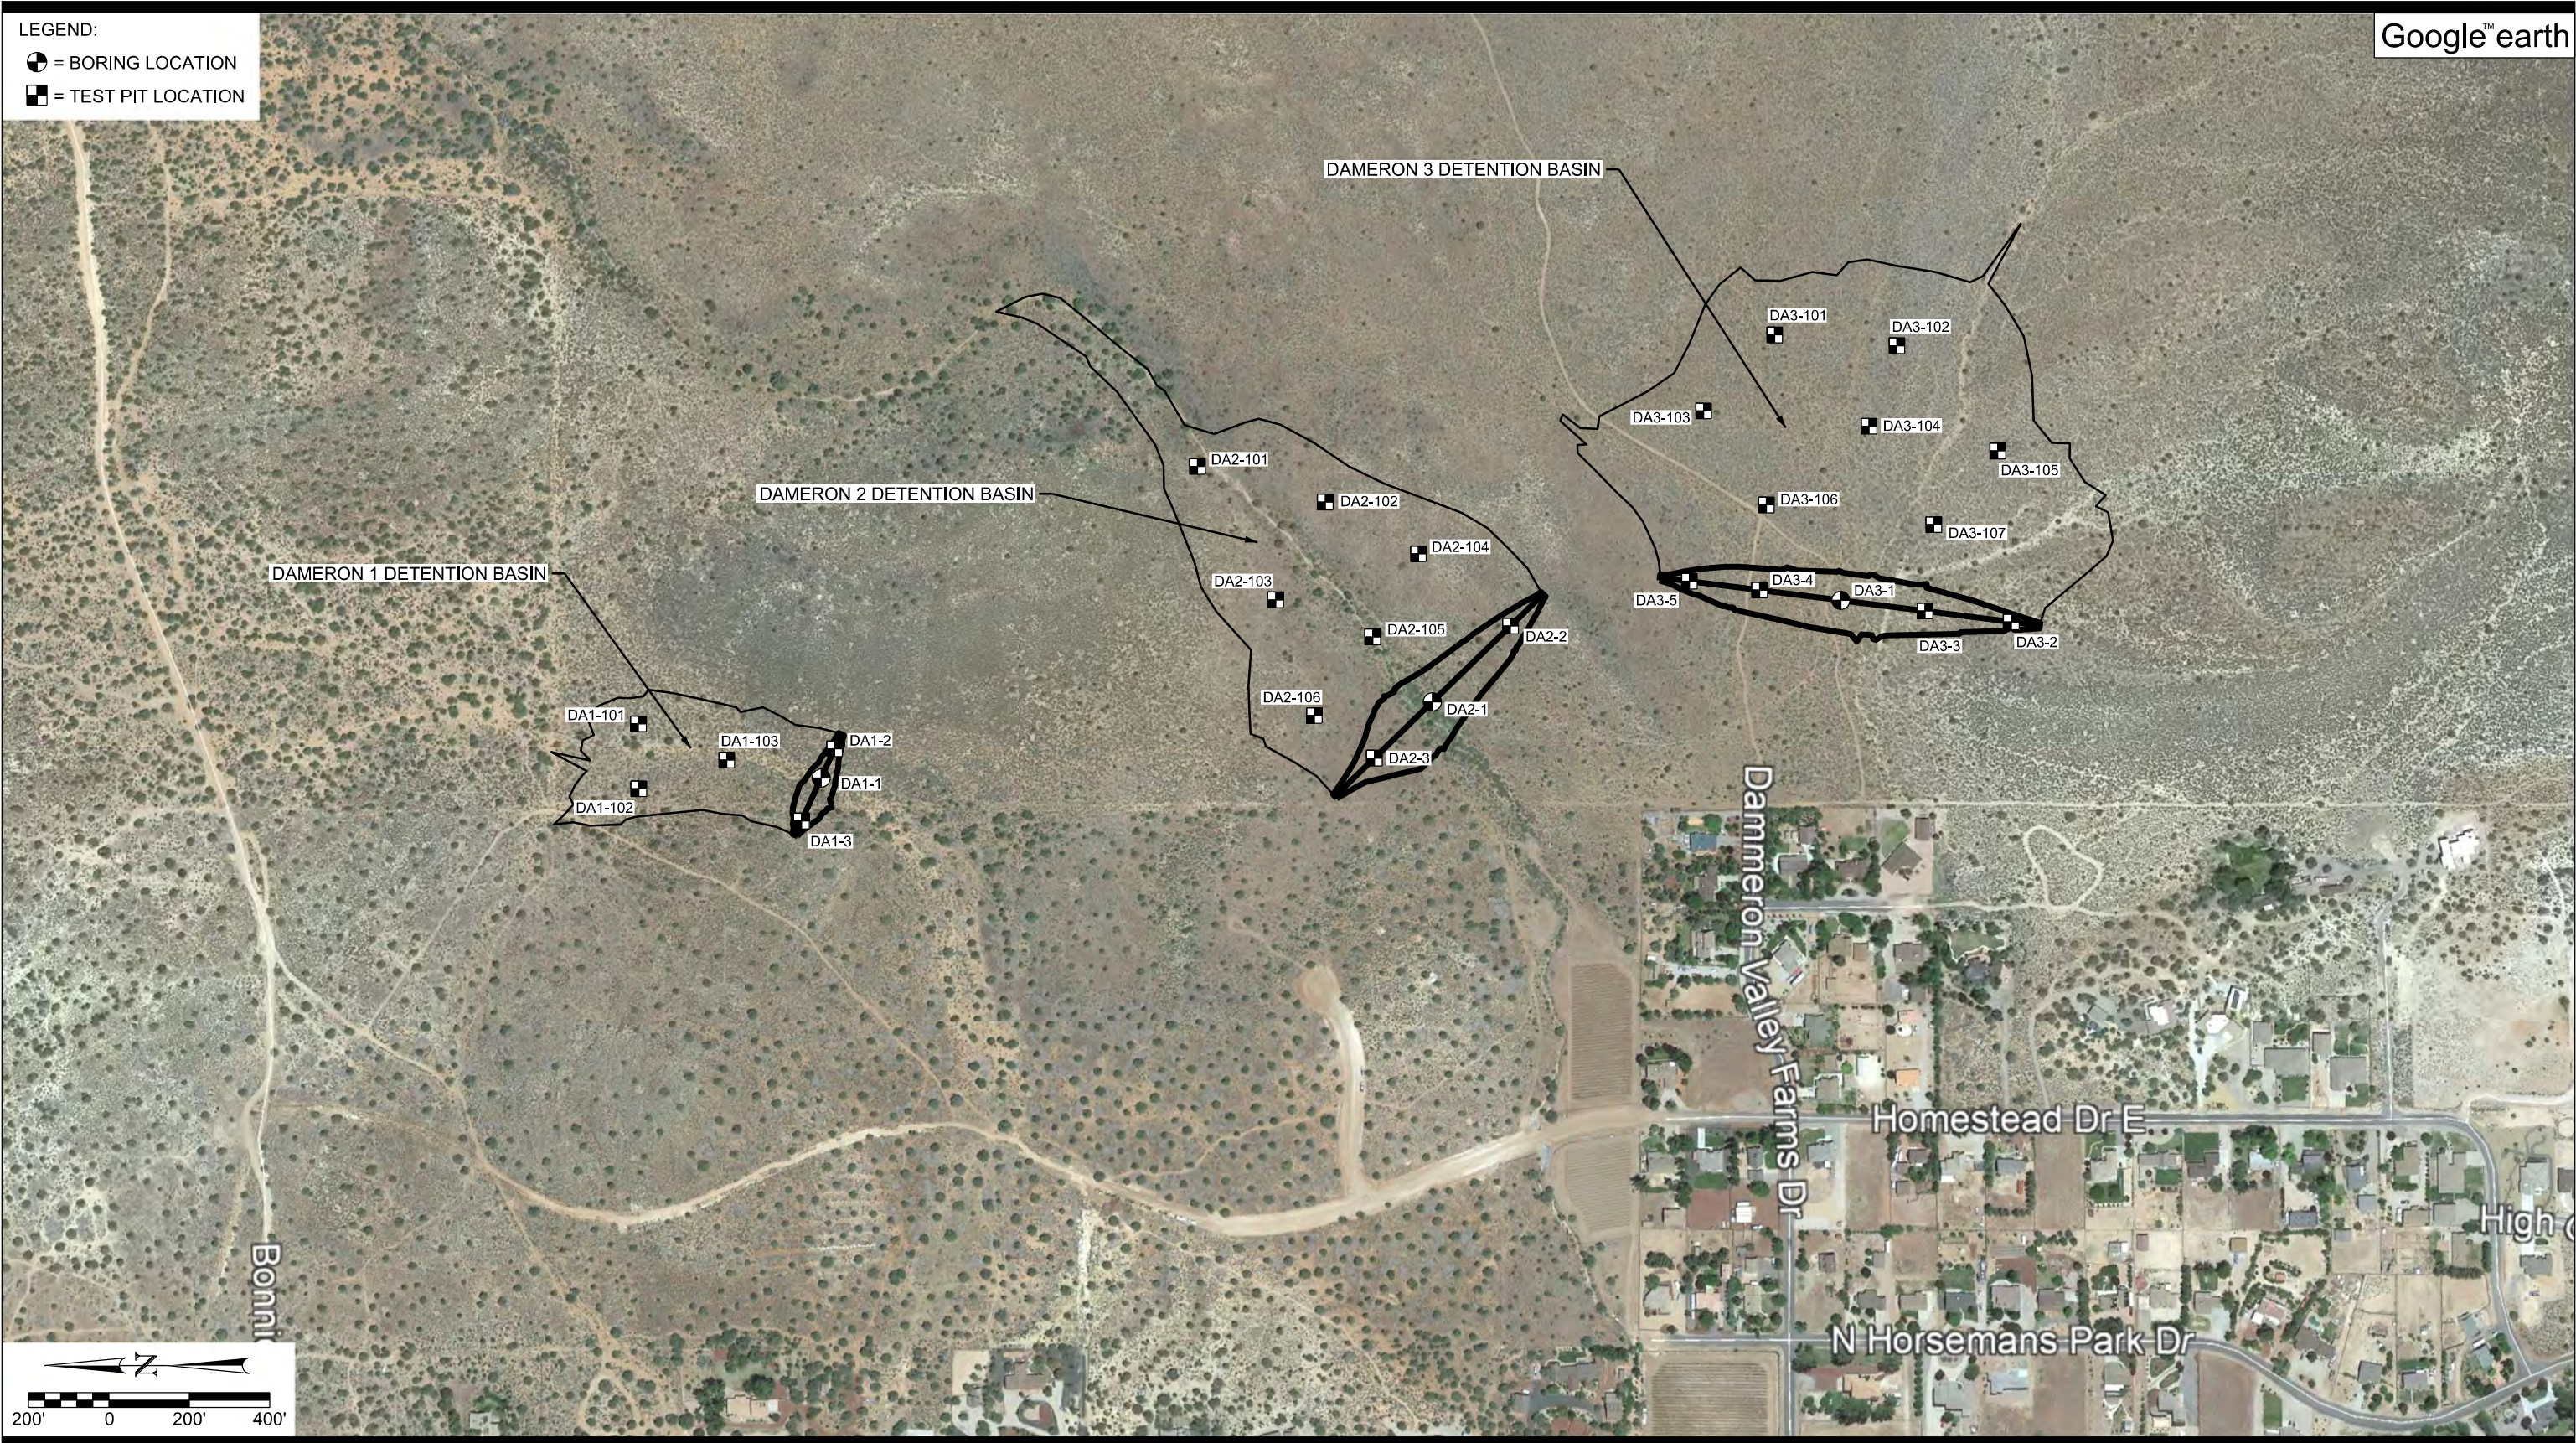


Figure 2



Figure 3

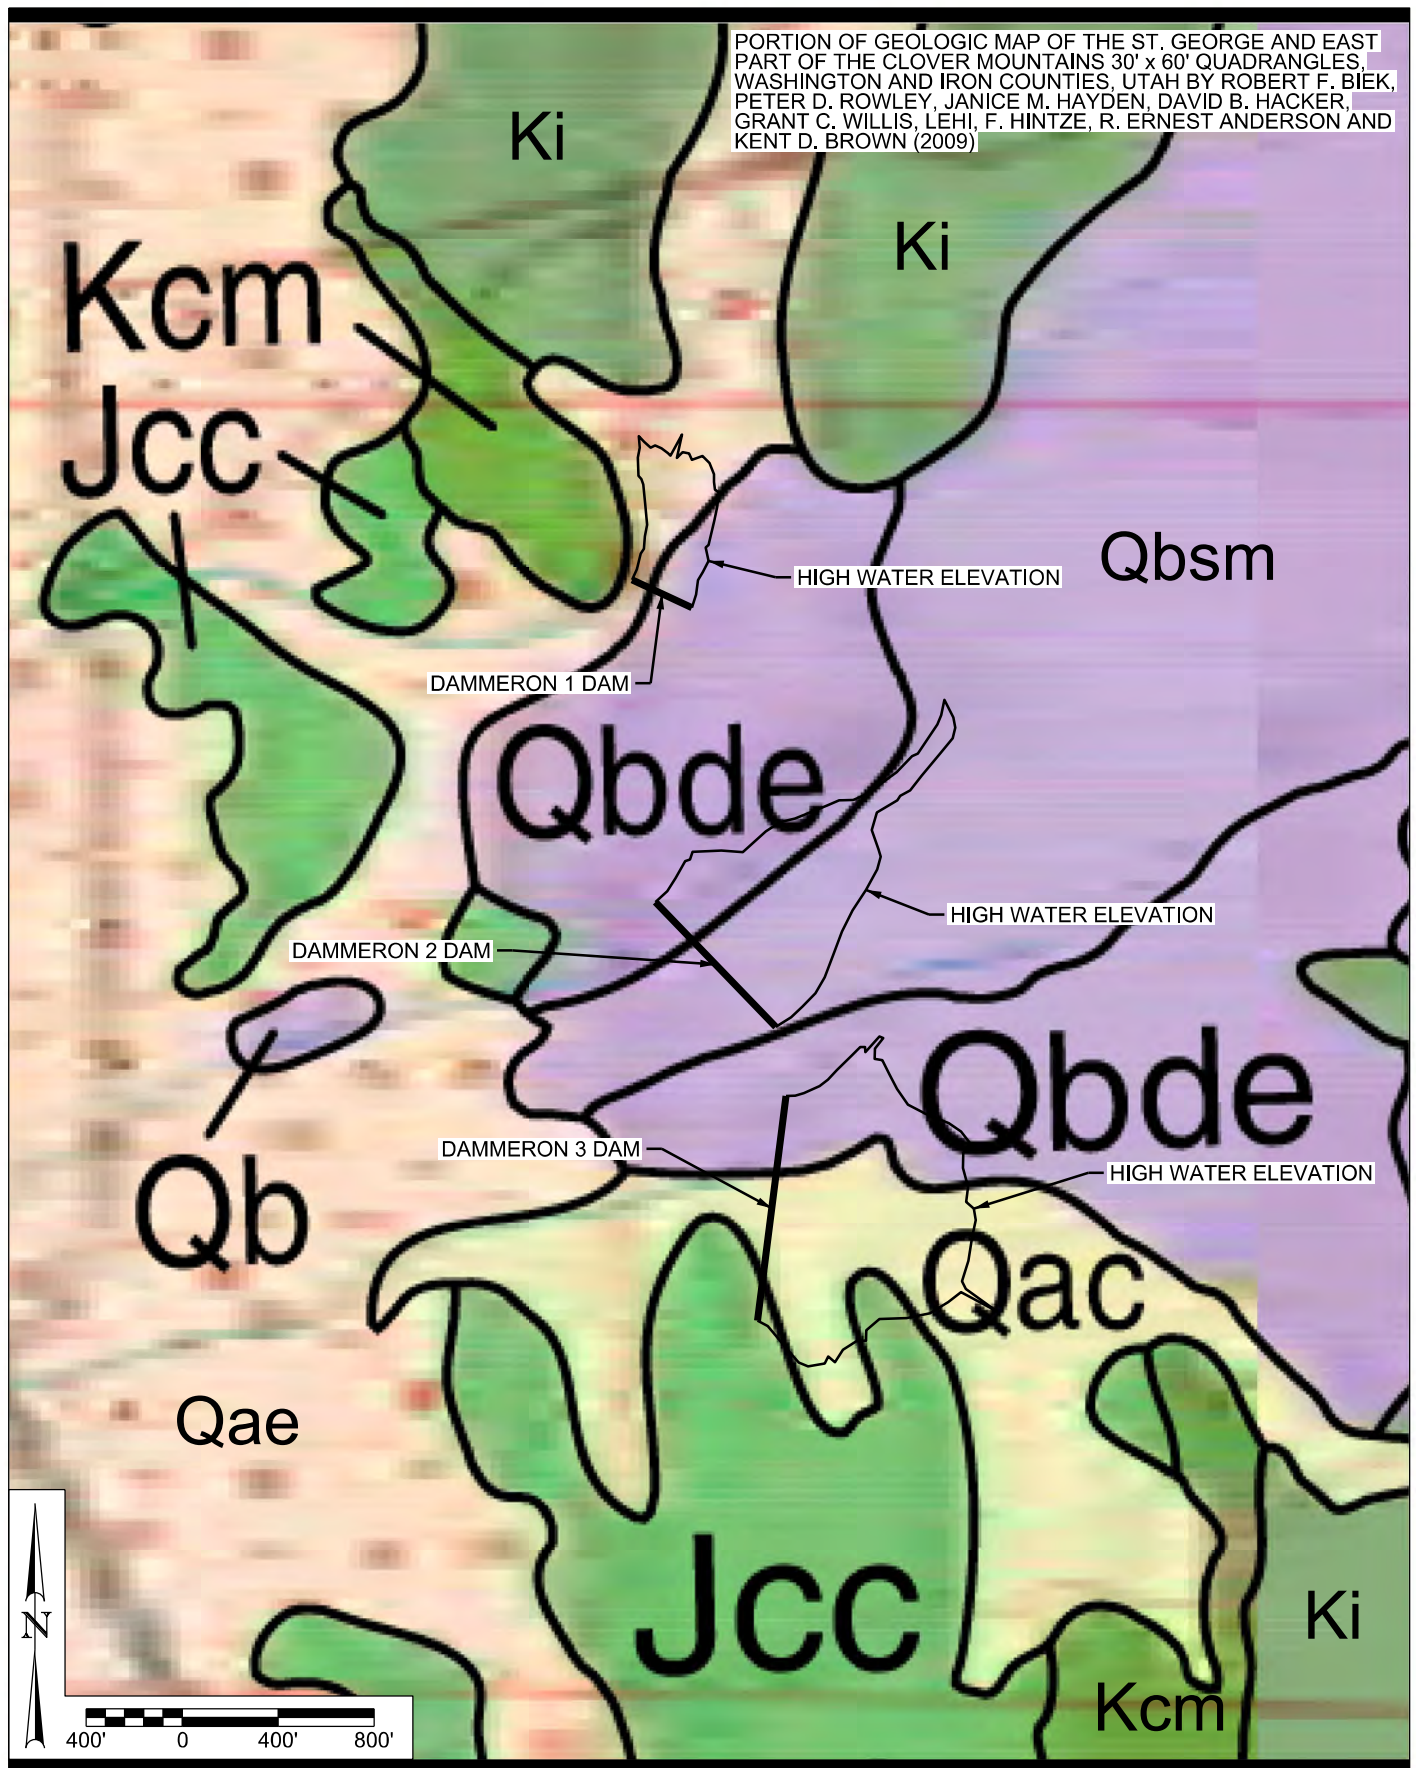

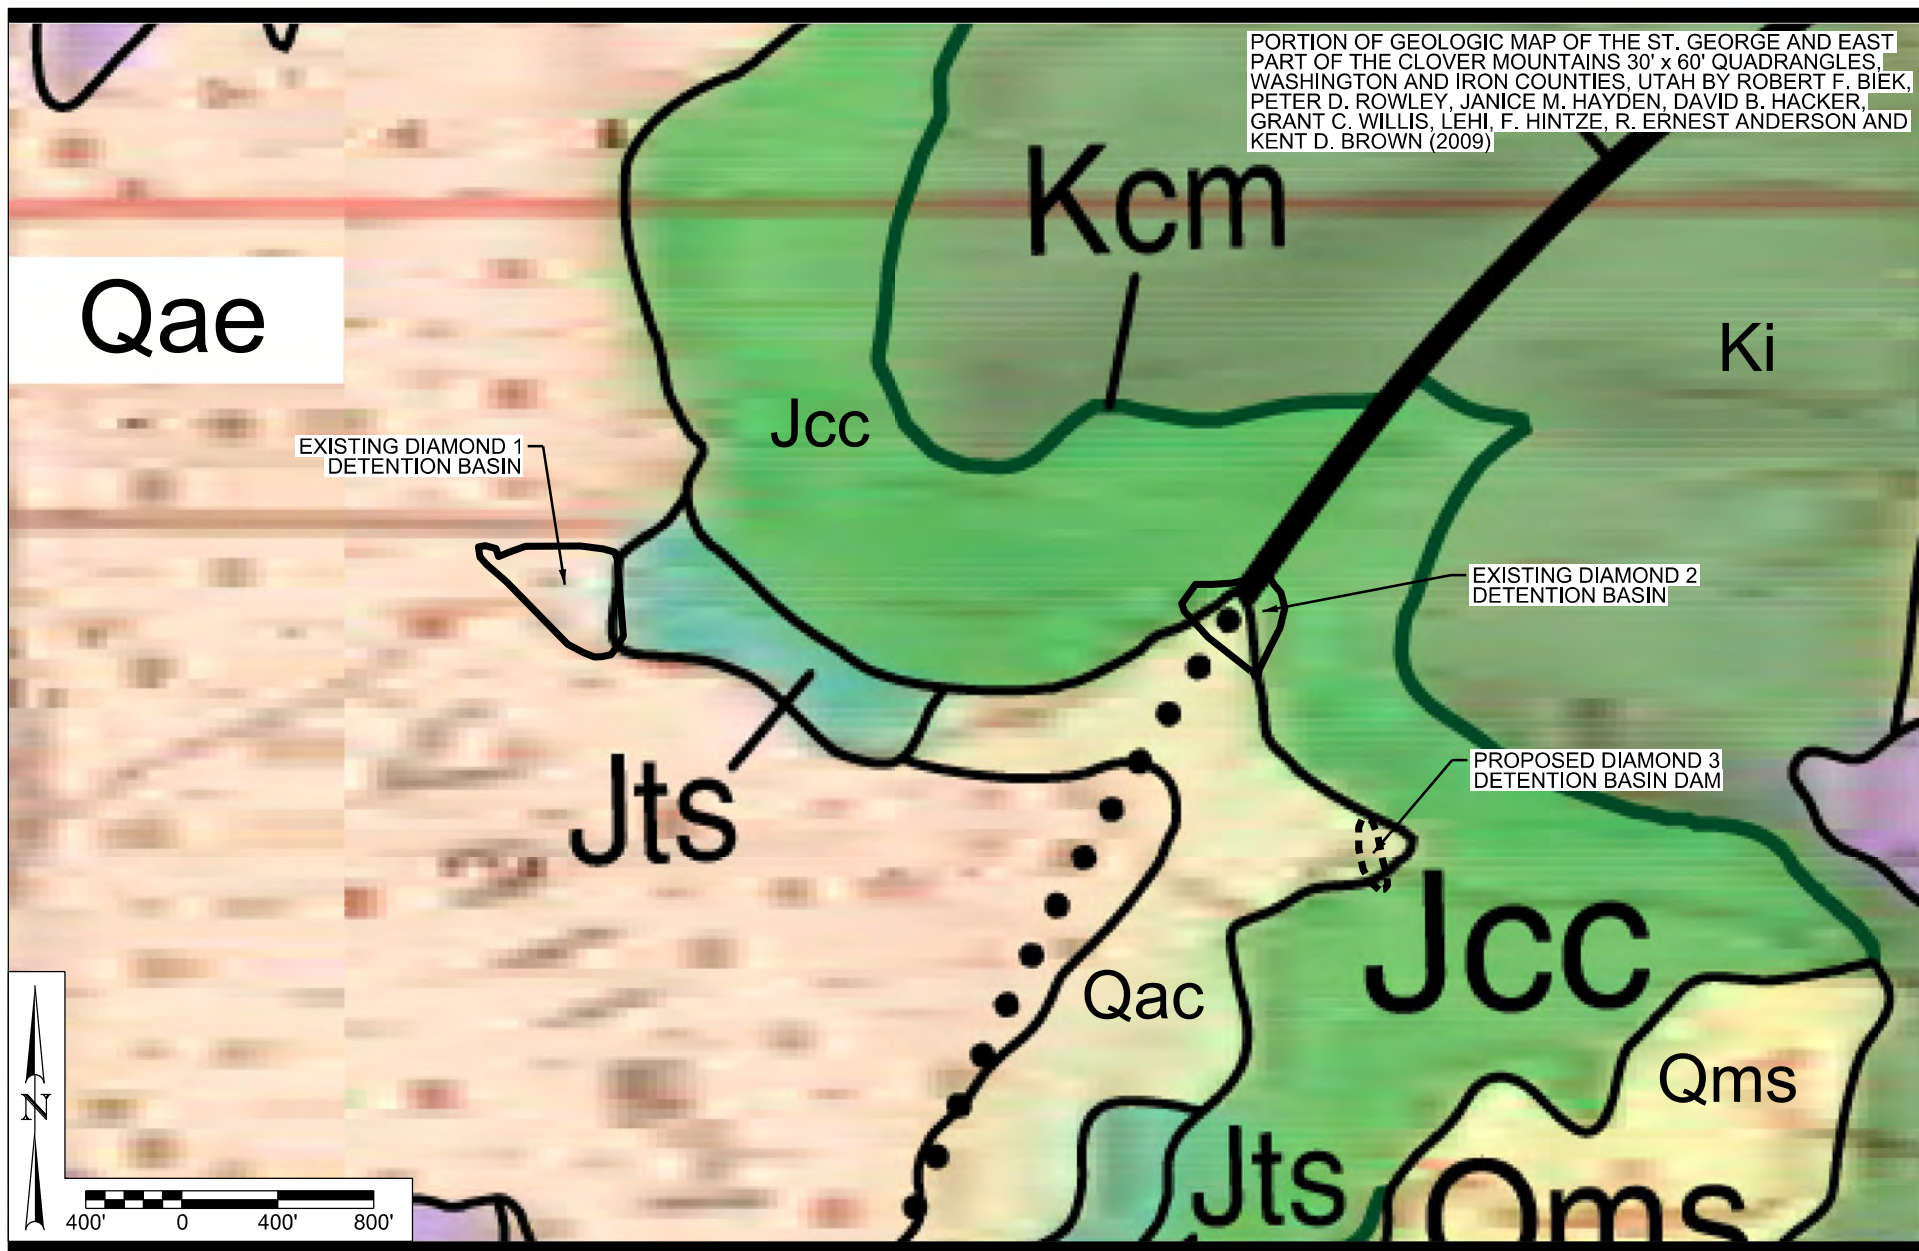

Qac, Qaco

Alluvium and colluvium (Holocene to upper Pleistocene) – Poorly to moderately sorted, generally poorly stratified, clay- to boulder-size, locally derived sediment deposited principally in swales, small drainages, and the upper reaches of large streams by fluvial, slope-wash, and creep processes; gradational with both alluvium and colluvium; older deposits (Qaco) include gypcrete (silt to small boulders cemented by gypsum) along the Moenkopi outcrop belt just west of St. George that is as much as 10 feet (3 m) thick; older deposits form inactive surfaces commonly incised by younger (Qac) deposits; generally less than 30 feet (9 m) thick.

Qac, Qaco

Alluvium and eolian sand (Holocene to upper Pleistocene) – Moderately sorted gravel, sand, and silt deposited in small channels and on alluvial flats, and well-sorted, fine- to medium-grained, reddish-brown eolian sand locally reworked by alluvial processes; younger deposits (Qac) form active depositional surfaces, whereas older deposits (Qaco) typically form incised, inactive surfaces; as much as about 20 feet (6 m) thick.

Qbc, Qbc

Basaltic lava flows and cinder deposits, undivided (Pleistocene) – Isolated basaltic lava flows (Qbc) and cinder deposits (Qbc) of uncertain correlation along the Virgin River near Hurricane, and along the Santa Clara River near Veyo and Central.

Qbdc, Qbdc

Dameron Valley East lava flow and cinder cone (middle Pleistocene) – Dark-gray trachybasalt (Qbdc) with small olivine phenocrysts in an aphanitic groundmass; erupted from a vent at a cinder cone (Qbdc) about 2 miles (3 km) southeast of Veyo; yielded an $^{40}\text{Ar}/^{39}\text{Ar}$ plateau age of 0.59 ± 0.02 Ma (0.59 ± 0.03 Ma isochron) (UGS and NMGRIL, 2008); lava flow is generally 10 to 20 feet (3–6 m) thick.

Qbsm, Qbsmc

Saddle Mountain lava flow and cinder cone (middle Pleistocene) – Dark-gray, fine-grained lava flow (Qbsm) that ranges in composition from basalt to trachybasalt to basaltic trachyandesite; contains small olivine and plagioclase phenocrysts; erupted from a vent at a cinder cone (Qbsmc) about 6 miles (10 km) east of Veyo; yielded an $^{40}\text{Ar}/^{39}\text{Ar}$ preferred isochron age of 0.47 ± 0.12 Ma (0.74 ± 0.07 Ma low-confidence plateau) (UGS and NMGRIL, 2008); lava flow is generally 20 to 40 feet (6–12 m) thick.

Qms

Landslides (Holocene to middle(?) Pleistocene) – Poorly sorted, clay- to boulder-size, locally derived material deposited by rotational and translational landslide movement; characterized by hummocky topography and small ponds, numerous internal scarps, and chaotic bedding attitudes; basal slip surfaces most commonly form in the Shnabkaib Member of the Moenkopi Formation, the Petrified Forest Member of the Chinle Formation, the Co-op Creek Limestone Member of the Carmel Formation, the Dakota Formation, and the upper unit of the Straight Cliffs Formation, and the slides incorporate these and overlying map units; the Petrified Forest Member and Dakota Formation especially form large, complex mass movements; undivided as to inferred age because new research shows that even landslides having subdued morphology (suggesting that they are older, weathered, and have not experienced recent large-scale movement) may continue to exhibit slow creep or are capable of renewed movement if stability thresholds are exceeded (Ashland, 2003); generally several tens of feet thick, but some deposits may exceed 200 feet (60 m) thick.

Ki

Iron Springs Formation (Upper Cretaceous, Santonian or lower Campanian to Cenomanian) – Interbedded, ledge-forming, calcareous, cross-bedded, fine- to medium-grained sandstone and less-resistant, poorly exposed sandstone, siltstone, and mudstone; contains a few thin sandy coquina beds, minor carbonaceous shale, and uncommon pebbly sandstone; lower part contains numerous light-gray to reddish-brown smectitic mudstone intervals; the formation is variously colored grayish orange, pale yellowish orange, dark yellowish orange, white, pale reddish brown, and greenish gray and is locally stained by iron-manganese oxides; Liesegang banding is locally common in the sandstone beds; sandstone beds range from quartz arenite to litharenite (Fillmore, 1991; Goldstrand, 1992); deposited principally in braided-stream and floodplain environments (Johnson, 1984; Fillmore, 1991), but Eaton and others (1997) noted that brackish-water molluscan faunas collected about 1000 feet (300 m) above the base of the formation in the Pine Valley Mountains probably indicate the maximum transgression of the Cretaceous seaway; map unit tentatively correlated to the Dakota Formation (as used here), Tropic Shale, and Straight Cliffs Formation of the Markagunt Plateau (Eaton, 1999); age from Goldstrand (1994); about 3500 to 4000 feet (1070–1220 m) thick in the Pine Valley Mountains (Cook, 1960b) and about 3000 feet (900 m) thick near Gunlock (Hintze, 1986).

Jts

Sinawava Member (Middle Jurassic, Bajocian) – Slope-forming, moderate-reddish-brown mudstone, siltstone, and fine-grained silty sandstone; west of the Hurricane Cliffs, contains several white, gray, and pink alabaster gypsum beds as much as 10 feet (3 m) thick and several thin intervals with white and pinkish-gray chert nodules that may be silicified bentonite; western exposures also contain numerous thin, greenish-gray mudstone (altered volcanic ash) beds with common biotite; a ledge-forming, pinkish-gray to light-greenish-gray, calcareous, medium- to coarse-grained, locally pebbly sandstone is present about one-third up the section in the Harrisburg Junction quadrangle (Biek, 2003a); forms narrow, but prominent, deep-reddish-brown, vegetated slope at the top of the Navajo Sandstone in the Zion National Park area; elsewhere forms conspicuous bright-red and gray slopes that weather to soft, gypsiferous soils; upper contact is gradational and interfingering with the White Throne Member in the Zion National Park area, but unconformable with light-gray calcareous shale and micritic limestone of the Co-op Creek Limestone Member to the west; deposited in coastal-sabkha and tidal-flat environments (Blakey, 1994; Peterson, 1994); member mapped as a colored line where too thin to show separately; Kowallis and others (2001) reported several $^{40}\text{Ar}/^{39}\text{Ar}$ ages of 170 to 169 million years old for altered volcanic ash beds within the formation that were likely derived from a magmatic arc in what is now southern California and western Nevada; thins abruptly over the crest of the Pintura anticline; thickens west and south from less than 10 feet (< 3 m) thick in the Kolob Canyons part of Zion National Park to about 400 feet (120 m) thick near Gunlock.

Kcm


Cedar Mountain Formation, undivided (Cretaceous, Cenomanian to Albian) – Consists of two units in southwest Utah (Hyland, 2000; Biek and Hyland, 2007) in ascending order: **Conglomerate unit** – Thick-bedded, yellowish-brown, channel-form conglomerate, pebbly sandstone, and pebbly gritstone; clasts are subrounded to rounded, pebble- to small-cobble-size quartzite, chert, and limestone; locally stained reddish brown to dark yellowish brown; best developed on the Upper Kolob Plateau east of Kolob Reservoir, on the east flank of the Pine Valley Mountains, and in the Gunlock-Veyo area, where it is 30 to 100 feet (10–30 m) thick, but nearly everywhere present as a thin, commonly less than 1-foot-thick (0.3 m), pebbly conglomerate deposited on paleotopography developed on top of the various members of the Carmel Formation. **Mudstone unit** – Gray to variegated smectitic mudstone with minor light-gray to yellowish-gray fine-grained sandstone that weathers to poorly exposed slopes; near the base of this predominantly mudstone interval on the Upper Kolob Plateau there is a distinctive, 1- to 4-foot-thick (0.3–1.2 m), locally ledge-forming, pale-olive to greenish-gray, thin- to medium-bedded, fine- to medium-grained sandstone containing subangular, reddish-brown chert granules; upper contact is poorly exposed and corresponds to a color and lithologic change, from comparatively brightly colored smectitic mudstone below to gray and light-yellowish-brown mudstone and fine-grained sandstone above; less than a few tens of feet thick.


Unconformably overlain by the Dakota Formation east of the Hurricane fault (see, for example, Kirkland and others, 1997) and by the Iron Springs Formation west of the fault; deposited in river-channel and floodplain environments on a broad, coastal plain (Tschudy and others, 1984; Kirkland and others, 1997); Biek and Hyland (2007) reported a single-crystal $^{40}\text{Ar}/^{39}\text{Ar}$ age of 97.9 ± 0.5 Ma (earliest Cenomanian) on sandstone from a volcanic ash in Cedar Mountain mudstone immediately above the conglomerate bed in the Straight Canyon quadrangle east of Zion National Park; Dyman and others (2002) obtained an $^{40}\text{Ar}/^{39}\text{Ar}$ age of 101.7 ± 0.42 Ma (latest Albian) on sandstone from a stratigraphically similar mudstone near Gunlock, the same 20-foot-thick (6 m), moderate-red bentonitic bed near the Gunlock Reservoir for which Hintze and others (1994) reported an anomalously young fission-track age of 80 ± 10 Ma; pollen analyses indicate an Albian age for the mudstone and underlying conglomerate (Doelling and Davis, 1989; Hyland, 2000).

Correlation of these strata to the Cedar Mountain Formation of central Utah is controversial (see, for example, Titus and others, 2005). The conglomeratic member was previously mapped as the lower part of the Dakota Formation, and the mudstone unit (in the Gunlock area) as an Upper Cretaceous bentonite, but the lithology, age, and stratigraphic position of these beds suggest correlation to the Cedar Mountain Formation of central Utah; specifically, the mudstone unit appears to be time-correlative with the Mussentuchit Member of the Cedar Mountain Formation of central and eastern Utah (Cifelli and others 1997; Kirkland and Madsen, 2007); ongoing detrital zircon studies may help resolve the provenance and correlation of the underlying conglomeratic unit; where conglomerate is thickest, it likely represents deposits of a major Cedar Mountain river channel, whereas thin conglomerate deposits may represent terrace remnants of this river system or possibly younger gravels that were reworked in the early Late Cretaceous; 0 to about 100 feet (0–30 m) thick.

Jcc


Co-op Creek Limestone Member (Middle Jurassic, Bajocian) – Divisible into two informal unmapped units: **Upper unit** – Thin- to medium-bedded, light-gray, yellowish-gray, or yellowish-brown micritic limestone and, especially in the upper part, oolitic and sandy limestone; forms sparsely vegetated, ledge slopes and cliffs; locally contains abundant *Isocrinus* sp. columnals, pelecypods, and gastropods. **Lower unit** – Mostly thinly laminated to thin-bedded, light-gray micritic limestone, calcareous shale, platy limestone, and, near the base, lesser gypsum and fine-grained sandstone; forms steep, vegetated slopes; contact with upper unit is gradational and corresponds to a subtle break in slope and vegetation patterns. Contact with Crystal Creek Member is sharp and planar and corresponds to a prominent color change from yellowish- and brownish-gray to reddish-brown, with fossiliferous sandy limestone and micritic limestone giving way to gypsiferous mudstone and siltstone; locally, moderate-reddish-brown blebs of Jasper and an oyster coquina are present in uppermost mudstones of the Co-op Creek Limestone; in the west half of the map area, locally unconformably overlain by the conglomerate unit of the Cedar Mountain Formation; Kowallis and others (2001) reported several $^{40}\text{Ar}/^{39}\text{Ar}$ ages of 168 to 167 million years old for altered volcanic ash beds within the lower unit in southwest Utah that were likely derived from a magmatic arc in what is now southern California and western Nevada; deposited in a shallow-marine environment (Imlay, 1980; Blakey and others, 1983); generally thins to the west, but ranges from about 285 to 580 feet (87–177 m) thick.

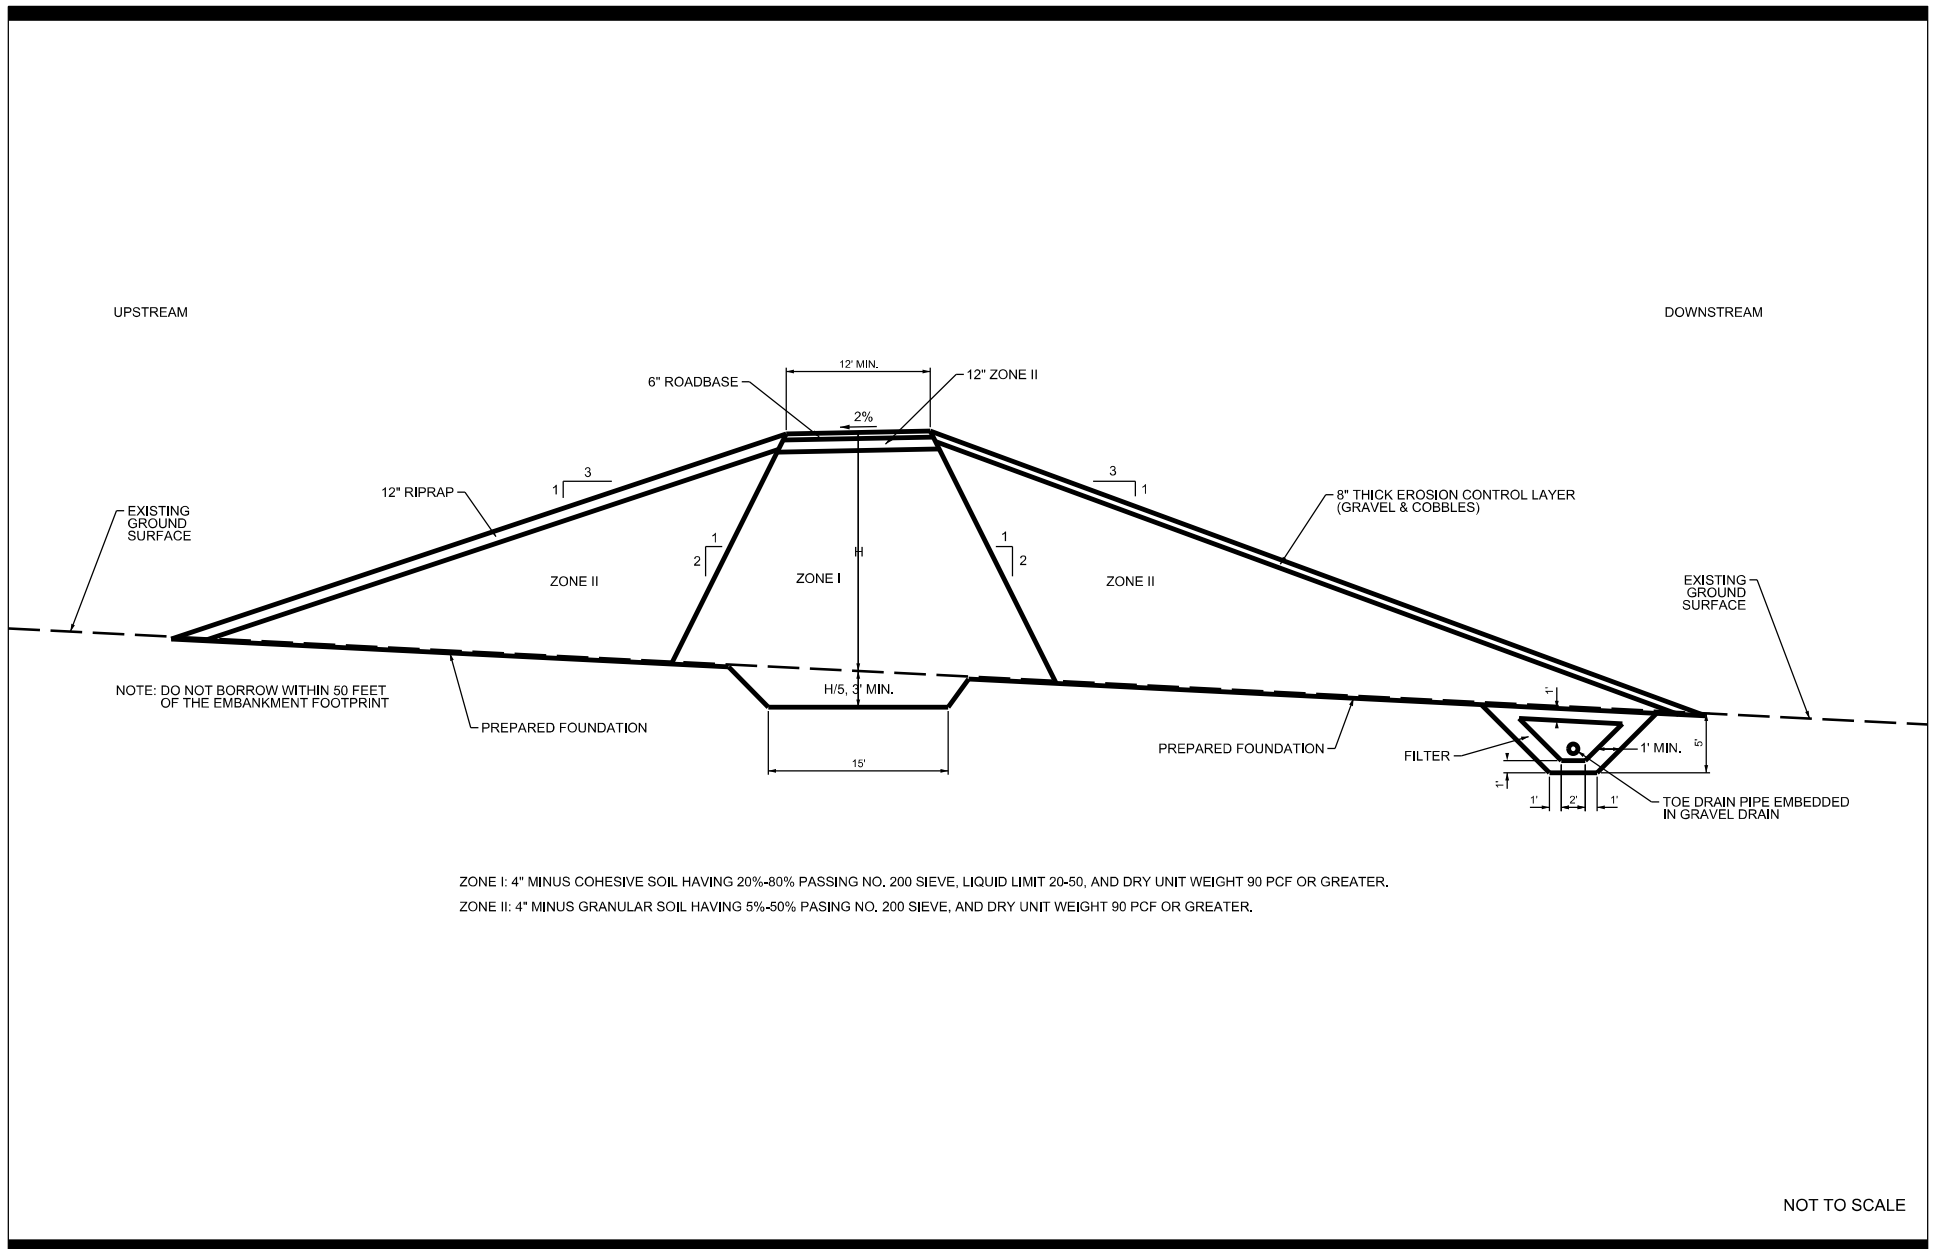

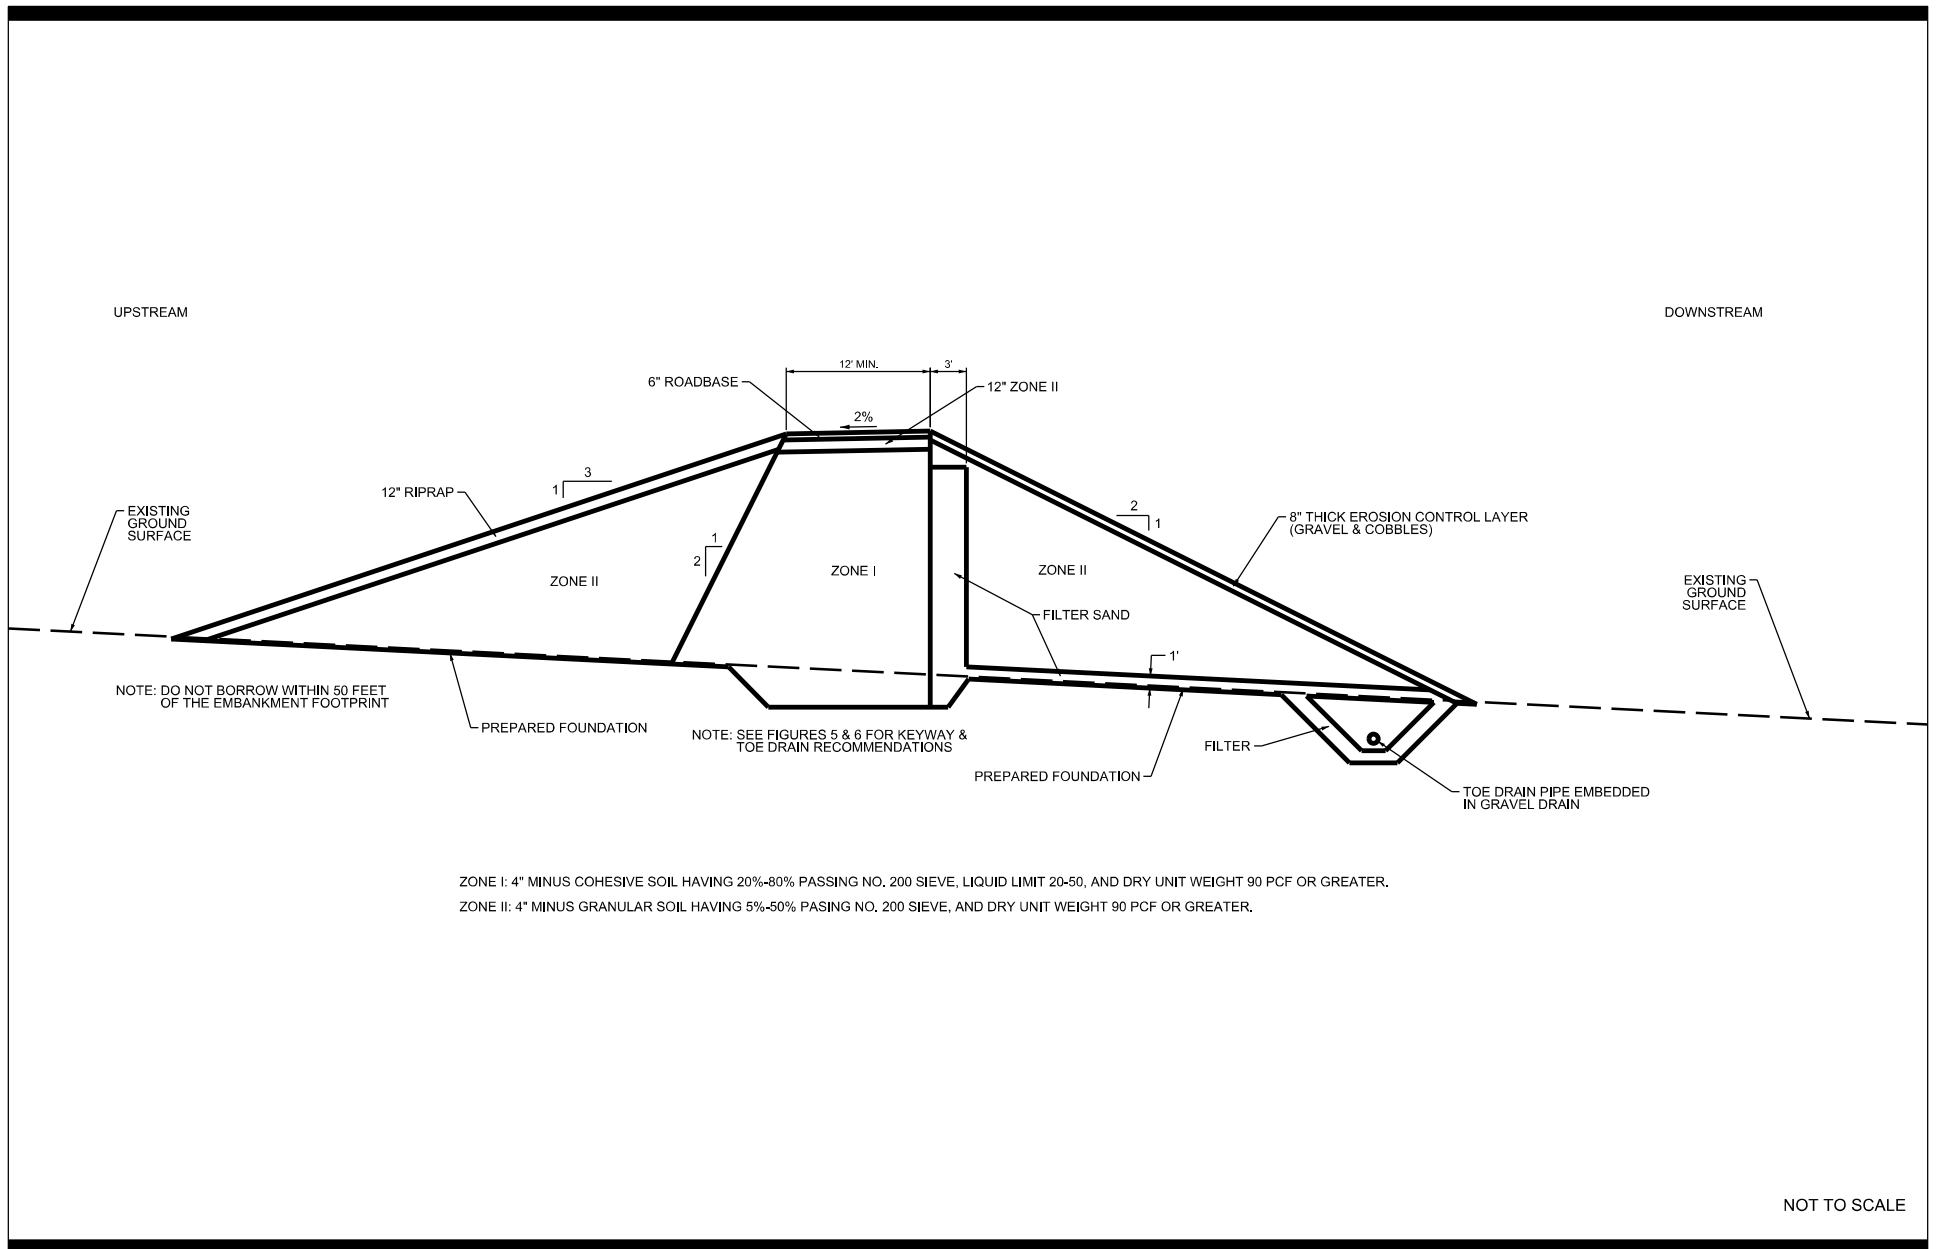

APPENDIX A










Conceptual Design

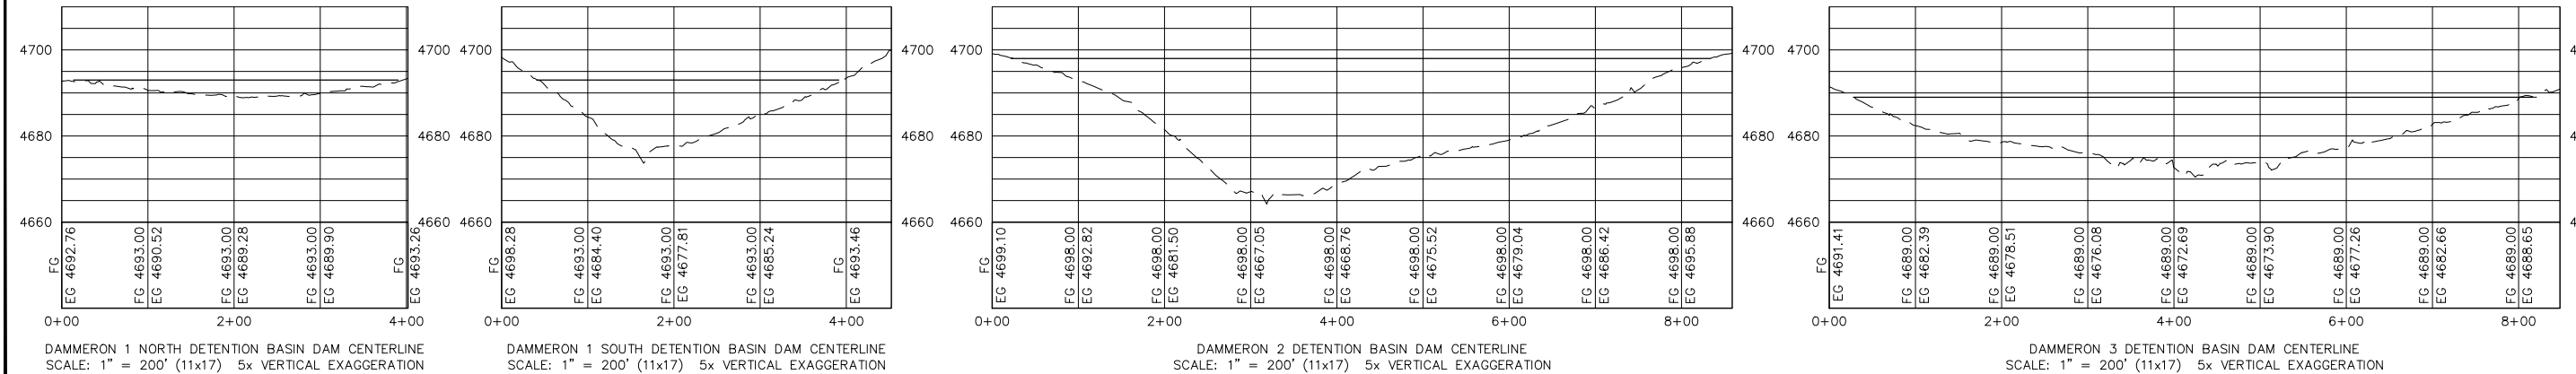[illegible]

DETENTION BASINS 1 THROUGH 3
DAM CENTERLINE SECTIONS

DAMMERON VALLEY
SANTA CLARA WATERSHED EA

PROJECT #	308-10
NAME	JTM
DATE	DECEMBER 13, 2021
SCALE	AS NOTED
SHEET	1
FILE	308-10 EXH Dammeron.dwg





REVISIONS



DIAMOND VALLEY
SANTA CLARA WATERSHED EA


1 OF 2

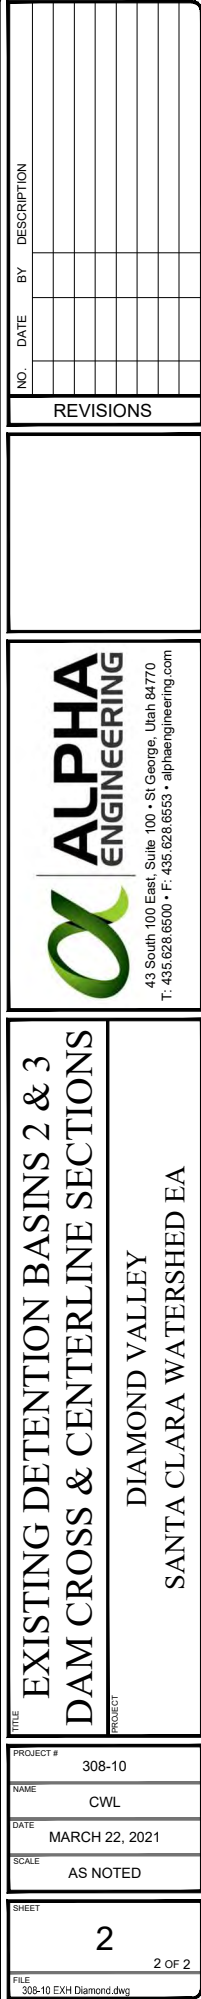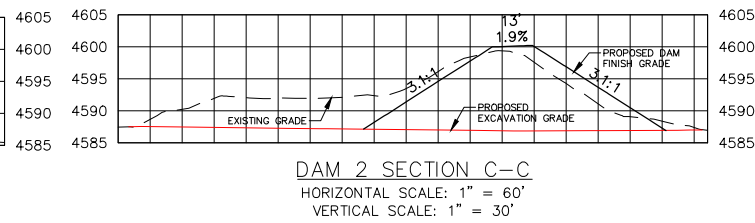

APPENDIX B

Boring Logs and Photos

Unified Soil Classification System

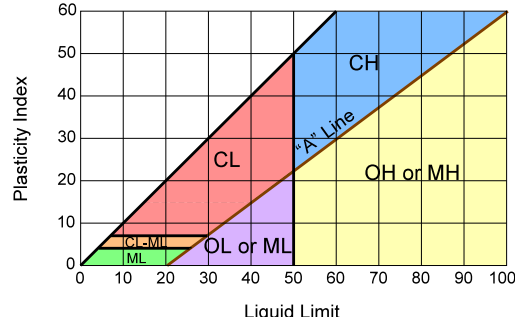Major Divisions			Group Symbols		Typical Names	Laboratory Classification Criteria			
COARSE- GRAINED SOILS more than half of material is larger than No. 200 sieve	Gravels more than half of coarse fraction is larger than No. 4 sieve size	Clean Gravels little or no fines	GW		Well graded gravels, gravel-sand mixtures, little or no fines	For laboratory classification of coarse-grained soils	$C_u = \frac{D_{60}}{D_{10}}$ Greater than 4 $C_c = \frac{(D_{30})^2}{D_{10} \times D_{60}}$ Between 1 and 3		
			GP		Poorly graded gravels, gravel-sand mixtures, little or no fines		Not meeting all gradation requirements for GW		
		Gravels With Fines appreciable amount of fines	GM*	d	Silty gravels, poorly graded gravel-sand-silt mixtures		Determine percentage of gravel and sand from grain-size curve. Depending on percentage of fines (fraction smaller than No. 200 sieve size), coarse-grained soils are classified as follows: Less than 5 % GW, GP, SW, SP More than 12 % GM, GC, SM, SC 5 % to 12 % Borderline cases requiring use of dual symbols**	Atterberg limits below “A” line, or PI less than 4	Above “A” line with PI between 4 and 7 are borderline cases requiring uses of dual symbols
				u					
			GC		Clayey gravels, poorly graded gravel-sand-clay mixtures				
	Sands more than half of coarse fraction is smaller than No. 4 sieve size	Clean Sands little or no fines	SW		Well graded sands, gravelly sands, little or no fines	$C_u = \frac{D_{60}}{D_{10}}$ Greater than 6 $C_c = \frac{(D_{30})^2}{D_{10} \times D_{60}}$ Between 1 and 3	Not meeting all gradation requirements for SW		
			SP		Poorly graded sands, gravelly sands, little or no fines				
		Sands with Fines appreciable amount of fines	SM*	d	Silty sands, poorly graded sand-silt mixtures		Atterberg limits below “A” line, or PI less than 4	Above “A” line with PI between 4 and 7 are borderline cases requiring uses of dual symbols	
				u					
			SC		Clayey sands, poorly graded sand-clay mixtures				Atterberg limits above “A” line, or PI greater
FINE- GRAINED SOILS more than half of material is smaller than No. 200 sieve	Silts and Clays liquid limit is less than 50	ML		Inorganic silts and very fine sands, rock flour, silty or clayey fine sands or clayey silts with slight plasticity	For laboratory classification of fine-grained soils				
		CL		Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays					
		OL		Organic silts and organic silt-clays of low plasticity					
	Silts and Clays liquid limit is greater than 50	MH		Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts				Plasticity Chart	
		CH		Inorganic clays of high plasticity, fat clays					
		OH		Organic clays of medium to high plasticity, organic silts					
HIGHLY ORGANIC SOILS			Pt		Peat and other highly organic soils				

*Division of **GM** and **SM** groups into subdivisions of **d** and **u** for roads and airfields only. Subdivision is based on Atterberg limits; suffix **d** used when liquid limit is 28 or less and the PI is 6 or less, the suffix **u** used when liquid limit is greater than 28.

Borderline classification: Soils possessing characteristics of two groups are designated by combinations of group symbols. (For example **GW-GC, well graded gravel-sand mixture with clay binder.)

Relative Density of Cohesionless Soils			
(N ₁) ₆₀ (blows/ft)		Relative Density	Field Test with 1/2-inch steel rod
≤ 35% Gravel	>35% Gravel		
<5	<18	very loose	Very easily penetrated when pushed by hand
5-10	18-26	loose	Easily penetrated when pushed by hand
11-30	27-49	medium dense	Easily penetrated when driven with 5-lb hammer
31-50	50-75	dense	Penetrated 1 ft with difficulty when driven with 5-lb hammer
>50	>75	very dense	Penetrated less than 3 in. when driven with 5-lb hammer

Consistency of Cohesive Soils				
N ₆₀ (blows/ft)	Consistency	Shear Strength (tsf) ¹	Unconfined Compressive Strength (tsf) ²	Field Test
<2	very soft	<0.12	<0.25	Easily penetrated several inches by fist
2-4	soft	0.12-0.25	0.25-0.50	Easily penetrated several inches by thumb
5-8	firm	0.25-0.50	0.50-1.0	Penetrated several inches by thumb with moderate effort
9-15	stiff	0.5-1.0	1.0-2.0	Readily indented by thumb but penetrated only with great effort
16-30	very stiff	1.0-2.0	2.0-4.0	Readily indented with thumbnail
>30	hard	>2.0	>4.0	Indented with difficulty by thumbnail

¹ Torvane test is an indicator of shear strength

² Pocket penetrometer is a general indicator of unconfined compressive strength

Rock Quality	
Description of Rock Quality	Rock Quality Designation (RQD)
Very Poor	< 25%
Poor	25 - 50%
Fair	50 - 75%
Good	75 - 90%
Excellent	75 - 90%

DRILL HOLE LOG

BORING NO. DA1-1

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/13/21

DRILLING METHOD: 20-CME-55 / NW CASING TO 6', NQ CORE

DATE COMPLETED: 10/13/21

DRILLER: L.P.

GROUND ELEVATION:

DEPTH TO WATER - INITIAL: ∇ 28.0'

AFTER 24 HOURS: ∇ N.M.

LOGGED BY: W.R., M.S.H., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Permeability (ft/yr)	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	Rec. (in)	USCS (AASHTO)					Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
			11	3,3,3,(13)	CL	brown, wet to sl. moist, firm SANDY LEAN CLAY trace gravels, trace organics, cobbles at surface	1650 (2 gpm)								
			13	10,55,83,(99+)	SM	white to lt. brown, moist, very dense SILTY SAND plastic fines	223 (2 oz/min)		13.0	31	7	6	54	40	SS
	5		11	Core 54,23	-	dk. gray	210 (27 oz/min)	139.1	0.5						UC 8,730 psi
			14	Core 51,0	-	dk. gray									
	10		37	Core 62,10	-	dk. gray	2700 (4.4 gal/min)	136.3	0.4						UC 4,840 psi
			11	Core 19,0	-	dk. gray	440 (1.0 gal/min)								
	20		14	Core 100,0	-	dk. gray	540 (1.6 gal/min)								
			43	Core 95,57	-	dk. gray									
	25		31	Core 52,32	-	dk. gray	3300 (11.8 gal/min)								
	30					BOTTOM OF HOLE									

LEGEND:

- 2" OD Split Spoon (SPT)
- 2.5" OD Split Spoon
- 3" OD Split Spoon

- Split Spoon Sample
- Core
- Thin-Walled Tube Sample

- Blow Count per 6"
- (N₆₀) Value
- T 0.45 Torvane (tsf)
- PP 2.0 Pocket Penetrometer (tsf)
- VST 2.30 Vane Shear Test (tsf)
- Pushed T 0.45 Torvane (tsf)
- PP 2.0 Pocket Penetrometer (tsf)

OTHER TESTS
 UC = Unconfined Compression
 CT = Consolidation
 DS = Direct Shear
 UU = Unconsolidated, Undrained
 CU = Consolidated, Undrained
 Chem. = pH, Resistivity, Sulfate, Chloride
 Hyd. = Hydrometer
 DC = Dispersive Clay
 SS = Soluble Salts

RB&G
ENGINEERING, INC.

TEST PIT LOG

TEST PIT NO. DA1-2

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/4/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 10/4/21

OPERATOR: D. BUNDY

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ∇ DRY' AFTER 24 HOURS: ∇ N.M.

LOGGED BY: C.S., J.B.

[illegible]

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE

OTHER TESTS

OTHER TESTS
UC = Unconfined Compression

CT = Consolidation

DS = Direct Shear

UU = Unconsolidated Undrained Triaxial

CU = Consolidated Undrained Triaxial

HYD = Hydrometer

DC = Dispersive Clay

Chem. = pH, Resistivity, Sulfate, Chloride

RB&G
ENGINEERING, INC.

TEST PIT LOG

TEST PIT NO. DA1-3

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/4/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 10/4/21

OPERATOR: D. BUNDY

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ∇ DRY' AFTER 24 HOURS: ∇ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	Rec. (in)	USCS				Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
					CL	red-brown, dry								
					CL	LEAN CLAY								
					Bulk	SC-SM	yellow-white, dry							
						SILTY CLAYEY SAND W/GRAVEL		2.6	25	4	28	56	16	Proctor Perm.* DC DS Soluble Salts
					Bulk	GM	lt. red, sl. moist							
						SILTY GRAVEL W/SAND ~30% 2"-6" cobbles								
					Bulk	GC	red-brown, sl. moist							
						CLAYEY GRAVEL W/SAND 50% 3" cobbles								
					CL	red-brown, sl. moist								
						SANDY LEAN CLAY W/GRAVEL 10% 6"-12" cobbles								
					Bulk	GM	red-brown, sl. moist							
						SILTY GRAVEL W/SAND 25% <5" cobbles								
					Bulk	CL	red-brown, sl. moist							
						SANDY LEAN CLAY								
						BOTTOM OF PIT								
						*1.09 x 10 ⁻⁵ cm/sec								

TP LOGV1 SANTA CLARA WS DA TP.GPJ US EVAL.GDT 12/10/21

RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

LOGGED BY: C.S., J.B.

TP LOGV1 SANTA CLARA WS DA TP.GPJ USEVAL.GDT 12/10/21

OTHER TESTS
 UC = Unconfined Compression
 CT = Consolidation
 DS = Direct Shear
 UU = Unconsolidated Undrained Triaxial
 CU = Consolidated Undrained Triaxial
 HYD = Hydrometer
 DC = Dispersive Clay
 Chem. = pH, Resistivity, Sulfate, Chloride

RB&G
ENGINEERING, INC.

TEST PIT LOG

TEST PIT NO. DA1-102

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/4/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 10/4/21

OPERATOR: D. BUNDY

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ∇ DRY' AFTER 24 HOURS: ∇ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	See Rec. (in)	USCS				Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
						SANDY LEAN CLAY pinholes								
						red-brown, dry								
						white-brown, sl. moist								
	5					SANDY LEAN CLAY								
						brown-gray, sl. moist		14.4	62	37	21	53	26	Proctor Perm.* DS
						CLAYEY SAND W/GRAVEL								
						gray, sl. moist								
	10					SANDY FAT CLAY								
						brown-gray, sl. moist								
						FAT CLAY								
						yellow-white, sl. moist								
	15					GRAVEL W/SILT & SAND 30% <6" cobbles								
						BOTTOM OF PIT								
						*2.62 x 10 ⁻⁸ cm/sec								

TP LOGV1 SANTA CLARA WS DA TP.GPJ US EVAL.GDT 12/10/21

RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

DRILL HOLE LOG

BORING NO. DA2-1

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/12/21

DRILLING METHOD: 20-CME-55 / NW CASING TO 22', NQ CORE

DATE COMPLETED: 10/12/21

DRILLER: L.P.

GROUND ELEVATION:




DEPTH TO WATER - INITIAL: ∇ DRY'

AFTER 24 HOURS: ∇ N.M.

LOGGED BY: W.R., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Permeability (ft/yr)	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	Rec. (in)	USCS (AASHTO)					Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
			15	5,12,24,(77)	CL	brown, dry to wet, hard SANDY LEAN CLAY W/GRAVEL organics									
			2	100/4"	GP	gray, wet, very dense BASALT COBBLES									
	5		14	36,42,34,(99+)	SP-SM	purple-red, very moist, very dense SAND W/SILT & GRAVEL	110 (2 oz/min)		15.5	NP	40	49	11	SS	
	10		11	17,25,31,(94)	SP-SM	purple-red, moist, very dense	62 (4 oz/min)								
			8	14,15,14,(43)	GP-GM	dk. red, wet, med. dense GRAVEL W/SILT & SAND	160 (24 oz/min)								
	15		6	8,16,25,(55)	SP-SM	dk. red, wet, very dense SAND W/SILT & GRAVEL	520 (1.0 gal/min)		16.4	NP	39	53	8		
	20		8	27,70/6"	GP-GM	dk. red, moist, very dense GRAVEL W/SILT & SAND	330 (0.8 gal/min)								
			7	Core 28,20	-	gray VESICULAR BASALT									
	25		40	Core 110,92	-	gray PORPHYRITIC BASALT some vesicles		170.2	0.7						UC 14,630 psi
			33	Core 92,0	-	gray PORPHYRITIC BASALT									
	30					BOTTOM OF HOLE									

LEGEND:



OTHER TESTS

UC = Unconfined Compression
 CT = Consolidation
 DS = Direct Shear
 UU = Unconsolidated, Undrained
 CU = Consolidated, Undrained
 Chem. = pH, Resistivity, Sulfate,
 Chloride
 Hyd. = Hydrometer
 DC = Dispersive Clay
 SS = Soluble Salts

RB&G
ENGINEERING, INC.

TEST PIT LOG

TEST PIT NO. DA2-2

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/1/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 10/1/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ▽ DRY' AFTER 24 HOURS: ▽ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	See Rec. (in)	USCS				Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
					Bulk	CL red-brown, dry LEAN CLAY W/SAND								
					CL	red-brown, sl. moist SANDY LEAN CLAY W/GRAVEL 2"-6" cobbles								
	5				Bulk	SP lt. brown, moist SAND W/GRAVEL 10% 3"-8" cobbles		14.4		NP	46	50	4	Proctor
	10													
						BOTTOM OF PIT								

TP LOGV1 SANTA CLARA WS DA TP GPJ US EVAL GDT 12/10/21

RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

TEST PIT LOG

TEST PIT NO. DA2-3

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/1/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 10/1/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ∇ DRY' AFTER 24 HOURS: ∇ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	Rec. (in)	See Legend				Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
						CL red-brown, dry LEAN CLAY								
						SM lt. brown, sl. moist SILTY SAND W/GRAVEL 10% cobbles & small boulders, dense - difficult to excavate								
	5				Bulk	SM lt. red-brown, moist		9.5		NP	17	44	39	
						BOTTOM OF PIT								

TP LOGV1 SANTA CLARA WS DA TP.GPJ US EVAL.GDT 12/10/21

RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

LOCATION: SEE SITE PLAN

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

OPERATOR: R. PIPER

DEPTH TO WATER - INITIAL: ∇ DRY' **AFTER 24 HOURS:** ∇ N.M.

SHEET 1 OF 1

PROJECT NUMBER: 202001-039

DATE STARTED: 10/4/21

DATE COMPLETED: 10/4/21


GROUND ELEVATION: NOT MEASURED

LOGGED BY: C.S., J.B.

TP LOGV1 SANTA CLARA WS DA TP.GPJ USEVAL.GDT 12/10/21

DISTURBED SAMPLE

UNDISTURBED SAMPLE



OTHER TESTS
 UC = Unconfined Compression
 CT = Consolidation
 DS = Direct Shear
 UU = Unconsolidated Undrained Triaxial
 CU = Consolidated Undrained Triaxial
 HYD = Hydrometer
 DC = Dispersive Clay
 Chem. = pH, Resistivity, Sulfate, Chloride

RB&G
ENGINEERING, INC.

TEST PIT LOG

TEST PIT NO. DA2-102

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/4/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 10/4/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ∇ DRY' AFTER 24 HOURS: ∇ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	Rec. (in)	See Legend				Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
					Bulk	SC-SM	red-brown, dry							
						SILTY CLAYEY SAND W/GRAVEL surface cobbles & small boulders								
						BASALT								
						BOTTOM OF PIT - REFUSAL								
	5													
	10													

TP LOGV1 SANTA CLARA WS DA TP.GPJ US EVAL.GDT 12/10/21

RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

LOGGED BY: C.S., J.B.

TP LOGV1 SANTA CLARA WS DA TP.GPJ USEVAL.GDT 12/10/21

OTHER TESTS
 UC = Unconfined Compression
 CT = Consolidation
 DS = Direct Shear
 UU = Unconsolidated Undrained Triaxial
 CU = Consolidated Undrained Triaxial
 HYD = Hydrometer
 DC = Dispersive Clay
 Chem. = pH, Resistivity, Sulfate, Chloride

RB&G
ENGINEERING, INC.

TEST PIT LOG

TEST PIT NO. DA2-105

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/4/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 10/4/21

OPERATOR: D. BUNDY

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ▽ DRY' AFTER 24 HOURS: ▽ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests	
			Type	Rec. (in)	See Legend				USCS	Liquid Limit	Plast. Index	Gravel (%)	Sand (%)		Silt/Clay (%)
					Bulk	CL	red-brown, dry		6.1	33	13	41	31	28	Proctor DC
						GC	red-brown, sl. moist								
						-	BASALT fractured								
						BOTTOM OF PIT									
	5														
	10														

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

RB&G
ENGINEERING, INC.

TEST PIT LOG

TEST PIT NO. DA2-106

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/4/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 10/4/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ∇ DRY' AFTER 24 HOURS: ∇ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	Rec. (in)	See Legend				Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
					Bulk	CL	red-brown, dry							
						SANDY LEAN CLAY W/GRAVEL 25% 2"-10" cobbles								
						BASALT								
						BOTTOM OF PIT - REFUSAL								
	5													
	10													

TP LOGV1 SANTA CLARA WS DA TP.GPJ US EVAL.GDT 12/10/21

RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

DRILL HOLE LOG

BORING NO. DA3-1

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/11/21

DRILLING METHOD: 20-CME-55 / HW CASING, HQ CASING ADVANCER

DATE COMPLETED: 10/11/21

DRILLER: L.P.




GROUND ELEVATION:

DEPTH TO WATER - INITIAL: ∇ DRY' **AFTER 24 HOURS:** ∇ N.M.

LOGGED BY: W.R., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Permeability (ft/yr)	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	Rec. (in)	USCS (AASHTO)					Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
			11	2,7,9,(34)	SC	brown, sl. moist, dense									
			13	16,24,29,(99+)	SC	brown, wet, very dense	850 (15 oz/min)		23.3	24	9	29	43	28	
	5		13	16,26,25,(99+)	SM	brown, moist, very dense	36 (4 oz/min)								
			9	5,15,16,(52)	SM	lt. brown, moist, very dense	37 (9 oz/min)		13.9		NP	4	61	35	
	10		9	7,10,10,(32)	SC-SM	brown, moist, dense									
	15		12	16,20,27,(63)	SC-SM	brown, moist, very dense	10 (3 oz/min)		8.8	20	4	1	71	28	
			13	11,16,21,(43)	SC	brown, very moist, dense	No Measurable Loss								
	20		14	12,21,29,(52)	CH	brown, moist, hard									
	25		16	12,21,29,(56)	CH	brown, moist, hard									
	30		6	Pushed T 2.25	CH	brown, moist, hard		104.0	20.2	57	34	1	2	97	CT
						BOTTOM OF HOLE									

LEGEND:



OTHER TESTS

UC = Unconfined Compression
 CT = Consolidation
 DS = Direct Shear
 UU = Unconsolidated, Undrained
 CU = Consolidated, Undrained
 Chem. = pH, Resistivity, Sulfate, Chloride
 Hyd. = Hydrometer
 DC = Dispersive Clay
 SS = Soluble Salts

202004-002 AV WATKINS SIPHON REPLACEMENT SANTA CLARA WS DA.GPJ US EVAL.GDT 12/10/21

RB&G
ENGINEERING, INC.

TEST PIT LOG

TEST PIT NO. DA3-2

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/1/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 10/1/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ∇ DRY' AFTER 24 HOURS: ∇ N.M.

LOGGED BY: C.S., J.B.

[illegible]

LEGEND:

LEGEND:
DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE

OTHER TESTS

OTHER TESTS
 UC = Unconfined Compression
 CT = Consolidation
 DS = Direct Shear
 UU = Unconsolidated Undrained Triaxial
 CU = Consolidated Undrained Triaxial
 HYD = Hydrometer
 DC = Dispersive Clay
 Chem. = pH, Resistivity, Sulfate, Chloride

TP_LOGV1 SANTA CLARA WS DA TP.GPJ US EVAL.GDT 12/10/21

RB&G
ENGINEERING, INC.

TEST PIT LOG

TEST PIT NO. DA3-3

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 9/30/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 10/1/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ▽ DRY' AFTER 24 HOURS: ▼ N.M.

LOGGED BY: C.S., J.B.

[illegible]

LEGEND:

GENERAL
DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE

OTHER TESTS

OTHER TESTS
 UC = Unconfined Compression
 CT = Consolidation
 DS = Direct Shear
 UU = Unconsolidated Undrained Triaxial
 CU = Consolidated Undrained Triaxial
 HYD = Hydrometer
 DC = Dispersive Clay
 Chem. = pH, Resistivity, Sulfate, Chloride

RB&G
ENGINEERING, INC.

TEST PIT LOG

TEST PIT NO. DA3-4

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 9/30/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 9/30/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ∇ DRY' AFTER 24 HOURS: ∇ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests	
			Type	Rec. (in)	See Legend				USCS	Liquid Limit	Plast. Index	Gravel (%)	Sand (%)		Silt/Clay (%)
					Bulk	CL	red-brown, dry								
							LEAN CLAY W/SAND								
					Bulk	CL	red-brown, sl. moist								
						ML	lt. red-brown, sl. moist								
	5				Bulk	GP-GM	lt. red-brown, sl. moist								
							GRAVEL W/SILT & SAND cobbles								
					Bulk	SM	lt. brown, sl. moist								
	10						SILTY SAND W/GRAVEL cobbles & small boulders								
					Bulk	SP-SM	lt. red-brown, sl. moist								
						SM	yellow-white-brown, sl. moist								
							SILTY SAND								
	15				Bulk	GP-GM	yellow-white-brown, sl. moist		2.6		NP	51	44	5	Proctor Perm.*
							BOTTOM OF PIT								
							*5.23 x 10-5 cm/sec								

TP LOGV1 SANTA CLARA WS DA TP.GPJ US EVAL.GDT 12/10/21

RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

TEST PIT LOG

TEST PIT NO. DA3-5

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/1/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 10/1/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ▽ DRY' AFTER 24 HOURS: ▽ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests	
			Type	Rec. (in)	See Legend				USCS	Liquid Limit	Plast. Index	Gravel (%)	Sand (%)		Silt/Clay (%)
				Bulk	CL	red-brown, dry GRAVELLY LEAN CLAY W/SAND some cobbles at 2'									
				Bulk	CL	red-brown, sl. moist LEAN CLAY W/SAND		8.5	40	22	2	24	74	Proctor DC	
	5			Bulk	SM	lt. brown, sl. moist SILTY SAND W/GRAVEL some cobbles at 7'									
	10			Bulk	GM	lt. brown, sl. moist SILTY GRAVEL W/SAND 10" cobbles									
						BOTTOM OF PIT									

TP LOGV1 SANTA CLARA WS DA TP GPJ US EVAL GDT 12/10/21

RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

TEST PIT LOG

TEST PIT NO. DA3-101

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 9/29/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR


DATE COMPLETED: 9/29/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ∇ DRY' AFTER 24 HOURS: ∇ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests	
			Type	Rec. (in)	See Legend				USCS	Liquid Limit	Plast. Index	Gravel (%)	Sand (%)		Silt/Clay (%)
					Bulk	CL	red-brown, dry								
							LEAN CLAY W/SAND								
					Bulk	SC-SM	red w/white, sl. moist								
							SILTY CLAYEY SAND W/GRAVEL								
					Bulk	SM	red-brown, sl. moist								
							SILTY SAND W/GRAVEL cobbles								
	5				Bulk	GP-GM	red-brown, sl. moist								
							GRAVEL W/SILT & SAND								
					Bulk	SP-SM	lt. red-brown, sl. moist								
	10						SAND W/SILT & GRAVEL								
					Bulk	SP-SM	lt. brown, moist								Soluble Salts
					Bulk	SP-SM	lt. brown, moist	9.5		NP	27	61	12		Soluble Salts
							SAND W/SILT & GRAVEL cemented layers, white striations								
	15				Bulk	SM	lt. brown, moist								
							SILTY SAND								
							BOTTOM OF PIT								

TP LOGV1 SANTA CLARA WS DA TP GPJ US EVAL GDT 12/10/21

RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

TEST PIT LOG

TEST PIT NO. DA3-102

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 9/29/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 9/29/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ∇ DRY' AFTER 24 HOURS: ∇ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests	
			Type	Rec. (in)	See Legend				USCS	Liquid Limit	Plast. Index	Gravel (%)	Sand (%)		Silt/Clay (%)
					Bulk	CL	red-brown, dry								
					Bulk	SC	red-brown, sl. moist	4.5	27	11	34	38	28		Proctor Perm.* DC DS
	5														
					Bulk	SP-SM	lt. red-brown, sl. moist								
					Bulk	SP-SM	lt. red-brown, moist	6.4		NP	40	48	12		Proctor
	10														
					Bulk	SM	lt. red-brown, sl. moist								
					Bulk	SC-SM	lt. red-brown, sl. moist								
					Bulk	SC	lt. red-brown, sl. moist								
															
	15														

TP LOGV1 SANTA CLARA WS DA TP.GPJ US EVAL.GDT 12/10/21

RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

TEST PIT LOG

TEST PIT NO. DA3-103

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 9/29/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR



DATE COMPLETED: 9/29/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ∇ DRY' AFTER 24 HOURS: ∇ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests																
			Type	Rec. (in)	See Legend				USCS	Liquid Limit	Plast. Index	Gravel (%)	Sand (%)		Silt/Clay (%)															
				Bulk	CL	red-brown, dry																								
	Bulk			CL	red-brown, sl. moist																									
					Bulk	CL										red-white, sl. moist	10.1	41	19	9	26	65	DC Soluble Salts							
	5				Bulk	SM										lt. red-brown, sl. moist	5.1		NP	58	34	8	Proctor							
					Bulk	GP-GM										lt. red-brown, moist														
	10				Bulk	SM										yellow-white, sl. moist														
				Bulk	SP-SM	yellow-white, sl. moist																								

TP LOGV1 SANTA CLARA WS DA TP GPJ US EVAL.GDT 12/10/21


RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

TEST PIT LOG

TEST PIT NO. DA3-105

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 9/29/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 9/30/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ∇ DRY' AFTER 24 HOURS: ∇ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests		
			Type	Rec. (in)	See Legend				USCS	Liquid Limit	Plast. Index	Gravel (%)	Sand (%)		Silt/Clay (%)	
	5			Bulk	CL	brown-red, dry		2.9	NP	60	31	9	Soluble Salts			
				SANDY LEAN CLAY												
				Bulk	GP-GM	yellow-white, sl. moist								GRAVEL W/SILT & SAND		
				Bulk	SP-SM	yellow-white, moist								SAND W/SILT & GRAVEL		
				Bulk	SC-SM	brown, moist								SILTY CLAYEY SAND		
				Bulk	SC	brown, sl. moist								CLAYEY SAND		
				BOTTOM OF PIT												

TP LOGV1 SANTA CLARA WS DA TP.GPJ US EVAL.GDT 12/10/21

RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

TEST PIT LOG

TEST PIT NO. DA3-106

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 9/30/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 9/30/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ▽ DRY' AFTER 24 HOURS: ▽ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests				
			Type	Rec. (in)	See Legend				USCS	Liquid Limit	Plast. Index	Gravel (%)	Sand (%)		Silt/Clay (%)			
	5			Bulk	CL	red-brown, sl. moist	LEAN CLAY W/SAND											
				Bulk	CL	red-brown, sl. moist												
				Bulk	GC	red-brown, moist	CLAYEY GRAVEL W/SAND cobbles	9.5	37	17	40	35	25	Proctor DC DS				
				-	-	CEMENTED LAYER												
				Bulk	SM	lt. red-brown, moist	SILTY SAND W/GRAVEL cobbles											
				GP	-	COBBLES												
				Bulk	GM	lt. red-brown, sl. moist	SILTY GRAVEL W/SAND cemented layers	4.4		NP	48	38	14	Soluble Salts				
				BOTTOM OF PIT														

TP LOGV1 SANTA CLARA WS DA TP.GPJ US EVAL.GDT 12/10/21

RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

TEST PIT LOG

TEST PIT NO. DA3-107

PROJECT: SANTA CLARA WATERSHED EA - DAMMERON VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 9/30/21

DIGGING METHOD: JOHN DEERE 160 EXCAVATOR

DATE COMPLETED: 9/30/21

OPERATOR: R. PIPER

GROUND ELEVATION: NOT MEASURED

DEPTH TO WATER - INITIAL: ∇ DRY' AFTER 24 HOURS: ∇ N.M.

LOGGED BY: C.S., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests							
			Type	Rec. (in)	See Legend				USCS	Liquid Limit	Plast. Index	Gravel (%)	Sand (%)		Silt/Clay (%)						
					Bulk	CL	brown, dry		4.8	23	5	7	54	39	DC Soluble Salts						
							SANDY LEAN CLAY														
					Bulk	SC-SM	brown, sl. moist									SILTY CLAYEY SAND white striations					
	5																				
					Bulk	SM	yellow-white-brown, sl. moist									SILTY SAND W/GRAVEL					
																					
	10				Bulk	SC	yellow-white-brown, sl. moist									CLAYEY SAND W/GRAVEL					
						Bulk	GC									yellow-white, sl. moist	CLAYEY GRAVEL W/SAND				
	15				Bulk	CL	yellow-white, sl. moist														

TP LOGV1 SANTA CLARA WS DA TP.GPJ US EVAL.GDT 12/10/21

RB&G
ENGINEERING, INC.

LEGEND:

DISTURBED SAMPLE

Bulk ← Type of Sample
0.45 ← Torvane (tsf)

UNDISTURBED SAMPLE



OTHER TESTS

UC = Unconfined Compression
CT = Consolidation
DS = Direct Shear
UU = Unconsolidated Undrained Triaxial
CU = Consolidated Undrained Triaxial
HYD = Hydrometer
DC = Dispersive Clay
Chem. = pH, Resistivity, Sulfate, Chloride

DRILL HOLE LOG

BORING NO. DI1-1

PROJECT: SANTA CLARA WATERSHED EA - DIAMOND VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 8/27/21

DRILLING METHOD: 08-CME-55 / HW CASING TO 18'

DATE COMPLETED: 8/27/21

DRILLER: D.K.

GROUND ELEVATION:




DEPTH TO WATER - INITIAL: ▽ DRY'

AFTER 24 HOURS: ▼ N.M.

LOGGED BY: M.N.H., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Permeability (ft/yr)	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	Rec. (in)	USCS (AASHTO)					Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
			11	6,6,7,(28)	CL-ML	brown, dry, stiff SANDY SILTY CLAY (fill)									
			14	4,4,5,(20)	SC-SM	brown, moist, med. dense SILTY CLAYEY SAND silty sand lenses & seams (fill)			13.2	23	5	0	51	49	DC SS
	5		8	Pushed	SM	brown, moist SILTY SAND (fill)			101.7	12.1	NP	0	61	39	
			13	3,6,7,(26)	SM	brown, sl. moist, med. dense SILTY SAND few organics, organic odor									
	10		13	5,7,8,(27)	CL	brown, sl. moist, stiff SANDY LEAN CLAY trace organics, trace charcoal									
			10	5,9,9,(28) PP >4.5	CL	brown, sl. moist, very stiff LEAN CLAY W/SAND			13.8	26	9	0	17	83	
	15		7	Pushed PP 4.0	CL	brown, sl. moist, very stiff SANDY LEAN CLAY			104.0	8.4	28	11	34	65	CT
			13	7,9,9,(23)	CL	brown, sl. moist, very stiff SANDY LEAN CLAY trace gravels									
	20		12	9,8,10,(22)	CL	brown, sl. moist, very stiff SANDY LEAN CLAY silt lenses, trace charcoal, possible pinholes									
			12	8,12,12,(27)	CL	brown, sl. moist, very stiff SANDY LEAN CLAY silt layers									
	25					BOTTOM OF HOLE									

LEGEND:



OTHER TESTS
 UC = Unconfined Compression
 CT = Consolidation
 DS = Direct Shear
 UU = Unconsolidated, Undrained
 CU = Consolidated, Undrained
 Chem. = pH, Resistivity, Sulfate,
 Chloride
 Hyd. = Hydrometer
 DC = Dispersive Clay
 SS = Soluble Salts

RB&G
 ENGINEERING, INC.

DRILL HOLE LOG

BORING NO. DI1-2

PROJECT: SANTA CLARA WATERSHED EA - DIAMOND VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 8/30/21

DRILLING METHOD: 08-CME-55 / HW CASING TO 18'

DATE COMPLETED: 8/31/21

DRILLER: T.K.

GROUND ELEVATION:



DEPTH TO WATER - INITIAL: ∇ DRY'

AFTER 24 HOURS: ∇ N.M.

LOGGED BY: M.N.H., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Permeability (ft/yr)	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	Rec. (in)	USCS (AASHTO)					Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
			12	5,9,11,(43)	CL-ML	brown, dry, hard SILTY CLAY W/SAND organics (fill)									
			10	7,13,13,(55)	SC-SM	brown, moist, very dense SILTY CLAYEY SAND (fill)			9.6	20	5	1	64	35	DC SS
	5		12	6,10,8,(36)	SC-SM	brown, sl. moist, dense SILTY CLAYEY SAND silty sand lenses (fill?)									
	10		17	Pushed PP > 4.5	ML	brown, moist, very stiff SANDY SILT	780 (1 gal/min)	117.2	11.0	17	3	0	47	53	CT
			12	6,9,10,(30) PP > 4.5	CL	brown, sl. moist, very stiff									
	15		12	6,10,11,(30)	CL	brown, sl. moist, very stiff LEAN CLAY W/SAND	610 (1.5 gal/min)								
			18	Pushed PP > 4.5	CL	brown, sl. moist, hard									
	20		12	8,13,15,(34)	CL	brown, sl. moist, very stiff LEAN CLAY W/SAND silty sand lenses & seams, trace gravels	250 (0.8 gal/min)	124.3	10.4	27	12	0	19	81	
			13	6,10,13,(26)	CL	brown, moist, very stiff LEAN CLAY silty sand lenses									
	25					BOTTOM OF HOLE									

LEGEND:



OTHER TESTS
 UC = Unconfined Compression
 CT = Consolidation
 DS = Direct Shear
 UU = Unconsolidated, Undrained
 CU = Consolidated, Undrained
 Chem. = pH, Resistivity, Sulfate, Chloride
 Hyd. = Hydrometer
 DC = Dispersive Clay
 SS = Soluble Salts

RB&G
ENGINEERING, INC.

DRILL HOLE LOG

BORING NO. DI2-1

PROJECT: SANTA CLARA WATERSHED EA - DIAMOND VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 8/26/21

DRILLING METHOD: 08-CME-55 / HW CASING ADVANCER

DATE COMPLETED: 8/27/21

DRILLER: T.K.

GROUND ELEVATION:

DEPTH TO WATER - INITIAL: ∇ DRY'

AFTER 24 HOURS: ∇ N.M.

LOGGED BY: M.N.H., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	Rec. (in)	USCS (AASHTO)				Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
			9	5,8,9,(36)	CL	brown, dry, very stiff LEAN CLAY W/SAND (fill)								
			8	2,5,6,(23)	SC	brown, moist, med. dense CLAYEY SAND trace gravels (fill)		10.5	24	9	10	44	46	SS
	5		9	5,8,7,(30) PP >4.5	CL	brown, sl. moist, very stiff SANDY LEAN CLAY (fill)		11.3	24	10	1	43	56	DC
	10		12	2,10,10,(34)	SC	brown to dk. brown, moist, dense CLAYEY SAND		13.8	24	9	8	45	47	
			9	5,9,12,(31)	CL	brown to dk. brown, sl. moist, very stiff SANDY LEAN CLAY								
	15		9	7,10,14,(32)	CL	brown, sl. moist, very stiff								
						BOTTOM OF HOLE								

LEGEND:

- 2" OD Split Spoon (SPT) Split Spoon Sample
- 2.5" OD Split Spoon
- 3" OD Split Spoon

- Thin-Walled Tube Sample

- Blow Count per 6" (N₆₀) Value
- T 0.45 Torvane (tsf)
- PP 2.0 Pocket Penetrometer (tsf)
- VST 2.30 Vane Shear Test (tsf)
- Pushed T 0.45 Torvane (tsf)
- PP 2.0 Pocket Penetrometer (tsf)

OTHER TESTS

- UC = Unconfined Compression
- CT = Consolidation
- DS = Direct Shear
- UU = Unconsolidated, Undrained
- CU = Consolidated, Undrained
- Chem. = pH, Resistivity, Sulfate, Chloride
- Hyd. = Hydrometer
- DC = Dispersive Clay
- SS = Soluble Salts

RB&G
ENGINEERING, INC.

DRILL HOLE LOG

BORING NO. DI2-101

PROJECT: SANTA CLARA WATERSHED EA - DIAMOND VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 8/26/21

DRILLING METHOD: 08-CME-55 / HQ CASING ADVANCER

DATE COMPLETED: 8/26/21

DRILLER: T.K.

GROUND ELEVATION:



DEPTH TO WATER - INITIAL: ∇ DRY'

AFTER 24 HOURS: ∇ N.M.

LOGGED BY: M.N.H., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	Rec. (in)	USCS (AASHTO)				Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
			8	6,12,13,(53) PP >4.5	CL	brown, dry SANDY LEAN CLAY								
					CL	brown w/white, dry, very stiff SANDY LEAN CLAY mudstone sand clasts								
			9	39,27,17,(94)	GP	yellow, sl. moist SANDSTONE GRAVEL cut & crushed								
					GP-GM	brown & gray, moist, very dense GRAVEL W/SILT & SAND		8.7		NP	65	24	10	SS
	5		10	9,13,16,(58)	SC	gray-brown, moist, very dense CLAYEY SAND		8.0	26	12	0	51	49	DC
			10	11,17,18,(59) PP >4.5	CL	gray-brown, sl. moist, hard SANDY LEAN CLAY trace gravels, charcoal flakes								
	10		10	11,12,16,(41)	GC	brown, sl. moist, med. dense CLAYEY GRAVEL W/SAND								
			11	14,22,36,(77)	SC	brown, sl. moist, very dense CLAYEY SAND W/GRAVEL								
	15					BOTTOM OF HOLE								

LEGEND:



OTHER TESTS
 UC = Unconfined Compression
 CT = Consolidation
 DS = Direct Shear
 UU = Unconsolidated, Undrained
 CU = Consolidated, Undrained
 Chem. = pH, Resistivity, Sulfate,
 Chloride
 Hyd. = Hydrometer
 DC = Dispersive Clay
 SS = Soluble Salts

RB&G
ENGINEERING, INC.

DRILL HOLE LOG

BORING NO. DI2-2

PROJECT: SANTA CLARA WATERSHED EA - DIAMOND VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/14/21

DRILLING METHOD: 20-CME-55 / NW CASING TO 25'

DATE COMPLETED: 10/14/21

DRILLER: L.P.

GROUND ELEVATION:



DEPTH TO WATER - INITIAL: ▽ DRY'

AFTER 24 HOURS: ▼ N.M.

LOGGED BY: W.R., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Permeability (ft/yr)	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	Rec. (in)	USCS (AASHTO)					Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
			15	3,7,4,(23) T 0.19	CL	brown, sl. moist, soft SANDY LEAN CLAY trace organics	170 (3 oz/min)								
	5		11	Pushed	SC	brown, moist CLAYEY SAND trace gravels	42 (6 oz/min)		14.2	26	12	10	42	48	
			2	5,4,2,(13)	SC	lt. brown, wet, med. dense CLAYEY SAND W/GRAVEL									
	10		12	Pushed T 0.40	CL	dk. brown, wet, firm SANDY LEAN CLAY	100.7		26.6	30	15	5	43	52	SS
			11	1,2,2,(6) T 0.45	CL	brown, wet, firm SANDY LEAN CLAY trace organics	140 (32 oz/min)								
	15		12	1,2,2,(6) T 0.21	CL	dk. brown, moist, soft SANDY LEAN CLAY silty sand seams	1,400 (3.2 gal/min)		18.9	27	11	1	44	55	
	20		9	5,5,6,(14) T 0.62	CL/CH	brown, moist, stiff LEAN CLAY TO FAT CLAY	6,400 (19 gal/min)								
	25		7	3,6,5,(12)	GC	lt. brown, moist, very loose CLAYEY GRAVEL W/SAND	1,200 (4.2 gal/min)								
	30		9	3,4,3,(8) T 0.30	GC CL	lt. brown, moist LEAN CLAY W/SAND									
						BOTTOM OF HOLE									

LEGEND:



OTHER TESTS
 UC = Unconfined Compression
 CT = Consolidation
 DS = Direct Shear
 UU = Unconsolidated, Undrained
 CU = Consolidated, Undrained
 Chem. = pH, Resistivity, Sulfate, Chloride
 Hyd. = Hydrometer
 DC = Dispersive Clay
 SS = Soluble Salts

RB&G
ENGINEERING, INC.

DRILL HOLE LOG

BORING NO. DI3-1

PROJECT: SANTA CLARA WATERSHED EA - DIAMOND VALLEY

SHEET 1 OF 1

CLIENT: ALPHA ENGINEERING COMPANY

PROJECT NUMBER: 202001-039

LOCATION: SEE SITE PLAN

DATE STARTED: 10/14/21

DRILLING METHOD: 20-CME-55 / NW CASING TO 25'

DATE COMPLETED: 10/14/21

DRILLER: L.P.

GROUND ELEVATION:

DEPTH TO WATER - INITIAL: ∇ DRY'

AFTER 24 HOURS: ∇ N.M.

LOGGED BY: W.R., J.B.

Elev. (ft)	Depth (ft)	Lithology	Sample			Material Description	Permeability (ft/yr)	Dry Density (pcf)	Moisture Content (%)	Atter.		Gradation			Other Tests
			Type	Rec. (in)	USCS (AASHTO)					Liquid Limit	Plast. Index	Gravel (%)	Sand (%)	Silt/Clay (%)	
			14	3,8,8,(34)	CL	lt. brown, sl. moist, very stiff									
			4	2,1,2,(7) T 0.65	CL	lt. brown, moist to sl. moist, stiff									
	5		8	Pushed T 0.24	CL	brown, moist, soft		98.8	24.0	34	18	0	35	65	CT
	10		10	3,3,6,(16)	CL	brown, sl. moist, stiff									
			4	Pushed	CL	brown, wet									
	15		10	4,11,14,(33)	GC	brown, wet, med. dense			15.1	32	18	35	29	36	
	20		10	20,50/5"	CL	lt. brown, sl. moist, hard									
	25		10	33,50/3"	GC	lt. brown, wet, very dense									
	30		0	50/0"	-	no recovery									
						BOTTOM OF HOLE									

LEGEND:

- 2" OD Split Spoon (SPT)
- 2.5" OD Split Spoon
- 3" OD Split Spoon

- Split Spoon Sample
- Thin-Walled Tube Sample

- Blow Count per 6"
- (N₁)₆₀ Value
- T 0.45 Torvane (tsf)
- PP 2.0 Pocket Penetrometer (tsf)
- VST 2.30 Vane Shear Test (tsf)
- Pushed T 0.45 Torvane (tsf)
- PP 2.0 Pocket Penetrometer (tsf)

OTHER TESTS

- UC = Unconfined Compression
- CT = Consolidation
- DS = Direct Shear
- UU = Unconsolidated, Undrained
- CU = Consolidated, Undrained
- Chem. = pH, Resistivity, Sulfate, Chloride
- Hyd. = Hydrometer
- DC = Dispersive Clay
- SS = Soluble Salts

RB&G
ENGINEERING, INC.

APPENDIX E-7C

TECHNICAL DOCUMENTS, CONTINUED

Sample Photos



TEST PIT DA1-2 EXCAVATION



TEST PIT DA1-2 EXCAVATED MATERIAL




TEST PIT DA1-3 EXCAVATION



TEST PIT DA1-3 EXCAVATED MATERIAL



TEST PIT DA1-3 EXCAVATED MATERIAL

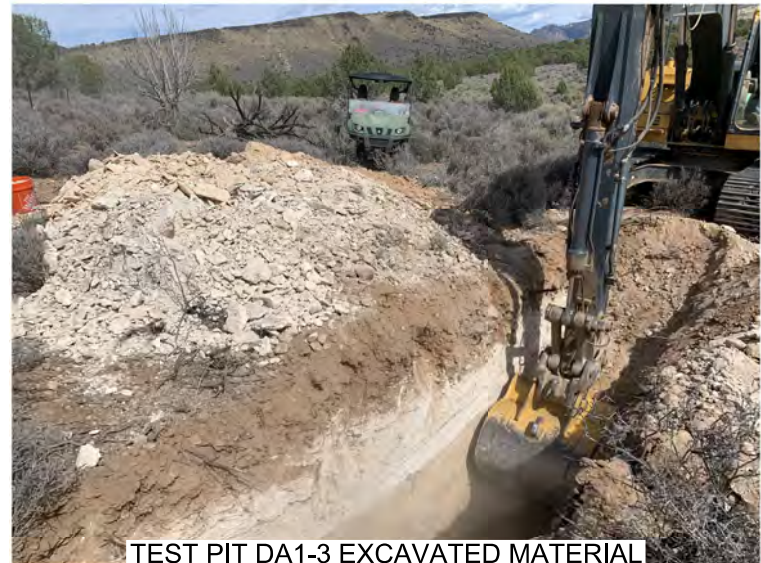

TEST PIT DA1-3 EXCAVATED MATERIAL



TEST PIT DA1-101 EXCAVATION



TEST PIT DA1-101 EXCAVATED MATERIAL



TEST PIT DA1-101 EXCAVATED MATERIAL



TEST PIT DA1-101 EXCAVATED MATERIAL



TEST PIT DA1-102 EXCAVATION



TEST PIT DA1-102 EXCAVATED MATERIAL



TEST PIT DA1-102 EXCAVATED MATERIAL



TEST PIT DA1-103 EXCAVATION



TEST PIT DA1-103 EXCAVATED MATERIAL



TEST PIT DA1-103 EXCAVATED MATERIAL



TEST PIT DA2-2 EXCAVATION



TEST PIT DA2-2 EXCAVATED MATERIAL



TEST PIT DA2-2 EXCAVATED MATERIAL



TEST PIT DA2-3 EXCAVATION



TEST PIT DA2-3 EXCAVATED MATERIAL



TEST PIT DA2-3 EXCAVATED MATERIAL



TEST PIT DA2-101 EXCAVATION



TEST PIT DA2-102 EXCAVATION



TEST PIT DA2-101 EXCAVATED MATERIAL



TEST PIT DA2-102 EXCAVATED MATERIAL



TEST PIT DA2-103 EXCAVATION



TEST PIT DA2-104 EXCAVATION



TEST PIT DA2-103 EXCAVATED MATERIAL



TEST PIT DA2-104 EXCAVATED MATERIAL



TEST PIT DA2-105 EXCAVATION



TEST PIT DA2-105 EXCAVATION



TEST PIT DA2-105 EXCAVATED MATERIAL



TEST PIT DA2-106 EXCAVATION



TEST PIT DA1-106 EXCAVATED MATERIAL



TEST PIT DA2-106 EXCAVATED MATERIAL




TEST PIT DA3-2 EXCAVATION



TEST PIT DA3-2 EXCAVATION



TEST PIT DA3-2 EXCAVATED MATERIAL

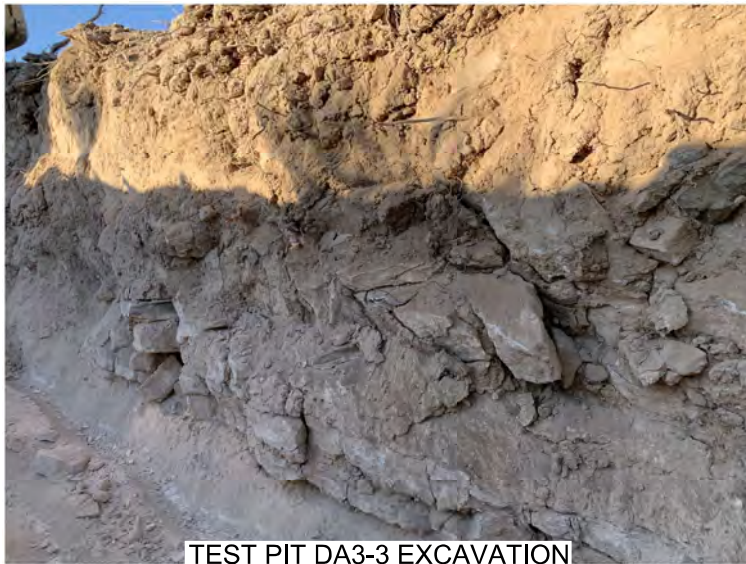

TEST PIT DA3-3 EXCAVATION



TEST PIT DA3-3 EXCAVATION & EXCAVATED MATERIAL



TEST PIT DA3-3 EXCAVATION




TEST PIT DA3-4 EXCAVATION



TEST PIT DA3-4 EXCAVATED MATERIAL



TEST PIT DA3-4 EXCAVATED MATERIAL

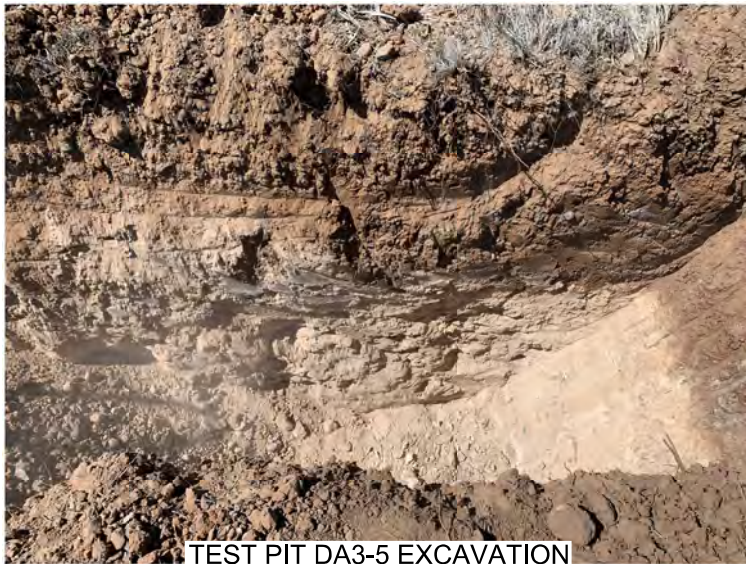

TEST PIT DA3-5 EXCAVATION



TEST PIT DA3-5 EXCAVATED MATERIAL



TEST PIT DA3-5 EXCAVATION



TEST PIT DA3-101 EXCAVATION



TEST PIT DA3-101 EXCAVATION



TEST PIT DA3-101 EXCAVATED MATERIAL





TEST PIT DA3-103 EXCAVATION



TEST PIT DA3-103 EXCAVATION



TEST PIT DA3-103 EXCAVATED MATERIAL





TEST PIT DA3-105 EXCAVATION



TEST PIT DA3-105 EXCAVATED MATERIAL




TEST PIT DA3-107 EXCAVATION




TEST PIT DA3-107 EXCAVATED MATERIAL





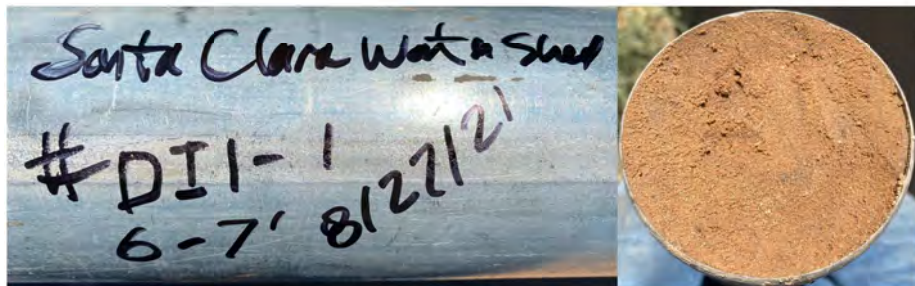



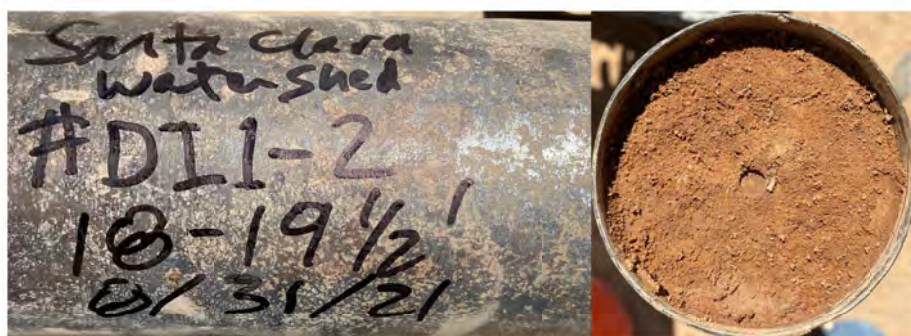





APPENDIX C

Laboratory Testing

Table 1

SUMMARY OF TEST DATA

PROJECT LOCATION	Santa Clara Watershed EA -	PROJECT NO. 202101-039
	Dammeron Valley see site plan	
		FEATURE Test pits and Borings


HOLE NO.	DEPTH BELOW GROUND SURFACE (ft)	IN-PLACE		UNCONFINED OR UU TRIAXIAL COMPRESSIVE STRENGTH (psi)	ATTERBERG LIMITS			MECHANICAL ANALYSIS			Dispersive Clay	Water Soluble Solids %	UNIFIED SOIL CLASSIFICATION SYSTEM
		DRY UNIT WEIGHT (pcf)	MOISTURE (%)		LIQUID LIMIT (%)	PLASTIC LIMIT (%)	PLASTICITY INDEX (%)	PERCENT GRAVEL	PERCENT SAND	PERCENT SILT & CLAY			
Dammeron Valley Investigations													
DA 1-1	3-4.5		13.0		31	24	7	6	54	40		0.27	SM
	6-7	139.1	0.5	UC 8,730									
	12-13	136.3	0.4	UC 4,840									
TP DA1 - 2	2-2.5		5.9		35	23	12	41	37	22	ND-1	0.28	GC
TP DA1 - 3	2-3		2.6		25	21	4	28	56	16	ND-1	1.15	SC-SM
TP DA1 - 101	4-5		5.2				NP	20	60	20			SM
	7.5-8.5		15.0		55	21	34	1	22	77	ND-1		CH
TP DA1 - 102	6-7		14.4		62	25	37	21	53	26			SC
	12-12.5		19.5		53	26	27	2	7	91	ND-2		CH
DA 2-1	6-7.5		15.5				NP	40	49	11		0.1	SP-SM
	15-16.5		16.4				NP	39	53	8			SP-SM
	25-26	170.2	0.7	UC 14,630									
TP DA2 - 2	6-7		14.4				NP	46	50	4			SP
TP DA2 - 3	5-6		9.5				NP	17	44	39			SM
TP DA2 - 105	1-2		6.1		33	20	13	41	31	28	ND-1		GC
DA 3-1	3-4.5		23.3		24	15	9	29	43	28			SC
	9-10.5		13.9				NP	4	61	35			SM
	15-16.5		8.8		20	16	4	1	71	28			SC-SM
	32-32.5	104.0	20.2		57	23	34	1	2	97			CH
TP DA3 - 2	3-3.5		5.9		30	21	9	5	52	43	ND-1		SC
TP DA3 - 4	15-15.3		2.6				NP	51	44	5			GP-GM
TP DA3 - 5	3-3.5		8.5		40	18	22	2	24	74	D-1		CL
TP DA3 - 101	11-12											0.25	
	12-13		9.5				NP	27	61	12		0.12	SP-SM
TP DA3 - 102	4-5		4.5		27	16	11	34	38	28	ND-1		SC
	9-10		6.4				NP	40	48	12			SP-SM
TP DA3 - 103	2.6-3		10.1		41	22	19	9	26	65	ND-1	2.96	CL
	9-10		5.1				NP	58	34	8			GP-GM
TP DA3 - 104	3-3.5		8.0		35	16	19	3	51	46		0.22	SC
TP DA3 - 105	3-3.5		2.9				NP	60	31	9		0.82	GP-GM
	6-7		7.0				NP	34	56	10			SP-SM
TP DA3 - 106	3-4		9.5		37	20	17	40	35	25	ND-1		GC
	9-10		4.4				NP	48	38	14		0.34	GM


Table 1


SUMMARY OF TEST DATA



PROJECT LOCATION	Santa Clara Watershed EA -	PROJECT NO.	202101-039
	Dammeron Valley see site plan		
		FEATURE	Test pits and Borings

HOLE NO.	DEPTH BELOW GROUND SURFACE (ft)	IN-PLACE		UNCONFINED OR UU TRIAXIAL COMPRESSIVE STRENGTH (psi)	ATTERBERG LIMITS			MECHANICAL ANALYSIS			Dispersive Clay	Water Soluble Solids %	UNIFIED SOIL CLASSIFICATION SYSTEM
		DRY UNIT WEIGHT (pcf)	MOISTURE (%)		LIQUID LIMIT (%)	PLASTIC LIMIT (%)	PLASTICITY INDEX (%)	PERCENT GRAVEL	PERCENT SAND	PERCENT SILT & CLAY			
TP DA3 - 107	3-3.5		4.8		23	18	5	7	54	39	ND-1	0.44	SC-SM
Diamond Valley Investigations													
DI 1-1	3-4.5		13.2		23	18	5	0	51	49	ND-2	0.39	SC-SM
	6-7	101.7	12.1				NP	0	61	39			SM
	12-13.5		13.8		26	17	9	0	17	83			CL
	15-15.7	104.0	8.4		28	17	11	1	34	65			CL
DI 1-2	3-4.5		9.6		20	15	5	1	64	35	ND-2	0.36	SC-SM
	9-10.5	117.2	11.0		17	14	3	0	47	53			ML
	18-19.5	124.3	10.4		27	15	12	0	19	81			CL
DI 2-1	3-4.5		10.5		24	15	9	10	44	46		0.45	SC
	6-7.5		11.3		24	14	10	1	43	56	ND-1		CL
	9-10.5		13.8		24	15	9	8	45	47			SC
DI 2-2	3-4.5		14.2		26	14	12	10	42	48			SC
	9-10.5	100.7	26.6		30	15	15	5	43	52		0.35	CL
	15-16.5		18.9		27	16	11	1	44	55			CL
DI 2-101	3-4.5		8.7				NP	65	25	10		0.09	GP-GM
	6-7.5		8.0		26	14	12	0	51	49	ND-1		SC
DI 3-1	6-7.5	98.8	24.0		34	16	18	0	35	65			CL
	15-16.5		15.1		32	14	18	35	29	36			GC

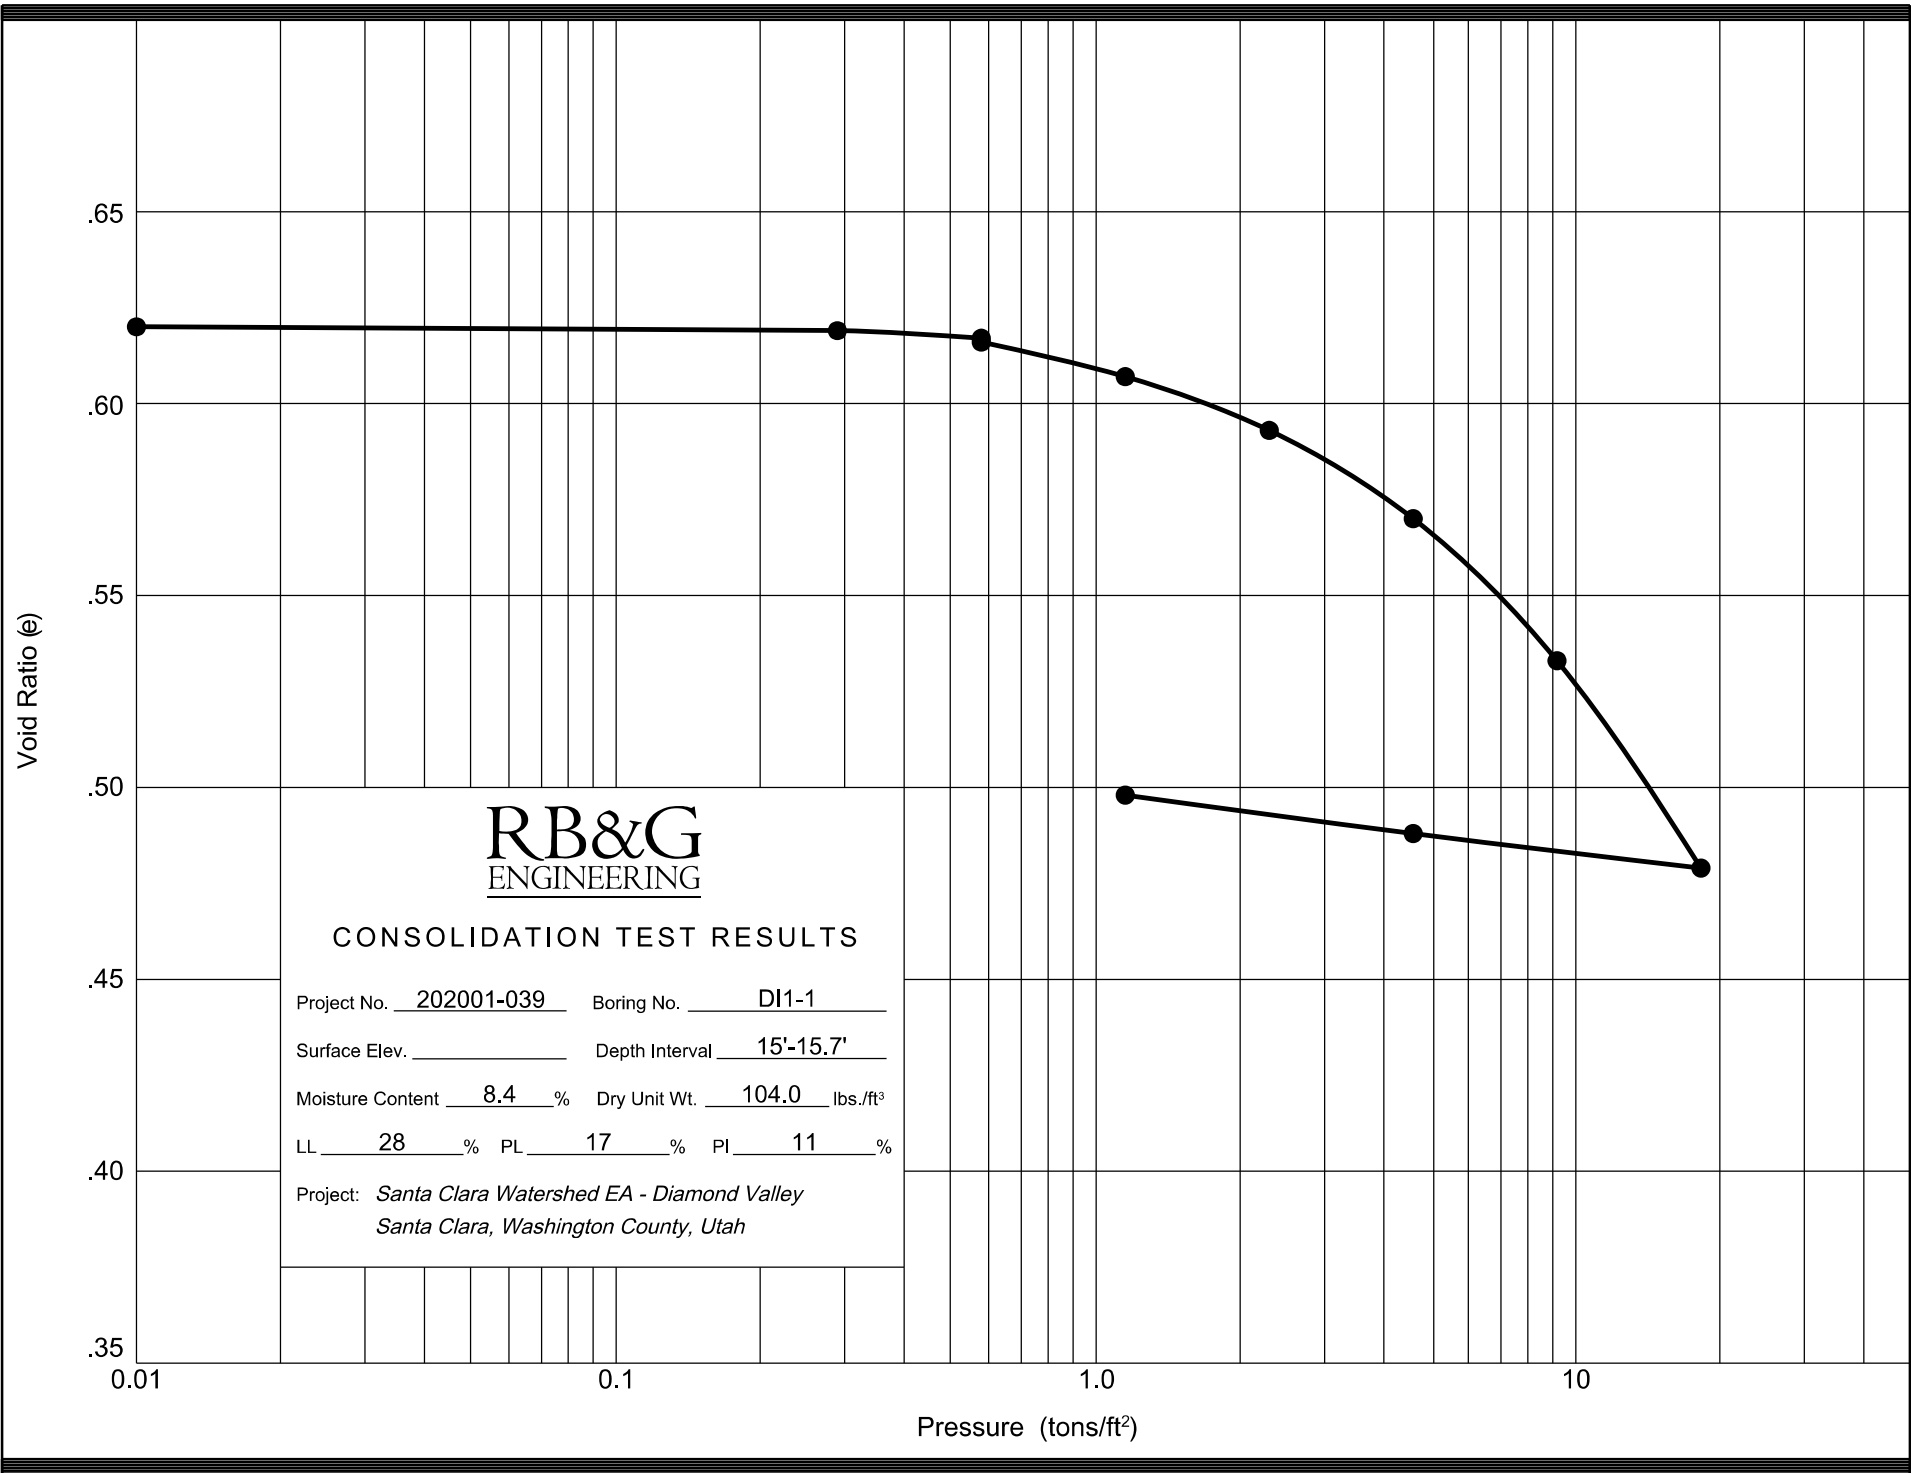


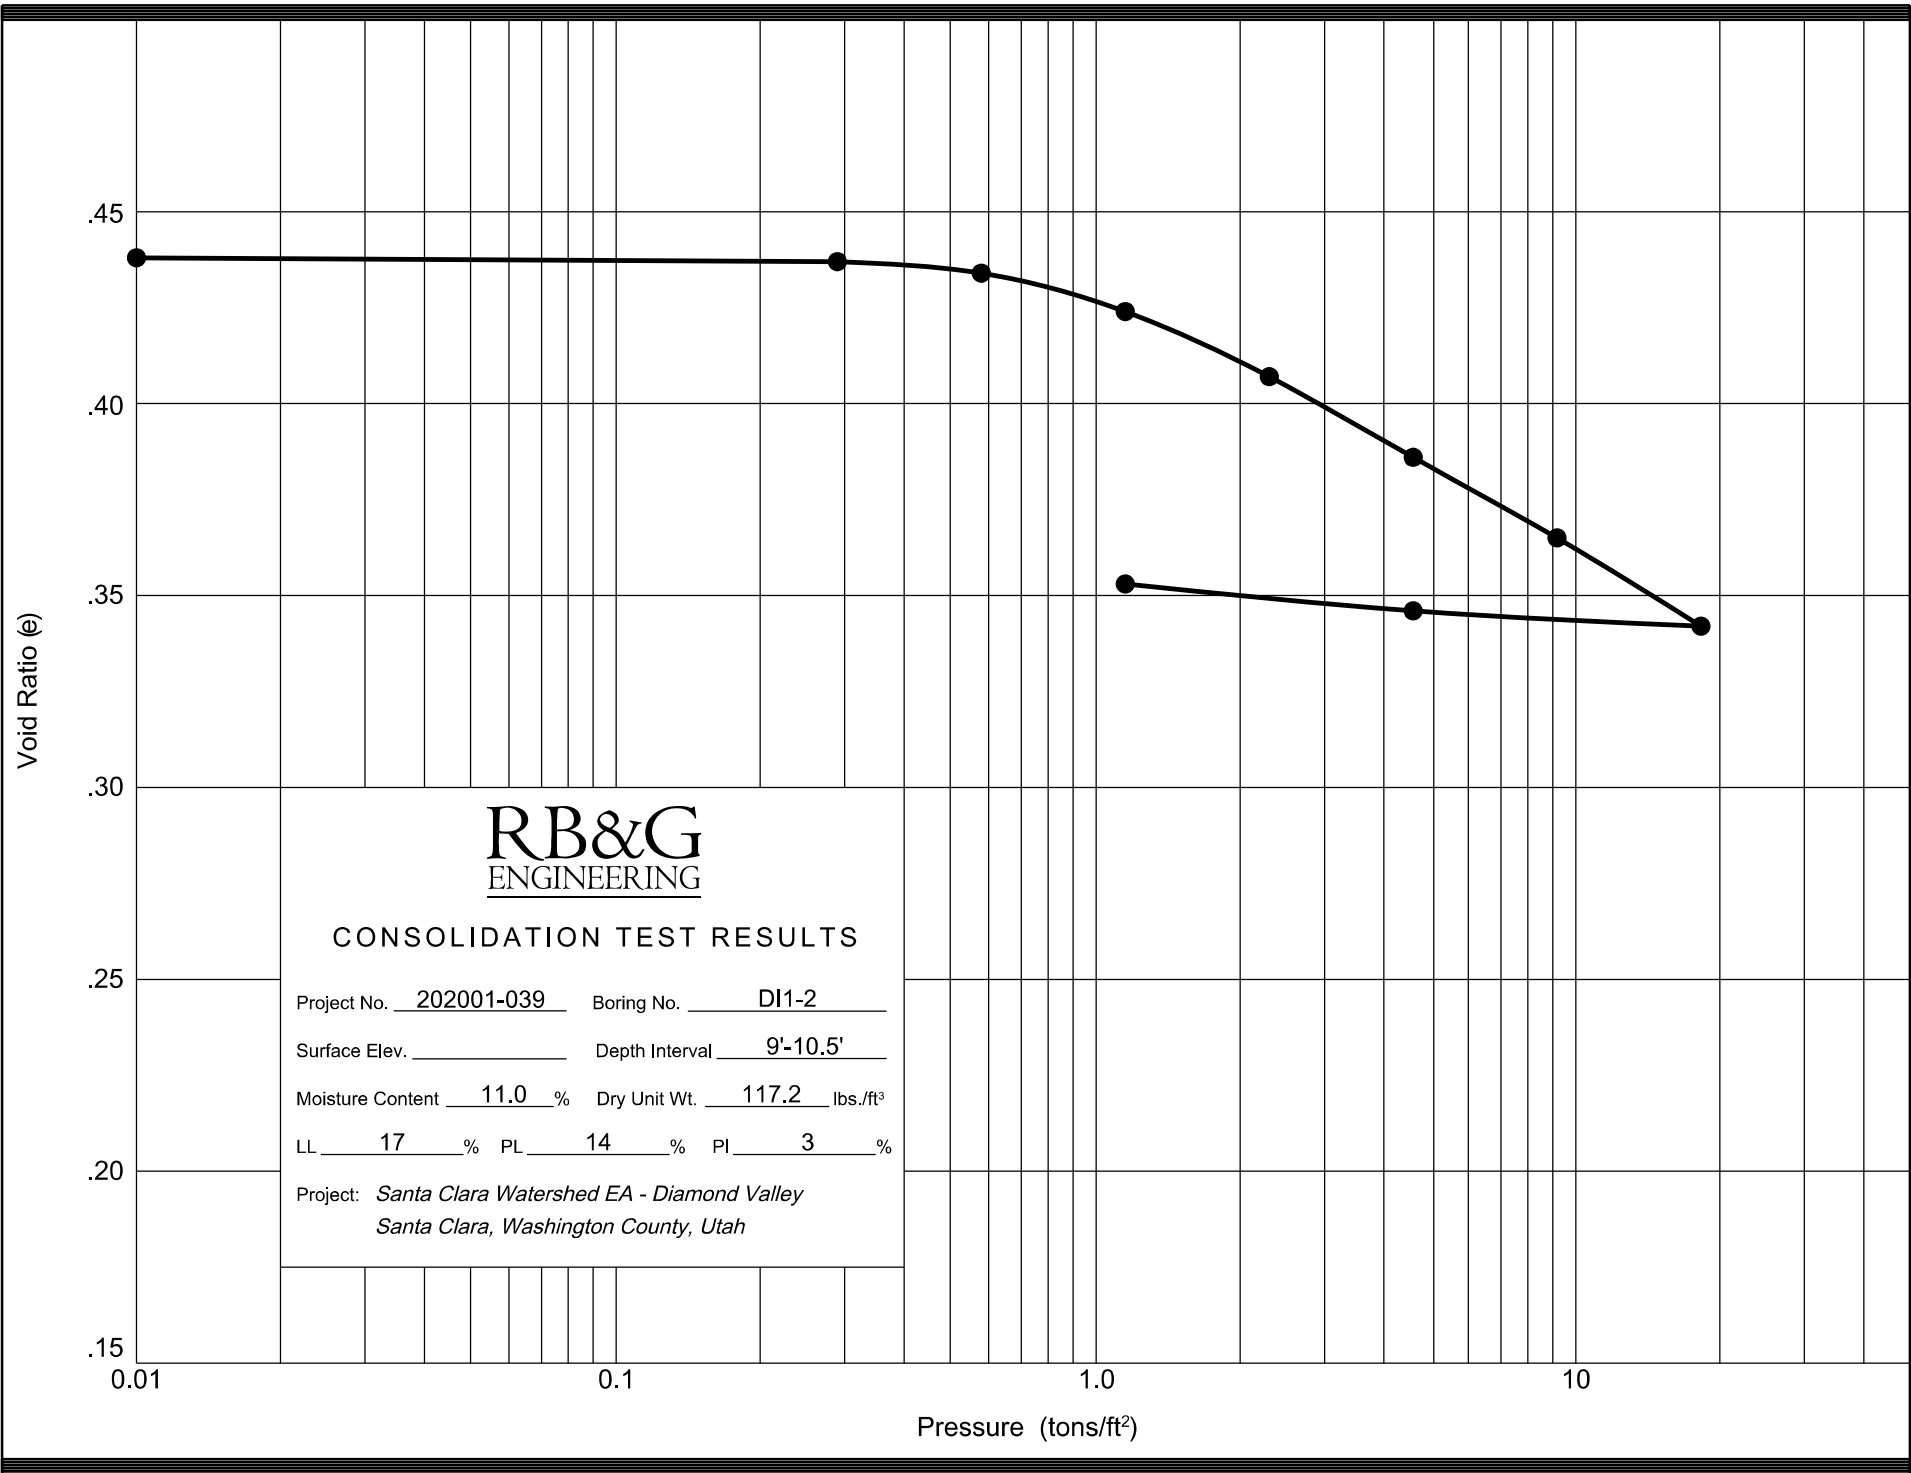


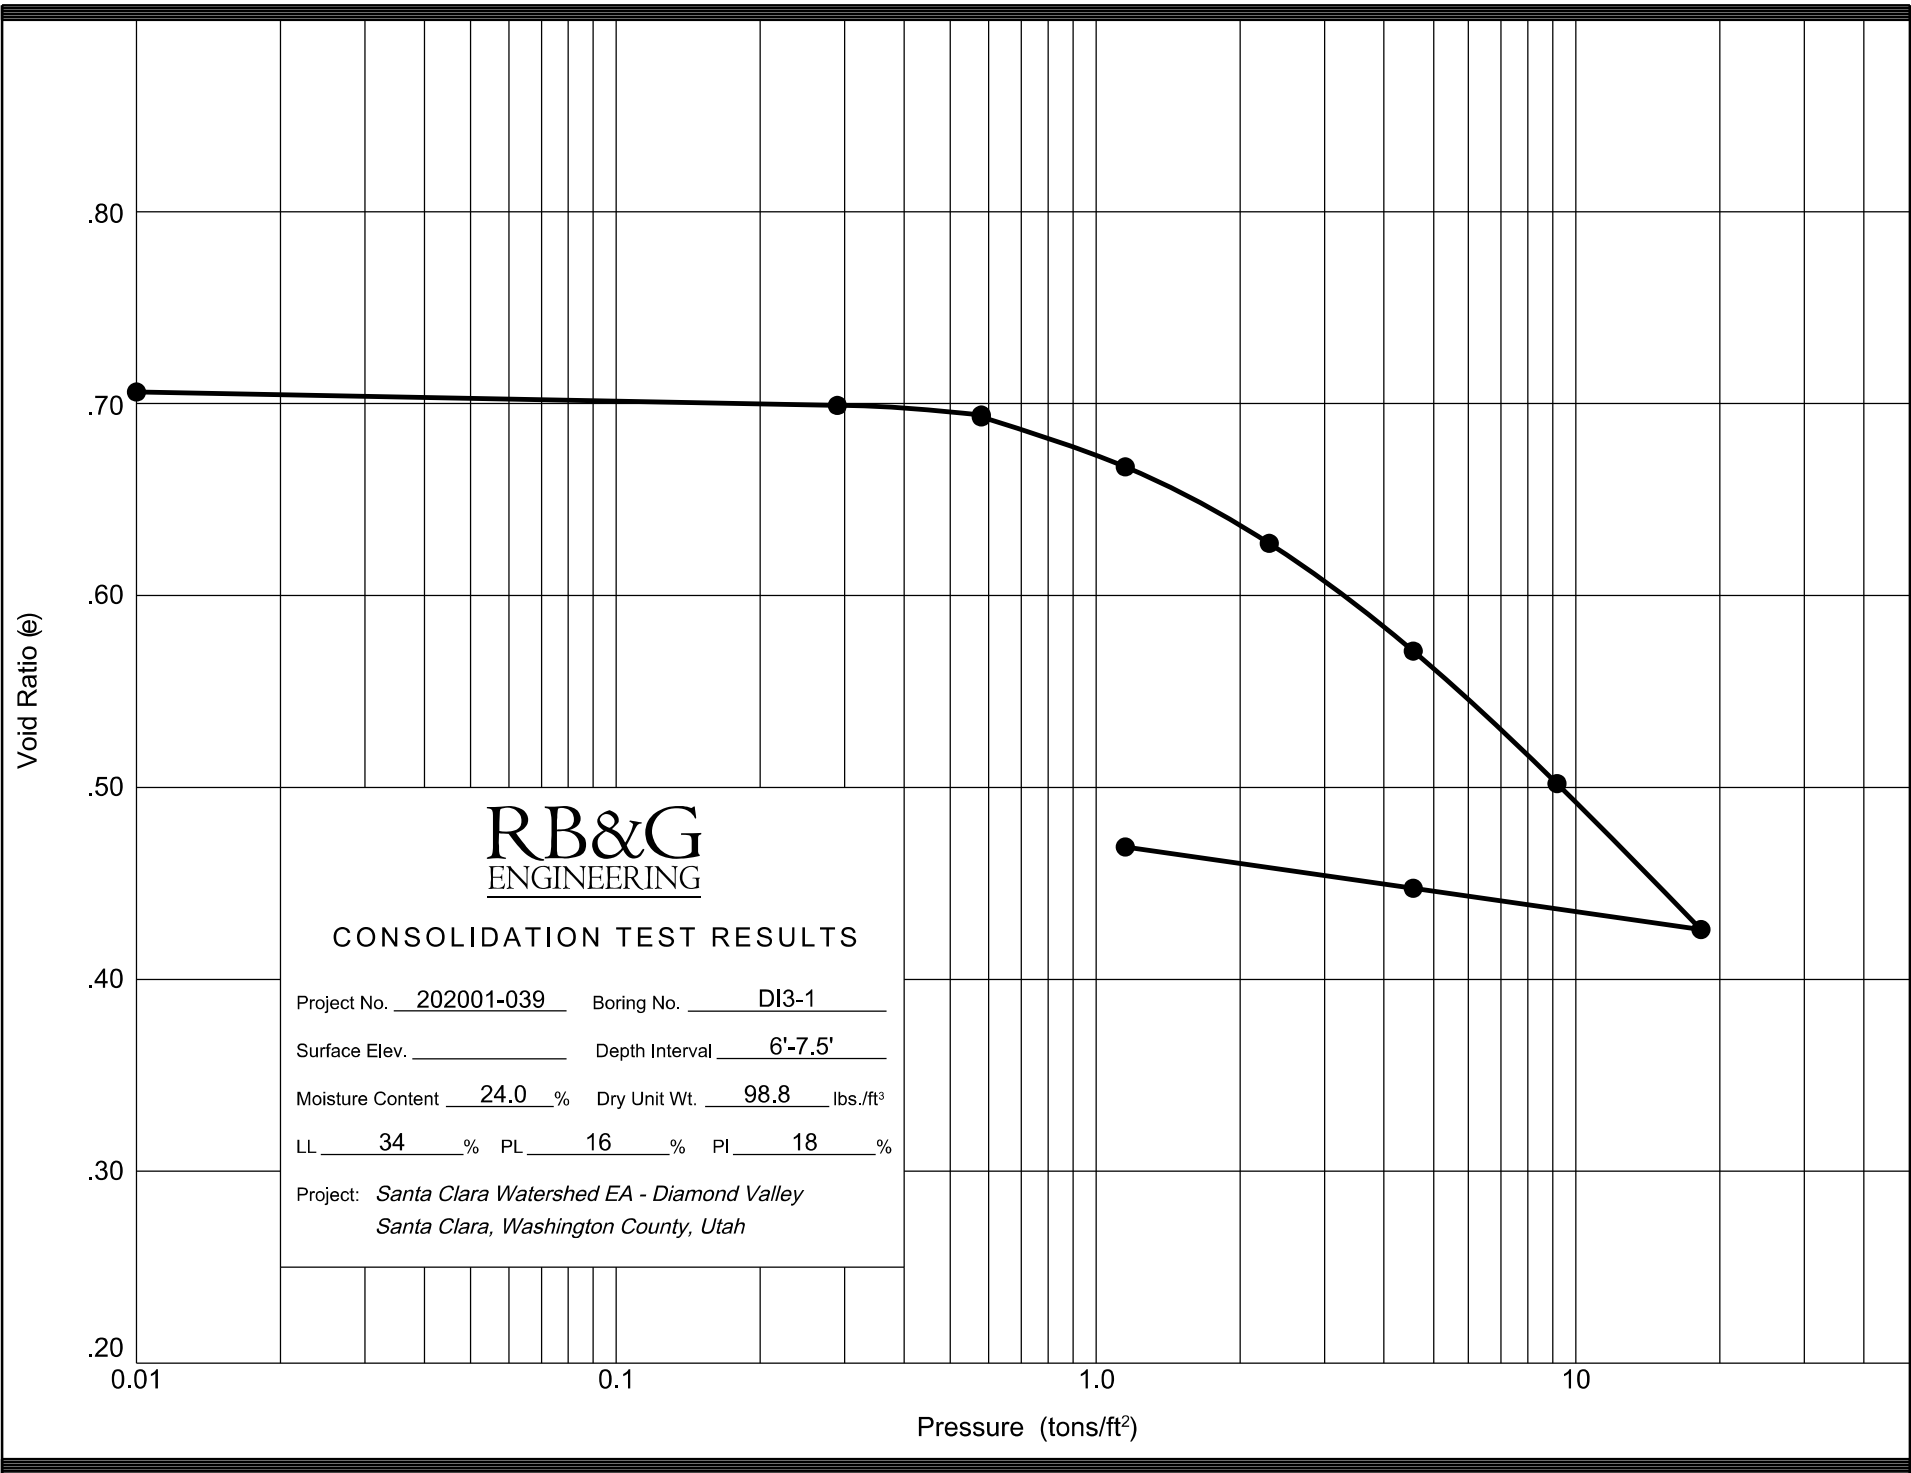

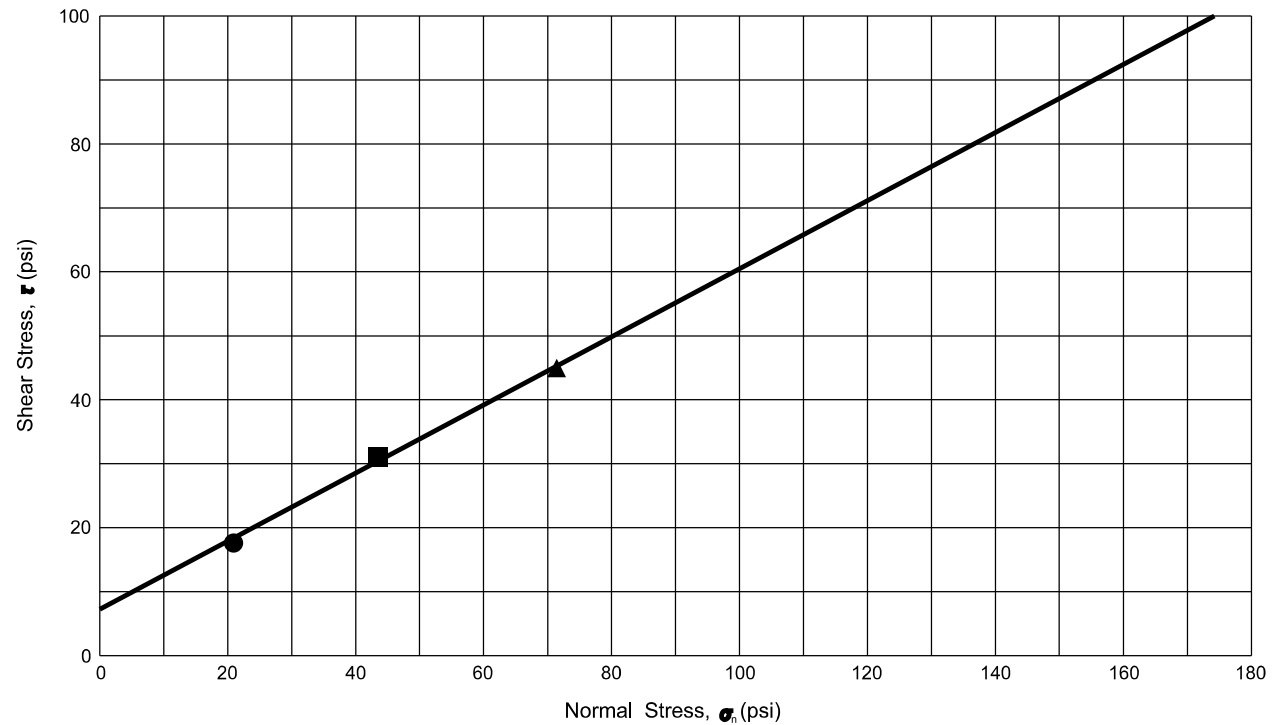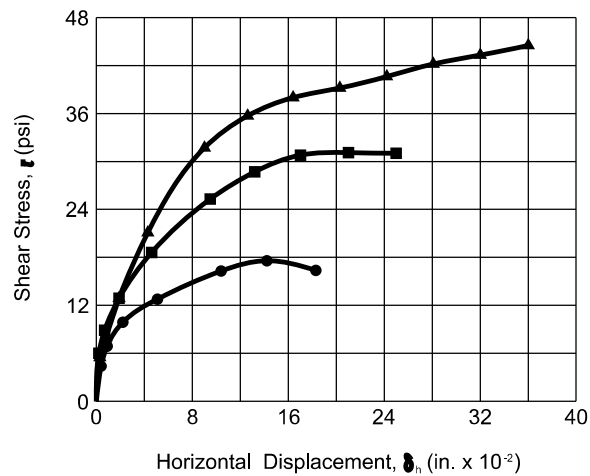



Test No. or Symbol	Sample Size (inches)	Sample Data		Degree of Saturation (%)	Normal Stress σ_n (psi)	Maximum Shear Stress τ (psi)	Strain Rate (inches/minute)	Shear Strength Parameters	
		Dry Density (pcf)	Moisture Content (%)					Friction Angle (degrees)	Cohesion (psi)
●	2.41	98.5	19.0	~100	20.9	17.6	0.0006	28.0	7.2
■	2.41	97.6	20.6	~100	43.4	31.1	0.0006		
▲	2.41	97.8	19.8	~100	71.4	44.5	0.0006		

MATERIAL: SILTY CLAYEY SAND W/GRAVEL, SC-SM (TEST PERFORMED ON -3/8" MATERIAL)

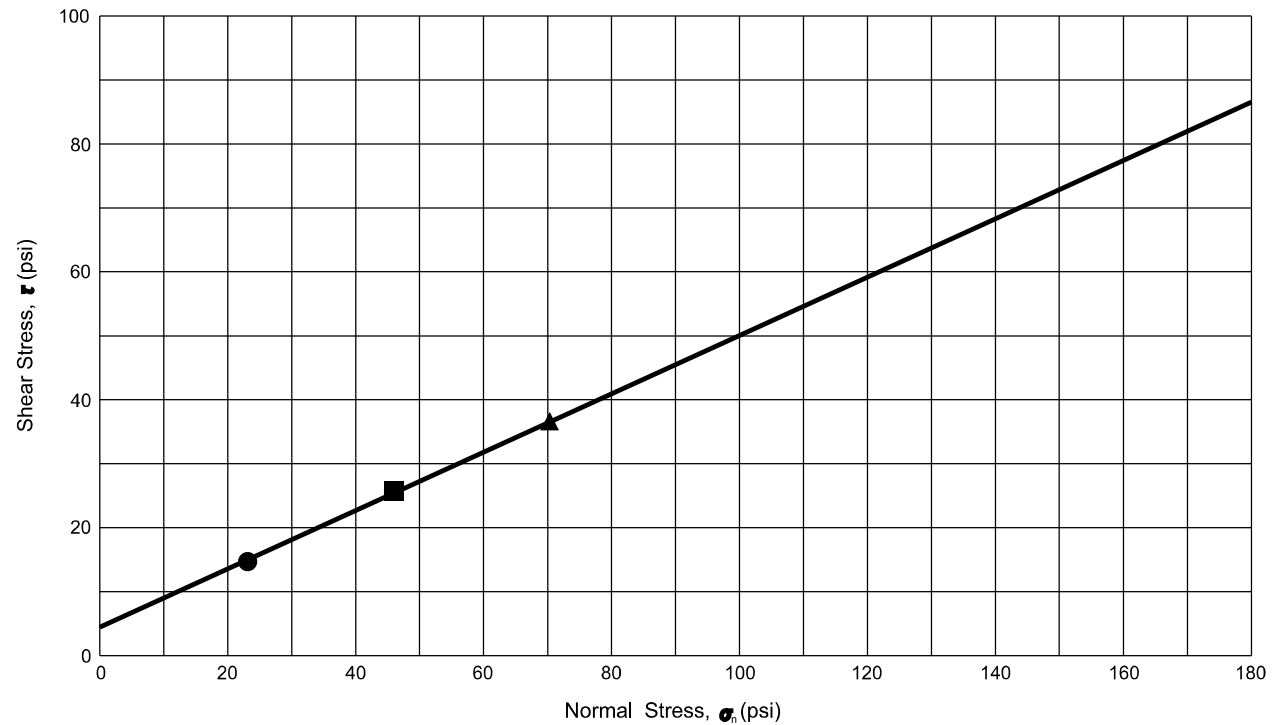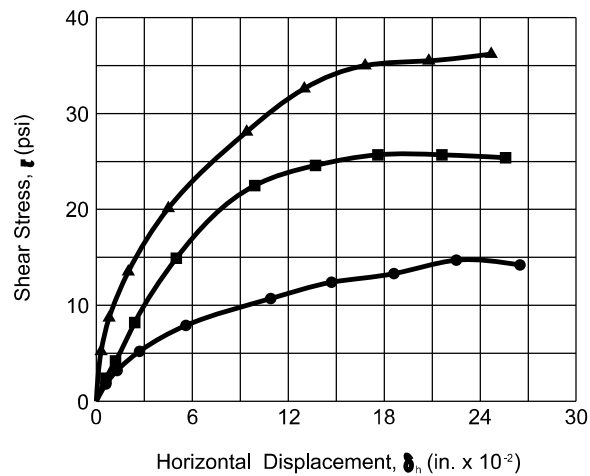



Test No. or Symbol	Sample Size (inches)	Sample Data		Degree of Saturation (%)	Normal Stress σ_n (psi)	Maximum Shear Stress τ (psi)	Strain Rate (inches/minute)	Shear Strength Parameters	
		Dry Density (pcf)	Moisture Content (%)					Friction Angle (degrees)	Cohesion (psi)
●	2.35	98.3	19.4	~100	23.1	14.7	0.0006	24.5	4.5
■	2.35	99.7	19.5	~100	46.0	25.7	0.0006		
▲	2.35	98.3	19.3	~100	70.3	36.2	0.0006		

MATERIAL: CLAYEY SAND W/GRAVEL, SC (TEST PERFORMED ON -3/8" MATERIAL)

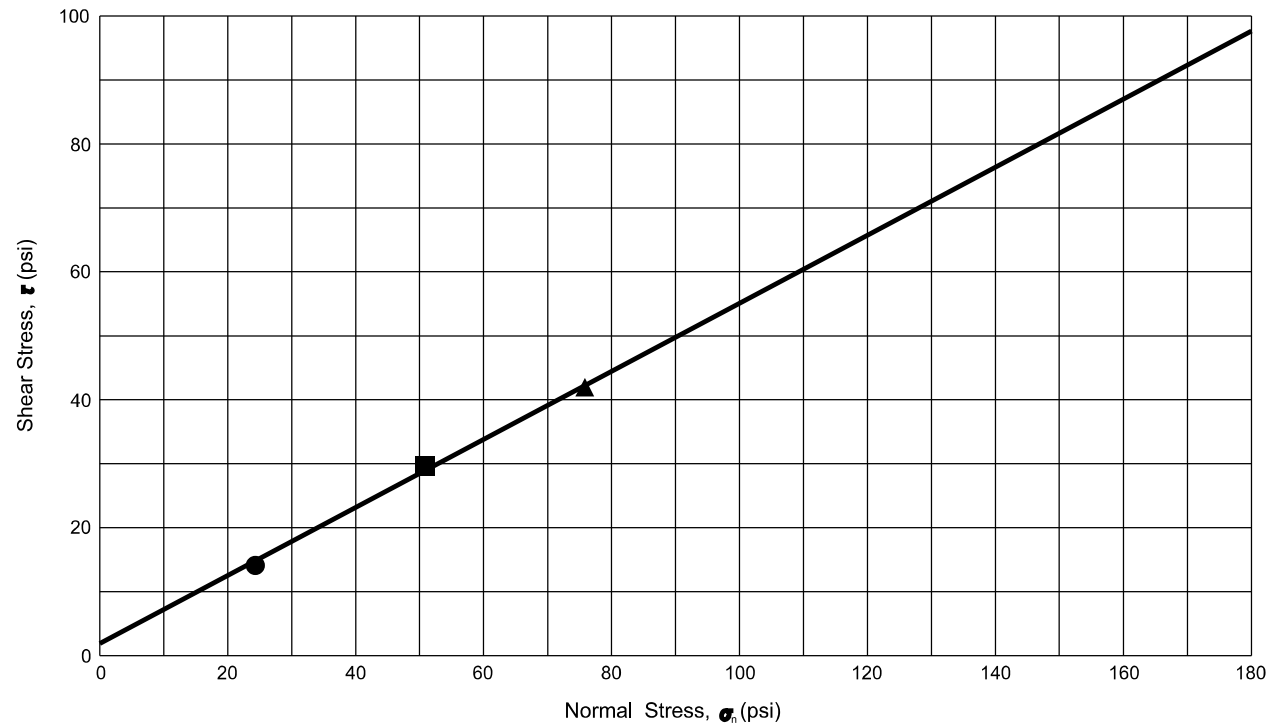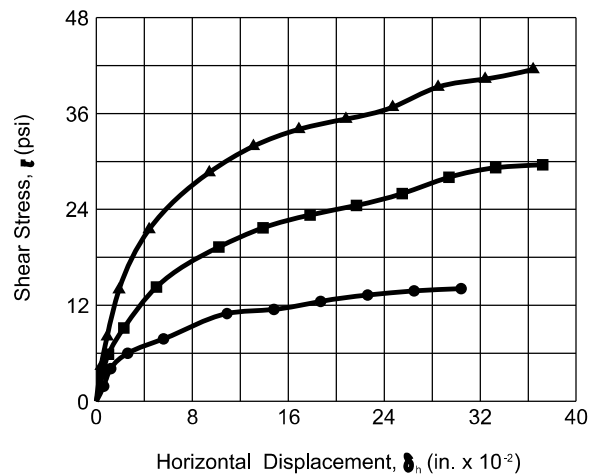

Test No. or Symbol	Sample Size (inches)	Sample Data		Degree of Saturation (%)	Normal Stress σ_n (psi)	Maximum Shear Stress τ (psi)	Strain Rate (inches/minute)	Shear Strength Parameters	
		Dry Density (pcf)	Moisture Content (%)					Friction Angle (degrees)	Cohesion (psi)
●	2.35	99.4	15.3	~100	24.3	14.1	0.0006	28.0	1.9
■	2.35	100.6	13.5	~100	50.8	29.6	0.0006		
▲	2.35	102.7	14.4	~100	75.8	41.5	0.0006		

MATERIAL: CLAYEY SAND W/GRAVEL, SC (TEST PERFORMED ON -3/8" MATERIAL)

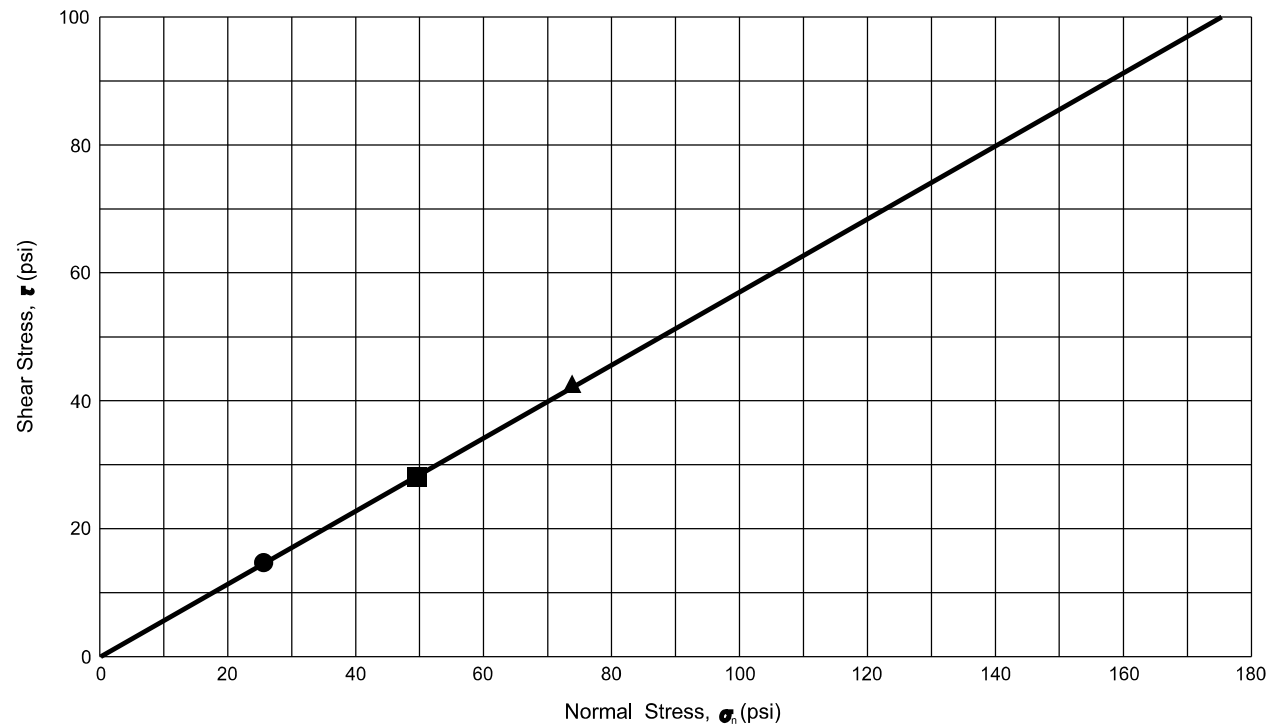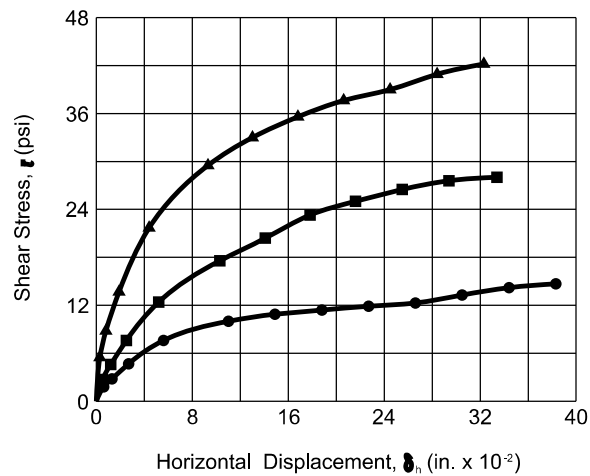

Test No. or Symbol	Sample Size (inches)	Sample Data		Degree of Saturation (%)	Normal Stress σ_n (psi)	Maximum Shear Stress τ (psi)	Strain Rate (inches/minute)	Shear Strength Parameters	
		Dry Density (pcf)	Moisture Content (%)					Friction Angle (degrees)	Cohesion (psi)
●	2.35	96.4	18.3	~100	25.6	14.7	0.0006	29.7	0.0
■	2.35	94.8	19.4	~100	49.5	28.0	0.0006		
▲	2.35	94.1	18.9	~100	73.8	42.2	0.0006		

MATERIAL: CLAYEY GRAVEL W/SAND, GC (TEST PERFORMED ON -3/8" MATERIAL)


SANTA CLARA WATERSHED EA - DAMMERON VALLEY

Washington County, Utah

MOISTURE-DENSITY RELATION (PROCTOR)

ASTM D698

Location	TEST PIT DA1-003 AT 2'-3'	Test Date	10/12/2021
Sample ID	NA	Technician	T. HENDRICKS
Material	SILTY CLAYEY SAND W/GRAVEL	Classification	SC-SM (Test)

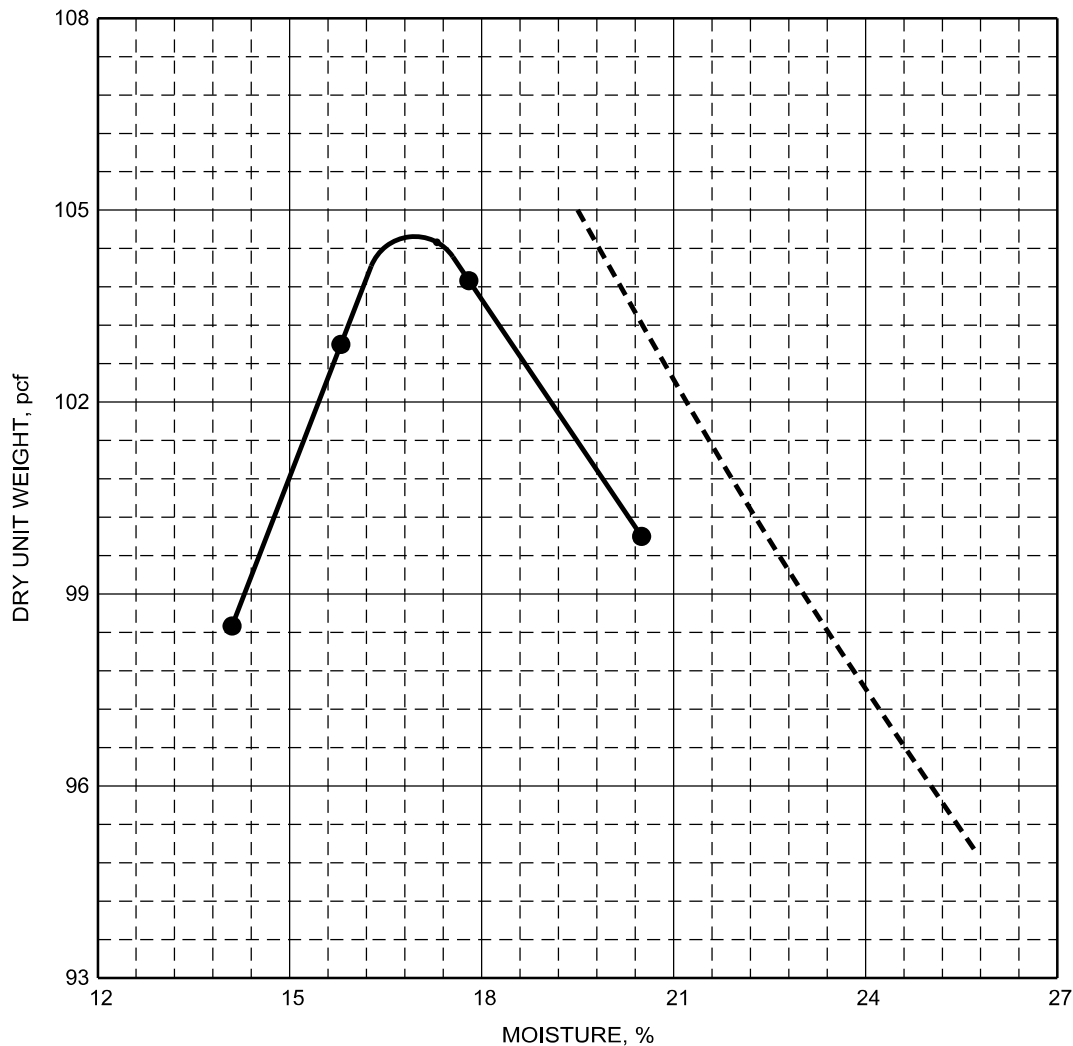

- - 100% Saturation Curve NA Not applicable / available Specific gravity type is bulk unless otherwise indicated. Results are as per the test method listed above and relate only to the items tested. Rock correction for >3/4-inch material is per ASTM D4718 or AASHTO T224.	UNCORRECTED RESULTS		OVERSIZE CORRECTION	
	Max. Dry Density (pcf)	104.5	Max. Dry Density (pcf)	106.6
	Optimum Moisture (%)	17.3	Optimum Moisture (%)	16.3
	Specific Gravity	2.50	Specific Gravity	2.50
	Moisture, As-Received (%)	3	Percent Oversize (%)	6


SANTA CLARA WATERSHED EA - DAMMERON VALLEY

Washington County, Utah

MOISTURE-DENSITY RELATION (PROCTOR)

ASTM D698

Location	TEST PIT DA1-102 AT 6'-7'	Test Date	10/12/2021
Sample ID	NA	Technician	T. HENDRICKS
Material	CLAYEY SAND W/GRAVEL	Classification	SC (Test)

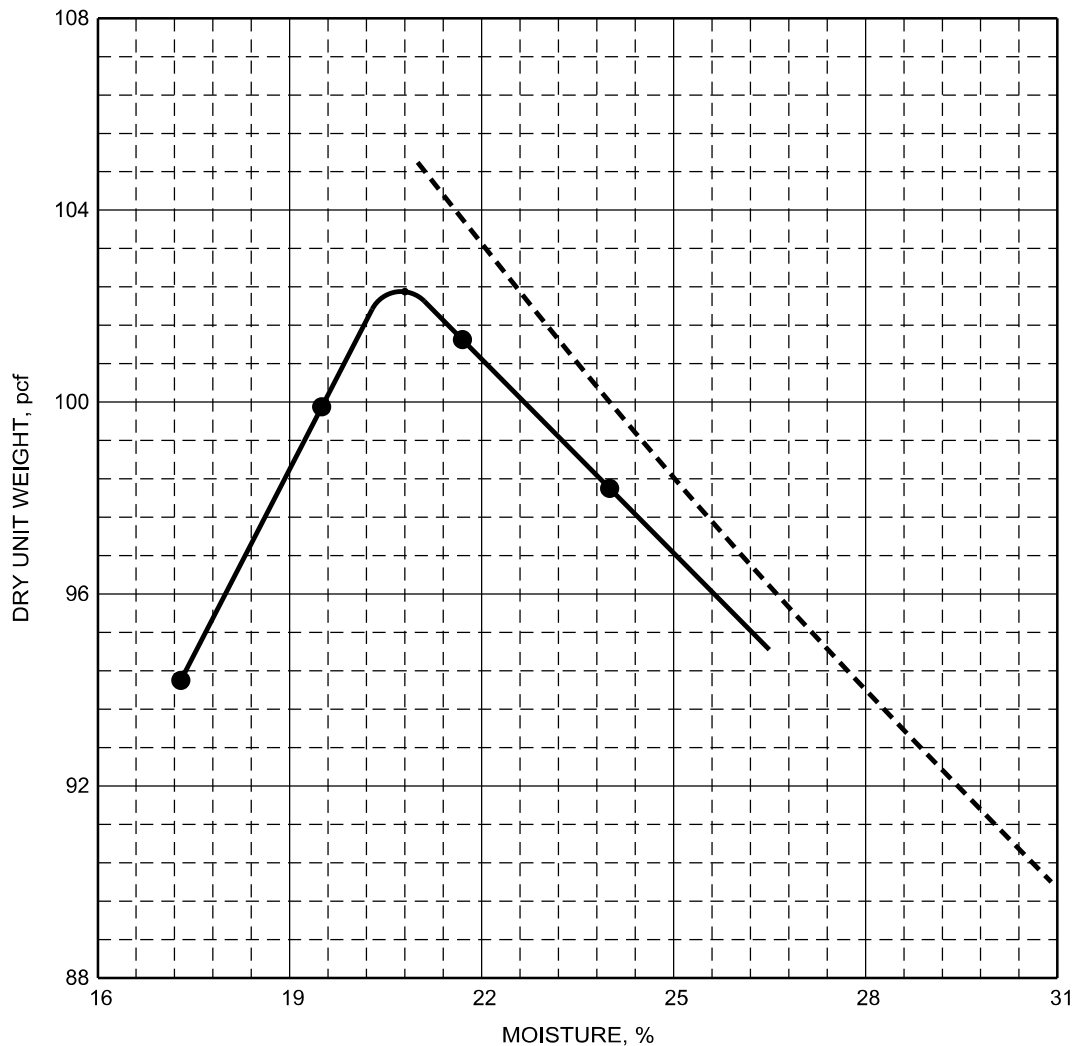

--- 100% Saturation Curve NA Not applicable / available Specific gravity type is bulk unless otherwise indicated. Results are as per the test method listed above and relate only to the items tested. Rock correction for >3/4-inch material is per ASTM D4718 or AASHTO T224.	UNCORRECTED RESULTS		OVERSIZE CORRECTION	
	Max. Dry Density (pcf)	102.3	Max. Dry Density (pcf)	NA
	Optimum Moisture (%)	20.8	Optimum Moisture (%)	NA
	Specific Gravity	2.60	Specific Gravity	NA
	Moisture, As-Received (%)	15	Percent Oversize (%)	0


SANTA CLARA WATERSHED EA - DAMMERON VALLEY

Washington County, Utah

MOISTURE-DENSITY RELATION (PROCTOR)

ASTM D698

Location	TEST PIT DA2-002 AT 6'-7'	Test Date	10/19/2021
Sample ID	NA	Technician	T. HENDRICKS
Material	SAND W/GRAVEL	Classification	SP (Test)

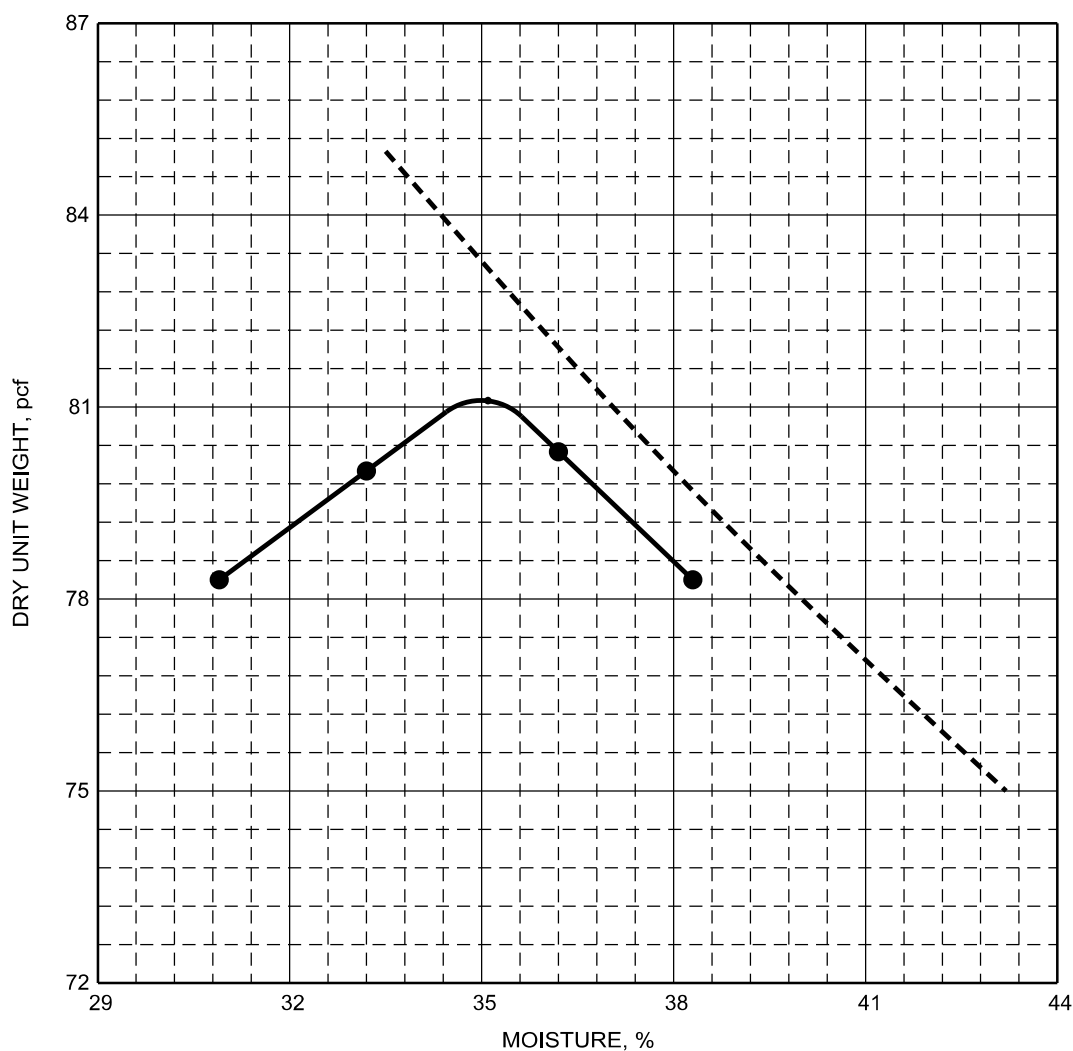

- - 100% Saturation Curve NA Not applicable / available Specific gravity type is bulk unless otherwise indicated. Results are as per the test method listed above and relate only to the items tested. Rock correction for >3/4-inch material is per ASTM D4718 or AASHTO T224.	UNCORRECTED RESULTS		OVERSIZE CORRECTION	
	Max. Dry Density (pcf)	81.1	Max. Dry Density (pcf)	84.3
	Optimum Moisture (%)	35.1	Optimum Moisture (%)	32.5
	Specific Gravity	2.50	Specific Gravity	2.50
	Moisture, As-Received (%)	15	Percent Oversize (%)	8


SANTA CLARA WATERSHED EA - DAMMERON VALLEY

Washington County, Utah

MOISTURE-DENSITY RELATION (PROCTOR)

ASTM D698

Location	TEST PIT DA2-105 AT 1'-2'	Test Date	10/19/2021
Sample ID	NA	Technician	T. HENDRICKS
Material	CLAYEY GRAVEL W/SAND	Classification	GC (Test)

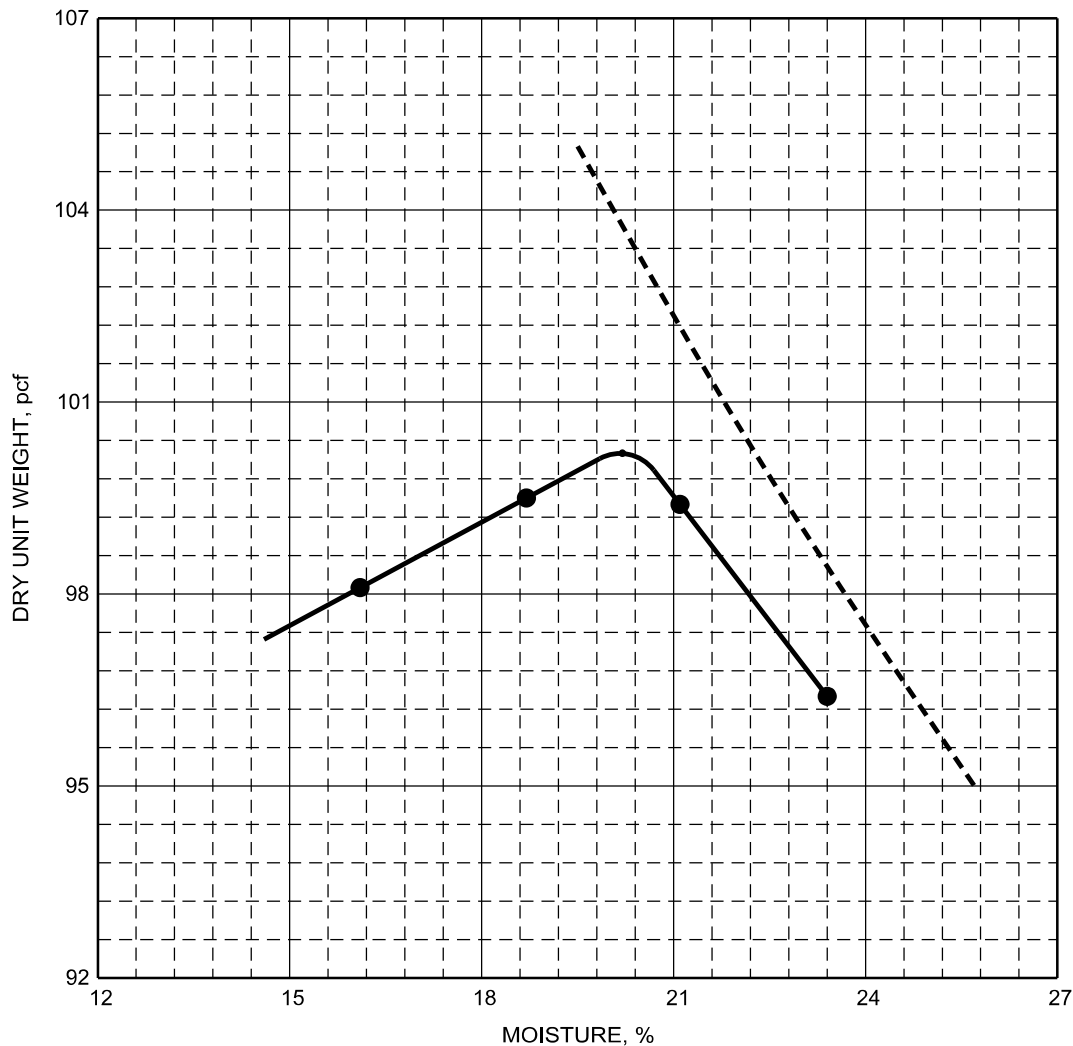

- - 100% Saturation Curve NA Not applicable / available Specific gravity type is bulk unless otherwise indicated. Results are as per the test method listed above and relate only to the items tested. Rock correction for >3/4-inch material is per ASTM D4718 or AASHTO T224.	UNCORRECTED RESULTS		OVERSIZE CORRECTION	
	Max. Dry Density (pcf)	100.2	Max. Dry Density (pcf)	NA
	Optimum Moisture (%)	20.2	Optimum Moisture (%)	NA
	Specific Gravity	2.50	Specific Gravity	NA
	Moisture, As-Received (%)	8	Percent Oversize (%)	0


SANTA CLARA WATERSHED EA - DAMMERON VALLEY

Washington County, Utah

MOISTURE-DENSITY RELATION (PROCTOR)

ASTM D698

Location	TEST PIT DA3-002 AT 3'-3.5'	Test Date	10/22/2021
Sample ID	NA	Technician	T. HENDERSON
Material	CLAYEY SAND	Classification	SC (Test)

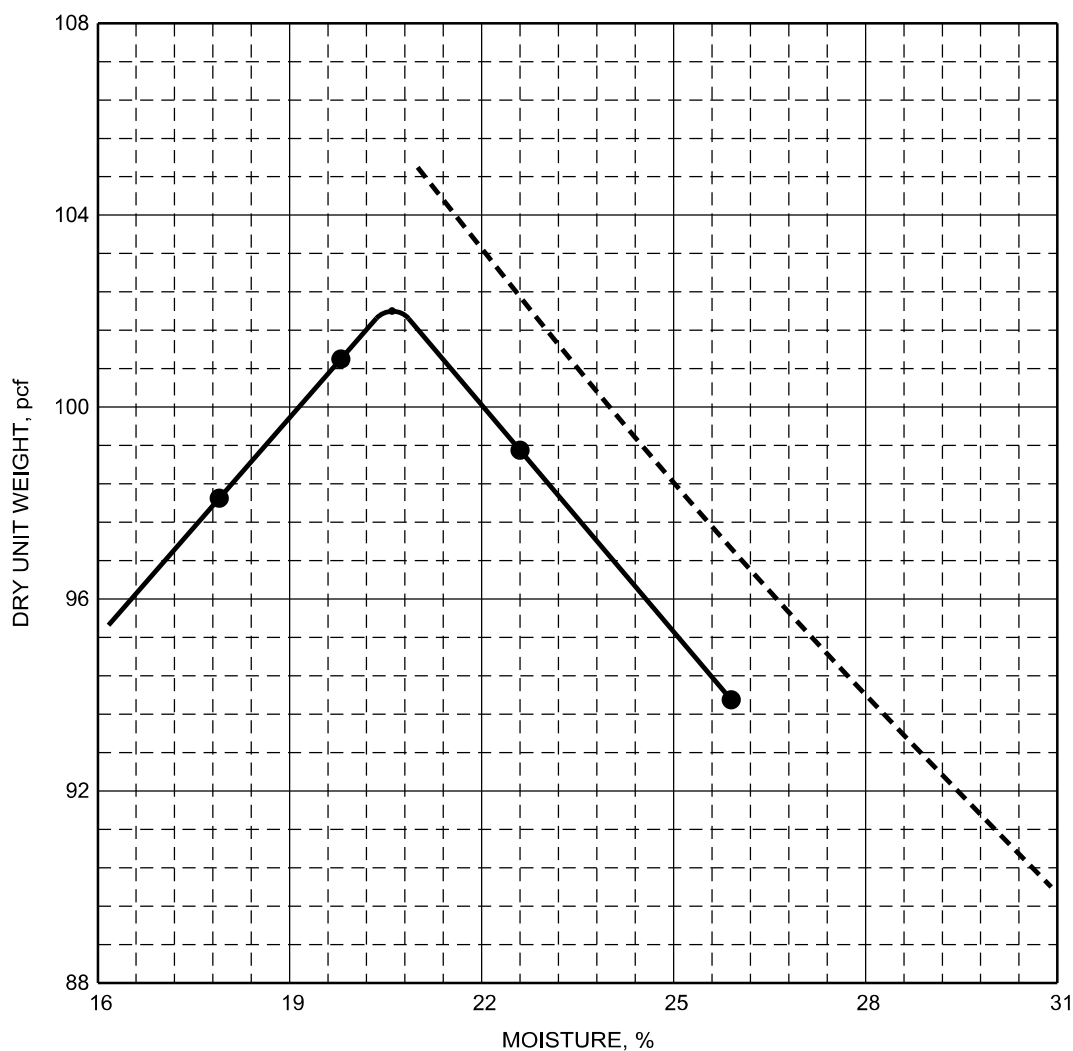

--- 100% Saturation Curve NA Not applicable / available Specific gravity type is bulk unless otherwise indicated. Results are as per the test method listed above and relate only to the items tested. Rock correction for >3/4-inch material is per ASTM D4718 or AASHTO T224.	UNCORRECTED RESULTS		OVERSIZE CORRECTION	
	Max. Dry Density (pcf)	102.0	Max. Dry Density (pcf)	NA
	Optimum Moisture (%)	20.6	Optimum Moisture (%)	NA
	Specific Gravity	2.60	Specific Gravity	NA
	Moisture, As-Received (%)	6	Percent Oversize (%)	0


SANTA CLARA WATERSHED EA - DAMMERON VALLEY

Washington County, Utah

MOISTURE-DENSITY RELATION (PROCTOR)

ASTM D698

Location	TEST PIT DA3-004 AT 15'-15.3'	Test Date	10/25/2021
Sample ID	NA	Technician	T. HENDERSON
Material	GRAVEL W/SILT & SAND	Classification	GP-GM (Test)

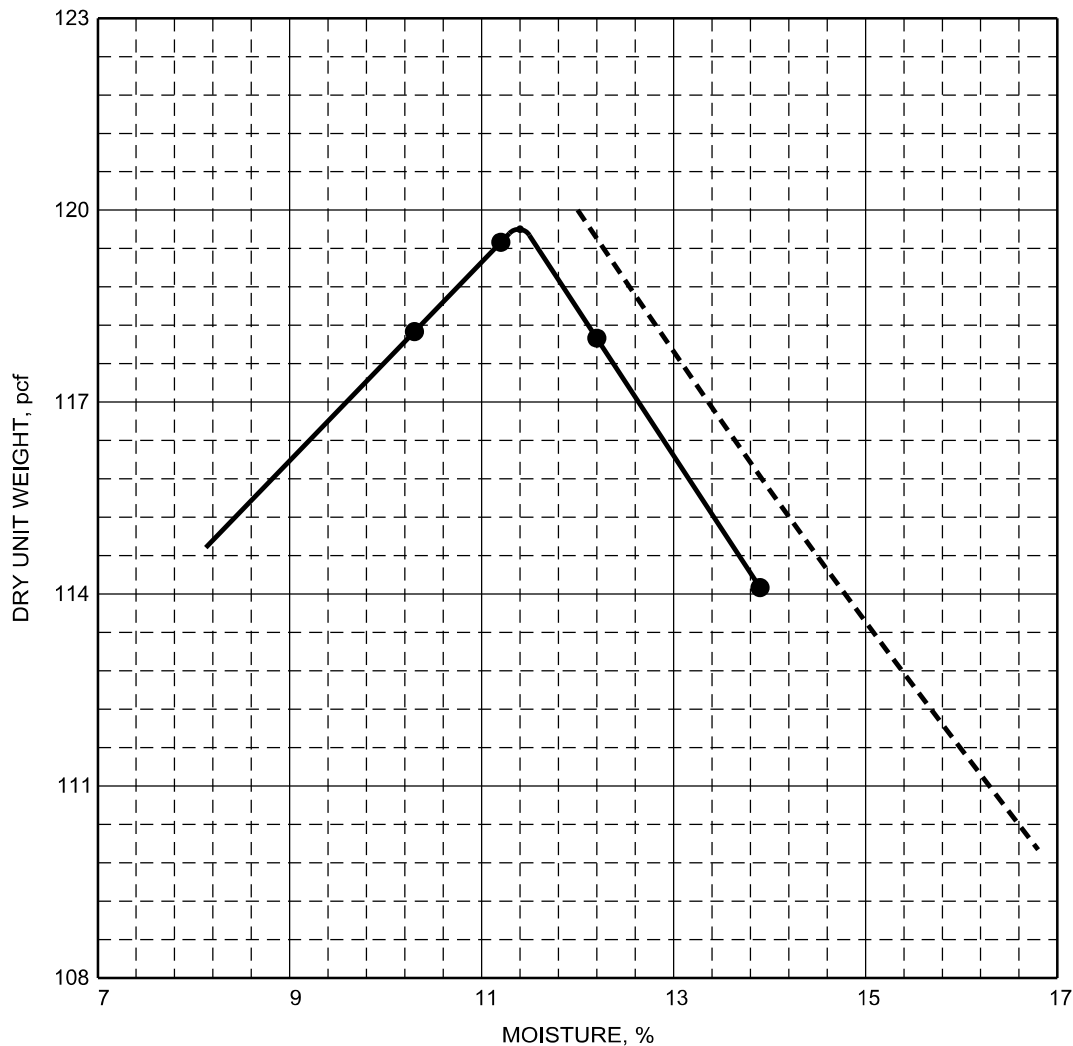

- - 100% Saturation Curve NA Not applicable / available Specific gravity type is bulk unless otherwise indicated. Results are as per the test method listed above and relate only to the items tested. Rock correction for >3/4-inch material is per ASTM D4718 or AASHTO T224.	UNCORRECTED RESULTS		OVERSIZE CORRECTION	
	Max. Dry Density (pcf)	119.7	Max. Dry Density (pcf)	128.7
	Optimum Moisture (%)	11.4	Optimum Moisture (%)	8.7
	Specific Gravity	2.50	Specific Gravity	2.50
	Moisture, As-Received (%)	3	Percent Oversize (%)	30+


SANTA CLARA WATERSHED EA - DAMMERON VALLEY

Washington County, Utah

MOISTURE-DENSITY RELATION (PROCTOR)

ASTM D698

Location	TEST PIT DA3-005 AT 3'-3.5'	Test Date	10/12/2021
Sample ID	NA	Technician	T. DAY, T. HENDERSON, T. HENDRICKS
Material	LEAN CLAY W/SAND	Classification	CL (Test)

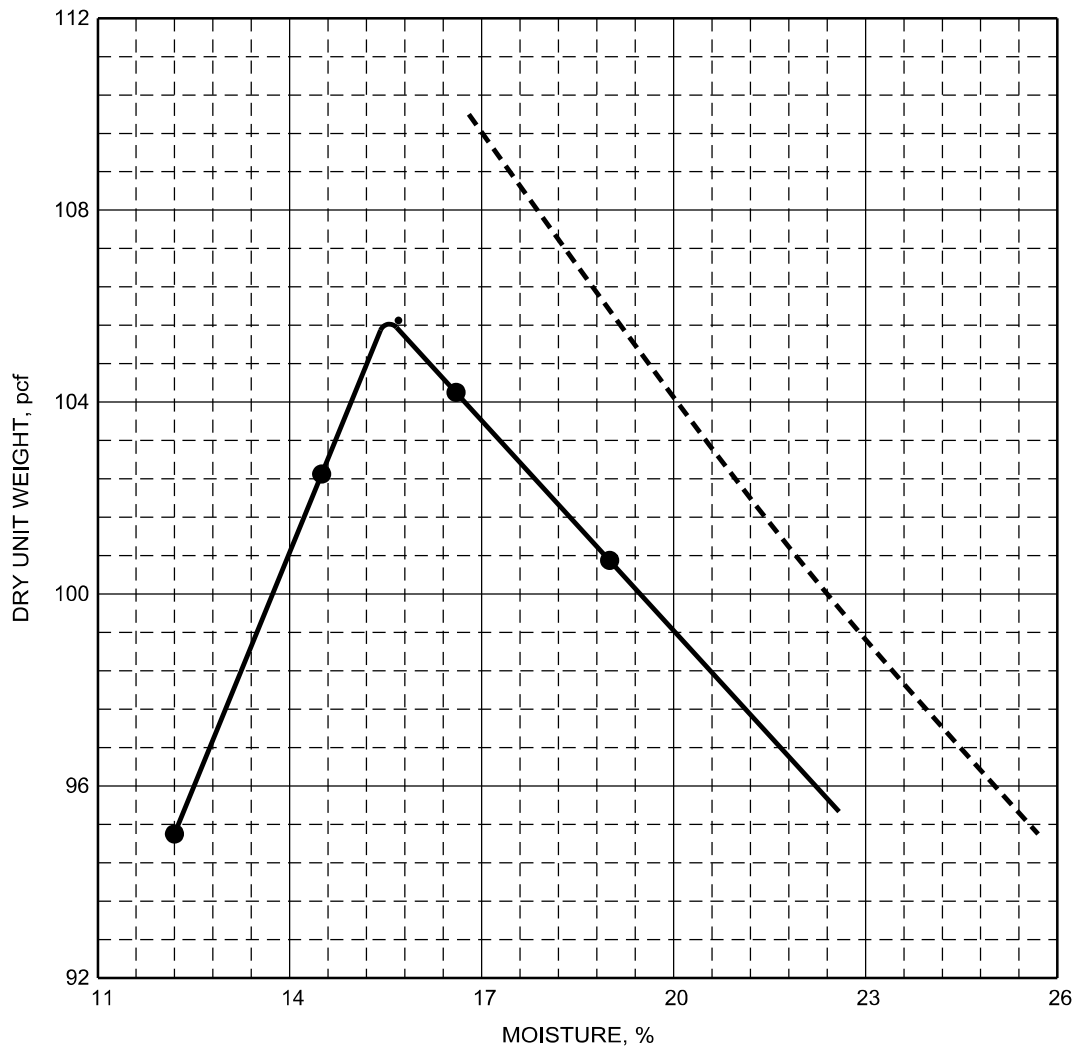

-- 100% Saturation Curve NA Not applicable / available Specific gravity type is bulk unless otherwise indicated. Results are as per the test method listed above and relate only to the items tested. Rock correction for >3/4-inch material is per ASTM D4718 or AASHTO T224.	UNCORRECTED RESULTS		OVERSIZE CORRECTION	
	Max. Dry Density (pcf)	105.7	Max. Dry Density (pcf)	NA
	Optimum Moisture (%)	15.7	Optimum Moisture (%)	NA
	Specific Gravity	2.50	Specific Gravity	NA
	Moisture, As-Received (%)	9	Percent Oversize (%)	0


SANTA CLARA WATERSHED EA - DAMMERON VALLEY

Washington County, Utah

MOISTURE-DENSITY RELATION (PROCTOR)

ASTM D698

Location	TEST PIT DA3-102 AT 4'-5'	Test Date	10/13/2021
Sample ID	NA	Technician	C. PRICE, T. HENDRICKS
Material	CLAYEY SAND W/GRAVEL	Classification	SC (Test)

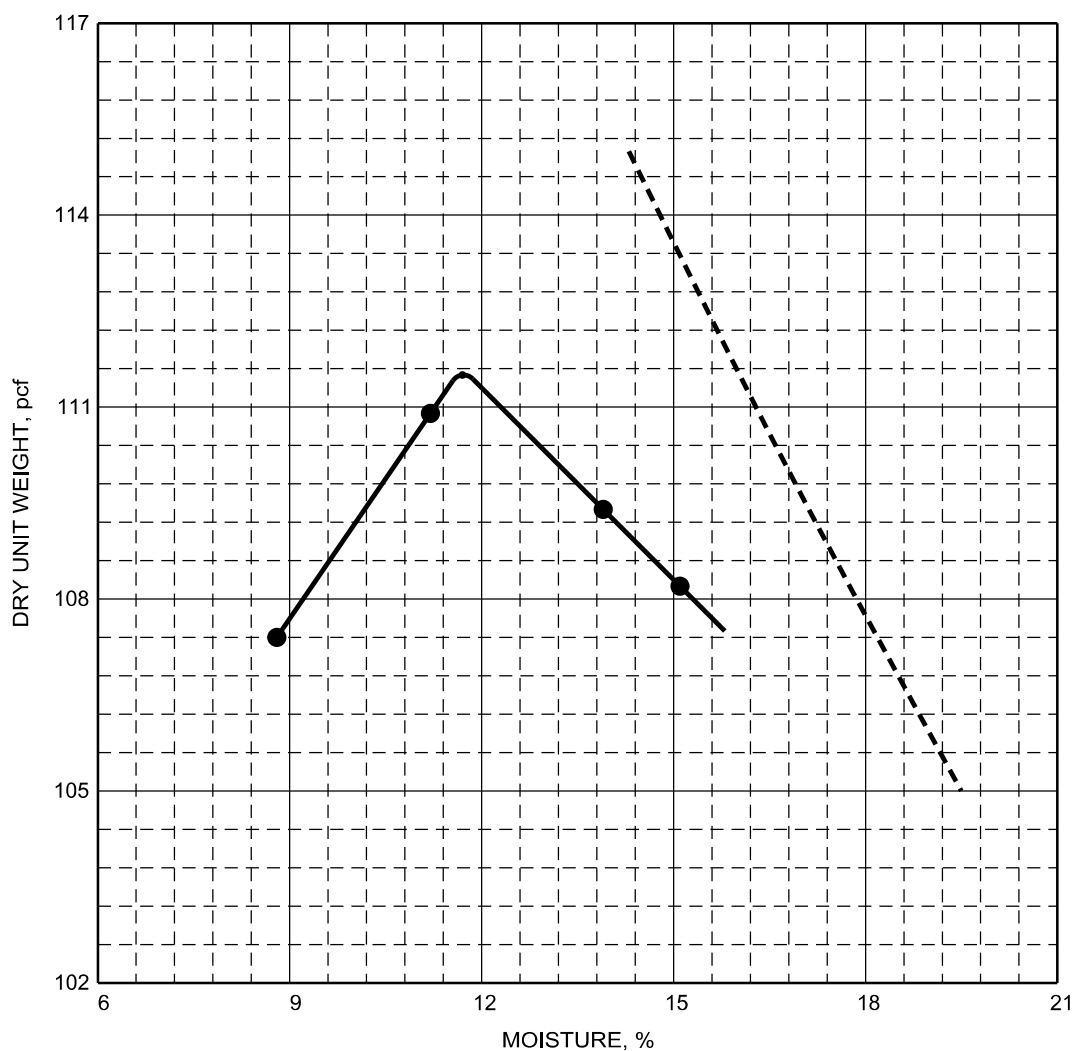

--- 100% Saturation Curve NA Not applicable / available Specific gravity type is bulk unless otherwise indicated. Results are as per the test method listed above and relate only to the items tested. Rock correction for >3/4-inch material is per ASTM D4718 or AASHTO T224.	UNCORRECTED RESULTS		OVERSIZE CORRECTION	
	Max. Dry Density (pcf)	111.5	Max. Dry Density (pcf)	115.5
	Optimum Moisture (%)	11.7	Optimum Moisture (%)	10.4
	Specific Gravity	2.50	Specific Gravity	2.50
	Moisture, As-Received (%)	5	Percent Oversize (%)	12


SANTA CLARA WATERSHED EA - DAMMERON VALLEY

Washington County, Utah

MOISTURE-DENSITY RELATION (PROCTOR)

ASTM D698

Location	TEST PIT DA3-102 AT 9'-10'	Test Date	10/19/2021
Sample ID	NA	Technician	J. REITZ
Material	SAND W/SILT & GRAVEL	Classification	SP-SM (Test)

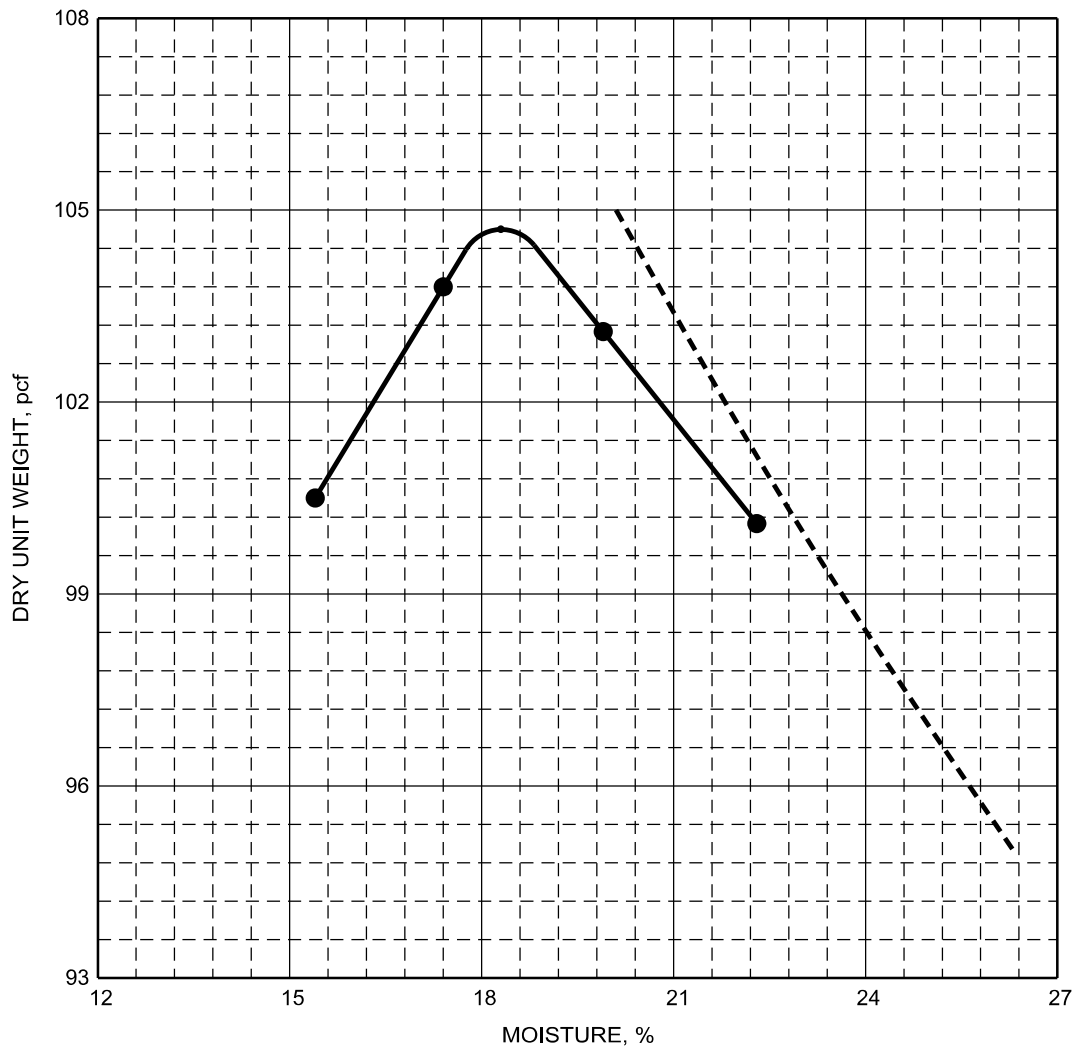

- - 100% Saturation Curve NA Not applicable / available Specific gravity type is bulk unless otherwise indicated. Results are as per the test method listed above and relate only to the items tested. Rock correction for >3/4-inch material is per ASTM D4718 or AASHTO T224.	UNCORRECTED RESULTS		OVERSIZE CORRECTION	
	Max. Dry Density (pcf)	104.7	Max. Dry Density (pcf)	109.0
	Optimum Moisture (%)	18.3	Optimum Moisture (%)	16.7
	Specific Gravity	2.50	Specific Gravity	2.50
	Moisture, As-Received (%)	7	Percent Oversize (%)	12


SANTA CLARA WATERSHED EA - DAMMERON VALLEY

Washington County, Utah

MOISTURE-DENSITY RELATION (PROCTOR)

ASTM D698

Location	TEST PIT DA3-103 AT 9'-10'	Test Date	10/20/2021
Sample ID	NA	Technician	C. PRICE
Material	GRAVEL W/SILT & SAND	Classification	GP-GM (Test)

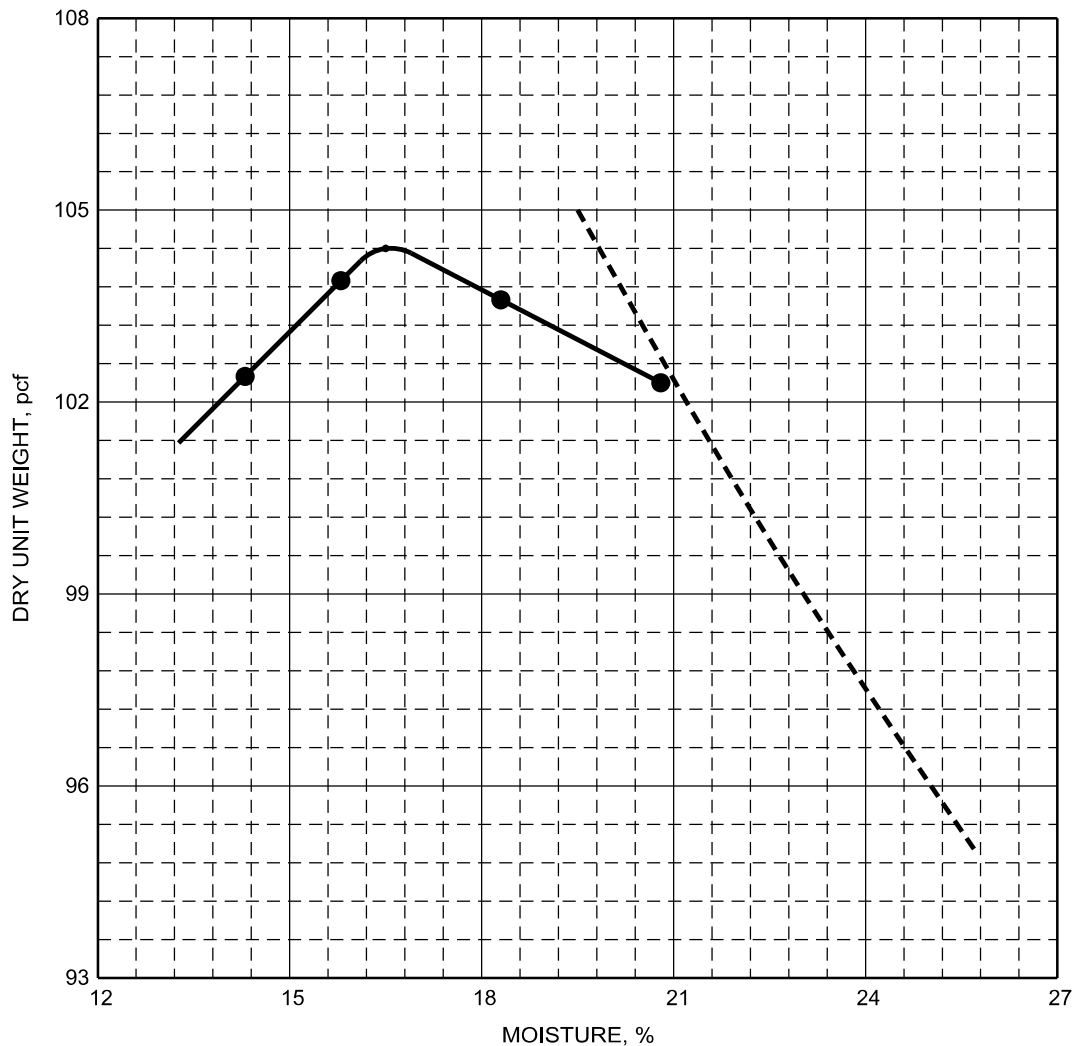

- - 100% Saturation Curve NA Not applicable / available Specific gravity type is bulk unless otherwise indicated. Results are as per the test method listed above and relate only to the items tested. Rock correction for >3/4-inch material is per ASTM D4718 or AASHTO T224.	UNCORRECTED RESULTS		OVERSIZE CORRECTION	
	Max. Dry Density (pcf)	104.4	Max. Dry Density (pcf)	115.9
	Optimum Moisture (%)	16.5	Optimum Moisture (%)	12.1
	Specific Gravity	2.50	Specific Gravity	2.50
	Moisture, As-Received (%)	7	Percent Oversize (%)	30+


SANTA CLARA WATERSHED EA - DAMMERON VALLEY

Washington County, Utah

MOISTURE-DENSITY RELATION (PROCTOR)

ASTM D698

Location	TEST PIT DA3-105 AT 6'-7'	Test Date	10/22/2021
Sample ID	NA	Technician	T. HENDERSON
Material	SAND W/SILT & GRAVEL	Classification	SP-SM (Test)

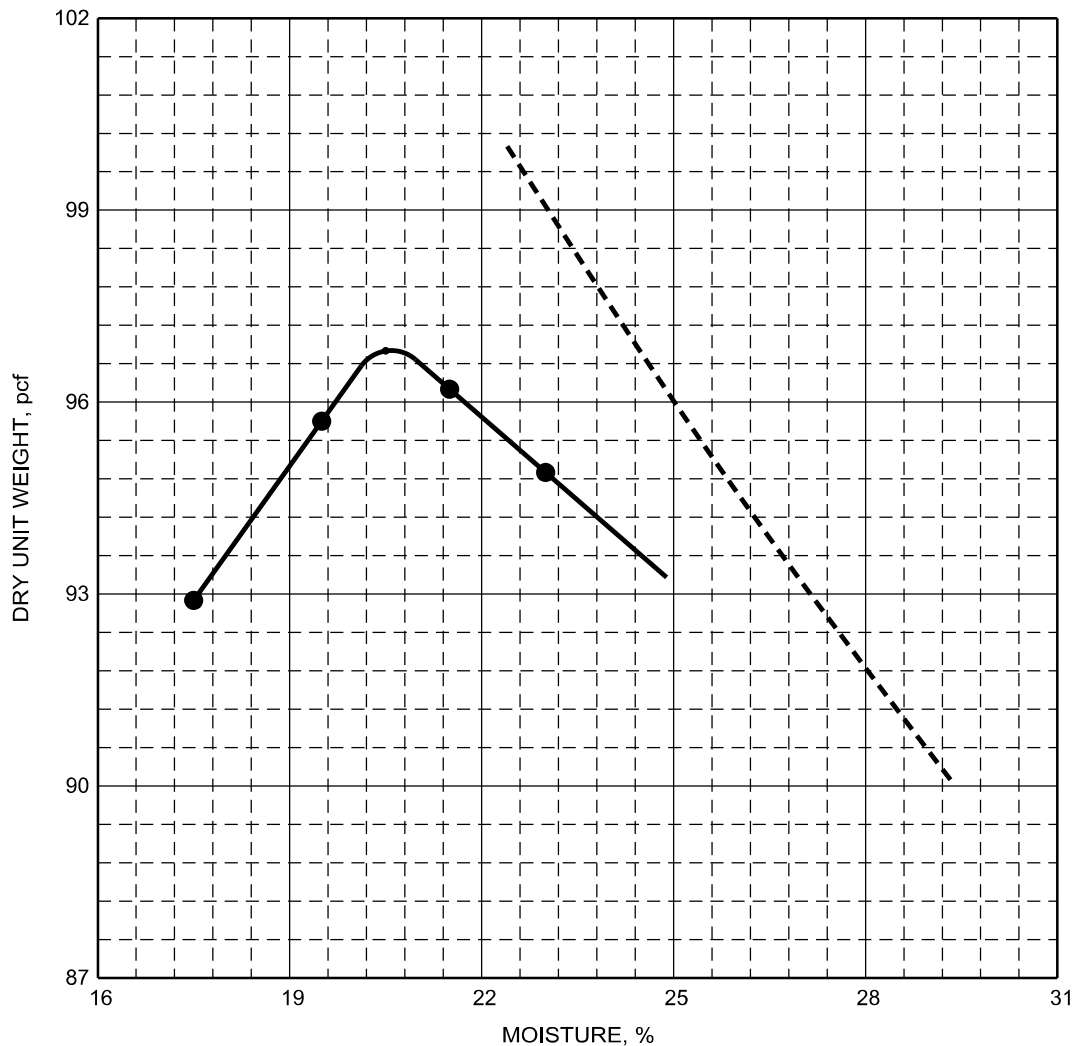

- - 100% Saturation Curve NA Not applicable / available Specific gravity type is bulk unless otherwise indicated. Results are as per the test method listed above and relate only to the items tested. Rock correction for >3/4-inch material is per ASTM D4718 or AASHTO T224.	<i>UNCORRECTED RESULTS</i>		<i>OVERSIZE CORRECTION</i>	
	Max. Dry Density (pcf)	96.8	Max. Dry Density (pcf)	NA
	Optimum Moisture (%)	20.5	Optimum Moisture (%)	NA
	Specific Gravity	2.50	Specific Gravity	NA
	Moisture, As-Received (%)	7	Percent Oversize (%)	0


SANTA CLARA WATERSHED EA - DAMMERON VALLEY

Washington County, Utah

MOISTURE-DENSITY RELATION (PROCTOR)

ASTM D698

Location	TEST PIT DA3-106 AT 3'-4'	Test Date	10/19/2021
Sample ID	NA	Technician	T. DAY, T. HENDERSON
Material	CLAYEY GRAVEL W/SAND	Classification	GC (Test)

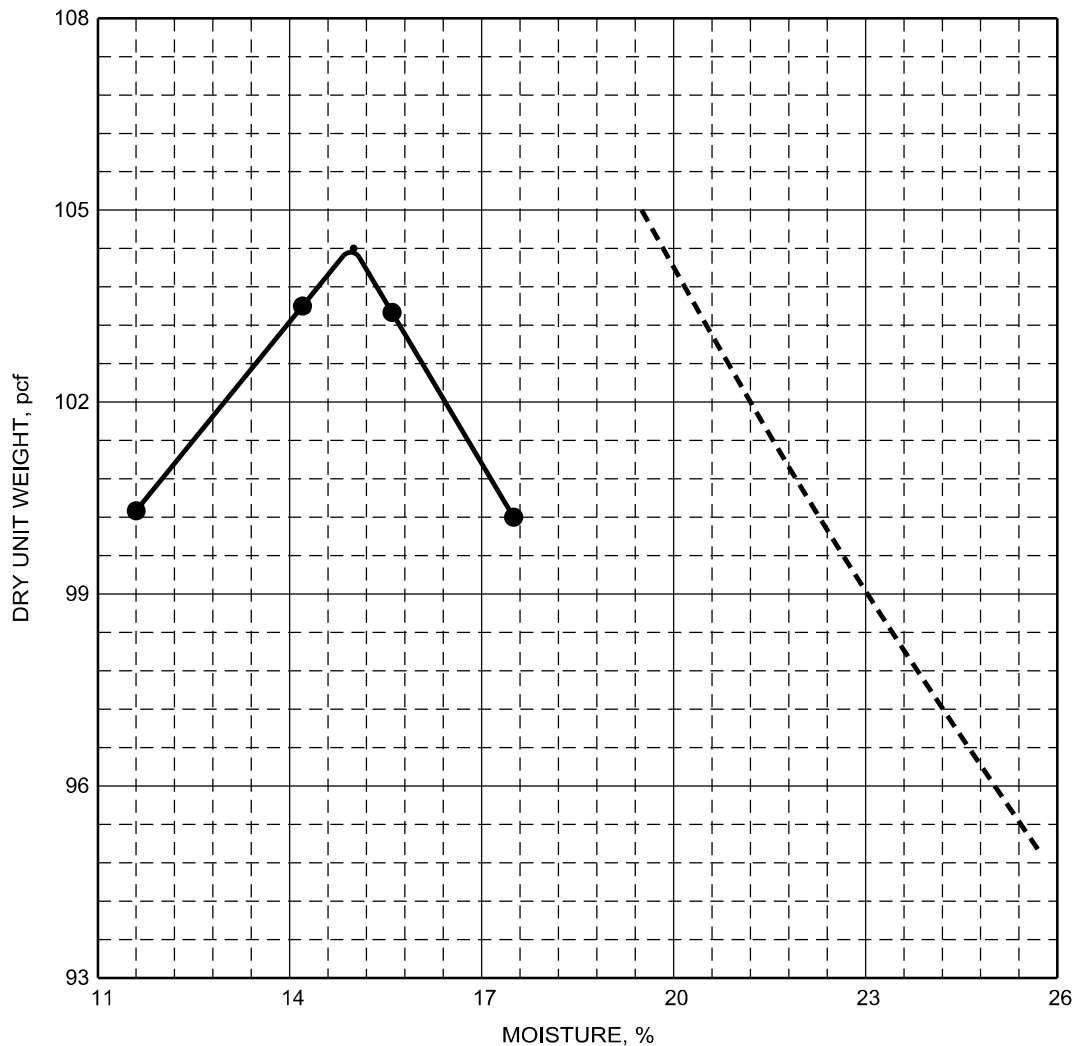

- - 100% Saturation Curve NA Not applicable / available Specific gravity type is bulk unless otherwise indicated. Results are as per the test method listed above and relate only to the items tested. Rock correction for >3/4-inch material is per ASTM D4718 or AASHTO T224.	<i>UNCORRECTED RESULTS</i>		<i>OVERSIZE CORRECTION</i>	
	Max. Dry Density (pcf)	104.4	Max. Dry Density (pcf)	110.6
	Optimum Moisture (%)	15.0	Optimum Moisture (%)	13.1
	Specific Gravity	2.50	Specific Gravity	2.50
	Moisture, As-Received (%)	11	Percent Oversize (%)	17

APPENDIX D

Sedimentation Calculations

Santa Clara EA
Sedimentation Calculations - Sediment Yield Classification Procedure
May 2021

Basin	Drainage Basin (mi ²)	Total Rating	Annual Sediment Yield (ac-ft/mi ²)			50-yr Sediment Yield (ac-ft)			Surface Geology		Soils		Climate		Runoff		Topography		Ground Cover		Land Use		Upland Erosion		Channel Erosion	
Dammeron 1	0.28	38	0.2	-	0.5	2.8	-	7.1	3	Hard basalt and limestone, moderately weathered and fractured	5	Sand and silt with frequent rock fragments	5	Infrequent convective storms, moderate intensity	5	Moderate flows or runoff per unit area	10	Moderate slopes, moderate flood plain development	0	Ground cover less than 40%, noticeable rock fragments	-10	No cultivation, logging, or grazing	10	Rill, gully, or landslide erosion over about 25% of area	10	Occasional channel erosion in bed and banks
Dammeron 2	3.57	38	0.2	-	0.5	35.7	-	89.3	3	Hard basalt and limestone, moderately weathered and fractured	5	Sand and silt with frequent rock fragments	5	Infrequent convective storms, moderate intensity	5	Moderate flows or runoff per unit area	10	Moderate slopes, moderate flood plain development	0	Ground cover less than 40%, noticeable rock fragments	-10	No cultivation, logging, or grazing	10	Rill, gully, or landslide erosion over about 25% of area	10	Occasional channel erosion in bed and banks
Dammeron 3	0.73	38	0.2	-	0.5	7.3	-	18.4	3	Hard basalt and limestone, moderately weathered and fractured	5	Sand and silt with frequent rock fragments	5	Infrequent convective storms, moderate intensity	5	Moderate flows or runoff per unit area	10	Moderate slopes, moderate flood plain development	0	Ground cover less than 40%, noticeable rock fragments	-10	No cultivation, logging, or grazing	10	Rill, gully, or landslide erosion over about 25% of area	10	Occasional channel erosion in bed and banks
Diamond 1	0.90	38	0.2	-	0.5	9.0	-	22.5	3	Hard basalt and limestone, moderately weathered and fractured	5	Sand and silt with frequent rock fragments	5	Infrequent convective storms, moderate intensity	5	Moderate flows or runoff per unit area	10	Moderate slopes, moderate flood plain development	0	Ground cover less than 40%, noticeable rock fragments	-10	No cultivation, logging, or grazing	10	Rill, gully, or landslide erosion over about 25% of area	10	Occasional channel erosion in bed and banks
Diamond 2	0.93	38	0.2	-	0.5	9.3	-	23.3	3	Hard basalt and limestone, moderately weathered and fractured	5	Sand and silt with frequent rock fragments	5	Infrequent convective storms, moderate intensity	5	Moderate flows or runoff per unit area	10	Moderate slopes, moderate flood plain development	0	Ground cover less than 40%, noticeable rock fragments	-10	No cultivation, logging, or grazing	10	Rill, gully, or landslide erosion over about 25% of area	10	Occasional channel erosion in bed and banks
Diamond 3	0.60	38	0.2	-	0.5	6.0	-	15.0	3	Hard basalt and limestone, moderately weathered and fractured	5	Sand and silt with frequent rock fragments	5	Infrequent convective storms, moderate intensity	5	Moderate flows or runoff per unit area	10	Moderate slopes, moderate flood plain development	0	Ground cover less than 40%, noticeable rock fragments	-10	No cultivation, logging, or grazing	10	Rill, gully, or landslide erosion over about 25% of area	10	Occasional channel erosion in bed and banks

Table 2.9. List of drainage basin characteristics and possible range of numerical ratings (modified from Pacific Southwest Interagency Committee, Water Management Subcommittee, 1968)

Drainage basin characteristics	Sediment yield levels		
	High rating	Moderate rating	Low rating
Surface geology	10: marine shales and related mudstones and siltstones	5: rocks of medium hardness moderately weathered and fractured	0: massive hard formations
Soils	10: fine textured and easily dispersed or single grain salts and fine sands	5: medium textured, occasional rock fragments, or caliche crusted layers	0: frequent rock fragments, aggregated clays, or high organic content
Climate	10: frequent intense convective storms	5: infrequent convective storms, moderate intensity	0: humid climate with low intensity rainfall, arid climate with low intensity rainfall, or arid climate with rare convective storms
Runoff	10: high flows or volume per unit area	5: moderate flows or runoff volume per unit area	0: low flows or volume per unit area or rare runoff events
Topography	20: steep slopes (in excess of 30%), high relief, little or no flood plain development	10: moderate slopes (about 20%), moderate flood plain development	0: gentle slopes (less than 5%), extensive flood plain development
Ground cover	10: ground cover less than 20%, no rock or organic litter in surface soil	0: ground cover less than 40%, noticeable organic litter in surface soil	-10: area completely covered by vegetation, rock fragments, organic litter with little opportunity for rainfall to erode soil
Land use	10: more than 50% cultivated, sparse vegetation, and no rock in surface soil	0: less than 25% cultivated, less than 50% intensively grazed	-10: no cultivation, no recent logging, and only low intensity grazing, if any
Upland erosion	25: rill, gully, or landslide erosion over more than 50% of the area	10: rill, gully, or landslide erosion over about 25% of area	0: no apparent signs of erosion
Channel erosion	25: continuous or frequent bank erosion, or active headcuts and degradation in tributary channels	10: occasional channel erosion of bed or banks	0: wide shallow channels with mild gradients, channels in massive rock, large boulders, or dense vegetation or artificially protected channels

Table 2.10. Drainage basin sediment yield classification (Randle, 1996)

Drainage basin classification number	Total rating	Annual sediment yield (ac-ft/mi ²)
1	> 100	> 3
2	75 to 100	1.0 to 3.0
3	50 to 75	0.5 to 1.0
4	25 to 50	0.2 to 0.5
5	0 to 25	< 0.2

Empirical sediment yield as a function of drainage area using Strand and Pemberton (1982) equation for the semiarid climate of the Southwestern United States.


Equation for the
southwestern United
States $Q_5 = 1.84A^{0.24}$

Drainage Basin	Area (mi ²)	Average Annual Sediment	50 Year Sediment Yield (acre-)	100 Year Sediment Yield
Dammeron 1	0.28	2.5	35.4	70.8
Dammeron 2	3.57	1.4	242.1	484.2
Dammeron 3	0.73	2.0	72.8	145.5
Diamond 1	0.90	1.9	84.8	169.6
Diamond 2	0.93	1.9	87.3	174.5
Diamond 3	0.60	2.1	62.4	124.8

YIELD CLASS	YIELD RATE	YIELD RATE
1	> 5.0	---
2	1.0-5.0	---
3	0.5-1.0	---
4	0.2-0.5	---
5	0.1-0.2	---
6	< 0.1	---

1. 0.5 GPM PER AC. (BASED ON 100% EROSION)
 2. 1.0 GPM PER AC. (BASED ON 100% EROSION)
 3. 1.5 GPM PER AC. (BASED ON 100% EROSION)
 4. 2.0 GPM PER AC. (BASED ON 100% EROSION)
 5. 2.5 GPM PER AC. (BASED ON 100% EROSION)
 6. 3.0 GPM PER AC. (BASED ON 100% EROSION)

1. 0.5 GPM PER AC. (BASED ON 100% EROSION)
 2. 1.0 GPM PER AC. (BASED ON 100% EROSION)
 3. 1.5 GPM PER AC. (BASED ON 100% EROSION)
 4. 2.0 GPM PER AC. (BASED ON 100% EROSION)
 5. 2.5 GPM PER AC. (BASED ON 100% EROSION)
 6. 3.0 GPM PER AC. (BASED ON 100% EROSION)

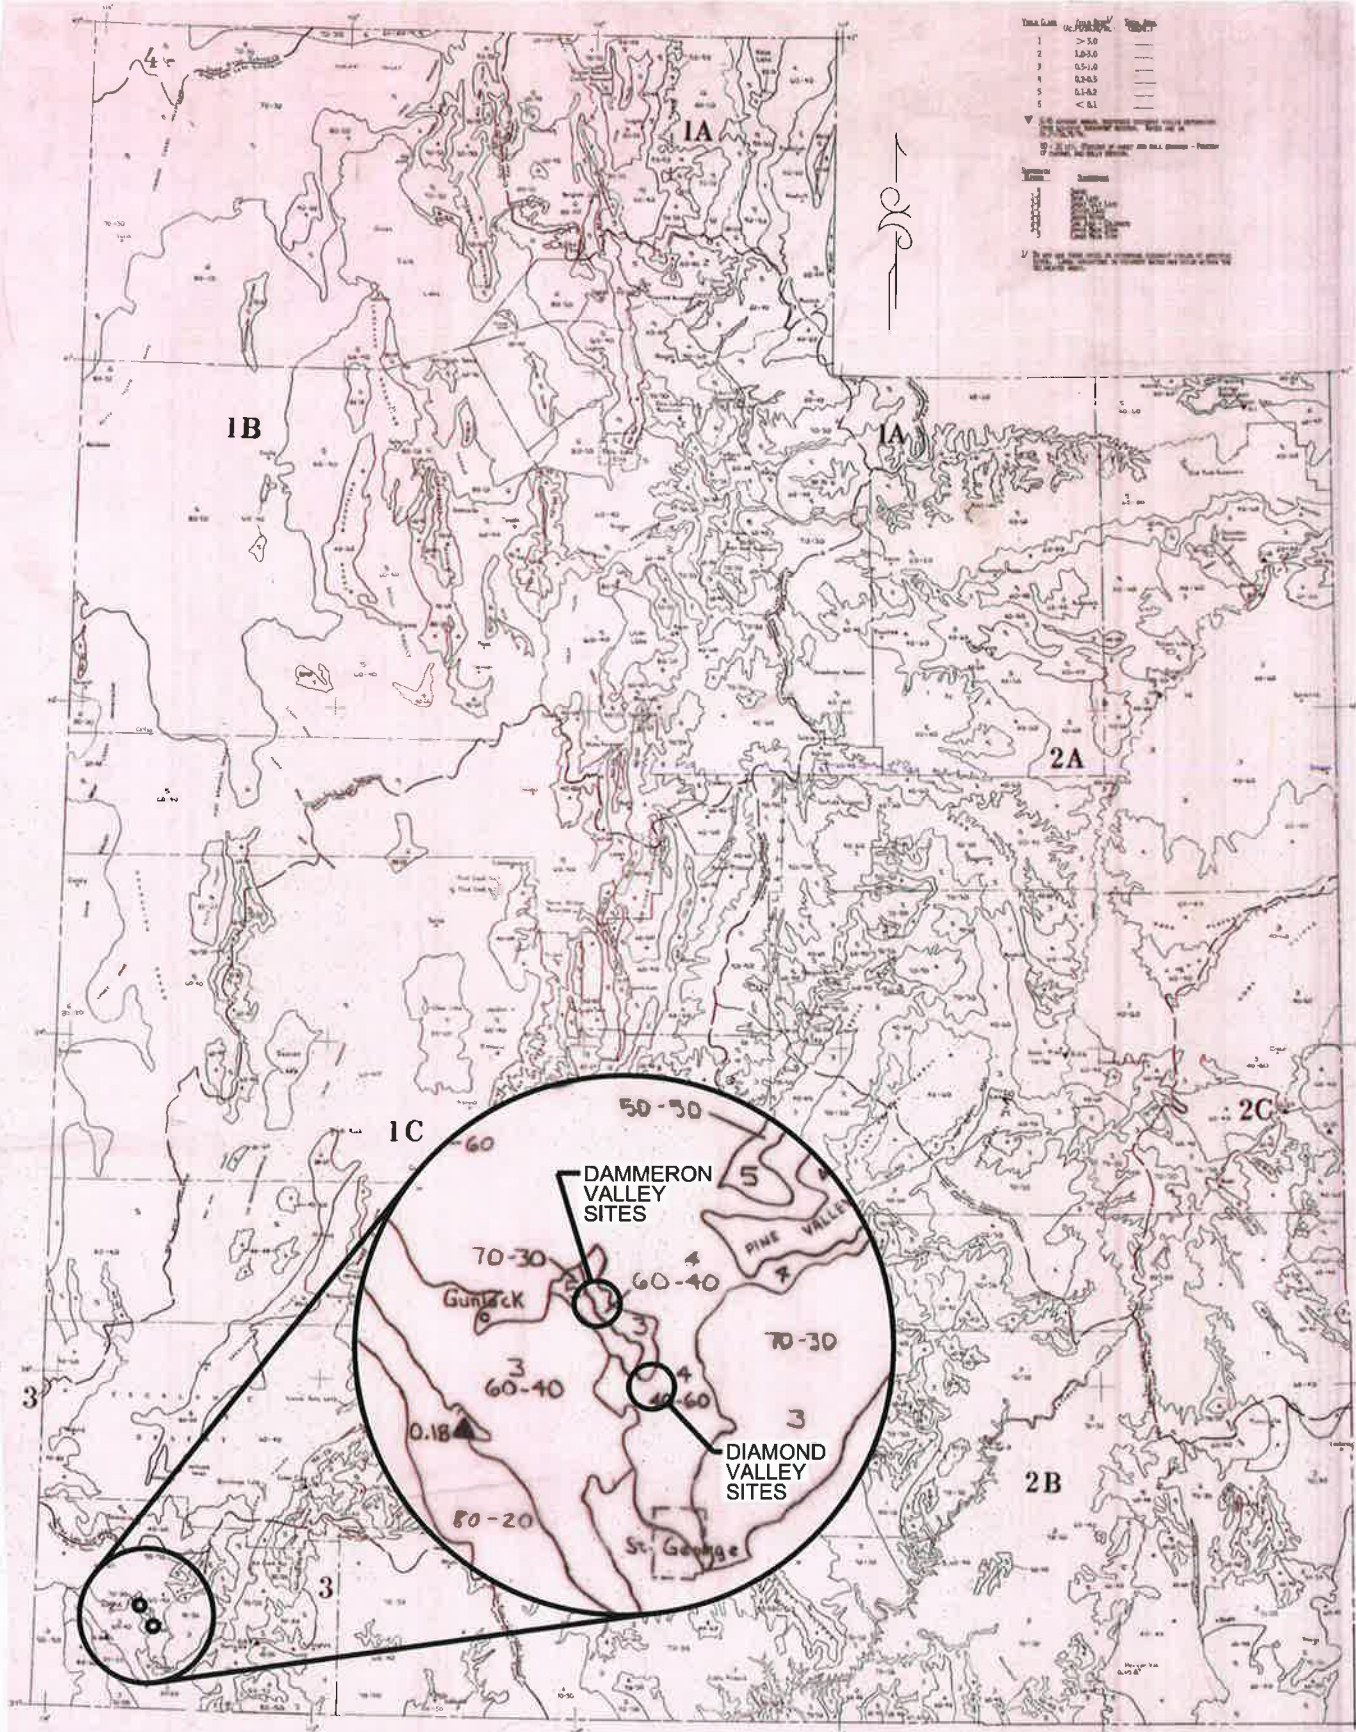

- SOURCES OF INFORMATION**
1. United States, United States and
Lower Colorado River, Comprehensive
Reclamation Study, American R.I.I. Bureau
Reclamation, and U.S. Reclamation
Department, Bureau of Reclamation
Bureau of Reclamation
 2. Utah State Soil Map and Soil Interpretation
X. Reclamation studies in 1973 & 1974
 3. Summary of Low Placeholders of 1973, 1974 &
1975
 4. Reclamation studies in 1973
 5. Reclamation studies in 1973
 6. Reclamation studies in 1973

ESTIMATED SEDIMENT YIELD RATES
 FOR THE
 STATE OF UTAH
 EROSION & SEDIMENTATION - 70
 WESTERN U.S. WATER PLAN
 AUGUST 1973
 (SUBJECT TO REVISION)
 Prepared by
 U.S. Army, Civil Engineering Service
 Corps of Engineers, Salt Lake Division

10 20 30 40 50
 scale in miles

APPENDIX E-8
CULTURAL RESOURCE DOCUMENTS

(November 2015)

BUREAU OF LAND MANAGEMENT**Summary Report of Cultural
Resources Inspection****PROJECT NUMBER: U21TN0316****Report Title: Cultural Resources Inventory Report, NRCS's Santa Clara Watershed Plan-EA
Project—Phase I: Borehole and Test Pit Locations, Washington County, Utah**

- | | |
|---|---|
| 1. Report Date: June 2021 | 5. Principal Investigator: Lindsey M. Evenson |
| 2. Date(s) of Survey: May 17–21 and 24–28, 2021 | 6. BLM Field Office: St. George Field Office |
| 3. Development Company: USDA NRCS | 7. County(ies): Washington County, Utah |
| 4. Responsible Institution: Transcon Environmental, Inc. | 8. NEPA Number: <i>TBD</i> |
| 9. Fieldwork Location:
USGS Map: Veyo, Saddle Mountain, and Washington, Utah | |

Township 40 South	Range 16 West	Sections 8, 9, 16, 17, 21, and 25
Township 41 South	Range 16 West	Sections 1 and 2

10. Description of the Undertaking (including the Area of Potential Effects):

The United States Department of Agriculture (USDA) Natural Resources Conservation Service (NRCS) is proposing to develop and authorize the Santa Clara Watershed Plan-EA. The proposed watershed area totals approximately 243,000 acres and encompasses the rural, unincorporated communities of Dammeron Valley and Diamond Valley; the Plan would also involve stream restoration, irrigation, and riparian restoration to benefit the endangered southwestern willow flycatcher within the Shivwits Band of Paiutes Reservation. Specific proposed flood control measures within Dammeron and Diamond valleys include channel routing and small flood and sediment control basins of less than 12,500 acre-feet individual structure capacity and 25,000 acre-feet total capacity. This report encompasses Phase I of the project, which consists of geotechnical and borehole test pit locations within Dammeron and Diamond Valleys (Utah Antiquities Project No. U21TN0316). Phase II consists of the entire project area, including Diamond and Dammeron Valleys, the Shivwits portion, and the Phase I geotechnical testing (Utah Antiquities Project No. U21TN0317). The entirety of the project encompasses approximately 587.82 acres: 296.38 acres in Phase I and 291.44 acres in Phase II. The overall project area of 587.82 is broken down as follows: Dammeron Valley (337.23 acres), Diamond Valley (187.42 acres), and Shivwits (63.17 acres). As previously noted, this report only documents Phase I: Borehole and Test Pit Locations; Phase II: Entire Project is not discussed further in this report.

Phase I of the project crosses lands managed by the Bureau of Land Management (BLM) St. George Field Office, and the State of Utah School and Institutional Trust Lands Administration (SITLA) as well as private lands (see **Table 1, Phase I Total Survey Area**, for acreage per area and landowner); portions of the project cross within the Utah Department of Transportation (UDOT) highway rights-of-way (ROWs) along State Route (SR)-18 and Old Highway 91. Phase I includes preliminary testing sites (8-inch borehole drilling and 20-foot-square test pits) to determine placement of project components.

The Phase I project area consists of blocks in Dammeron and Diamond valleys in Washington County, Utah. The project areas are located within portions of Dammeron Valley—Township 40 South; Range 16 West; Sections 8, 9, 16, 17, and 21—and Diamond Valley—Township 40 South, Range 16 West, Section 35 and Township 41 South, Range 16 West, Sections 1 and 2 of the Salt Lake Baseline and Meridian. The project crosses the Veyo, Saddle Mountain, and Washington, Utah 7.5-minute U.S. Geological Survey (USGS) topographic quadrangle maps (**Appendix A, Project Results Maps**).

The project area of potential effect (APE) for Phase I totals 296.38 acres. Boreholes and test pit areas will be accessed along existing roads that have been cleared of vegetation, where possible, using wheeled and tracked equipment. Borings will be up to 8 inches in diameter, and the disturbed area for test pits will measure approximately 20 square feet. Borings will be backfilled without grout or bentonite and test pits will be backfilled with excavated materials. Construction equipment will likely consist of rotary drill equipment for the boreholes, and test pits may be dug by hand or machine using power excavating equipment such as bulldozers, trenching machines, large-diameter bucket augers, clamshells, and backhoes. The portion(s) of the APE utilized for the Project during construction would be further defined during final project engineering. A total of 296.38 acres were evaluated for cultural resources.

Alpha Engineering Company retained Transcon Environmental, Inc. (Transcon) to support the NRCS project by conducting a cultural resources analysis. The cultural resources survey and this resulting report have been completed as part of that analysis and were conducted in compliance with Section 106 of the National Historic Preservation Act of 1966, as amended. The NRCS served as the lead agency on the project. The survey was conducted under a BLM St. George Field Office fieldwork authorization (FWA) dated May 13, 2021, a SITLA FWA dated May 11, 2021, and a UDOT FWA dated May 11, 2021. A desktop literature review was conducted for the proposed project area on May 3, 2021, and a Class III (intensive pedestrian) cultural resources inventory was conducted in two field sessions from May 17–21, 2021, and May 24–28, 2021, for a total of 20 person-days of fieldwork. Lindsey M. Evenson served as Principal Investigator and report author, Jennifer L. Bannick served as report co-author and co-Field Director, and Brent Larsen served as co-Field Director.

11. Location(s) and Date(s) of Literature Review:

1. Field Office: N/A
2. Utah Division of State History/Sego: May 3, 2021
3. Historic Records and Maps: May 3, 2021
4. Satellite imagery: May 3, 2021

12. Results of Literature Review (½ mile buffer):

On May 3, 2021, prior to the commencement of fieldwork, records on file with the Utah Division of State History were reviewed to determine whether previously identified cultural resources were present or if any previously reported archaeological investigations had been conducted within 0.5 mile of the proposed project alignment (UDSH 2021a). The results of this background research are presented in **Appendix B, Results of Literature Review**. The results of this literature review indicate there are a total of 32 previously conducted cultural resource surveys (**Table B-1**) and 43 previously recorded cultural resource sites (**Table B-2**) within 0.5 mile of the project area. Of these, nine previously conducted surveys and four previously identified sites were mapped as overlapping, being immediately adjacent to, or being crossed by some portion of the current project APE.

Previously Conducted Cultural Resource Surveys

Background research identified 33 previously conducted cultural resource surveys within 0.5 mile of the project area (**Appendix B, Results of Literature Review**). Of these, ten previously conducted cultural surveys cross into or overlap some portion of the project APE, and only one was conducted within the past 10 years (U20TN0970 - *Cultural Resources Inventory Report, Dominion Energy Utah's Utah Feeder Line 135 Replacement Project, Washington County, Utah* [in progress]). These surveys mapped within or adjacent to the project area are detailed in **Table B-1, Previous Cultural Surveys within 0.5 Mile of the Project Area**. No portion of the current project APE was left unsurveyed due to prior survey efforts.

Previously Recorded Cultural Resource Sites

Background research identified 44 previously recorded cultural resources within 0.5 mile of the project area; these previously recorded sites are detailed in **Table B-2, Previously Recorded Cultural Resource Sites within 0.5 Mile of the Project Area**. Of these, four were mapped within or adjacent to the Phase I project APE during the literature review. These cultural resources consist of one historic road segment (*Road from St. George to Pine Valley*), two prehistoric lithic scatters, and one prehistoric artifact scatter (sites 42WS2428, 42WS5150, 42WS5151, and 42WS5152, respectively).

Historic Document Review

In addition to the Sego literature review (described above), Transcon consulted a number of historic documents and records, including BLM land records (e.g., historic General Land Office [GLO] records, land patents, mining records, grazing records, Master Title Plat records, etc.), the Utah State Historic Preservation Office's historic contexts, individual BLM field office predictive models (if available) and Class I documents (if available), water rights, Sanborn maps, and Utah Division of Water Rights (UDWR) records (BLM 2021a, 2021b, 2021c, 2021d, 2021e; LOC 2021; UDSH 2021b, 2021c; UDWR 2021). As a result of this historic document review, it was determined that the GLO records, land patents, grazing records, and water rights records yielded historic resources in or very near to the project area (see General Land Office Maps, Land Patent Records, Grazing Allotment Records, and Water Rights Records sections below).

General Land Office Maps

Historic GLO maps and plats of the project area were reviewed and accessed through the BLM website on December 2, 2020 (BLM 2020b). Original cadastral surveys for Township 40 South; Range 15 West; Sections 8, 9, 16, 17, 21, and 35 (1887) and Township 41 South, Range 16 West, Sections 1 and 2 (1887) were perused (BLM 2021a). These historic resources indicate a few historic improvements near the project area, including historic roads (To Pine Valley, Old Road, Wood Road, St. George and Pine Valley Road, Wood Roads, and unnamed), a ditch, a fence, cultivated fields, a reservoir, a transmission line (Telegraph Line), and structures (John Alger, Geo. Edwards, Old Cabin, and unnamed); these historic GLO developments are detailed in **Table B-3, Historic GLO Maps**.

Additional historic maps were accessed from both the USGS TopoView topographic map viewer created by the National Geologic Map Database Project and the Utah Geological Survey Aerial Imagery Collection (DNR 2021; USGS 2021a, 2021b, 2021c). Historic aerial imagery in the vicinity of the project (1939, 1950, 1953, 1958) indicates a few visible historic developments, including established roads/highways, cultivated fields, and ranches. Portions of the historic road system are likely the same as (or adjacent to) the present alignments of SR-18 and other roads around Dammeron and Diamond valleys (DNR 2021).

Land Patent Records

Historic land patent records within the project area were also reviewed and accessed through the BLM website on May 3, 2021. These historic resources indicate 14 land patents near the project area with dates ranging from 1892 to 1983. Twelve of these land patents are for parcels located within the project APE: Willard E. Alger (11/12/1913), Samuel L. Carter (6/12/1922), William Carter (7/10/1918 and 6/02/1924), David Chidester (6/22/1899), James F. Cottam (2/14/1922), Esaias Edwards (6/21/1892), Myrza A. Miles (1/24/1921), Utah State (7/16/1894, 7/24/1902, 6/15/1965, 1/10/1966, and 9/30/1983), and George W. Higgins (5/16/1896) (BLM 2021b).

Grazing Allotment Records

Historic grazing allotment records within the project area were also reviewed and accessed through the BLM National Data website on May 3, 2021. This resource indicated two active grazing allotments in or near the project area. One of these allotments, the Veyo Allotment (#14055), encompasses the eastern half and southern portion of the project APE within Dammeron Valley; the Sand Wash Allotment (#04136) borders the southern portion of the project APE within Dammeron Valley, and the Diamond Vall Allotment (#04075) crosses the southeastern portion of the project APE in Diamond Valley. There are no dates associated with this data to indicate if these are historic allotments (BLM 2021e).

Water Rights Records

Historic water rights records within the project area were reviewed and accessed through the UDWR records website on May 3, 2021. These historic resources indicate that there are 20 historic water rights within 0.5 mile of the project APE, including surface and underground water sources originating from Whitaker Well, Alger Canyon Springs, Leo Canyon Springs, Wide Canyon Stream, and various unnamed springs and underground wells. None of these are directly within the project APE (UDWR 2021).

Summary and Expectations

Based on the results of the record search, it was anticipated that four previous sites may be located within or immediately adjacent to the project APE; however, it was understood that some of those sites' previous recordings are within a growing rural community and, as a result, may not be relocated in the project APE.

13. Description of Field Methods:

The survey was conducted in 15-meter-wide transects (blocks in Dammeron and Diamond valleys) throughout the entire project APE. This resulted in a total of approximately 296.38 acres evaluated for cultural resources (**Table 1, Total Survey Area**). No portion of the project APE was left unsurveyed due to prior survey efforts.

Isolated occurrence (IO) locations were documented during the survey. Previously identified cultural resource sites identified during the survey had locations noted, revisited, and recorded/updated after the survey was conducted for a more thorough review and to update site documentation, as necessary. These sites and IOs are discussed below in **Table 2, Total Sites Recorded**, and **Table 3, Newly Identified Isolated Occurrences within the Project APE**. The *Cultural Resource Fieldwork Guidelines and Standards BLM Supplement H-8110—Utah—May 2020* and the *Utah State Historic Preservation Office & Antiquities Section Archaeological Compliance Guidance—June 2020* were adhered to at all times during fieldwork (BLM 2021f; UDSH 2021a).

14. Area Surveyed:

Table 1, below, indicates the total acreage per landowner surveyed to Class III standards within the Phase I project area.

TABLE 1 PHASE I TOTAL SURVEY AREA				
Acreage	BLM	SITLA	Private	TOTAL
Dammeron Valley Phase I Acreage	144.47	24.08	45.39	213.94
Diamond Valley Phase I Acreage	12.72	7.88	61.84	82.44
TOTAL Phase I Acreage	157.19	31.96	107.23	296.38

15. Sites Recorded:

Of the four previously recorded sites mapped within the project APE, four sites were relocated and evaluated during the Class III inventory (**Table 2**). Updated Utah Archaeology Site Forms have been prepared for all four sites.

TABLE 2 TOTAL SITES RECORDED*								
		BLM		STATE		PRIVATE		TOTAL
		#	Site No.	#	Site No.	#	Site No.	
Revisits <i>Updated</i>	Eligible	1	42WS2428*	0		0		1
	Not Eligible	0		1	42WS5150	1	42WS5151, 42WS5152	3
Revisits <i>Not Updated</i>	Eligible	0		0		0		0
	Not Eligible	0		0		0		0
Newly Recorded	Eligible	0		0		0		0
	Not Eligible	0		0		0		0
TOTAL		1		1		2		4

*Note: site 42WS2428 is located within the jurisdiction indicated as well as on SITLA-managed land and private property.

16. Individual Site Descriptions and Determinations of Eligibility and Effect:

Transcon assessed four previously recorded sites during the Class III inventory (**Appendix C, Cultural Resource Sites Within the Project APE**). One of these sites (42WS2428) is recommended to be Eligible for listing on the National Register of Historic Places (NRHP) under Criterion A for its association with significant regional events. The remaining three sites (42WS5150, 42WS5151, 42WS5152) are recommended Not Eligible for NRHP listing under any Criteria. Additionally, Transcon recommends that site 42WS5152 is no longer an archaeological site as it has been destroyed by the construction of Homestead Drive. Transcon has prepared updated site forms for all four sites reflecting the 2021 revisit.

17. Isolated Occurrences:

A total of three IOs were identified and recorded within the project APE during the Class III inventory (**Appendix A, Project Results Maps**). These IOs are detailed in **Table 3, Newly Identified Isolated Occurrences Within the Project APE**, and shown in **Figures 1–3**, below. None of these IOs are recommended Eligible for listing on the NRHP under any Criteria.

TABLE 3 NEWLY IDENTIFIED ISOLATED OCCURRENCES WITHIN THE PROJECT APE*						
IO No.	Temporal Affiliation	Description	UTM—E	UTM—N	Figure	Map Panel
IO-01	Prehistoric	Four quartzite flakes			1	1
IO-02	Historic	Water diversion valve			2	2
IO-03	Historic	Culvert			3	2

*Note: UTM coordinates are provided in NAD'83 Zone 12; "UTM—E" represents the Easting and "UTM—N" represents the Northing.

18. Summary of Findings:

As a result of the Class III inventory, it was determined that a total of four previously identified cultural resource sites are located within or crossed by the project APE (42WS2428, 42WS5150, 42WS5151, and 42WS5152). Updated Utah Archaeology Site Forms have been prepared for all four sites mapped within the project APE; however, Transcon recommends that 42WS5152 is no longer an archaeological site. No new cultural resource sites were identified as a result of this survey; however, a total of three IOs were identified and recorded within the APE. Modern debris was also noted but not recorded at various places within the project area, as it appears to have originated from modern recreational visitation.

Survey conditions were good, consisting of sunny to cloudy or partially cloudy skies and hot temperatures. For most of the survey, ground visibility was good to excellent, ranging between 60 and 80 percent or greater (**Figures 4 and 5**). Of the four cultural resource sites identified within the Project APE, one site is recommended Eligible for listing on the NRHP under Criterion A (42WS2428); the remaining three sites (42WS5150, 42WS5151, and 42WS5152 [recommended to no longer be considered an archaeological site]) and all three IOs are recommended Not Eligible for NRHP listing under any Criteria.

19. Collection Yes ☐ No ☒

(If Yes) Curation Facility: N/A

Accession Number(s): N/A

20. Conclusion/Recommendation of Effect:

Transcon archaeologists conducted a Class III cultural resources inventory of 296.38 acres of BLM St. George Field Office-managed, SITLA-managed, and privately owned lands in Dammeron and Diamond valleys in Washington County, Utah. This investigation was requested by Alpha Engineering Company in support of an NRCS project to determine if any significant cultural resources which could be affected by the proposed undertaking were present within the project area.

As a result of the survey, it was determined that a total of four cultural resource sites are located within the project APE (see **Appendix C, Cultural Resource Sites Within the Project APE**, for details). Of these four sites, one (42WS2428) is recommended Eligible for listing on the NRHP under Criterion A for its association with significant historic events, and the remaining three sites (42WS5150, 42WS5151, and 42WS5152) and all three IOs are recommended Not Eligible for the NRHP under any Criteria. Additionally, 42WS5151 is recommended to no longer be considered an archaeological site, as it has been destroyed by the construction of Homestead Drive and a residential property.

Transcon recommends that the project will result in *No Adverse Effects to Historic Properties*. At the only Eligible site location within the project APE (42WS2428), the alignment of the historic road has been heavily disturbed/destroyed and almost entirely reclaimed by vegetation in one crossing; it has lost all historic format in another crossing, and all elements of the segment are non-contributing to the overall eligibility of the site within the Project APE (**Table 4, Project Summary and Conclusions**).

TABLE 4 PROJECT SUMMARY AND CONCLUSIONS					
Site No.	Temporal Affiliation	Site Description	Eligibility	Effects	Site Protective or Avoidance Measures
42WS2428	Historic	Historic road (<i>Road from St. George to Pine Valley</i>)	Eligible—A, <i>non-contributing</i>	<i>No Adverse Effect</i>	None; non-contributing segment
42WS5150	Prehistoric	Prehistoric lithic scatter	Not Eligible	No effect	N/A
42WS5151	Prehistoric	Prehistoric lithic scatter	Not Eligible	No effect	N/A
42WS5152	Prehistoric	Prehistoric artifact scatter	Not Eligible	No effect	N/A

If any previously undetected or unreported cultural features or deposits are encountered during future project-related activities, these activities must be discontinued in the immediate area of the feature(s), and a BLM archaeologist (or SITLA archaeologist, where appropriate) must be consulted to evaluate their nature and significance.

References:**Bureau of Land Management (BLM)**

- 2021a “Cadastral Surveys and Plats” Land Records, Bureau of Land Management, Utah. Accessed May 3, 2021, at https://www.ut.blm.gov/LandRecords/search_plats.cfm.
- 2021b “Land Patent Records” Land Records, Bureau of Land Management, Utah. Accessed May 3, 2021, at <https://glorerecords.blm.gov/search/default.aspx>.
- 2021c “Mineral Survey Records” Land Records, Bureau of Land Management, Utah. Accessed May 3, 2021, at https://www.ut.blm.gov/LandRecords/special_surveys.cfm#special_results.
- 2021d “Master Title Plat Maps” Land Records, Bureau of Land Management, Utah. Accessed May 3, 2021, at <https://glorerecords.blm.gov/search/default.aspx>.
- 2021e “Grazing Allotments” National Data, Bureau of Land Management, Utah. Accessed May 3, 2021, at <https://blm-egis.maps.arcgis.com/apps/webappviewer/index.html?id=6f0da4c7931440a8a80bfe20eddd7550>.
- 2021f Cultural Resource Fieldwork Guidelines and Standards BLM Supplement H-8110—Utah. Accessed May 3, 2021, at <https://www.blm.gov/sites/blm.gov/files/Cultural%20Resource%20Fieldwork%20Guidelines%20and%20Standards.pdf>.

Library of Congress

- 2021 “Sanborn Fire Insurance Maps” Sanborn Maps Collection, Library of Congress. Accessed May 3, 2021, at <https://www.loc.gov/collections/sanborn-maps/index/location/?q=Utah>.

United States Geological Survey (USGS)

- 2021a Veyo 7.5-Minute topographic map. Accessed May 3, 2021, at <https://ngmdb.usgs.gov/topoview/viewer/#13/37.2971/-113.6607>.
- 2021b Saddle Mountain 7.5-Minute topographic map. Accessed May 3, 2021, at <https://ngmdb.usgs.gov/topoview/viewer/#13/37.2642/-113.6794>.
- 2021c Washington 7.5-Minute topographic map. Accessed May 3, 2021, at <https://ngmdb.usgs.gov/topoview/viewer/#13/37.2143/-113.6133>.

Utah Division of Natural Resources (DNR)

- 2021 UGS Aerial Imagery Collection. Accessed on May 3, 2021, at <https://geodata.geology.utah.gov/imagery/>.

Utah Division of State History (UDSH)

- 2021a Archaeological Compliance Guidance. Utah State Historic Preservation Office & Antiquities Section. Accessed May 3, 2021, at https://drive.google.com/file/d/1_e2QLxR2pLUBns2l2GyDbomzJeWTH_Wu/view.
- 2021b Historic Contexts. Utah Department of Heritage and Arts, Utah Division of State History. Accessed May 3, 2021, at <https://drive.google.com/drive/u/0/folders/1f29mMHZF5NZuuz8ar8WkHEMu0oKDiW6R>.
- 2021c Sego. Utah Department of Heritage and Arts, Utah Division of State History. Accessed May 3, 2021, at <https://shpo.utah.gov/portal/apps/webappviewer/index.html?id=8d1c8337d050431080f7dce538f7677c>.

Utah Division of Water Resources (UDWR)

- 2021 “Water Right Areas” Utah Division of Water Rights Database. Accessed May 3, 2021, at <https://maps.waterrights.utah.gov/EsrMap/map.asp>.

*Include the appropriate amount of 1:24,000 scale topographic maps, which clearly identify the APE, area of Class II or III survey area, sites, and isolated finds.

**Include at least one landscape photograph of the area surveyed.

8100-3 Form



Figure 4. Overview of the block survey area in Dammeron Valley. View to the north.



Figure 5. Project overview showing the eastern block survey area over the borehole locations in Diamond Valley. View to the northwest.

APPENDIX A

PROJECT RESULTS MAPS

APPENDIX B

RESULTS OF LITERATURE REVIEW

**TABLE B-1
PREVIOUS CULTURAL SURVEYS WITHIN 0.5 MILE OF THE PROJECT AREA**

Survey No.	Survey Name	Organization	Date	In/Out*	Project Area**	Phase***
U82BL0146	Pipeline ROW	BLM	1982	Out	Study Area	N/A
U82BL0151	Buhler Power and Pipeline	BLM	1982	Out	Study Area	N/A
U86BC0383	An Archaeological Inventory of the Proposed Red Butte to Middleton 138 kV Power Line in Washington County, Utah	Brigham Young University	1986	Out	Study Area	N/A
U86BL0560	Road ROW Vicinity of Dammeron Valley	BLM	1986	Out	Study Area	N/A
U86NP0409	A Cultural Resource Inventory of the Dammeron Valley Powerline Extension, Washington County, Utah	A.K. Nielson Associates	1986	In	Dammeron Valley	Phase I, Phase II
U89PD0087	Cultural Resource Inventory of SR-18, Snow Canyon to Veyo, From Milepost 12.67 to Milepost 19.8, Washington County, Utah	P-III Associates, Inc. (P-III)	1989	In	Dammeron Valley	Phase I, Phase II
U91NP0299	An Archaeological Inventory of the Proposed UAMPS Central Substation to St. George Substation Access, Equipment Stations and Wire Set-up Locations, Washington County, Utah	A.K. Nielson Associates	1991	Out	Study Area	N/A
U92NP0658	UP&L Dammeron Valley Distribution	A.K. Nielson Associates	1992	In	Dammeron Valley	Phase I, Phase II
U93NP0713	UP&L Dammeron Valley Distribution	A.K. Nielson Associates	1993	Out	Study Area	N/A
U94BL0491	Diamond Valley Fence	BLM	1994	In	Dammeron Valley	Phase I, Phase II
U95BL0756	Chuck Buhler Road	BLM	1995	Out	Study Area	N/A
U95IG0312	An Archaeological Survey of the Diamond Valley Gravel Pit, Washington County, Utah	Intersearch, Inc.	1995	Out	Study Area	N/A
U96JB0202	A Cultural Resource Inventory of the Dammeron Valley—Sand Cove Utah Power Replacement Powerline near Veyo, Utah	JBR Environmental Consultants, Inc.	1996	Out	Study Area	N/A
U01EP0270	A Cultural Resource Inventory of 4 Segments of 69kV Power Lines from Dammeron to Ivins, Washington County, Utah	EarthTouch LLC	2001	Out	Study Area	N/A
U02BL0312	Diamond Valley Exchange	BLM	2002	Out	Study Area	N/A
U03BL0609	Diamond Valley—Red Cliffs Reserve Trailhead Parking	BLM	2003	Out	Study Area	N/A

**TABLE B-1
PREVIOUS CULTURAL SURVEYS WITHIN 0.5 MILE OF THE PROJECT AREA**

Survey No.	Survey Name	Organization	Date	In/Out*	Project Area**	Phase***
U04BS0282	A Cultural Resources Inventory of the Proposed Red Butte to St. George Transmission Line Upgrade in Washington County, Utah	Baseline Data, Inc.	2004	Out	Study Area	N/A
U06HQ0775	An Archaeological Survey of Three Fire Break Lines in Dammeron Valley, Washington County, Utah	HRA, Inc.	2006	In	Dammeron Valley	Phase I, Phase II
U06MX0031	An Archaeological Inventory of the Canyon Trails Easement, Dammeron Valley, Phase 2	McFadden Archaeological Consulting	2006	Out	Study Area	N/A
U08ES0816	Cultural Resources Inventory of the Dammeron and Central Fuels Project Areas North of St. George, Washington County, Utah	EnviroSystems Management, Inc.	2008	In	Dammeron Valley	Phase I, Phase II
U08HO0786	Results of Testing & Data Recovery for the Red Butte to St. George Transmission Line Upgrade, Washington County, Utah	Bighorn Archaeological Consultants, LLC (Bighorn)	2008	Out	Study Area	N/A
U08HQ1022	An Archaeological Survey of Approximately 560 Acres in Three Parcels within the Dammeron Valley, Washington County, Utah	HRA, Inc.	2008	In	Dammeron Valley	Phase I, Phase II
U09HO0364	A Cultural Resource Inventory of the Red Butte to St. George Transmission Line Upgrade Access Roads, Washington County, Utah	Bighorn	2009	Out	Study Area	N/A
U10IG0862	Tower Engineering—Dammeron Valley Tower Site Survey	Intersearch, Inc.	2010	Out	Study Area	N/A
U10LI0939	St. George Travel Management Plan	Logan Simpson	2010	In	Dammeron Valley	Phase I, Phase II
U10ST0248	Utah Education Network Btop Surveys	SWCA Environmental Consultants	2010	In	Diamond Valley	Phase I, Phase II
U11BL0843	Diamond Valley ESR CRI	BLM	2011	Out	Study Area	N/A
U16HQ0389	Data Recovery at Four Prehistoric Sites in the Dammeron Valley Residential Development, Washington County, Utah	HRA, Inc.	2016	Out	Study Area	N/A
U17BL0939	Lava Ridge Trailhead Improvement	BLM	2017	Out	Study Area	N/A

**TABLE B-1
PREVIOUS CULTURAL SURVEYS WITHIN 0.5 MILE OF THE PROJECT AREA**

Survey No.	Survey Name	Organization	Date	In/Out*	Project Area**	Phase***
U17SH0627	Cultural Resources Inventory in Support of an Environmental Quality Incentives Program Brush Management Project on Shivwits Band of Paiutes Land, Washington County, Utah	NRCS	2017	Out	Study Area	N/A
U17UT0379	SR-18; Diamond Valley Intersection Improvements Cultural Resources Survey	UDOT	2017	Out	Study Area	N/A
U19TN0509	Cultural Resources Inventory Report, Lloyd Graff LTD's Graff Road Project, Washington County, Utah	Transcon	2019	Out	Study Area	N/A
U20TN0970	Cultural Resources Inventory Report, Dominion Energy Utah's Utah Feeder Line 135 Replacement Project, Washington County, Utah (in progress)	Transcon	2021	In	Dammeron Valley	Phase I, Phase II

*Note: "In" is a project crossing or overlapping some portion of the APE (also blue text); "Out" is a project mapped outside the APE.

**Note: There are three project areas: Dammeron Valley, Diamond Valley, and Shivwits; anything within the 0.5-mile study area but outside the three APE project areas is referenced as "Study Area."

***Note: There are two project phases: Phase I: Borehole and Test Pit Locations and Phase II: Entire Project.

**TABLE B-2
PREVIOUSLY IDENTIFIED CULTURAL RESOURCE SITES
WITHIN 0.5 MILE OF THE PROJECT AREA**

Site No.	Description	Eligibility	In/Out*	Project Area **	Phase ***
42WS0531	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0532	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0533	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0534	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0535	Prehistoric campsite	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0536	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0537	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0538	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0539	Prehistoric campsite	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0540	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A

TABLE B-2
PREVIOUSLY IDENTIFIED CULTURAL RESOURCE SITES
WITHIN 0.5 MILE OF THE PROJECT AREA

Site No.	Description	Eligibility	In/Out*	Project Area **	Phase ***
42WS0541	Prehistoric campsite	Determined Eligible	Out	Study Area	N/A
42WS0544	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS1553	Prehistoric lithic scatter and rock alignment	Determined Not Eligible	Out	Study Area	N/A
42WS1554	Prehistoric lithic scatter with fossil exposure	Determined Eligible	Out	Study Area	N/A
42WS1555	Prehistoric lithic scatter and rock alignment	Determined Not Eligible	Out	Study Area	N/A
42WS1556	Historic isolated structures	Determined Not Eligible	Out	Study Area	N/A
42WS2203	Prehistoric campsite	Determined Eligible	Out	Study Area	N/A
42WS2206	Prehistoric campsite	Recommended Eligible	Out	Study Area	N/A
42WS2425	Prehistoric lithic scatter	Recommended Not Eligible	Out	Study Area	N/A
42WS2428	Historic road (<i>Road from St. George to Pine Valley</i>)	Recommended Eligible	In	Diamond Valley	Phase I, Phase II
42WS2761	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS2762	Prehistoric lithic scatter and rock alignment	Determined Eligible	Out	Study Area	N/A
42WS3124	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS4174	Prehistoric campsite	Recommended Eligible	Out	Study Area	N/A
42WS4175	Prehistoric campsite	Recommended Eligible	Out	Study Area	N/A
42WS4311	Prehistoric Paiute campsite	Determined Eligible	Out	Study Area	N/A
42WS4824	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5126	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5127	Prehistoric lithic scatter	Recommended Eligible	Out	Study Area	N/A
42WS5128	Prehistoric lithic scatter	Determined Eligible	Out	Study Area	N/A
42WS5145	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5146	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5147	Prehistoric artifact scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5149	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5150	Prehistoric lithic scatter	Determined Not Eligible	In	Dammon Valley	Phase I, Phase II
42WS5151	Prehistoric lithic scatter	Determined Not Eligible	In	Dammon Valley	Phase I
42WS5152	Prehistoric artifact scatter	Determined Not Eligible	In	Dammon Valley	Phase I
42WS5153	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5155	Historic artifact scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5269	Prehistoric campsite	Recommended Eligible	Out	Study Area	N/A

**TABLE B-2
PREVIOUSLY IDENTIFIED CULTURAL RESOURCE SITES
WITHIN 0.5 MILE OF THE PROJECT AREA**

Site No.	Description	Eligibility	In/Out*	Project Area **	Phase ***
42WS5525	Multicomponent: Prehistoric and historic artifact scatter with features	Determined Not Eligible	Out	Study Area	N/A
42WS5526	Multicomponent: Prehistoric and historic artifact scatter with features	Determined Eligible	Out	Study Area	N/A
42WS5715	Prehistoric campsite	Recommended Eligible	Out	Study Area	N/A
42WS6498	Historic artifact scatter (in progress)	Recommended Not Eligible	Out	Study Area	N/A
*Note: "In" is a site mapped within or crossed by some portion of the APE (also blue text); "Out" is a site mapped outside the APE. **Note: There are three project areas: Dammeron Valley, Diamond Valley, and Shivwits; anything within the 0.5-mile study area but outside the three APE project areas is referenced as "Study Area." ***Note: There are two project phases: Phase I: Borehole and Test Pit Locations and Phase II: Entire Project.					

**TABLE B-3
HISTORIC GENERAL LAND OFFICE MAPS**

Date	Township	Range	Historic Features near the Project Area	Project Area*
1877	40 South	16 West	Roads (<i>To Pine Valley, Old Road</i> , and unnamed)	Dammeron Valley
1877	40 South	16 West	Roads (unnamed), reservoir, cultivated fields, and structures (<i>John Alger, Geo. Edwards</i> , and <i>Old Cabin</i>)	Diamond Valley
1877	41 South	16 West	Roads (<i>Wood Road, St. George and Pine Valley Road, Wood Roads</i> , and unnamed), transmission line (<i>Telegraph Line</i>), cultivated field, fence, and ditch	Diamond Valley
*Note: There are three project areas: Dammeron Valley, Diamond Valley, and Shivwits.				

APPENDIX C

CULTURAL RESOURCE SITES WITHIN THE PROJECT APE

TABLE C-1 CULTURAL RESOURCE SITES WITHIN THE PROJECT APE						
Site Number	Site Name	Land Owner	Site Description	Eligibility Recommendation	Effects	Protective or Avoidance Measures
42WS2428	<i>Road from St. George to Pine Valley</i>	BLM, Private, SITLA	Site 42WS2428 is the historic <i>Road from St. George to Pine Valley</i> . The site was originally recorded in 1989 by P-III and later revisited and re-evaluated on various occasions in 1994, 1996, 2004, 2006, 2008, and twice in 2021; various segments of the site have been recommended or determined to be Not Eligible, and others have been recommended or determined to be Eligible under Criterion A. Transcon archaeologists revisited two crossings of Segment M of the historic road within the current project APE in 2021 and noted that the northern portion (Surveyed Area 1) of the road segment within the APE appears to be in use as a frontage road and looks like a modern two track; it is non-contributing to the overall eligibility of the site as it has lost all historic format. The southern crossing of Segment M (Surveyed Area 2) is in very poor condition, has been reclaimed by vegetation for the most part, and is presumed to be in the previously plotted location by evidence of some incised areas and a change in vegetation along the alignment. Transcon concurs with the previous site eligibility determination and recommends site 42WS2428 is Eligible for listing on the NRHP under Criterion A because the site is associated with historically important events of transportation and settlement between Pine Valley and St. George; however, Transcon recommends the portion of Segment M revisited in 2021 is non-contributing to the overall integrity and eligibility of the site.	Eligible—A; non-contributing	<i>No Adverse Effects</i>	None; non-contributing segment.
42WS5150		SITLA	Site 41WS5150 is a prehistoric lithic scatter. The site was originally recorded by HRA, Inc. in 2008 and was determined Not Eligible for the NRHP under any Criteria. When revisited in 2021, Transcon archaeologists observed the site to be in similar condition to the 2008 recording with a diffuse scatter of lithic debris (approximately 50 flakes) within the site area consisting primarily of gray quartzite tertiary flakes with some white chert tertiary flakes. Transcon archaeologists relocated and documented previously recorded AC-01; however, previously recorded AC-02 and the previously recorded lithic tools were not relocated. There is some displacement of artifacts by erosion and obscurement of the site area by selective bullhogging, and the site has been impacted by a dirt road that bisects the site. Formerly documented diagnostic artifacts have likely been collected, as the site is close to a developing residential neighborhood and sees frequent visitation. Transcon concurs with the previous site eligibility determination and recommends site 42WS5150 is Not Eligible for listing on the NRHP under any Criteria.	Not Eligible	No Effects	N/A

TABLE C-1 CULTURAL RESOURCE SITES WITHIN THE PROJECT APE						
Site Number	Site Name	Land Owner	Site Description	Eligibility Recommendation	Effects	Protective or Avoidance Measures
42WS5151		Private	Site 41WS5151 is a prehistoric lithic scatter. The site was originally recorded by HRA, Inc. in 2008 and was determined Not Eligible for the NRHP under any Criteria. When revisited in 2021, Transcon archaeologists observed a very small amount of lithic debitage, 5 total pieces (4 light gray quartzite flakes and 1 white chert tertiary flake), which is far less than the previously recorded 20 flakes. Additionally, the previously noted lithic tools were not relocated. There appears to be displacement of artifacts by erosion, and some areas of the site have been selectively bullhogged. The site is adjacent to a residential property, and the diagnostic artifacts have likely been collected. Transcon concurs with the previous site eligibility determination and recommends site 42WS5151 is Not Eligible for listing on the NRHP under any Criteria.	Not Eligible	No Effects	N/A
42WS5152		Private	Site 41WS5152 was a prehistoric artifact scatter. The site was originally recorded by HRA, Inc. in 2008 and was determined Not Eligible for the NRHP under any Criteria. When revisited in 2021, Transcon archaeologists observed that a road (Homestead Drive) has been constructed through the site and that selective bullhogging has been conducted within the site area. Transcon archaeologists were unable to relocate the previously documented lithic flake assemblage, any ceramics, or any of the documented diagnostic tools. Only a single quartzite tertiary flake was relocated within the site area. Transcon concurs with the previous site eligibility determination and recommends site 42WS5152 is Not Eligible for listing on the NRHP under any Criteria. Additionally, Transcon recommends 42WS5152 no longer be considered an archaeological site as it has been destroyed by the construction of Homestead Drive.	Not Eligible	No Effects	N/A; recommended destroyed (no longer an archaeological site).

(November 2015)

BUREAU OF LAND MANAGEMENT**Summary Report of Cultural
Resources Inspection****PROJECT NUMBER: U21TN0317****Report Title: Cultural Resources Inventory Report, NRCS's Santa Clara Watershed Plan-EA Project—
Phase II: Entire Project, Washington County, Utah**

- | | |
|--|---|
| 1. Report Date: August 2022 | 5. Principal Investigator: Lindsey M. Evenson |
| 2. Date(s) of Survey: May 17–21 and 24–28, 2021 | 6. BLM Field Office: St. George Field Office |
| 3. Development Company: USDA NRCS | 7. County(ies): Washington County, Utah |
| 4. Responsible Institution: Transcon Environmental, Inc. | 8. NEPA Number: <i>TBD</i> |
| 9. Fieldwork Location:
USGS Map: Veyo, Saddle Mountain, Washington, and Shivwits Utah | |
| Township 40 South | Range 16 West |
| Township 41 South | Range 16 West |
| Township 41 South | Range 17 West |
| | Sections 8, 9, 16, 17, 21, and 35 |
| | Sections 1 and 2 |
| | Sections 28 and 33 |

10. Description of the Undertaking (including the Area of Potential Effects):

The United States Department of Agriculture (USDA) Natural Resources Conservation Service (NRCS) is proposing to develop and authorize the Santa Clara Watershed Plan-EA. The proposed watershed area totals approximately 243,000 acres and encompasses the rural, unincorporated communities of Dammeron Valley and Diamond Valley; the Plan would also involve stream restoration, irrigation, and riparian restoration to benefit the endangered southwestern willow flycatcher within the Shivwits Band of Paiute Indians (Shivwits) Reservation. Specific proposed flood control measures within Dammeron and Diamond valleys include channel routing and small flood and sediment control basins of less than 12,500 acre-feet individual structure capacity and 25,000 acre-feet total capacity. This report presents Phase II of the project (Entire Project), which includes the completed Phase I geotechnical and borehole test pit locations within Dammeron and Diamond Valleys (Utah Antiquities Project No. U21TN0316). Phase II consists of the entire project area, including Diamond and Dammeron Valleys, the Shivwits portion, and the Phase I geotechnical testing (Utah Antiquities Project No. U21TN0317). The entirety of the project encompasses approximately 587.82 acres, including 296.38 acres that was previously surveyed in Phase I, and 291.44 acres of new survey in Phase II. The entire project area (Phase I and Phase II) encompasses 587.82 acres includes the following areas: Dammeron Valley (337.23 acres), Diamond Valley (187.42 acres), and Shivwits (63.17 acres).

The previously completed survey for Phase I of the project included preliminary testing sites (8-inch borehole drilling and 20-square-foot test pits) to determine placement of project components, and both Phases cross lands managed by the Bureau of Land Management (BLM) St. George Field Office, and the State of Utah School and Institutional Trust Lands Administration (SITLA) as well as private lands; additionally, Phase II crosses Shivwits Reservation tribal lands (see **Table 1, Total Survey Area**, for acreage per project phase, area, and landowner). Portions of the project also cross within the Utah Department of Transportation (UDOT) highway rights-of-way (ROWs) along State Route (SR)-18 and Old Highway 91.

The Phase II project area encompasses the previously completed survey area for Phase I and consists of survey area in Dammeron and Diamond valleys, as well as Shivwits Reservation tribal land in Washington County, Utah. The project areas are located within portions of Dammeron Valley—Township 40 South; Range 16 West; Sections 8, 9, 16, 17, 21, and 21; Diamond Valley—Township 40 South, Range 16 West, Section 35 and Township 41 South, Range 16 West, Sections 1 and 2; and Shivwits—Township 41 South, Range 17 West, Sections 28 and 33 and of the Salt Lake Baseline and Meridian. The project crosses the Veyo, Saddle Mountain, Washington, and Shivwits, Utah 7.5-minute U.S. Geological Survey (USGS) topographic quadrangle maps (**Appendix A, Project Results Maps**).

The project area of potential effect (APE) for Phase II totals 587.82 acres (296.38 previously surveyed acres and 291.44 acres of new survey). Boreholes and test pit areas will be accessed along existing roads that have been cleared of vegetation, where possible, using wheeled and tracked equipment. Borings will be up to 8 inches in diameter, and the disturbed area for test pits will measure approximately 20 square feet. Borings will be backfilled without grout or bentonite and test pits will be backfilled with excavated materials. Construction equipment will likely consist of rotary drill equipment for the boreholes, and test pits may be dug by hand or machine using power excavating equipment such as bulldozers, trenching machines, large-diameter bucket augers, clamshells, and backhoes. A total of 587.82 acres were evaluated for cultural resources.

Alpha Engineering Company retained Transcon Environmental, Inc. (Transcon) to support the NRCS project by conducting a cultural resources analysis. The cultural resources survey and this resulting report have been completed as part of that analysis and were conducted in compliance with Section 106 of the National Historic Preservation Act of 1966, as amended. The NRCS served as the lead agency on the project. The survey was conducted under a BLM St. George Field Office fieldwork authorization (FWA) dated May 13, 2021, a SITLA FWA dated May 11, 2021, and a UDOT FWA dated May 11, 2021. A desktop literature review was conducted for the proposed project area on May 3, 2021, and a Class III (intensive pedestrian) cultural resources inventory was conducted in two field sessions from May 17–21, 2021, and May 24–28, 2021, for a total of 20 person-days of fieldwork. Lindsey M. Evenson served as Principal Investigator and report author, Jennifer L. Bannick served as report co-author and co-Field Director, and Brent Larsen served as co-Field Director.

11. Location(s) and Date(s) of Literature Review:

1. Field Office: N/A
2. Utah Division of State History/Sego: May 3, 2021
3. Historic Records and Maps: May 3, 2021
4. Satellite imagery: May 3, 2021

12. Results of Literature Review (one half- mile buffer):

On May 3, 2021, prior to the commencement of fieldwork, records on file with the Utah Division of State History (UDSH) were reviewed to determine whether previously identified cultural resources were present or if any previously reported archaeological investigations had been conducted within 0.5 mile of the proposed project alignment (UDSH 2021a). The results of this background research are presented in **Appendix B, Results of Literature Review**. The results of this literature review indicate there are a total of 39 previously conducted cultural resource surveys (**Table B-1**) and 65 previously recorded cultural resource sites (**Table B-2**) within 0.5 mile of the project area. Of these, 13 previously conducted surveys and 7 previously identified sites were mapped as overlapping, being immediately adjacent to, or being crossed by some portion of the current project APE.

Previously Conducted Cultural Resource Surveys

Background research identified 39 previously conducted cultural resource surveys within 0.5 mile of the project area (**Appendix B, Results of Literature Review**). Of these, 13 previously conducted cultural surveys cross into or overlap some portion of the project APE, and only two were conducted within the past 10 years (U20TN0970 - *Cultural Resources Inventory Report, Dominion Energy Utah's Utah Feeder Line 135 Replacement Project, Washington County, Utah* [in progress]; and U16HO0417 - *A Cultural Resource Inventory of the Old Highway 91 Milepost 0.00 to 16.50 Safety Improvements Project, Washington County, Utah*). These surveys mapped within or adjacent to the project area are detailed in **Table B-1, Previous Cultural Surveys within 0.5 Mile of the Project Area**. No portion of the current project APE was left unsurveyed due to prior survey efforts.

Previously Recorded Cultural Resource Sites

Background research identified 65 previously recorded cultural resources within 0.5 mile of the project area; these previously recorded sites are detailed in **Table B-2, Previously Recorded Cultural Resource Sites within 0.5 Mile of the Project Area**. Of these, seven were mapped within or adjacent to the Phase II (Entire Project) APE during the literature review; however, sites 42WS2428, 42WS5150, 42WS5151, and 42WS5152 were recently updated during Phase I of the project and were not revisited during Phase II. The remaining previously recorded cultural resources consist of one historic pipeline and suspension bridge, and two prehistoric lithic scatters (sites 42WS4692, 42WS4823, 42WS5154, respectively).

Historic Document Review

In addition to the Sego literature review (described above), Transcon consulted a number of historic documents and records, including BLM land records (e.g., historic General Land Office [GLO] records, land patents, mining records, grazing records, Master Title Plat records, etc.), the Utah State Historic Preservation Office's historic contexts, individual BLM field

office predictive models (if available) and Class I documents (if available), water rights, Sanborn maps, and Utah Division of Water Rights (UDWR) records (BLM 2021a, 2021b, 2021c, 2021d, 2021e; LOC 2021; UDSH 2021a, 2021b; UDWR 2021). As a result of this historic document review, it was determined that the GLO records, land patents, grazing records, and water rights records yielded historic resources in or very near to the project area (see General Land Office Maps, Land Patent Records, Grazing Allotment Records, and Water Rights Records sections below).

General Land Office Maps

Historic GLO maps and plats of the project area were reviewed and accessed through the BLM website on May 3, 2021 (BLM 2021a). Original cadastral surveys for Township 40 South; Range 15 West; Sections 8, 9, 16, 17, 21, and 35 (1887); Township 41 South, Range 16 West, Sections 1 and 2 (1887); and Township 41 South, Range 17 West, Sections 28 and 33 (1912) were perused (BLM 2021a). These historic resources indicate a few historic improvements near the project area, including historic roads (To Pine Valley, Old Road, Wood Road, St. George and Pine Valley Road, Wood Roads, Road from Shem to St. George, Road from Apex Mine to Shem, and unnamed), a ditch, fences, cultivated fields, a stable, a reservoir, transmission lines (Telegraph Line, Telephone Line Acoma/St. George), and structures (John Alger, Geo. Edwards, Old Cabin, Shem [abandoned], Office, Smelter Stack, House, Mission, Church, House No. 1, House No. 2, Indian Jail, Indian Agent's House, Indian School, and unnamed); these historic GLO developments are detailed in **Table B-3, *Historic GLO Maps***.

Additional historic maps were accessed from both the USGS TopoView topographic map viewer created by the National Geologic Map Database Project and the Utah Geological Survey Aerial Imagery Collection (DNR 2021; USGS 2021a, 2021b, 2021c, 2021d). Historic aerial imagery in the vicinity of the project (1939, 1950, 1953, 1958) indicates a few visible historic developments, including established roads/highways, cultivated fields, and ranches. Portions of the historic road system are likely the same as (or adjacent to) the present alignments of SR-18 and other roads around Dammeron and Diamond valleys, and Old Highway 91 near the Shivwits Reservation (DNR 2021).

Land Patent Records

Historic land patent records within the project area were also reviewed and accessed through the BLM website on May 3, 2021 (BLM 2021b). These historic resources indicate 14 land patents near the project area with dates ranging from 1892 to 1983. Twelve of these land patents are for parcels located within the project APE: Willard E. Alger (11/12/1913), Samuel L. Carter (6/12/1922), William Carter (7/10/1918 and 6/02/1924), David Chidester (6/22/1899), James F. Cottam (2/14/1922), Esaias Edwards (6/21/1892), Myrza A. Miles (1/24/1921), Utah State (7/16/1894, 7/24/1902, 6/15/1965, 1/10/1966, and 9/30/1983), George W. Higgins (5/16/1896), and Walker Bank and Trust Co. (10/23/1956) (BLM 2021b).

Grazing Allotment Records

Historic grazing allotment records within the project area were also reviewed and accessed through the BLM National Data website on May 3, 2021. This resource indicated two active grazing allotments in or near the project area. One of these allotments, the Veyo Allotment (#14055), encompasses the eastern half and southern portion of the project APE within Dammeron Valley; the Sand Wash Allotment (#04136) borders the southern portion of the project APE within Dammeron Valley, and the Diamond Vall Allotment (#04075) crosses the southeastern portion of the project APE in Diamond Valley.

There are no grazing allotments on the Shivwits tribal lands; however, the reservation is bordered to the north by the Gunlock Allotment (#14025), the northwest by the Jackson Wash Allotment (#14030), the southwest by the Beaver Dam Slope Allotment (#14004), to the south by the Castle Cliffs Allotment (#14076) and the Curly Hollow Allotment (#14015), and to the southeast and east by the Santa Clara Creek Allotment (#14047) and the Santa Clara Creek Custodial Allotment (#04071). There are no dates associated with this data to indicate if these are historic allotments (BLM 2021e).

Water Rights Records

Historic water rights records within the project area were reviewed and accessed through the UDWR records website on May 3, 2021. These historic resources indicate that there are 24 historic water rights within 0.5 mile of the project APE, including surface and underground water sources originating from Whitaker Well, Alger Canyon Springs, Leo Canyon Springs, Wide Canyon Stream, the Santa Clara River, and various unnamed springs and underground wells. None of these are directly within the project APE (UDWR 2021).

Summary and Expectations

Based on the results of the record search, it was anticipated that three previous sites may be located within or immediately adjacent to the project APE in the new survey area; however, it was understood that one of the previously recorded sites (42WS4823) is located near a growing rural community and, as a result, may not be relocated in the project APE.

13. Description of Field Methods:

The survey was conducted in 15-meter-wide transects (blocks in Dammeron, Diamond, and Shem valleys) throughout the entire project APE. This resulted in a total of approximately 587.82 acres evaluated for cultural resources. No portion of the project APE was left unsurveyed due to prior survey efforts; however, some portions of the new survey area in the project APE were surveyed to Class II (reconnaissance) only as they are located on private property in disturbed residential neighborhoods (**Table 1, Total Survey Area**).

Isolated occurrence (IO) locations were documented during the survey. Previously identified cultural resource sites identified during the survey had locations noted, revisited, and recorded/updated after the survey was conducted for a more thorough review and to update site documentation, as necessary. These sites and IOs are discussed below in **Table 2, Total Sites Recorded**, and **Table 3, Newly Identified Isolated Occurrences within the Project APE**. The *Cultural Resource Fieldwork Guidelines and Standards BLM Supplement H-8110—Utah—February 2021* and the *Utah State Historic Preservation Office & Antiquities Section Archaeological Compliance Guidance—June 2020* were adhered to at all times during fieldwork (BLM 2021f; UDSH 2021c).

14. Area Surveyed:

Table 1, below, indicates the total acreage per landowner surveyed to Class II and III standards within the entire project area.

TABLE 1 TOTAL SURVEY ACREAGE							
Project Area	Phase	Survey Type	BLM	SITLA	Private	Tribal	TOTAL
Dammeron Valley	Phase I	Class III	144.47	24.08	45.39	0.00	213.94
	Phase II	Class II	0.00	0.00	23.98	0.00	23.98
		Class III	69.61	15.24	14.45	0.00	99.30
Diamond Valley	Phase I	Class III	12.72	7.88	61.84	0.00	82.44
	Phase II	Class II	0.00	0.00	57.89	0.00	57.89
		Class III	19.17	10.53	17.39	0.00	47.10
Shivwits	Phase I	Class II	0.00	0.00	0.00	0.00	0.00
	Phase II	Class III	0.00	0.00	0.00	63.17	63.17
Combined Project Area	Phase I	Class III	157.19	31.96	107.23	0.00	296.38
	Phase II	Class II	0.00	0.00	81.87	0.00	81.87
		Class III	88.78	25.78	31.84	63.17	209.57
TOTAL PROJECT SURVEY ACREAGE			245.97	57.74	220.94	63.17	587.82

15. Sites Recorded:

Four previously recorded sites mapped within the project APE were relocated and evaluated during the Class III inventory during Phase I of the Project (42WS2428, 42WS5150, 42WS5151, and 42WS5152); 9 sites (including sites that were previously redocumented for Phase I, sites 42WS2428 and 42WS5150, previously recorded sites 42WS4692, 42WS4823 and 42WS5154, and 4 newly recorded sites, 42WS6520, 42WS6521, 42WS6522, and 42WS6523) are located in the new Phase II survey area (**Table 2**). Updated and new Utah Archaeology Site Forms have been prepared for sites 42WS4692, 42WS4823, 42WS5154, 42WS6520, 42WS6521, 42WS6522, and 42WS6523.

TABLE 2 TOTAL SITES RECORDED*										
		BLM		STATE		PRIVATE		TRIBAL		TOTAL
		#	Site No.	#	Site No.	#	Site No.	#	Site No.	
	Eligible	1	42WS2428*	0		0		0		1

TABLE 2 TOTAL SITES RECORDED*										
		BLM		STATE		PRIVATE		TRIBAL		TOTAL
		#	Site No.	#	Site No.	#	Site No.	#	Site No.	
Revisits Updated	Not Eligible	0		3	42WS5150* 42WS4823 42WS5154	2	42WS5151* 42WS5152*	1	42WS4692	6
Revisits Not Updated	Eligible	0		0		0		0		0
	Not Eligible	0		0		0		0		0
Newly Recorded	Eligible	0		0		0		4	42WS6520, 42WS6521, 42WS6522, 42WS6523	4
	Not Eligible	0		0		0		0		
TOTAL		1		3		2		5		11

*Note: site 42WS2428 is located within the jurisdiction indicated as well as on SITLA-managed land and private property; also, sites 42WS2428, 42WS5150, 42WS5151 and 42WS5152 are located in Phase I and were reported separately (see U21TN0316).

16. Individual Site Descriptions and Determinations of Eligibility and Effect:

Transcon reported separately on four previously recorded sites during the Class III inventory during Phase I (sites 42WS2428, 42WS5150, 42WS5151, and 42WS5152). One of these sites (42WS2428) is recommended to be Eligible for listing on the National Register of Historic Places (NRHP) under Criterion A for its association with significant regional events. Three sites (42WS5150, 42WS5151, 42WS5152) are recommended Not Eligible for NRHP listing under any Criteria. Additionally, Transcon recommends that site 42WS5152 is no longer an archaeological site as it has been destroyed by the construction of Homestead Drive. Transcon has prepared updated site forms for all four sites reflecting the 2021 revisit (see U21TN0316 - *Cultural Resources Inventory Report, NRCS's Santa Clara Watershed Plan-EA Project—Phase I: Borehole and Test Pit Locations, Washington County, Utah*).

Additionally, three previously recorded sites (42WS4692, 42WS4823, and 42WS5154) were relocated and redocumented during new Class III survey, and four new sites were recorded on Shivwits tribal lands (42WS6520, 42WS6521, 42WS6522, and 45WS6523). Sites 42WS6520, 42WS6521, 42WS6522, and 45WS6523 are all recommended to be Eligible for listing on the NRHP under Criterion A for their association with significant regional events and Criterion D for information potential; additionally, sites 42WS6520, 42WS6521, and 42WS6523 are also recommended to be Eligible for listing on the NRHP under Criterion C as they embody the distinctive characteristics of a type, period, and method of construction in the region. The three previously recorded sites (42WS4692, 42WS4823, and 42WS5154) are recommended Not Eligible for NRHP listing under any Criteria (**Appendix C, Cultural Resource Sites Within the Project APE**).

17. Isolated Occurrences:

Three IOs were identified and recorded within the project APE during the Class III inventory in Phase I (**Appendix A, Project Results Maps**). These IOs were reported separately in Phase I of the Project (U21TN0316). Two additional IOs (IO-04 and IO-05) were identified and recorded during the new survey (**Table 3, Newly Identified Isolated Occurrences Within the Project APE**, and shown in **Figures 1–2**, below). IO-05 consists of a single petroglyph panel and was not considered a site as it has been moved from its original context by road construction/maintenance. None of these IOs are recommended Eligible for listing on the NRHP under any Criteria.

Table 3 NEWLY IDENTIFIED ISOLATED OCCURRENCES WITHIN THE PROJECT APE*						
IO No.	Temporal Affiliation	Description	UTM—E	UTM—N	Figure	Map Panel
IO-01	Prehistoric	Four quartzite flakes			N/A	1

Table 3 NEWLY IDENTIFIED ISOLATED OCCURRENCES WITHIN THE PROJECT APE*						
IO No.	Temporal Affiliation	Description	UTM—E	UTM—N	Figure	Map Panel
IO-02	Historic	Water diversion valve			N/A	2
IO-03	Historic	Culvert			N/A	2
IO-04	Historic	Irrigation pipe			1	3
IO-05	Prehistoric	Petroglyph panel			2	3
*Note: UTM coordinates are provided in NAD'83 Zone 12; "UTM—E" represents the Easting and "UTM—N" represents the Northing. IO-01 – IO-03 were previously reported in U21TN0316, Phase I of the Project.						

18. Summary of Findings:

As a result of the Class II and Class III inventory, it was determined that a total of seven previously identified cultural resource sites are located within or crossed by the project APE (42WS2428, 42WS4692, 42WS4823, 42WS5150, 42WS5151, 42WS5152, 42WS5154). Four of these sites were recently reported separately under Phase I of the project and were not updated as part of this report (see U21TN0316). Updated Utah Archaeology Site Forms have been prepared for three previously recorded sites identified within the project APE during new survey (42WS4692, 42WS4823, and 42WS5154); additionally, Transcon identified four new cultural resource sites as a result of this survey (42WS6520, 42WS6521, 42WS6522, and 42WS6523). Also, a total of three IOs were identified and recorded within the APE during Phase I of the Project (IO-01, IO-02, and IO-03); these IOs were reported separately, and two additional IOs (IO-04 and IO-05) were identified as a result of new survey. Modern debris was also noted but not recorded at various places within the project area, as it appears to have originated from modern recreational visitation.

Survey conditions were good, consisting of sunny to cloudy or partially cloudy skies and hot temperatures. For most of the survey, ground visibility was good to excellent, ranging between 60 and 80 percent or greater (**Figures 3 and 4**). Of the seven cultural resource sites identified within the Project APE during new survey (four sites were reported separately in Phase I of the project; 42WS2428, 42WS5150, 42WS5151, and 42WS5152) four newly recorded sites are recommended Eligible for listing on the NRHP under Criteria A and D (42WS6520, 42WS6521, 42WS6522, and 42WS6523), and three sites are also recommended Eligible under Criterion C (42WS6520, 42WS6521, and 42WS6523); the remaining previously recorded three sites (42WS4692, 42WS4823, and 42WS5154 and all five IOs (three previously reported and two newly identified) are recommended Not Eligible for the NRHP under any Criteria.

19. Collection Yes ☐ No ☒

(If Yes) Curation Facility: N/A

Accession Number(s): N/A

20. Conclusion/Recommendation of Effect:

Transcon archaeologists conducted a Class II and III cultural resources inventory of 587.82 acres of BLM St. George Field Office-managed, SITLA-managed, privately owned, and Tribal lands in Dammeron, Diamond, and Shem valleys in Washington County, Utah. This investigation was requested by Alpha Engineering Company in support of an NRCS project to determine if any significant cultural resources which could be affected by the proposed undertaking were present within the project area.

As a result of the survey, it was determined that a total of 11 cultural resource sites are located within the project APE (see **Appendix C, Cultural Resource Sites Within the Project APE**, for details). Of these 11 sites, four sites were recently reported separately under Phase I of the Project and were not updated as part of this report (42WS2428, 42WS5150, 42WS5151, 42WS5154 [see U21TN0316]). Site (42WS2428) is recommended Eligible for listing on the NRHP under Criterion A for its association with significant historic events, and three sites (42WS5150, 42WS5151, and 42WS5152) are recommended Not Eligible for the NRHP under any Criteria. Additionally, 42WS5151 is recommended to no longer be considered an archaeological site, as it has been destroyed by the construction of Homestead Drive and a residential property.

Also, three previously recorded sites were identified within the project APE during new survey (42WS4692, 42WS4823, and 42WS5154), and four new cultural resource sites as a result of this survey (42WS6520, 42WS6521, 42WS6522, and 42WS6523). Sites 42WS6520, 42WS6521, 42WS6522, and 42WS6523 are all recommended to be Eligible for listing on the NRHP under Criterion A for their association with significant regional events and Criterion D for information potential;

additionally, sites 42WS6520, 42WS6521, and 42WS6523 are also recommended to be Eligible for listing on the NRHP under Criterion C as they embody the distinctive characteristics of a type, period, and method of construction in the region. The three previously recorded sites (42WS4692, 42WS4823, and 42WS5154), and all five IOs (three previously reported [IO-01 – IO-03] and two newly identified [IO-04 and IO-05]) are recommended Not Eligible for NRHP listing under any Criteria (**Appendix C, Cultural Resource Sites Within the Project APE**).

Transcon recommends that the project will result in *No Adverse Effects to Historic Properties*. At one Eligible site location within the project APE (42WS2428), the alignment of the historic road has been heavily disturbed/destroyed and almost entirely reclaimed by vegetation in one crossing; it has lost all historic format in another crossing, and all elements of the segment are non-contributing to the overall eligibility of the site within the Project APE.

For all Eligible sites in the Shivwits area of the project, a pre-construction meeting should be held, an inadvertent discovery plan should be prepared, and an archaeological and Tribal monitor should be present for all ground disturbance within 15 meters of each site boundary. Additionally, at the two Eligible historic ditch sites on the Shivwits Reservation (42WS6520 and 42WS6523) the ditch should be flagged during construction (**Table 4, Project Summary and Conclusions**). Extensive ground disturbance is anticipated to occur within the Shivwits area of the project. **Table 5, Santa Clara Watershed Plan-EA Project Preliminary Cultural Effects Recommendations (Shivwits)** details these anticipated disturbances in relation to the documented cultural sites in that area.

TABLE 4 PROJECT SUMMARY AND CONCLUSIONS					
Site No.	Temporal Affiliation	Site Description	Eligibility	Effects	Proposed Construction Elements Within the Site Boundary
42WS2428	Historic	Historic road (<i>Road from St. George to Pine Valley</i>)	Eligible—A, non-contributing	<i>No Adverse Effect</i>	None; non-contributing segment
42WS4692	Historic	Historic pipeline and suspension bridge	Not Eligible	No effect	N/A
42WS4823	Prehistoric	Prehistoric lithic scatter	Not Eligible	No effect	N/A
42WS5150	Prehistoric	Prehistoric lithic scatter	Not Eligible	No effect	N/A
42WS5151	Prehistoric	Prehistoric lithic scatter	Not Eligible	No effect	N/A
42WS5152	Prehistoric	Prehistoric artifact scatter	Not Eligible	No effect	N/A
42WS5154	Prehistoric	Prehistoric lithic scatter	Not Eligible	No effect	N/A
42WS6520	Historic	Historic irrigation ditch	Eligible—A, C, D	<i>No Adverse Effect</i>	All ground disturbance activities should take place at least 15 meters away from the site boundary; the ditch should be flagged, and an archaeological and Tribal monitor should be present during all ground disturbance activities.
42WS6521	Multi-component	Multi-component prehistoric artifact scatter and historic schoolhouse/habitation complex	Eligible—A, C, D	<i>No Adverse Effect</i>	All ground disturbance activities should take place at least 15 meters away from the site boundary; an archaeological and Tribal monitor should be present during all ground disturbance activities.
42WS6522	Multi-component	Multi-component prehistoric and historic artifact scatter	Eligible—A, D	<i>No Adverse Effect</i>	All ground disturbance activities should take place at least 15 meters away from the site boundary; an archaeological and Tribal monitor should be present

TABLE 4 PROJECT SUMMARY AND CONCLUSIONS					
Site No.	Temporal Affiliation	Site Description	Eligibility	Effects	Proposed Construction Elements Within the Site Boundary
					during all ground disturbance activities.
42WS6523	Historic	Historic flood control ditch	Eligible—A, C, D	<i>No Adverse Effect</i>	All ground disturbance activities should take place at least 15 meters away from the site boundary; the ditch should be flagged, and an archaeological and Tribal monitor should be present during all ground disturbance activities.

If any previously undetected or unreported cultural features or deposits are encountered during future project-related activities, these activities must be discontinued in the immediate area of the feature(s), and an NRCS archaeologist (or BLM, SITLA, or UDOT archaeologist, where appropriate) must be consulted to evaluate their nature and significance. Procedures for post-review discoveries, as outlined in the NRCS 2015 Prototype Programmatic Agreement with the Utah SHPO, shall be followed.

TABLE 5 SANTA CLARA WATERSHED PLAN-EA PROJECT CULTURAL EFFECTS RECOMMENDATIONS (SHIVWITS AREA)							
Site No.	Site Type	Eligibility	Design	Impacts	Status	Effects	Mitigation*
42WS6520	Historic canal	Eligible - A, C, D	Pipeline	Crosses NW edge of site, within area of existing disturbance	Non-Contributing	No Adverse Effect	Archaeological and Tribal monitor present during construction, a pre-construction meeting, and an inadvertent discovery plan prior to construction.
				Enters site boundary at one other location	Contributing	No Adverse Effect	
42WS6521	Multi-component habitation complex	Eligible A, C, D	Pipeline	Crosses W edge of site, with nearby features	Contributing	No Adverse Effect	Archaeological and Tribal monitor present during construction, a pre-construction meeting, and an inadvertent discovery plan prior to construction.
			Ditch Rip Rap	Within N edge of site in area of prior disturbance (erosion); will repair eroded channel without impacting intact masonry	Non-Contributing	No Adverse Effect	
42WS6522	Multi-component artifact scatter	Eligible - A, D	Pipeline	Crosses S edge of site within area of existing disturbance	Non-Contributing	No Adverse Effect	Archaeological and Tribal monitor present during construction, a pre-construction meeting, and an inadvertent
			Bank Rip Rap	Crosses N edge of site, within area of no	Contributing	No Adverse Effect	

TABLE 5
SANTA CLARA WATERSHED PLAN-EA PROJECT
CULTURAL EFFECTS RECOMMENDATIONS (SHIVWITS AREA)

Site No.	Site Type	Eligibility	Design	Impacts	Status	Effects	Mitigation*
				surface observations			discovery plan prior to construction.
42WS6523	Historic flood control ditch	Eligible - A, C, D	Pipeline	Crosses at S end of site, within area of prior disturbance (erosion and existing pipeline crossing); new pipe will be placed within existing pipeline	Non-Contributing	No Adverse Effect	Archaeological and Tribal monitor present during construction, a pre-construction meeting, and an inadvertent discovery plan prior to construction.
			Ditch Rip Rap	Within center of site, within area of prior disturbance (erosion); will repair eroded channel without impacting intact masonry	Non-Contributing	No Adverse Effect	
N/A	N/A	N/A	Land Leveling	No sites within the proposed land leveling area (previously disturbed area)	N/A	N/A	N/A
*Note: both a cultural and Tribal monitor are recommended to be present for all ground disturbing activities within the Shivwits area of the project.							

REFERENCES:

Bureau of Land Management (BLM) 2021a “Cadastral Surveys and Plats” Land Records, Bureau of Land Management, Utah. Accessed May 3, 2021, at https://www.ut.blm.gov/LandRecords/search_plats.cfm.

_____. 2021b “Land Patent Records” Land Records, Bureau of Land Management, Utah. Accessed May 3, 2021, at <https://glorerecords.blm.gov/search/default.aspx>.

_____. 2021c “Mineral Survey Records” Land Records, Bureau of Land Management, Utah. Accessed May 3, 2021, at https://www.ut.blm.gov/LandRecords/special_surveys.cfm#special_results.

_____. 2021d “Master Title Plat Maps” Land Records, Bureau of Land Management, Utah. Accessed May 3, 2021, at <https://glorerecords.blm.gov/search/default.aspx>.

_____. 2021e “Grazing Allotments” National Data, Bureau of Land Management, Utah. Accessed May 3, 2021, at <https://blm-egis.maps.arcgis.com/apps/webappviewer/index.html?id=6f0da4c7931440a8a80bfe20eddd7550>.

_____. 2021f Cultural Resource Fieldwork Guidelines and Standards BLM Supplement H-8110—Utah. Accessed May 3, 2021, at https://www.blm.gov/sites/blm.gov/files/docs/2021-02/H8110_Fieldwork%20Guidelines%20and%20Standards508.pdf

Library of Congress. 2021. “Sanborn Fire Insurance Maps” Sanborn Maps Collection, Library of Congress. Accessed May 3, 2021, at <https://www.loc.gov/collections/sanborn-maps/index/location/?q=Utah>.

United States Geological Survey (USGS) 2021a Veyo 7.5-Minute topographic map. Accessed May 3, 2021, at <https://ngmdb.usgs.gov/topoview/viewer/#13/37.2971/-113.6607>.

_____. 2021b Saddle Mountain 7.5-Minute topographic map. Accessed May 3, 2021, at <https://ngmdb.usgs.gov/topoview/viewer/#13/37.2642/-113.6794>.

_____. 2021c Washington 7.5-Minute topographic map. Accessed May 3, 2021, at <https://ngmdb.usgs.gov/topoview/viewer/#13/37.2143/-113.6133>.

_____. 2021d Shivwits 7.5-Minute topographic map. Accessed May 3, 2021, at <https://ngmdb.usgs.gov/topoview/viewer/#10/37.1039/-114.0662>.

Utah Division of Natural Resources (DNR) 2021 UGS Aerial Imagery Collection. Accessed on May 3, 2021, at <https://geodata.geology.utah.gov/imagery/>.

Utah Division of State History (UDSH) 2021a Sego. Utah Department of Heritage and Arts, Utah Division of State History. Accessed May 3, 2021, at <https://shpo.utah.gov/portal/apps/webappviewer/index.html?id=8d1c8337d050431080f7dce538f7677c>.

_____. 2021b Historic Contexts. Utah Department of Heritage and Arts, Utah Division of State History. Accessed May 3, 2021, at <https://drive.google.com/drive/u/0/folders/1f29mMHZF5NZuuz8ar8WkHEMu0oKDiW6R>.

_____. 2021c Archaeological Compliance Guidance. Utah State Historic Preservation Office & Antiquities Section. Accessed May 3, 2021, at https://drive.google.com/file/d/1_e2QLxR2pLUBns2l2GyDbomzJeWTH_Wu/view.

Utah Division of Water Resources (UDWR) 2021 “Water Right Areas” Utah Division of Water Rights Database. Accessed May 3, 2021, at <https://maps.waterrights.utah.gov/EsriMap/map.asp>.

*Include the appropriate amount of 1:24,000 scale topographic maps, which clearly identify the APE, area of Class II or III survey area, sites, and isolated finds.

**Include at least one landscape photograph of the area surveyed.

8100-3 Form



Figure 3. Overview showing site 42WS6521 multi-component historic schoolhouse, habitation complex, and prehistoric artifact scatter in Shem Valley on Paiute (Shivwits) land. View to the west.



Figure 4. Overview showing a portion of site 42WS6523 historic flood control ditch in Shem Valley on Paiute (Shivwits) land. View to the northeast.

APPENDIX A

PROJECT RESULTS MAPS

APPENDIX B

RESULTS OF LITERATURE REVIEW

**TABLE B—1
PREVIOUS CULTURAL SURVEYS WITHIN 0.5 MILE OF THE PROJECT AREA**

Survey No.	Survey Name	Organization	Date	In/Out*	Project Area**	Phase***
U82BL0146	Pipeline Right-of-Way (ROW)	Bureau of Land Management (BLM)	1982	Out	Study Area	N/A
U82BL0151	Buhler Power and Pipeline	BLM	1982	Out	Study Area	N/A
U86BC0383	An Archaeological Inventory of the Proposed Red Butte to Middleton 138 kV Power Line in Washington County, Utah	Brigham Young University	1986	Out	Study Area	N/A
U86BL0560	Road ROW Vicinity of Dammeron Valley	BLM	1986	Out	Study Area	N/A
U86NP0409	A Cultural Resource Inventory of the Dammeron Valley Powerline Extension, Washington County, Utah	A.K. Nielson Associates	1986	In	Dammeron Valley	Phase I, Phase II
U89PD0087	Cultural Resource Inventory of SR-18, Snow Canyon to Veyo, From Milepost 12.67 to Milepost 19.8, Washington County, Utah	P-III Associates, Inc. (P-III)	1989	In	Dammeron Valley	Phase I, Phase II
U91NP0299	An Archaeological Inventory of the Proposed UAMPS Central Substation to St. George Substation Access, Equipment Stations and Wire Set-up Locations, Washington County, Utah	A.K. Nielson Associates	1991	Out	Study Area	N/A
U92NP0658	UP&L Dammeron Valley Distribution	A.K. Nielson Associates	1992	In	Dammeron Valley	Phase I, Phase II
U93NP0713	UP&L Dammeron Valley Distribution	A.K. Nielson Associates	1993	Out	Study Area	N/A
U94BL0491	Diamond Valley Fence	BLM	1994	In	Dammeron Valley	Phase I, Phase II
U95BL0756	Chuck Buhler Road	BLM	1995	Out	Study Area	N/A
U95IG0312	An Archaeological Survey of the Diamond Valley Gravel Pit, Washington County, Utah	Intersearch, Inc.	1995	Out	Study Area	N/A
U96JB0202	A Cultural Resource Inventory of the Dammeron Valley - Sand Cove Utah Power Replacement Powerline near Veyo, Utah	JBR Environmental Consultants, Inc.	1996	Out	Study Area	N/A
U97BL0553	Gunlock to Ivins Pipeline	BLM	1997	In	Shivwits	Phase II
U01EP0270	A Cultural Resource Inventory of 4 Segments of 69kV Power Lines from Dammeron to Ivins, Washington County, Utah	EarthTouch LLC	2001	Out	Study Area	N/A
U02BL0312	Diamond Valley Exchange	BLM	2002	Out	Study Area	N/A

TABLE B—1
PREVIOUS CULTURAL SURVEYS WITHIN 0.5 MILE OF THE PROJECT AREA

Survey No.	Survey Name	Organization	Date	In/Out*	Project Area**	Phase***
U03BL0609	Diamond Valley - Red Cliffs Reserve Trailhead Parking	BLM	2003	Out	Study Area	N/A
U04BS0282	A Cultural Resources Inventory of the Proposed Red Butte to St. George Transmission Line Upgrade in Washington County, Utah	Baseline Data, Inc.	2004	Out	Study Area	N/A
U05IG0648	An Archaeological Survey of the Proposed Shivwits Band of Paiute Indians Tamarisk Removal Project Area, in Washington County, Utah	Intersearch, Inc.	2005	In	Shivwits	Phase II
U05MQ0506	Cultural Resource Inventory for the Santa Clara River Bridge (Structure 053006D) on Shivwits Tribal Land, Washington County, Utah	Montgomery Archaeological Consultants	2005	In	Shivwits	Phase II
U06HQ0775	An Archaeological Survey of Three Fire Break Lines in Dammeron Valley, Washington County, Utah	HRA, Inc.	2006	In	Dammeron Valley	Phase I, Phase II
U06MX0031	An Archaeological Inventory of the Canyon Trails Easement, Dammeron Valley, Phase 2	McFadden Archaeological Consulting	2006	Out	Study Area	N/A
U08ES0816	Cultural Resources Inventory of the Dammeron and Central Fuels Project Areas North of St. George, Washington County, Utah	EnviroSystems Management, Inc.	2008	In	Dammeron Valley	Phase I, Phase II
U08HO0786	Results of Testing & Data Recovery for the Red Butte to St. George Transmission Line Upgrade, Washington County, Utah	Bighorn Archaeological Consultants, LLC (Bighorn)	2008	Out	Study Area	N/A
U08HQ1022	An Archaeological Survey of Approximately 560 Acres in Three Parcels within the Dammeron Valley, Washington County, Utah	HRA, Inc.	2008	In	Dammeron Valley	Phase I, Phase II
U09HO0364	A Cultural Resource Inventory of the Red Butte to St. George Transmission Line Upgrade Access Roads, Washington County, Utah	Bighorn	2009	Out	Study Area	N/A
U10IG0862	Tower Engineering - Dammeron Valley Tower Site Survey	Intersearch, Inc.	2010	Out	Study Area	N/A
U10LI0939	St. George Travel Management Plan	Logan Simpson	2010	In	Dammeron Valley	Phase I, Phase II
U10ST0248	Utah Education Network Btop Surveys	SWCA	2010	In	Diamond Valley	Phase I, Phase II

**TABLE B—1
PREVIOUS CULTURAL SURVEYS WITHIN 0.5 MILE OF THE PROJECT AREA**

Survey No.	Survey Name	Organization	Date	In/Out*	Project Area**	Phase***
U11BL0843	Diamond Valley ESR CRI	BLM	2011	Out	Study Area	N/A
U13SH0355	Cultural Resources Inventory of the Shem Dam Rehabilitation Emergency Watershed Protection (EWP) Project, Washington County, Utah	USDA NRCS	2013	Out	Study Area	N/A
U13SH0832	Cultural Resources Inventory of the Motoqua Cutoff Road Emergency Watershed Protection (EWP) Project, Washington County, Utah	NRCS	2013	Out	Study Area	N/A
U16HQ0389	Data Recovery at Four Prehistoric Sites in the Dammeron Valley Residential Development, Washington County, Utah	HRA, Inc.	2016	Out	Study Area	N/A
U16HO0417	A Cultural Resource Inventory of the Old Highway 91 Milepost 0.00 to 16.50 Safety Improvements Project, Washington County, Utah	Bighorn	2016	In	Shivwits	Phase II
U17BL0939	Lava Ridge Trailhead Improvement	BLM	2017	Out	Study Area	N/A
U17SH0627	Cultural Resources Inventory in Support of an Environmental Quality Incentives Program (EQIP) Brush Management Project on Shivwits Band of Paiutes Land, Washington County, Utah	NRCS	2017	Out	Study Area	N/A
U17UT0379	SR-18; Diamond Valley Intersection Improvements Cultural Resources Survey	UDOT	2017	Out	Study Area	N/A
U19TN0509	Cultural Resources Inventory Report, Lloyd Graff LTD's Graff Road Project, Washington County, Utah	Transcon Environmental, Inc. (Transcon)	2019	Out	Study Area	N/A
U20TN0970	Cultural Resources Inventory Report, Dominion Energy Utah's Utah Feeder Line 135 Replacement Project, Washington County, Utah (in progress)	Transcon	2021	In	Dammeron Valley	N/A

*Note: "In" is a project crossing or overlapping some portion of the APE (also blue text); "Out" is a project mapped outside the APE.

**Note: There are three project areas: Dammeron Valley, Diamond Valley, and Shivwits; anything within the 0.5-mile study area but outside the three APE project areas is referenced as "Study Area."

***Note: There are two project phases: Phase I: Borehole and Test Pit Locations and Phase II: Entire Project.

TABLE B—2
PREVIOUSLY IDENTIFIED CULTURAL RESOURCE SITES
WITHIN 0.5 MILE OF THE PROJECT AREA

Site No.	Description	Eligibility	In/Out*	Project Area **	Phase ***
42WS0531	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0532	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0533	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0534	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0535	Prehistoric campsite	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0536	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0537	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0538	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0539	Prehistoric campsite	<i>Unevaluated</i>	Out	Study Area	N/A
42WS0540	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS0541	Prehistoric campsite	Determined Eligible	Out	Study Area	N/A
42WS0544	Prehistoric lithic scatter	<i>Unevaluated</i>	Out	Study Area	N/A
42WS1553	Prehistoric lithic scatter and rock alignment	Determined Not Eligible	Out	Study Area	N/A
42WS1554	Prehistoric lithic scatter with fossil exposure	Determined Eligible	Out	Study Area	N/A
42WS1555	Prehistoric lithic scatter and rock alignment	Determined Not Eligible	Out	Study Area	N/A
42WS1556	Historic isolated structures	Determined Not Eligible	Out	Study Area	N/A
42WS2203	Prehistoric campsite	Determined Eligible	Out	Study Area	N/A
42WS2204	Prehistoric artifact scatter	Determined Eligible	Out	Study Area	N/A
42WS2205	Prehistoric campsite	Recommended Eligible	Out	Study Area	N/A
42WS2206	Prehistoric campsite	Recommended Eligible	Out	Study Area	N/A
42WS2425	Prehistoric lithic scatter	Recommended Not Eligible	Out	Study Area	N/A
42WS2428	Historic road	Recommended Eligible	In	Diamond Valley	Phase I, Phase II
42WS2761	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A

TABLE B—2
PREVIOUSLY IDENTIFIED CULTURAL RESOURCE SITES
WITHIN 0.5 MILE OF THE PROJECT AREA

Site No.	Description	Eligibility	In/Out*	Project Area **	Phase ***
42WS2762	Prehistoric lithic scatter and rock alignment	Determined Eligible	Out	Study Area	N/A
42WS2763	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS3124	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS3125	Prehistoric campsite	Determined Eligible	Out	Study Area	N/A
42WS3534	Multi-component: Prehistoric rock art; historic signatures	Determined Eligible	Out	Study Area	N/A
42WS3535	Prehistoric petroglyph	Determined Eligible	Out	Study Area	N/A
42WS3536	Prehistoric petroglyph	Determined Eligible	Out	Study Area	N/A
42WS3540	Prehistoric roomblocks and artifact scatter	Determined Eligible	Out	Study Area	N/A
42WS3709	Historic road (<i>Old US-91, Arrowhead Trail/Highway</i>)	Determined Eligible	Out	Study Area	N/A
42WS4143	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS4174	Prehistoric campsite	Recommended Eligible	Out	Study Area	N/A
42WS4175	Prehistoric campsite	Recommended Eligible	Out	Study Area	N/A
42WS4311	Prehistoric Paiute campsite	Determined Eligible	Out	Study Area	N/A
42WS4409	Historic wagon road (<i>Old Spanish Trail, Road to California, Mormon Road</i>)	Determined Eligible	Out	Study Area	N/A
42WS4692	Historic pipeline and suspension bridge	Recommended Not Eligible	In	Shivwits	Phase II
42WS4693	Historic rock piers	Determined Eligible	Out	Study Area	N/A
42WS4694	Prehistoric rock art	Recommended Eligible	Out	Study Area	N/A
42WS4695	Multi-component: Prehistoric rock art and historic walls	Recommended Eligible	Out	Study Area	N/A
42WS4715	Prehistoric habitation	Determined Eligible	Out	Study Area	N/A
42WS4716	Historic road	Recommended Eligible	Out	Study Area	N/A
42WS4717	Historic cistern	Recommended Eligible	Out	Study Area	N/A

TABLE B—2
PREVIOUSLY IDENTIFIED CULTURAL RESOURCE SITES
WITHIN 0.5 MILE OF THE PROJECT AREA

Site No.	Description	Eligibility	In/Out*	Project Area **	Phase ***
42WS4822	Prehistoric lithic scatter	Determined Eligible	Out	Study Area	N/A
42WS4823	Prehistoric lithic scatter	Determined Not Eligible	In	Shivwits	Phase II
42WS4824	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5126	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5127	Prehistoric lithic scatter	Recommended Eligible	Out	Study Area	N/A
42WS5128	Prehistoric lithic scatter	Determined Eligible	Out	Study Area	N/A
42WS5145	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5146	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5147	Prehistoric artifact scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5149	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5150	Prehistoric lithic scatter	Determined Not Eligible	In	Dammeron Valley	Phase I, Phase II
42WS5151	Prehistoric lithic scatter	Determined Not Eligible	In	Dammeron Valley	Phase I
42WS5152	Prehistoric artifact scatter	Determined Not Eligible	In	Dammeron Valley	Phase I
42WS5153	Prehistoric lithic scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5154	Prehistoric lithic scatter	Determined Not Eligible	In	Dammeron Valley	Phase II
42WS5155	Historic artifact scatter	Determined Not Eligible	Out	Study Area	N/A
42WS5269	Prehistoric campsite	Recommended Eligible	Out	Study Area	N/A
42WS5525	Multi-component: Prehistoric and historic artifact scatter with features	Determined Not Eligible	Out	Study Area	N/A
42WS5526	Multi-component: Prehistoric and historic artifact scatter with features	Determined Eligible	Out	Study Area	N/A
42WS5715	Prehistoric campsite	Recommended Eligible	Out	Study Area	N/A
42WS5931	Historic dam (<i>Shem or Winsor Dam</i>)	Determined Eligible	Out	Study Area	N/A
*Note: "In" is a site mapped within or crossed by some portion of the APE (also blue text); "Out" is a site mapped outside the APE.					

**TABLE B—2
PREVIOUSLY IDENTIFIED CULTURAL RESOURCE SITES
WITHIN 0.5 MILE OF THE PROJECT AREA**

Site No.	Description	Eligibility	In/Out*	Project Area **	Phase ***
Note: There are three project areas: Dammeron Valley, Diamond Valley, and Shivwits; anything within the 0.5-mile study area but outside the three APE project areas is referenced as “Study Area.” *Note: There are two project phases: Phase I: Borehole and Test Pit Locations and Phase II: Entire Project.					

**TABLE B—3
HISTORIC GENERAL LAND OFFICE MAPS**

Date	Township	Range	Historic Features near the Project Area	Project Area*
1877	40 South	16 West	Roads (<i>To Pine Valley, Old Road</i> , and unnamed)	Dammeron Valley
1877	40 South	16 West	Roads (unnamed), reservoir, cultivated fields, and structures (<i>John Alger, Geo. Edwards</i> , and <i>Old Cabin</i>)	Diamond Valley
1877	41 South	16 West	Roads (<i>Wood Road, St. George and Pine Valley Road, Wood Roads</i> , and unnamed), transmission line (<i>Telegraph Line</i>), cultivated field, fence, and ditch	Diamond Valley
1912	41 South	17 West	Roads (<i>Road from Shem to St. George, Road from Apex Mine to Shem, unnamed</i>) structures (<i>Shem [abandoned], Office, Smelter Stack, House, Mission, Church, House No. 1, House No. 2, Indian Jail, Indian Agent's House, Indian School</i> , unnamed), graveyard (<i>Indian Graveyard</i>), transmission line (<i>Telephone Line Acoma/St. George</i>), fences, cultivated fields, stable	Shivwits
*Note: There are three project areas: Dammeron Valley, Diamond Valley, and Shivwits.				

APPENDIX C

CULTURAL RESOURCE SITES WITHIN THE PROJECT APE

TABLE C-1 CULTURAL RESOURCE SITES WITHIN THE PROJECT APE						
Site Number	Site Name	Land Owner	Site Description	Eligibility Recommendation	Effects	Protective or Avoidance Measures
42WS2428	<i>Road from St. George to Pine Valley</i>	BLM, Private, SITLA	Site 42WS2428 is the historic <i>Road from St. George to Pine Valley</i> . The site was originally recorded in 1989 by P-III and later revisited and re-evaluated on various occasions in 1994, 1996, 2004, 2006, 2008, and twice in 2021; various segments of the site have been recommended or determined to be Not Eligible, and others have been recommended or determined to be Eligible under Criterion A. Transcon archaeologists revisited two crossings of Segment M of the historic road within the current project APE in 2021 and noted that the northern portion (Surveyed Area 1) of the road segment within the APE appears to be in use as a frontage road and looks like a modern two track; it is non-contributing to the overall eligibility of the site as it has lost all historic format. The southern crossing of Segment M (Surveyed Area 2) is in very poor condition, has been reclaimed by vegetation for the most part, and is presumed to be in the previously plotted location by evidence of some incised areas and a change in vegetation along the alignment. Transcon concurs with the previous site eligibility determination and recommends site 42WS2428 is Eligible for listing on the NRHP under Criterion A because the site is associated with historically important events of transportation and settlement between Pine Valley and St. George; however, Transcon recommends the portion of Segment M revisited in 2021 is non-contributing to the overall integrity and eligibility of the site.	Eligible—A; non-contributing	<i>No Adverse Effects</i>	None; non-contributing segment.
42WS4692		Tribal	Site 42WS4692 is a historic pipeline and suspension bridge complex. The site was originally recorded by Montgomery Archaeological Consultants in 2005 and was determined Not Eligible for the NRHP under any Criteria. When revisited in 2021, Transcon archaeologists observed that the site has been severely altered since the 2005 recording. Transcon rerecorded Features A (suspension cable bridge with bases), B (headgate and pit), and C (two rock and mortar piers); however, Feature A now consists of rock, mortar and concrete supports only; the pipe and support bridge that previously spanned the Santa Clara River is now gone, and one of the previously reported components of Feature C (the southwestern rock pier) is also missing - this has either been removed or is somewhere beneath the large amount of basalt riprap on the southwestern side of the river. A modern pipe culvert has been placed on the northeastern side of the river to the west of Feature A through which water now drains. Transcon concurs with the previous site eligibility determination and recommends site 42WS4692 is Not Eligible for listing on the NRHP under any Criteria.	Not Eligible	No Effects	N/A

TABLE C-1 CULTURAL RESOURCE SITES WITHIN THE PROJECT APE						
Site Number	Site Name	Land Owner	Site Description	Eligibility Recommendation	Effects	Protective or Avoidance Measures
42WS4823		SITLA	Site 42WS4823 is a prehistoric lithic scatter. The site was originally recorded by HRA, Inc. in 2006 and was determined Not Eligible for the NRHP under any Criteria. When revisited in 2021, Transcon archaeologists noted a diffuse scatter of lithic debris within the site area consisting primarily of quartzite with some chert tertiary flakes observed. There appears to be displacement of artifacts by erosion and the site is located in close proximity to a residential neighborhood. Transcon archaeologists noted that the site is similar in condition to the 2006 recording with approximately 150 tan quartzite and white chert tertiary flakes total. The previously recorded artifacts were not relocated; however, Transcon recorded A-01 biface, A-02 biface and AC-01 lithic debris concentration which has approximately 60 flakes. There is a drainage area circling around the southern site area, and the two newly identified bifaces are located within AC-01. Transcon concurs with the previous site eligibility determination and recommends site 42WS4823 is Not Eligible for listing on the NRHP under any Criteria.	Not Eligible	No Effects	N/A
42WS5150		SITLA	Site 42WS5150 is a prehistoric lithic scatter. The site was originally recorded by HRA, Inc. in 2008 and was determined Not Eligible for the NRHP under any Criteria. When revisited in 2021, Transcon archaeologists observed the site to be in similar condition to the 2008 recording with a diffuse scatter of lithic debris (approximately 50 flakes) within the site area consisting primarily of gray quartzite tertiary flakes with some white chert tertiary flakes. Transcon archaeologists relocated and documented previously recorded AC-01; however, previously recorded AC-02 and the previously recorded lithic tools were not relocated. There is some displacement of artifacts by erosion and obscurement of the site area by selective bullhogging, and the site has been impacted by a dirt road that bisects the site. Formerly documented diagnostic artifacts have likely been collected, as the site is close to a developing residential neighborhood and sees frequent visitation. Transcon concurs with the previous site eligibility determination and recommends site 42WS5150 is Not Eligible for listing on the NRHP under any Criteria.	Not Eligible	No Effects	N/A
42WS5151		Private	Site 42WS5151 is a prehistoric lithic scatter. The site was originally recorded by HRA, Inc. in 2008 and was determined Not Eligible for the NRHP under any Criteria. When revisited in 2021, Transcon archaeologists observed a very small amount of lithic debitage, 5 total pieces (4 light gray quartzite flakes and 1 white chert tertiary flake), which is far less than the previously recorded 20 flakes. Additionally, the previously noted lithic tools were not relocated. There appears to be displacement of artifacts by erosion, and some areas of the site have been selectively bullhogged. The site is adjacent to a residential property, and the diagnostic artifacts have likely been collected. Transcon concurs with the previous site eligibility determination and recommends site 42WS5151 is Not Eligible for listing on the NRHP under any Criteria.	Not Eligible	No Effects	N/A

TABLE C-1 CULTURAL RESOURCE SITES WITHIN THE PROJECT APE						
Site Number	Site Name	Land Owner	Site Description	Eligibility Recommendation	Effects	Protective or Avoidance Measures
42WS5152		Private	Site 42WS5152 was a prehistoric artifact scatter. The site was originally recorded by HRA, Inc. in 2008 and was determined Not Eligible for the NRHP under any Criteria. When revisited in 2021, Transcon archaeologists observed that a road (Homestead Drive) has been constructed through the site and that selective bullhogging has been conducted within the site area. Transcon archaeologists were unable to relocate the previously documented lithic flake assemblage, any ceramics, or any of the documented diagnostic tools. Only a single quartzite tertiary flake was relocated within the site area. Transcon concurs with the previous site eligibility determination and recommends site 42WS5152 is Not Eligible for listing on the NRHP under any Criteria. Additionally, Transcon recommends 42WS5152 no longer be considered an archaeological site as it has been destroyed by the construction of Homestead Drive.	Not Eligible	No Effects	N/A; recommended destroyed (no longer an archaeological site).
42WS5154		SITLA	Site 42WS5154 is a prehistoric lithic scatter. The site was originally recorded by HRA, Inc. in 2008 and was determined Eligible for the NRHP under Criterion D. In 2015, HRA Inc. collected surface artifacts at the site, excavated 7 backhoe trenches spaced 10 meters apart throughout the site, and excavated two test units, with artifact types and testing indicated a Formative to Late Prehistoric and Early to Middle Archaic presence at the site. When revisited in 2021, Transcon archaeologists relocated all 7 backhoe trenches. No diagnostic artifacts were relocated as the site has been previously collected, and only 5 chert tertiary flakes were observed in the disturbed soil near the backhoe trenches. As the site has been collected and excavations have exhausted the research potential of the site, Transcon recommends site 42WS5154 is Not Eligible for listing on the NRHP under any Criteria.	Not Eligible	No Effects	N/A; was Eligible (D) in 2008, but excavations exhausted data potential in 2015.
42WS6520		Tribal	Site 42WS6520 is a historic irrigation ditch recorded for the first time in 2021 by Transcon and recommended Eligible for the NRHP under Criteria A, C, and D. The site consists of a series of sandstone slab and cement lined irrigation ditch segments recorded (from north to south) as F-01 irrigation ditch segment; F-02 irrigation ditch segment; and F-03 irrigation ditch segment. These segments run parallel to Gunlock Drive, on the northeastern side of the highway. The ditch has disappeared in many locations along the alignment, and in some places, it is represented only by a shallow linear depression or a graded shelf. As the site is located in close proximity to Gunlock Drive, modern trash is ubiquitous along the site alignment. Transcon recommends site 42WS6520 is Eligible for listing on the NRHP under any Criteria A, C, and D for important events in this region as it was essential for irrigation/subsistence for the Shivwits; it retains structural integrity, and the design and workmanship of the site is relatively unique and intact; and for information potential regarding past irrigation practices in the region.	Eligible—A, C, D	No Adverse Effects	Archaeological and Tribal monitor present during construction, a pre-construction meeting, and an inadvertent discovery plan prior to construction.

TABLE C-1 CULTURAL RESOURCE SITES WITHIN THE PROJECT APE						
Site Number	Site Name	Land Owner	Site Description	Eligibility Recommendation	Effects	Protective or Avoidance Measures
42WS6521		Tribal	Site 42WS6521 is multi-component historic schoolhouse, habitation complex, and prehistoric artifact scatter in a 370 by 250-meter area recorded for the first time in 2021 by Transcon and recommended Eligible for the NRHP under Criteria A, C, and D. Transcon archaeologists recorded a variety of historic features (21) intermingled with prehistoric artifacts throughout the site, as well as two projectile points (A-01 and A-02), and one historic artifact concentration (AC-01). Features include F-01 schoolhouse, F-02 superintendent's foundation, F-03 rock wall, F-04 small foundation, F-05 water cistern/storage tank, F-06 windmill pipe, F-07 generator room, F-08 basketball court, F-09 foundation with collapsed boulders, F-10 rock alignment, F-11 rock retaining wall, F-12 Collapsed structure, foundation, and rock alignment, F-13 foundation, F-14 mortar and flagstone foundation, F-15 foundation, F-16 road, F-17 flood control ditch, F-18 canal catchment, F-19 block and mortar structure, F-20 cement pad, and F-21 stacked rock wall. Additionally, there are 700 plus pieces of lithic debris and 600 plus prehistoric ceramic fragments within the site area. Transcon recommends site 42WS6521 is Eligible for listing on the NRHP under Criteria A, C, and D for important events in this region as it was a schoolhouse and agricultural center for the Shivwits; some features retain structural integrity, and the design and workmanship of some features in the site are relatively unique and intact; and for information potential regarding past irrigation practices and land use patterns.	Eligible—A, C, D	<i>No Adverse Effects</i>	Archaeological and Tribal monitor present during construction, a pre-construction meeting, and an inadvertent discovery plan prior to construction.
42WS6522		Tribal	Site 42WS6522 is a multi-component historic artifact scatter and prehistoric artifact scatter recorded for the first time in 2021 by Transcon and recommended Eligible for the NRHP under Criteria A and D. Transcon archaeologists observed prehistoric and historic artifacts in a 104 by 73-meter area that are mixed together in an area that has been bulldozed and consists of several push piles. Historic artifacts within the site appear to date from the early 1900s to the 1960s. There are thousands (5000+) of historic glass fragments (clear, brown, amber, cobalt, green, and white milk glass, medicine bottles, bases) in AC-01 multi-component historic/prehistoric artifact concentration, and diffusely spread throughout the site area with increased density near AC-01. Additional historic artifacts include 400+ historic ceramic fragments, various indeterminate metal artifacts, 30+ cinder blocks, and a gas can spout. Prehistoric artifacts are scattered throughout the site area and mixed with historic artifacts. The prehistoric artifact assemblage includes 1000+ flakes throughout the site area; most flakes are chert tertiary flakes in various colors but primarily a mottled translucent, gray mottled, and white and blue/purple chert type, with some obsidian flakes noted; there are very few primary or secondary flakes. There are 2000+ ceramic fragments within the site area, predominantly grayware with less common black-on-gray and black-on-white and corrugated grayware. Transcon recommends site 42WS6522 is Eligible for listing on the NRHP under Criteria A and D as it was part of an agricultural center for the Shivwits and for information	Eligible—A, D	<i>No Adverse Effects</i>	Archaeological and Tribal monitor present during construction, a pre-construction meeting, and an inadvertent discovery plan prior to construction.

TABLE C-1 CULTURAL RESOURCE SITES WITHIN THE PROJECT APE						
Site Number	Site Name	Land Owner	Site Description	Eligibility Recommendation	Effects	Protective or Avoidance Measures
			potential regarding past irrigation and farming techniques on the reservation, as well as land use patterns.			
42WS6523		Tribal	Site 42WS6523 is a historic flood control ditch recorded for the first time in 2021 by Transcon and recommended Eligible for the NRHP under Criteria A, C, and D. The site consists of a historic flood control ditch constructed with stacked sandstone slabs and is approximately 490 feet long on the northern side of US-91 and varies in dimension along the alignment but is generally 5 feet wide on the bottom and about 5 feet wide at the top of the ditch. There is approximately 300 feet of stacked sandstone that is intact within the ditch after which there is a 30-foot-long blowout and then 100 feet of buried but visible wall within an earthen section after which the stacked rock is re-exposed for about 60 feet. The ditch ranges in depth from 4 to 6 feet deep and extends to the northwest from US-91. The average size of the sandstone slabs ranges from 12 to 24 inches long and 1 foot wide and 7 inches thick. Some of the sandstone slabs are stacked with no mortar on the top 3 feet. There is an inscribed culvert connecting to US-91 and an inscription in the mortar near a spillway within the ditch. Transcon recommends site 42WS6523 is Eligible for listing on the NRHP under Criteria A, C, and D for important events in this region as it was essential for flood control for the Shivwits; it retains structural integrity, and the design and workmanship of the site is relatively unique and intact; and for information regarding past flood control practices in the region.	Eligible—A, C, D	<i>No Adverse Effects</i>	Archaeological and Tribal monitor present during construction, a pre-construction meeting, and an inadvertent discovery plan prior to construction.

February 21, 2024

Tara S. Hoffman
State Watershed Cultural Resources Specialist/Tribal Liaison
Natural Resources Conservation Service
Wallace F. Bennett Federal Building, 125 State Street # 4010
Salt Lake City, Utah 84138

**RE: USDA NRCS's Santa Clara Watershed Plan-EA Project—Supplemental Cultural Resources
Desktop Review Memo**

Dear Ms. Hoffman:

Pursuant to your request, Transcon Environmental, Inc. (Transcon) is pleased to submit this Supplemental Cultural Resources Desktop Review Memo as part of the desktop environmental compliance review activities associated with the **USDA NRCS's Santa Clara Watershed Plan-EA Project** (Project) being conducted to develop and authorize the Santa Clara Watershed Plan-EA.

The proposed project is broken into two phases: **Phase I: Borehole and Test Pit Locations** (Utah Antiquities Project No. U21TN0316) and **Phase II: Entire Project** (Utah Antiquities Project No. U21TN0317). The original literature review for both phases of the Project was conducted on May 3, 2021, prior to the commencement of fieldwork, and included a Sego (the Utah State Historic Preservation Office's [USHPO] online database) literature review, as well as a comprehensive historic document review which consulted a number of historic documents and records, including Bureau of Land Management land records (e.g., historic General Land Office [GLO] records, land patents, mining records, grazing records, Master Title Plat records, etc.), the USHPO's historic contexts, water rights, Sanborn maps, and Utah Division of Water Rights (UDWR) records.

At the time the original literature review was conducted, a review of historic structures/buildings in the proposed Project area was not required and was not completed. The purpose of this Supplemental Cultural Resources Desktop Review Memo is to provide supplemental historic research for the Project as a whole, including both phases of the Project, and to identify any historic structures/buildings within the Project Area of Potential Effect (APE) prior to construction design finalization that may be impacted by the proposed development/construction activities.

If you have any questions regarding this information, please contact me directly at 801-649-5141 ext. 310 or levenson@transcon.com.

Sincerely,



Lindsey M. Evenson
Regional Manager | Senior Archaeologist
Transcon Environmental, Inc.

HISTORIC STRUCTURES/BUILDINGS

The USHPO Historic Utah Buildings online database (HUB) was reviewed for the entire proposed Project area (including both phases) and accessed through the HUB website on February 20, 2024. Records indicate there are no previously recorded historic buildings within the Project APE (for both Phase I and Phase II), and there are also no historic buildings located within 0.5 mile of the Project area (HUB 2024).

Based on these findings, Transcon recommends that there are no historic structures/buildings within the Project APE, and that there will be no impacts to any historic structures/buildings as the result of the proposed Project implementation or other Project-related construction activities.

REFERENCES:

Historic Utah Buildings (HUB).

2024 Utah State Historic Preservation Office. Accessed February 20, 2024, at: <https://shpo.utah.gov/portal/apps/webappviewer/index.html?id=8e218e18c2b74477b5f520e5617bebafe>.



MARK A. ECHO HAWK
ERIC L. OLSEN
NATHAN R. LONG
JOSEPH T. PRESTON
PATRICK J. DAVIS
MARISSA MAHKUK
JORDAN HARMON
ATTORNEYS

505 PERSHING AVE., STE. 100
PO BOX 6119
POCATELLO, ID 83205-6119
208.478.1624
208.478.1670 FAX
WWW.ECHOHAWK.COM

February 16, 2021

Emily Fife, State Conservationist
NRCS
Wallace F. Bennett Federal Building
125 S. State St., Room 4010
Salt Lake City, UT 8418-1100

Re: Shivwits Band of Paiutes' Response to NRCS' formal request to be a Cooperating Agency in the development of the Santa Clara Watershed Plan-Environmental Assessment (Plan-EA)

Dear Emily:

The Shivwits Band of Paiutes (Shivwits Band) is in receipt of the Natural Resources Conservation Service's (NRCS) formal request for the Band to be a Cooperating Agency in the development of the Santa Clara Watershed Plan.

The Shivwits Band appreciates and accepts NRCS's invitation to be a cooperating agency and would like to discuss potential terms of a memorandum of agreement regarding the Band's participation as a Cooperating Agency. Could we set up a time to talk in the next week or two? I am available at mark@echohawk.com or directly by phone at 435.922.8920.

The Shivwits Band looks forward to working with NRCS on this important project.

Sincerely,

A handwritten signature in black ink that reads "Mark A. Echo Hawk".

Mark A. Echo Hawk
Counsel for Shivwits Band of Paiutes

Cc: Shivwits Band Council
Kyle Wheeler, Water Resources Coordinator
Norm Evenstad, Asst. State Conservationist – Water Resources

APPENDIX E-9A
AQUATIC RESOURCES

PRELIMINARY AQUATIC RESOURCE DELINEATION REPORT

Santa Clara Watershed Plan Project
Washington County, Utah
SPK 2021-00134

Prepared for:

Washington County Utah
10 North 100 East
St. George, Utah 84770

and

United States Department of Agriculture
Natural Resources Conservation Service
Wallace F. Bennett Federal Building
125 South State Street, Room 4010
Salt Lake City, Utah 84138-1100

For submittal to:

United States Army Corps of Engineers
Intermountain Regulatory Branch
Sacramento District—Bountiful Field Office
533 West 2600 South, Suite 150
Bountiful, Utah 84010

Prepared by:

Transcon Environmental, Inc.
444 South Main Street, Suite A6
Cedar City, Utah 84720



October 2021

TABLE OF CONTENTS

Introduction.....	1
Project Location and Description	1
Project Location.....	1
Project Description	2
Study Methods	2
Existing Conditions	3
Existing Field Conditions	3
Land Use.....	3
Vegetation.....	3
Soils	3
Observations	4
Overview.....	4
Santa Clara River (Photos 1–3 and 11–13; Sheets 1–2, Aquatic Resources Detail Map).....	4
Potential Wetland 1 (Photos 4–8; Sheet 1, Aquatic Resources Detail Map).....	4
Ditch 1 (Photos 9 and 10; Sheet 2, Aquatic Resources Detail Map).....	4
Ditch 2 (Photos 14–16; Sheet 2, Aquatic Resources Detail Map).....	5
Wash 1 (Photos 17–24; Sheets 3–6, Aquatic Resources Detail Map).....	5
Wash 2 (Photos 25–27; Sheet 6, Aquatic Resources Detail Map)	5
Wash 3 (Photos 28 and 29; Sheet 6, Aquatic Resources Detail Map).....	6
Wash 4 (Photos 30–31 and 34–35; Sheets 7–8, Aquatic Resources Detail Map)	6
Wash 5 (Photos 32 and 33; Sheet 7, Aquatic Resources Detail Map).....	6
Wash 6 (Photos 36–41; Sheets 9 and 10, Aquatic Resources Detail Map)	7
Wash 7 (Photos 43–45 and 47; Sheets 11 and 12, Aquatic Resources Detail Map)	7
Wash 8 and 8a (Photos 47–52; Sheet 12, Aquatic Resources Detail Map).....	8
Conclusion	8
References.....	9

List of Tables

Table 1	Native Soil Types in the Review Area	3
Table 2	Aquatic Features Observed in the Review Area.....	8

List of Appendices

Appendix A	Aquatic Resources Maps
Appendix B	Field Photographs
Appendix C	OHWB Datasheets
Appendix D	NRCS Custom Soil Resource Report

INTRODUCTION

The U.S. Department of Agriculture Natural Resources Conservation Service (NRCS), with assistance from Washington County as the project sponsor, is considering proposed improvements within the Santa Clara Watershed. Currently, the proposed improvements include the installation and reestablishment of a series of detention basins in the communities of Dammeron Valley and Diamond Valley and irrigation supply improvement and armoring along the Santa Clara River on Shivwits Band of Paiutes tribal land near Ivins, Utah. The detention basins and armoring will provide flood protection to the local communities and Shivwits tribal farming area. The engineering design is being performed by Alpha Engineering Company out of St. George, Utah.

PROJECT LOCATION AND DESCRIPTION

Project Location

The overall review area for the proposed project is in Washington County, Utah. The review area is separated into three general sections: Shivwits, Dammeron Valley, and Diamond Valley. Below is a brief description and general location of each review area:

- The Shivwits Review Area encompasses approximately 63.6 acres and is located along the Santa Clara River along Old Highway 91 at Gunlock Road within the Shivwits Band of Paiutes Indian Reservation (37.184170, -113.762145)
- The northern section of the Dammeron Valley Review Area encompasses approximately 165.5 acres and is located within and to the east of the town of Dammeron Valley, north of the City of St. George, Utah, along Utah State Route 18 (SR-18) (37.310682, -113.661842)
- The southern section of the Dammeron Valley Review Area encompasses approximately 48.3 acres and is located 0.7 mile south of the town Dammeron Valley, crossing SR-18 (37.293470, -113.655903)
- The northern section of the Diamond Valley Review Area encompasses approximately 13.0 acres and is located at the northwestern limits of the town of Diamond Valley (37.258245, -113.616462)
- The southern section of the Diamond Valley Review Area encompasses approximately 69.4 acres and is located within and to the east of the town of Diamond Valley (37.251757, -113.607277)

The total area reviewed for this study encompasses approximately 360 acres of land and is located within Township 40 South, Range 16 West, Sections 8, 9, 16, 17, 21, and 35; Township 41 South, Range 16 West, Sections 1 and 2; and Township 41 South, Range 17 West, Sections 28 and 33 of the Salt Lake Baseline and Meridian. The review area is depicted in **Appendix A, Aquatic Resources Maps**.

Access to the Shivwits Review Area can be made by traveling northwest from St. George on Old Highway 91 approximately 10 miles or by traveling from the town of Veyo south on Gunlock Road approximately 14 miles. The Shivwits Review Area is located directly adjacent to the north side of Old Highway 91. Access to the Dammeron Valley Review Area can be made by traveling northwest from St. George on SR-18 approximately 17.5 miles or by traveling from the town of Enterprise south on SR-18 for approximately 19 miles. The boundaries of the Dammeron Valley Review Area are located directly adjacent to the east side of SR-18. The Diamond Valley Review Area is located approximately 3 miles to the south of the Diamond Valley Review Area on SR-18 and can be accessed by taking Diamond Valley Drive east off of SR-18 for approximately 0.6 mile. The boundaries of the Diamond Valley Review Area are located primarily within private residential developments.

Project Description

At this time, the proposed project is anticipated to include the construction of up to three detention basins on dry washes east of Dammeron Valley, the re-routing of existing flows to an adjacent routed channel on the south end of Dammeron Valley, the potential construction of an alternative detention basin and the re-establishment of up to three existing detention basins in Diamond Valley, armoring and protection along an existing channel in Diamond Valley, and armoring portions of the south bank of the Santa Clara River just west of the Shivwits tribal community near the Shem Dam. Two man-made ditches will also be armored in the Shivwits Review Area, and a water pipeline will be hung on the Gunlock Road bridge, replacing the existing pipeline. Additional project measures may be identified as the planning process for the proposed project moves forward.

Defined areas of permanent and temporary disturbance are currently under development and have not been finalized; however, final project measures would be designed to avoid permanent impacts to Waters of the U.S. (WOTUS), where possible, and significant impacts to WOTUS are not expected as a result of this project. For the Shivwits Review Area specifically, no rip rap or other project measures would be installed below the ordinary high watermark (OHWM) of the Santa Clara River, and no permanent impacts to the river would occur. Impacts to Washes 4 and 5 will be unavoidable due to the rerouting of Wash 4 into Wash 5.

STUDY METHODS

A focused evaluation of WOTUS located within the review area was performed from May 24–26 and September 7–10, 2021. The methods used to identify potentially jurisdictional WOTUS and any other potential aquatic features (including wetlands) within the review area were based upon the U.S. Army Corps of Engineers' (USACE's) *Jurisdictional Determination Form Instructional Guidebook* (USACE 2007), *A Field Guide to the Identification of the Ordinary High Water Mark in the Arid West Region of the Western United States* (Lichvar and McColley 2008), the *USACE Wetland Delineation Manual* (USACE 1987), and the *Regional Supplement to the USACE Wetland Delineation Manual: Arid West Region* (USACE 2008).

Existing data was reviewed before conducting a field assessment to identify potentially jurisdictional WOTUS. Information reviewed included the following:

- Recent and historic aerial photography
- U.S. Fish and Wildlife Service National Wetlands Inventory Mapper (USFWS 2021)
- Natural Resources Conservation Service soil maps (NRCS 2021)

A Transcon Environmental, Inc. aquatic resource specialist used two methods to identify WOTUS in the field:

1. Locations with previously mapped wetlands and potentially jurisdictional water features were identified in the field and investigated
2. The review area was traversed and inspected for signs of wetlands and water features (e.g., changes in vegetation, depressions holding water, or channels), which were then investigated

OHWM data was collected for the Santa Clara River and all ditches and washes with a distinct OHWM within the review area. Excepting where the proposed pipeline would be hung on the Gunlock Road bridge, the OHWM of the Santa Clara River was only delineated along its southern banks, as all remaining proposed project activities will occur to the south and outside of the OHWM for the river. Additionally, a formal wetland delineation was conducted adjacent to the Santa Clara River in order to determine the extent of a suspected wetland.

Photographs taken during field review can be found in **Appendix B**. OHWM and photo locations are indicated on the *Aquatic Resources Detail Map* in **Appendix A**. The datasheets used to collect OHWM and wetland data can be found in **Appendix C**.

EXISTING CONDITIONS

Existing Field Conditions

Land Use

Much of the Dammeron Valley and Diamond Valley review areas are disturbed and currently occupied by residential and agricultural development. The areas not occupied by residential or agricultural land is undeveloped, native lands with signs of recreational use such as hiking, hunting, and off-road vehicle use.

The lands within the Shivwits Review Area include fallow agricultural fields (now used for grazing) and the Santa Clara River riparian corridor. Surrounding lands mostly consist of undeveloped native land used for grazing.

Vegetation

Vegetation found in the Dammeron Valley and Diamond Valley review areas are similar and consist almost entirely of upland shrub-steppe and woodland species. Vegetation found in the Shivwits Review Area consists of riparian-dominant trees and shrubs associated with the Santa Clara River surrounded by mixed desert scrub species.

Dominant ecological systems in the review areas include Introduced Upland Vegetation—Shrub; Inter-Mountain Basins Big Sagebrush Shrubland; Mojave Mid-Elevation Mixed Desert Scrub; Sonora-Mojave Mixed Salt Desert Scrub; Inter-Mountain Basins Semi-Desert Shrub Steppe; Introduced Upland Vegetation—Annual Grassland; Pasture/Hay; North American Warm Desert Lower Montane Riparian Woodland and Shrubland; Great Basin Pinyon-Juniper Woodland; and Developed, Open Space (USGS 2021). Dominant native vegetation observed within the review area includes narrow-leaf cottonwood (*Populus angustifolia*), coyote willow (*Salix exigua*), tamarisk (*Tamarix ramosissima*), narrow-leaf cattail (*Typha angustifolia*), Utah juniper (*Juniperus osteosperma*), sagebrush (*Artemisia tridentata*), and salt bush (*Atriplex confertifolia*).

Soils

NRCS soils surveys indicate nine native soil types in the review area (NRCS 2021). **Table 1** lists the soil types and whether they meet the NRCS hydric soils criteria. Of the nine soil types identified within the review area, only one, *Fluvaquents and torrifluvents, sandy*, is indicated to be hydric. The NRCS custom resource report, including a description and map for all soils contained within the review area, is located in **Appendix D**.

TABLE 1 NATIVE SOIL TYPES IN THE REVIEW AREA			
Map Unit Name	Acres in Review Area	Percent of Review Area	NRCS Hydric Soil
Badland, very steep	6.5	1.8	No
Eroded land-Shalet complex, warm	3.6	1.0	No
Fluvaquents and torrifluvents, sandy	9.8	2.7	Yes
Leeds silty clay loam, 1 to 2 percent slopes	43.7	12.2	No

TABLE 1 NATIVE SOIL TYPES IN THE REVIEW AREA			
Map Unit Name	Acres in Review Area	Percent of Review Area	NRCS Hydric Soil
Mogatsu-Pastura complex, 2 to 20 percent slopes	138.3	38.4	No
Naplene silt loam, 2 to 6 percent slopes	100.2	27.8	No
Redbank fine sandy loam, 1 to 5 percent slopes	24.8	6.9	No
Water	0.9	0.3	No
Yaki very cobbly loam, 3 to 35 percent slopes	32	8.9	No

OBSERVATIONS

Overview

One river, two ditches, nine washes, and one potential wetland were identified during desktop and field reviews. Descriptions of each feature are detailed below.

Santa Clara River (Photos 1–3 and 11–13; Sheets 1–2, Aquatic Resources Detail Map)

The OHWM of the Santa Clara River meandered in and out of the northern limits of the Shivwits Review Area and was delineated for approximately 1.39 miles. With the exception of an approximately 140-foot area beginning at the Gunlock Road bridge, where the delineation was conducted from bank to bank, the OHWM data was taken from the outermost channel; however, the river contained multiple channels in some places as it traveled along the northern limits of the review area. Along the entirety of the banks of the Santa Clara River reviewed as part of this survey was thick, riparian vegetation including but not limited to narrow-leaf cottonwood, coyote willow, tamarisk, and narrow-leaf cattail. The substrate within the river consisted of cobbles towards the northern section under the Gunlock Road bridge and transitioned to sand and mud further downstream. The banks of the river within the review area were steep walled and exhibited signs of significant erosion during periods of high flow.

Flows within this section of the Santa Clara River appeared to be permanent in nature and were observed during the survey to vary from swift to low. Multiple active beaver dams have affected the flow of the river in this area. Flows carried by the Santa Clara River traveled southeast from the review area and continued south for approximately 14 miles before converging with the Virgin River.

Potential Wetland 1 (Photos 4–8; Sheet 1, Aquatic Resources Detail Map)

Potential Wetland 1 was located adjacent to the south side of the Santa Clara River at the northern limits of the Shivwits Review Area. Although the soil depths did not meet the technical definition of hydric soils, the soil components observed during field delineation did indicate the presence of hydric soils. These indicators included hydrogen sulfide, sandy mucky material, and stratified layers. The water table was high in this area, and there were portions that were inundated with up to 2 inches of water at the time of survey. In addition to the presence of hydric soil indicators, vegetation within this area consisted of riparian and hydrophytic species including *Phragmites* spp., narrow-leaf cattail, tamarisk, coyote willow, and narrow-leaf cottonwood. The entirety of Potential Wetland 1 was within the OHWM of the Santa Clara River. The southern edge of the potential wetland was bordered by a sandy bank with large boulders and a mix of riparian and upland vegetation. The northern edge of the potential wetland was defined by the southernmost, swift-flowing channel of the Santa Clara River.

Ditch 1 (Photos 9 and 10; Sheet 2, Aquatic Resources Detail Map)

Ditch 1 entered the south side of the Shivwits Review Area via a culvert south of Gunlock Road. Flows traveled northwest for approximately 250 feet before turning northeast towards the Santa Clara River. The initial 250 feet of the ditch was improved with stone walls and a concrete bottom and was approximately 5 feet wide. The ditch blows out and no longer contained any improvements after approximately 250 feet, when it began to follow the natural contours of the land. After the blowout and for approximately 282 feet, the OHWM was clearly visible within the steep-walled drainage. The OHWM was barely visible in the final approximately 54 feet before draining into the Santa Clara River and was primarily covered in upland vegetation mixed with some riparian vegetation.

Within the review area, Ditch 1 encompassed approximately 0.07 acre and was 585 feet in length. Ditch 1 appeared to be ephemeral in nature, as it likely only conveys seasonal stormwaters from the basin located 0.5 mile southwest as well as runoff from Old Highway 91.

Ditch 2 (Photos 14–16; Sheet 2, Aquatic Resources Detail Map)

Ditch 2 entered the Shivwits Review Area via a culvert south of Old Highway 91. Flows traveled northeast towards the Santa Clara River. The initial approximately 327 feet of the ditch was improved with stone walls and a concrete bottom and was approximately 5 feet wide. After approximately 327 feet, the ditch dropped off of a heavily eroded bank where the OHWM was barely visible beneath vegetation and debris. Approximately 51 feet after the drop, the ditch drained into the Santa Clara River.

Within the review area, Ditch 2 encompassed approximately 0.03 acre and was 378 feet in length. Ditch 2 appeared to be ephemeral in nature, as it conveyed seasonal stormwaters from the basin located 0.3 mile south as well as runoff from Old Highway 91.

Wash 1 (Photos 17–24; Sheets 3–6, Aquatic Resources Detail Map)

Wash 1 entered the northern section of the Dammeron Valley Review Area near its northeastern limits. Flows traveled southwest for the initial approximately 0.45 mile. This portion of the wash began with a sandy substrate which progressively transitioned to more cobble and pebble. Vegetation adjacent to the wash consisted of upland vegetation. The width varied and began to taper further downstream with an average width of approximately 3.5 feet.

At approximately 0.45 mile, the wash entered the developed area of Dammeron Valley and flowed east. It crossed beneath Homestead Drive East via a culvert; entered lands that were within an active vineyard; and continued east crossing North Dammeron Valley Drive, North Canyon Trails Drive, SR-18, and North Carters Pond Road via culverts before exiting the review area approximately 165 feet after crossing North Carters Pond Road. This portion of the wash was approximately 0.81 mile and was heavily disturbed by the surrounding residential and agricultural areas. Significant disturbances included berming, redirected flows, and other unnatural topographical changes. After crossing North Dammeron Valley Road, the wash followed the alignment of a series of what appear to be man-made ditches where the OHWM was hardly discernable. The substrate of this portion of the wash consisted of sandy and rocky soil overgrown with vegetation (mostly native and invasive upland grasses). The width of Wash 1 in this portion was approximately 2 feet. Upon exiting the review area, the wash continued flowing west before dissipating just east of Upper Sand Cove Reservoir.

Within the review area, Wash 1 encompassed approximately 0.37 acre and was 1.24 miles in length. Wash 1 appeared to be ephemeral in nature, as it likely conveys seasonal stormwaters from the surrounding basins as well as runoff from the town roads and properties within the town of Dammeron Valley.

Wash 2 (Photos 25–27; Sheet 6, Aquatic Resources Detail Map)

Wash 2 entered the northern section of the Dammeron Valley Review Area near its southeastern limits. Flows traveled southeast within the review area. The OHWM was barely visible throughout much of the wash, as it conveyed sheet flow from the surrounding uplands, only becoming obvious in areas of high flow volume. Just as the wash entered the residential area in the town of Dammeron Valley, flows dissipated to the extent that the OHWM was no longer visible. The substrate of this wash consisted of sandy and rocky soil, and the width was between 1.5 to 2 feet throughout.

Within the review area, Wash 2 encompassed approximately 0.07 acre and was 0.32 mile long. Wash 2 appeared to be ephemeral in nature, as it conveyed seasonal stormwaters from the surrounding basins. Before leaving the review area, flows dissipated into the adjacent residential area.

Wash 3 (Photos 28 and 29; Sheet 6, Aquatic Resources Detail Map)

Wash 3 entered the northern section of the Dammeron Valley Review Area at its southeastern corner. Flows traveled northwest within the review area, ultimately converging with Wash 2. The OHWM was barely visible throughout much of the wash, as it conveyed sheet flow from the surrounding uplands, only becoming obvious in areas of high flow volume. The substrate of this wash consisted of sandy and rocky soil, and the width was approximately 1.5 feet throughout.

Within the review area, Wash 3 encompassed approximately 0.03 acre and was 893 feet in length. Wash 3 appeared to be ephemeral in nature, as it conveyed stormwater from the surrounding basins and a small hill to the southeast.

Wash 4 (Photos 30–31 and 34–35; Sheets 7–8, Aquatic Resources Detail Map)

Wash 4 entered the southern section of the Dammeron Valley Review Area at the northeastern limits of the review area. Flows traveled west within the review area and generally followed the alignment of the adjacent unpaved roadway, Horseman Park Drive. This wash was defined by steep walls and a narrow width (2 feet wide on average) with a sandy to rocky substrate surrounded by upland vegetation. Minor anthropogenic influences on this wash included a dirt road crossing.

Within the review area, Wash 4 encompassed approximately 0.09 acre and was 0.37 mile in length. Wash 4 appeared to be ephemeral in nature, as it conveyed stormwater from the surrounding basins and nearby hills and mountains. The flows conveyed by this wash exit the review area, travel under SR-18, and continue north in a ditch along SR-18 before dissipating into the surrounding residential areas of Dammeron Valley.

Wash 5 (Photos 32 and 33; Sheet 7, Aquatic Resources Detail Map)

Wash 5 entered the southern section of the Dammeron Valley Review Area at the southwestern limits of the review area. Flows traveled west-southwest within the review area. As the wash entered the review area, it appeared to have few anthropogenic influences on its shape or flow; the wash was defined by a distinct OHWM with an average width of approximately 11 feet. The substrate was cobble and rocky, and the wash was surrounded by upland vegetation. After approximately 343 feet, the wash crossed an unpaved and overgrown road, where it lost much of its definition. The OHWM was significantly thinner, averaging approximately 5 feet for the next approximately 530 feet, although the substrate and surrounding vegetation remained the same. Debris accumulated within the wash just before it entered a culvert beneath SR-18. Upon exiting the culvert, the wash continued for approximately 671 feet before exiting the review area. Within this portion of the wash, the OHWM had an average width of about 10 feet, with a maximum width of 16 feet as it exited the culvert.

Within the review area, Wash 5 encompassed approximately 0.09 acre and was 527 feet in length. Wash 5 appeared to be ephemeral in nature, as it conveyed stormwater from the surrounding basins and runoff from

SR-18. After exiting the review area, Wash 5 continued west for approximately 0.65 mile before draining into a larger wash where flows continued west for another 2.8 miles before converging with Sand Cone Wash. Flows continued east for 4.7 miles before draining into Gunlock Reservoir.

Wash 6 (Photos 36–41; Sheets 9 and 10, Aquatic Resources Detail Map)

Wash 6 entered the northern section of the Diamond Valley Review Area at its northern limits and continued into the southern section of the Diamond Valley Review area where it exited at the southwestern corner. Flows traveled south within the review area. Where the wash entered the review area and up until it crossed a frequently used unpaved road, it appeared to have few anthropogenic influences on its shape or flow and was defined by steep banks and a distinct OHWM with an average width of approximately 7 feet. The substrate consisted of large rocks to small cobbles, and the wash was surrounded by upland vegetation. After crossing the unpaved road, the wash continued for approximately 0.28 mile before exiting the review area for the first time. The OHWM in this section was still distinct, with an average width of approximately 8 feet and the substrate remaining unchanged; however, there were significantly more anthropogenic influences on flows, specifically from dirt and rock fill that have created berms.

Wash 6 entered the Diamond Valley Review Area for the second time in the southern section at its western limits, where it crossed West Jade Drive before exiting the review area again after approximately 309 feet. Flows in this portion have been heavily affected by anthropogenic influences including concrete and rip rap bank stabilization. The OHWM was clearly defined and averages approximately 5 feet. The substrate was sandy with some rocks and cobble, and the banks abutted residential properties and roads. The vegetation consisted of a mix of native and exotic upland and landscape species.

Wash 6 entered the Diamond Valley Review Area for the final time in the southwestern corner of the southern section, where it crossed West Diamond Valley Drive before exiting the review area after approximately 376 feet. This portion of Wash 6 was similar to the previous section in its anthropogenic influences, OHWM, substrate, and vegetation.

Within the review area, Wash 6 encompassed approximately 0.55 acre and was 0.37 mile in length. Wash 6 appeared to be ephemeral in nature. Wash 6 appeared to either be a tributary of or the southernmost portion of Rock Hollow Wash, which conveyed stormwater and snowmelt runoff from the Pine Valley Mountains located 7 miles northeast. After exiting the review area, Wash 6 continued 1.2 miles to the southwest before losing definition along the southern base of the Cinder Cone volcano.

Wash 7 (Photos 43–45 and 47; Sheets 11 and 12, Aquatic Resources Detail Map)

Wash 7 began in the southern section of the Diamond Valley Review Area near the northeastern corner. This wash has been heavily affected by anthropogenic influences including berms, unpaved roads, grading on residential lots, and a detention basin 150 feet east of the headwaters (**Photo 46**); however, it did appear to generally follow the alignment of a natural wash that flowed east. The OHWM throughout the review area was poorly defined and at points dissipated altogether, causing Wash 7 to be separated into three sections within the review area. The OHWM again became defined after dissipating once enough sheet flow from the hill to the north drained into it. This in turn increased flows within the alignment of the original wash. The substrate for this wash ranged from fine to cobbles and pebbles and was surrounded by upland vegetation that in places grew within the OHWM. The wash crossed beneath two small culverts beneath residential roads and continued before crossing West Diamond Valley Road via a larger culvert and draining into a detention basin (**Photo 42**).

Within the review area, Wash 7 encompassed approximately 0.10 acre and was a discontinuous 0.33 mile. Wash 7 appeared to be ephemeral in nature, as it conveyed stormwater that overflows from the detention

basin to the east and sheetflow from the hillside to the north. Wash 7 ultimately drained into a detention basin within the Diamond Valley Review Area.

Wash 8 and 8a (Photos 47–52; Sheet 12, Aquatic Resources Detail Map)

Washes 8 and 8a entered the southern section of the Diamond Valley Review Area at the southeastern corner. Wash 8a was a small (only 36 feet within the review area) wash that conveyed runoff north from the unpaved road approximately 94 feet south of the review area before converging with Wash 8. The substrate of Wash 8a was rocky, and the average width of the OHWM was 1 foot. Wash 8 flowed west for approximately 704 feet. This portion of the wash appeared natural, with a clearly defined OHWM with an average width of approximately 4 feet. The substrate within the wash was fine to rocky. Vegetation adjacent to the wash consisted of upland vegetation. After approximately 704 feet, the wash flowed north and was heavily affected by anthropogenic influences including a large berm and unpaved road. The wash followed an unpaved road where the OHWM was poorly defined for approximately 0.21 mile before draining into a detention basin (**Photo 48**). In this portion, the surrounding vegetation consisted of upland grasses, while the substrate was fine mixed occasionally with small rocks.

Within the review area, Washes 8 and 8a encompassed approximately 0.10 acre and were a combined 0.35 mile. Both washes appeared to be ephemeral in nature. Before converging with Wash 8, Wash 8a conveyed runoff from the nearby dirt road. In addition to conveying seasonal stormwaters from the basin 0.55 mile east, Wash 8 conveyed runoff from the same dirt road as well as sheetflow from the hill to the north and east. Wash 8 ultimately drained into a detention basin within the Diamond Valley Review Area.

CONCLUSION

Within the 360-acre review area, one river, two ditches, nine washes, and one potential wetland were identified. Of these features, both ditches and seven washes show some level of anthropogenic influences ranging from minor to significant. **Table 2** below lists the features and their attributes as well as in which review area they are located.


TABLE 2 AQUATIC FEATURES OBSERVED IN THE REVIEW AREA			
Feature Name	Linear Feet	Acres	Review Area
Santa Clara River	7,339	N/A	Shivwits
Potential Wetland 1	N/A	0.27	Shivwits
Ditch 1	585	0.07	Shivwits
Ditch 2	378	0.03	Shivwits
Wash 1	6,568	0.37	Dammeron Valley
Wash 2	1,666	0.65	Dammeron Valley
Wash 3	939	0.30	Dammeron Valley
Wash 4	1,942	0.09	Dammeron Valley
Wash 5	527	0.09	Diamond Valley
Wash 6	2,929	0.51	Diamond Valley
Wash 7	1,761	0.11	Diamond Valley
Wash 8	1,820	0.10	Diamond Valley
Wash 8a	36	0.00	Diamond Valley

REFERENCES

- Lichvar, R.W., D.L. Banks, W.N. Kirchner, and N.C. Melvin. 2016. *The National Wetland Plant List*; 2016 wetland ratings. *Phytoneron* 2016-30: 1-17. Published 28 April 2016. ISSN 2153 733X.
- Lichvar, Robert W. and Shawn M. McColley. 2008. A Field Guide to the Identification of the Ordinary High Water Mark (OHWM) in the Arid West Region of the Western United States. United States Army Engineer Research and Development Center. Vicksburg, Mississippi.
- Munsell Color X-Rite. 2009. Munsell Soil Color Charts. Grand Rapids, MI.
- National Resources Conservation Service (NRCS). 2021. Web Soil Survey Tabular Data: Washington County Area, Utah. U.S. Department of Agriculture. <https://websoilsurvey.sc.egov.usda.gov/App>.
- U.S. Army Corps of Engineers (USACE). 1987. *USACE Wetland Delineation Manual*. Department of the Army, Waterways Experiment Station, Vicksburg, Mississippi.
- _____. 2007. *USACE Jurisdictional Determination Form Instructional Guidebook*. May 30, 2007. http://www.usace.army.mil/Portals/2/docs/civilworks/regulatory/cwa_guide/jd_guidebook_051207final.pdf.
- _____. 2008. *Regional Supplement to the USACE Wetland Delineation Manual: Arid West Region* (Version 2.0). U.S. Army Engineer Research and Development Center, Vicksburg, Mississippi.
- U.S. Fish and Wildlife Service (USFWS). 2021. National Wetlands Inventory Wetlands mapper. <https://www.fws.gov/wetlands/data/mapper.html>.
- United States Geological Service (USGS). 2021. Gap Analysis Program (GAP) GAP/LANDFIRE National Terrestrial Ecosystems 2011 map viewer. URL: <https://maps.usgs.gov/terrestrial-ecosystems-2011/>.

APPENDIX A

AQUATIC RESOURCES MAPS

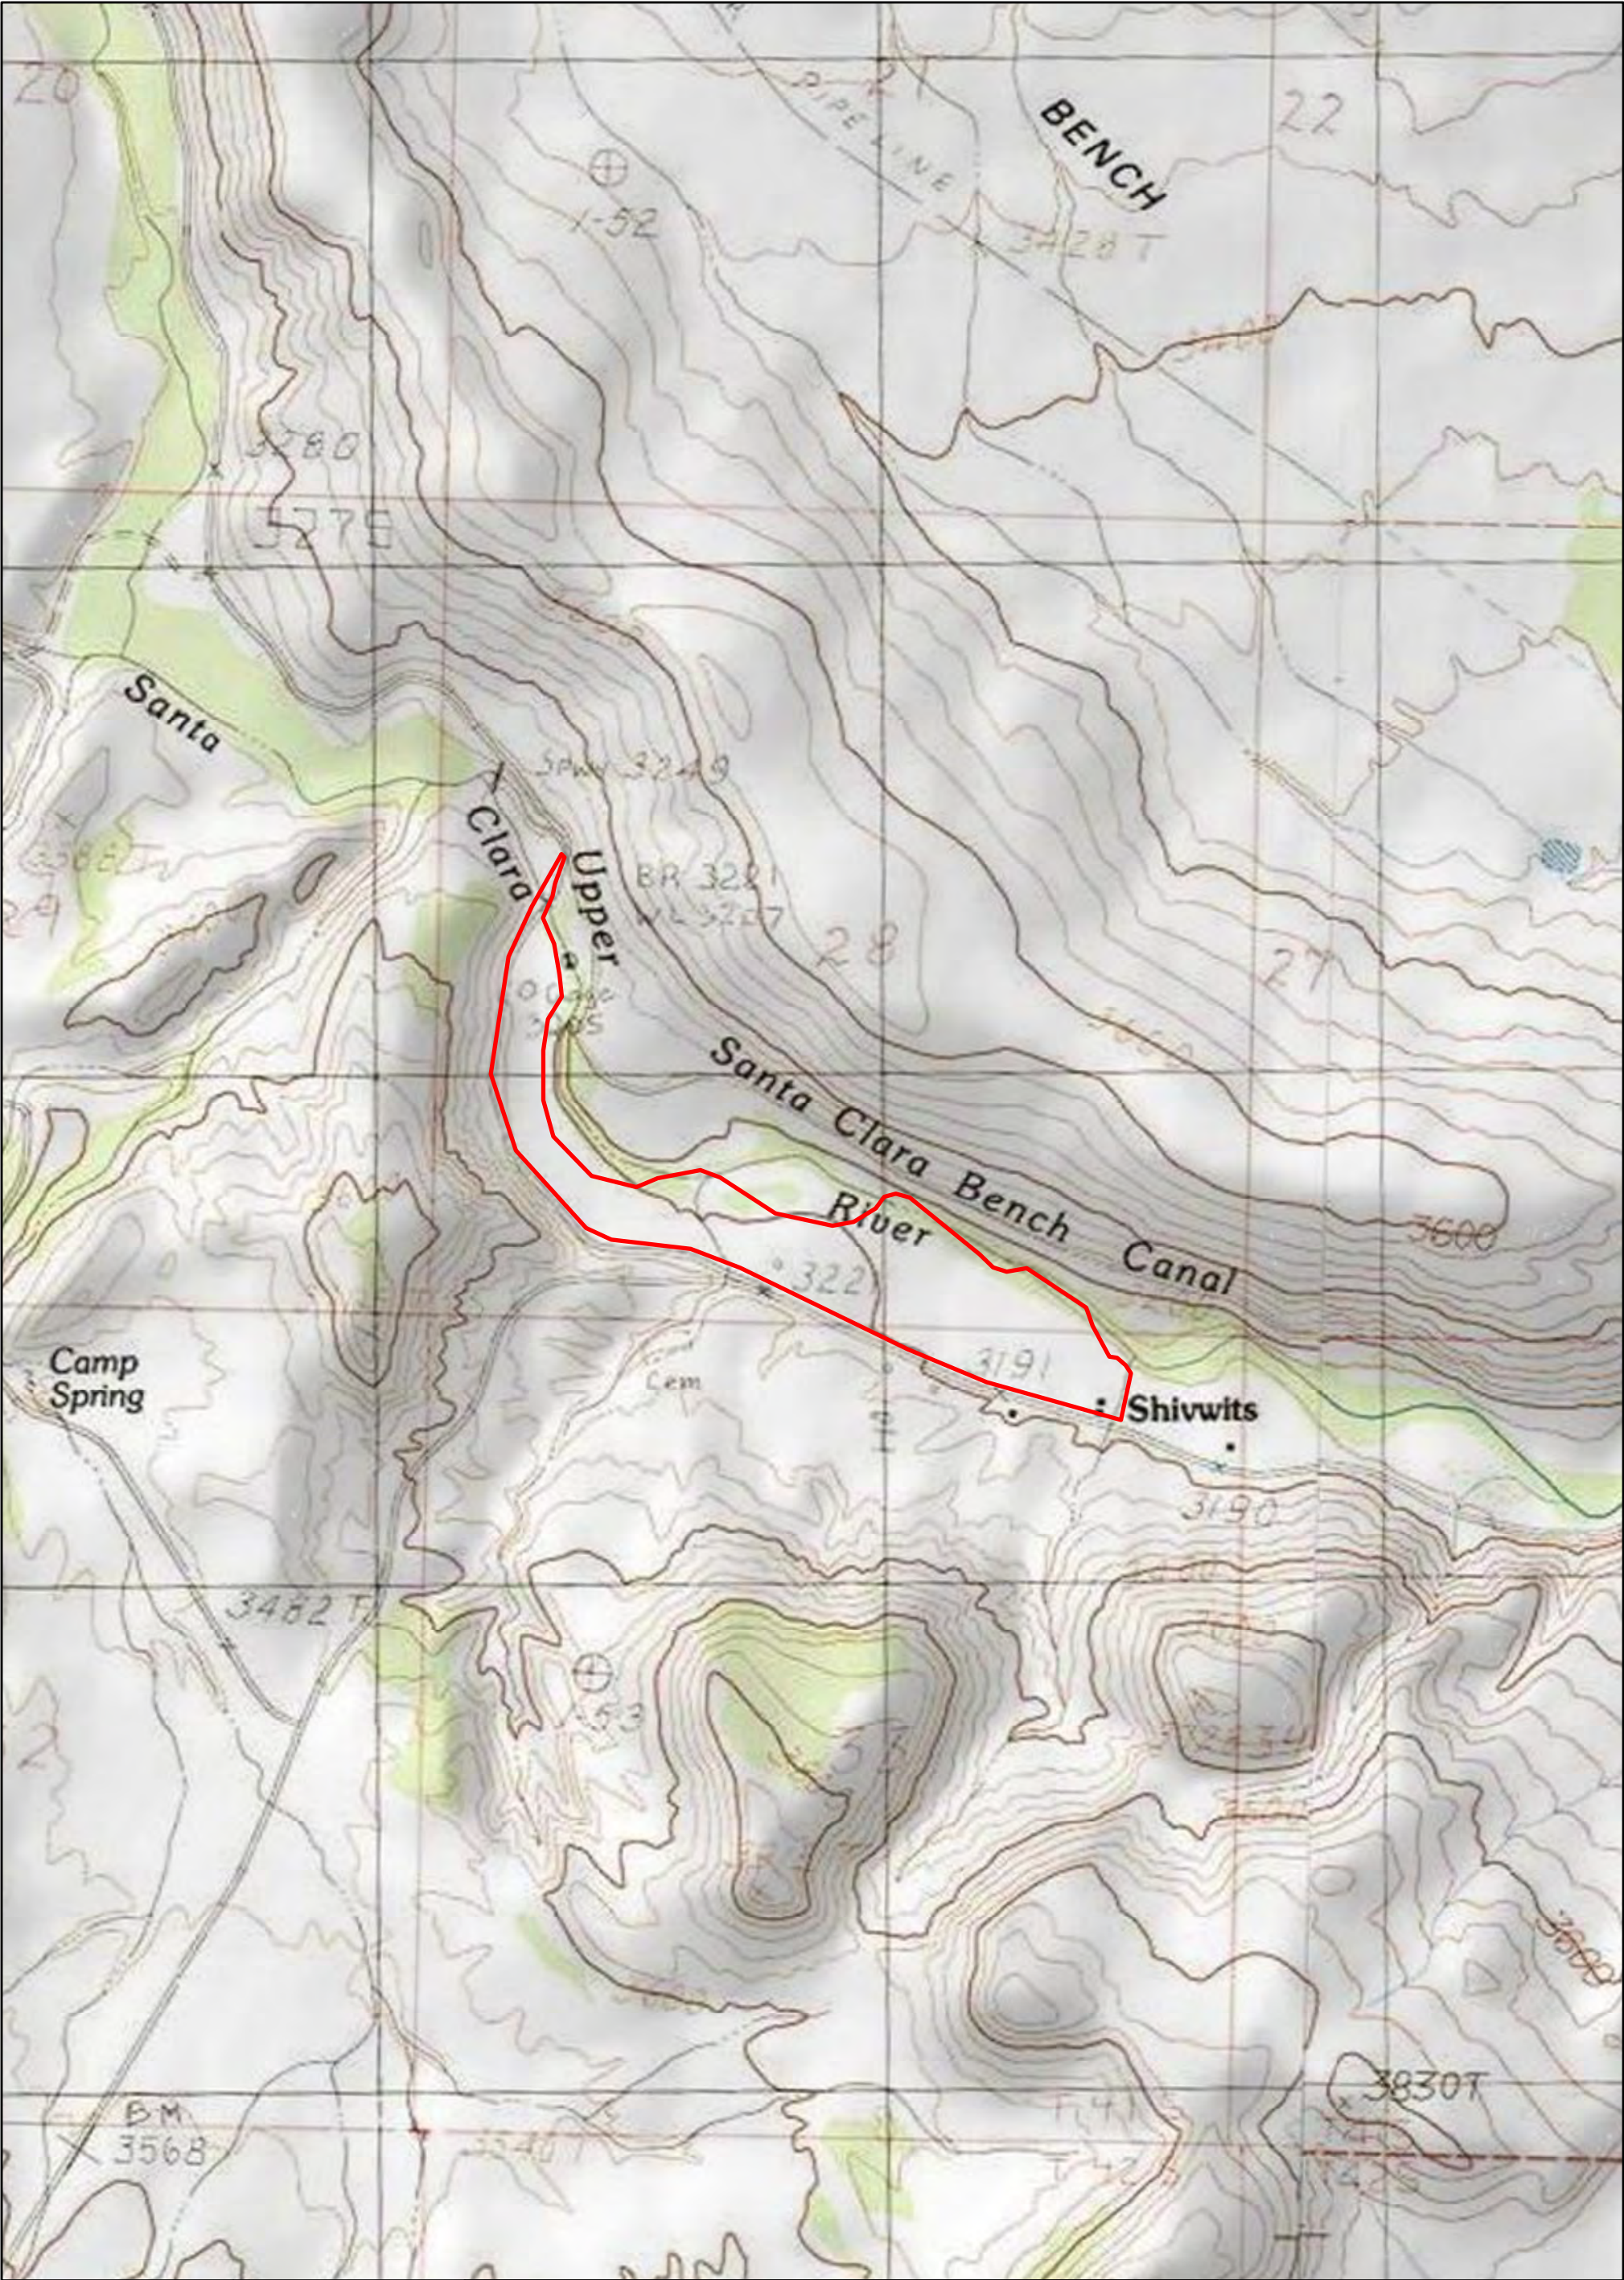

Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 10/8/2021

USGS 7.5' Quad Map (*Shivwits*, Utah)
(Shivwits Review Area)

No.

Revision

Date

By

Appr.

0

750

1,500

3,000

4,500

Feet


N

Transcon
environmental


Planners &
Scientists

Legend


Review Area

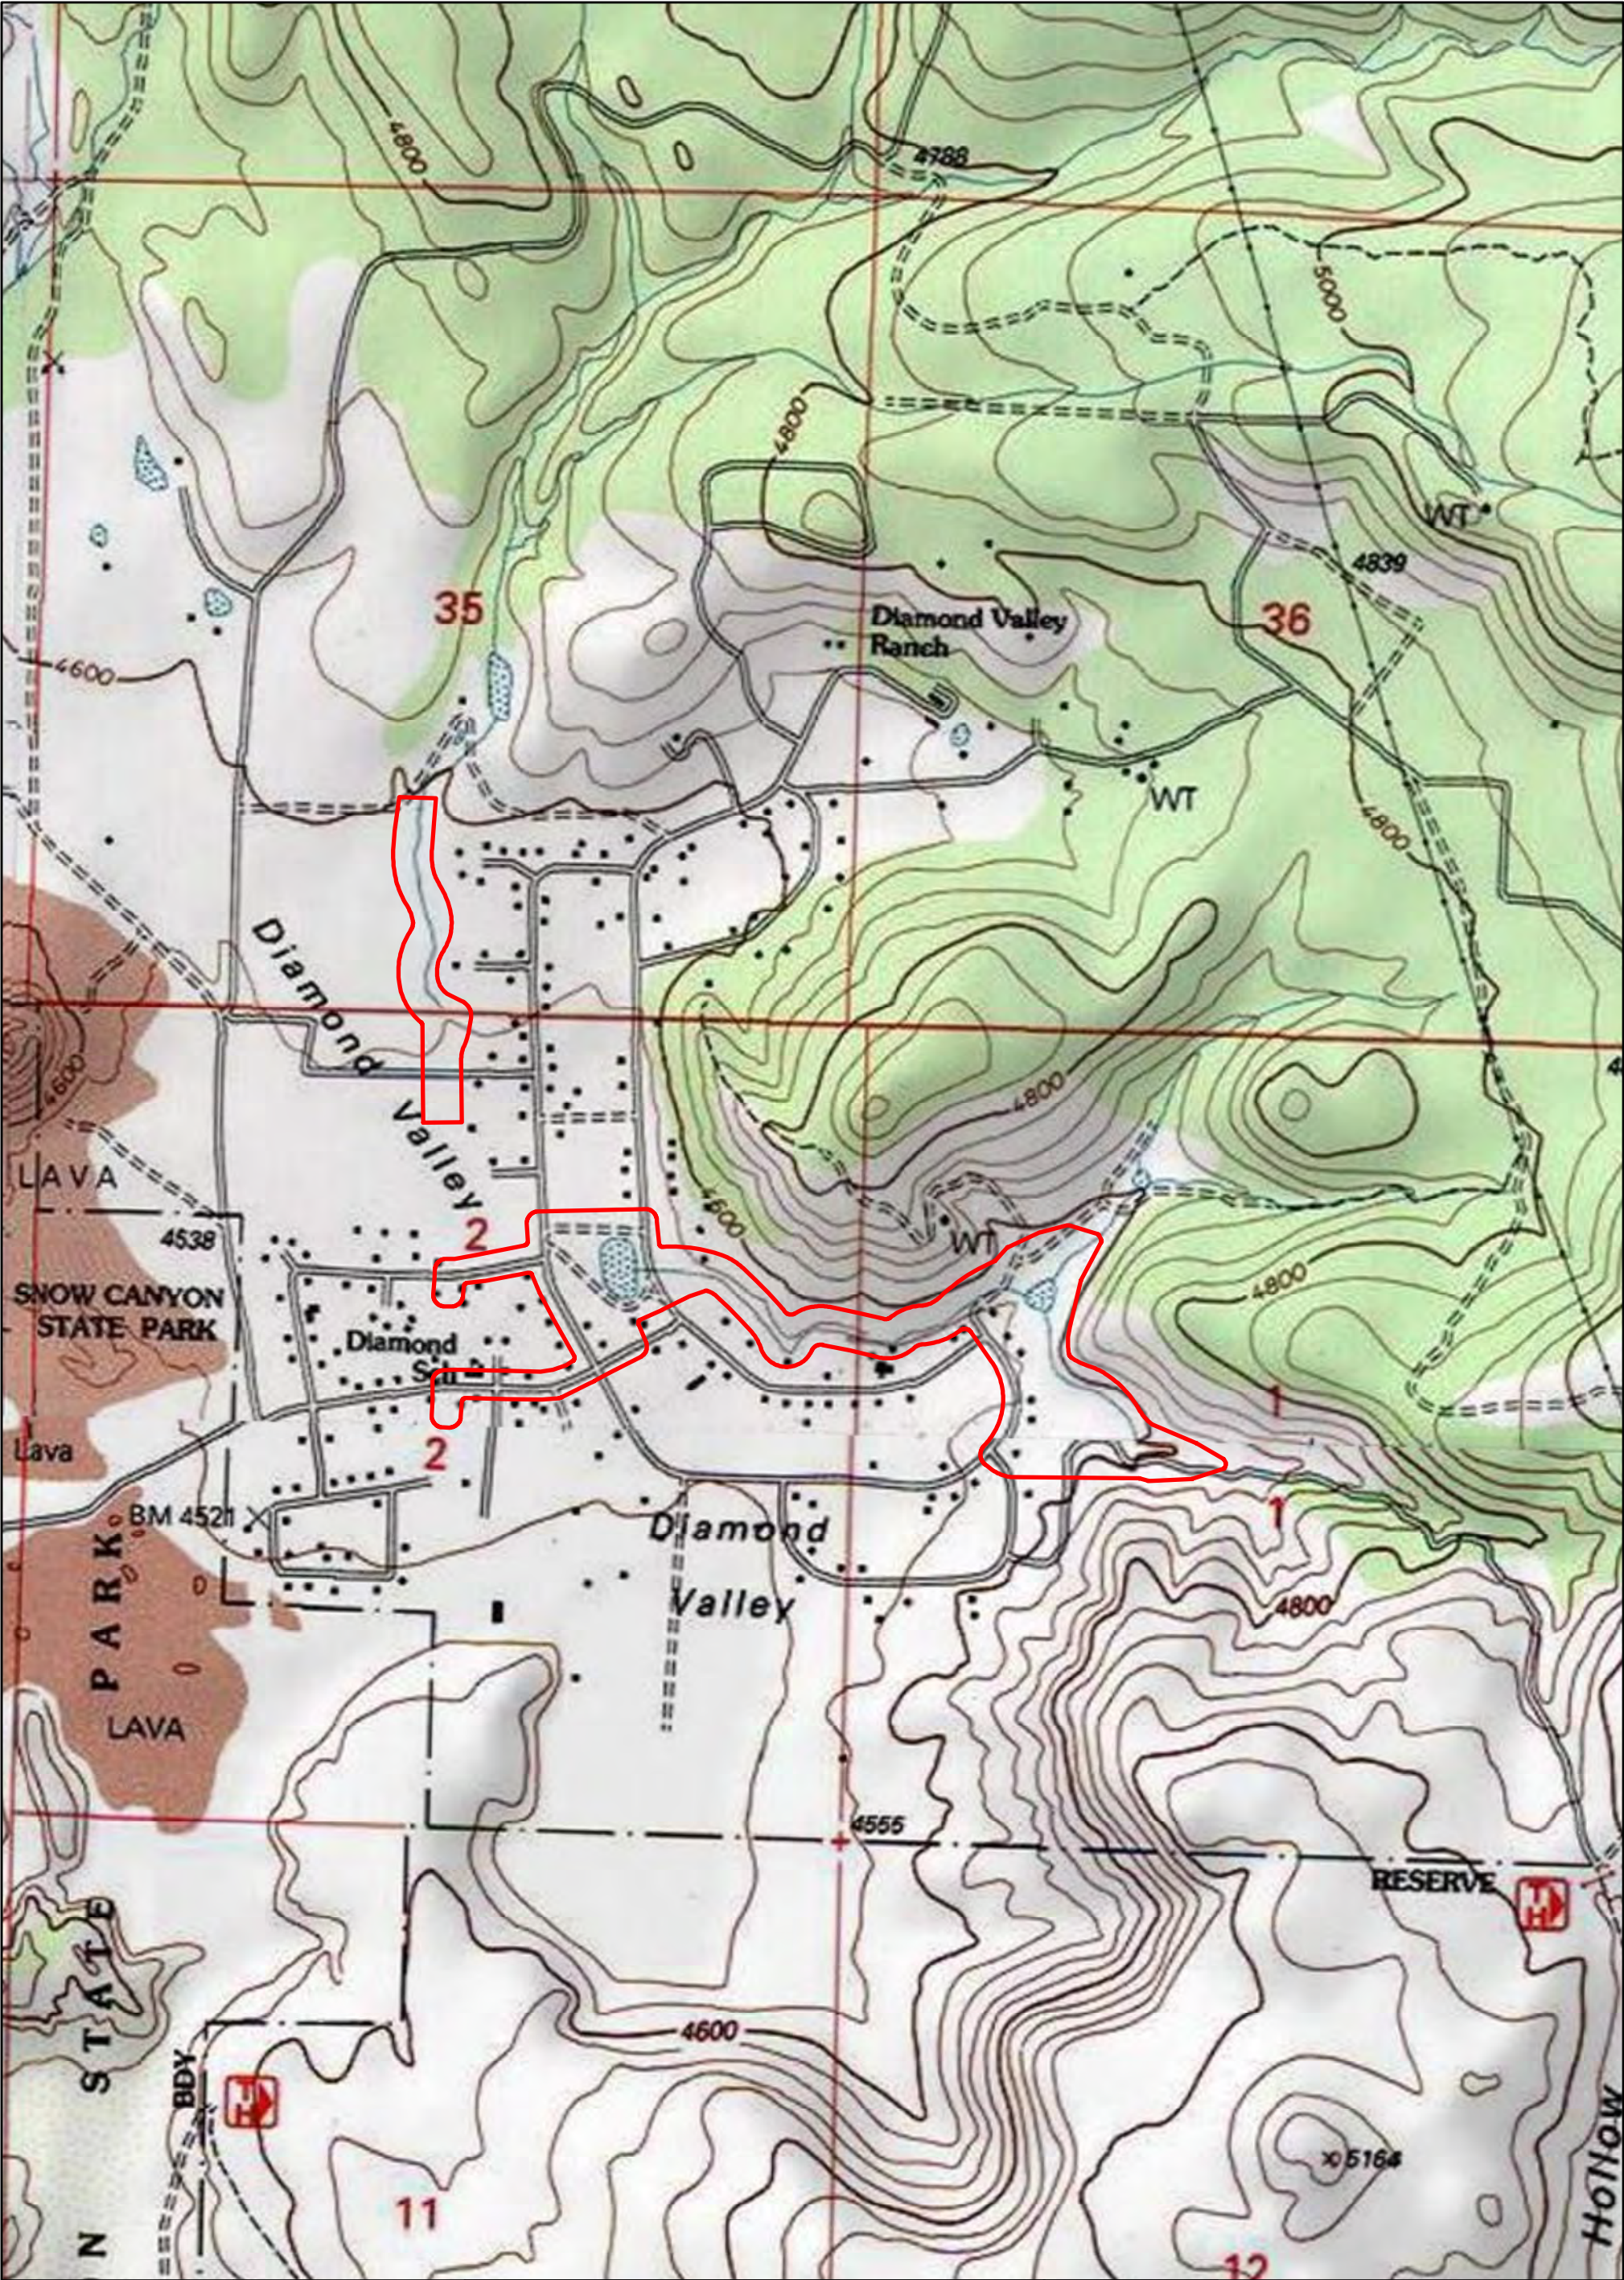

Santa Clara Watershed EA SPK 2021-00134		Drawn By: C Melisi Date: 10/8/2021		USGS 7.5' Quad Map (Saddle Mountain and Washington, Utah) (Diamond Valley Review Area)		Legend Review Area	
No.	Revision	Date	By	Appr.	0750150030004500 Feet Transcon environmental Planners & Scientists		

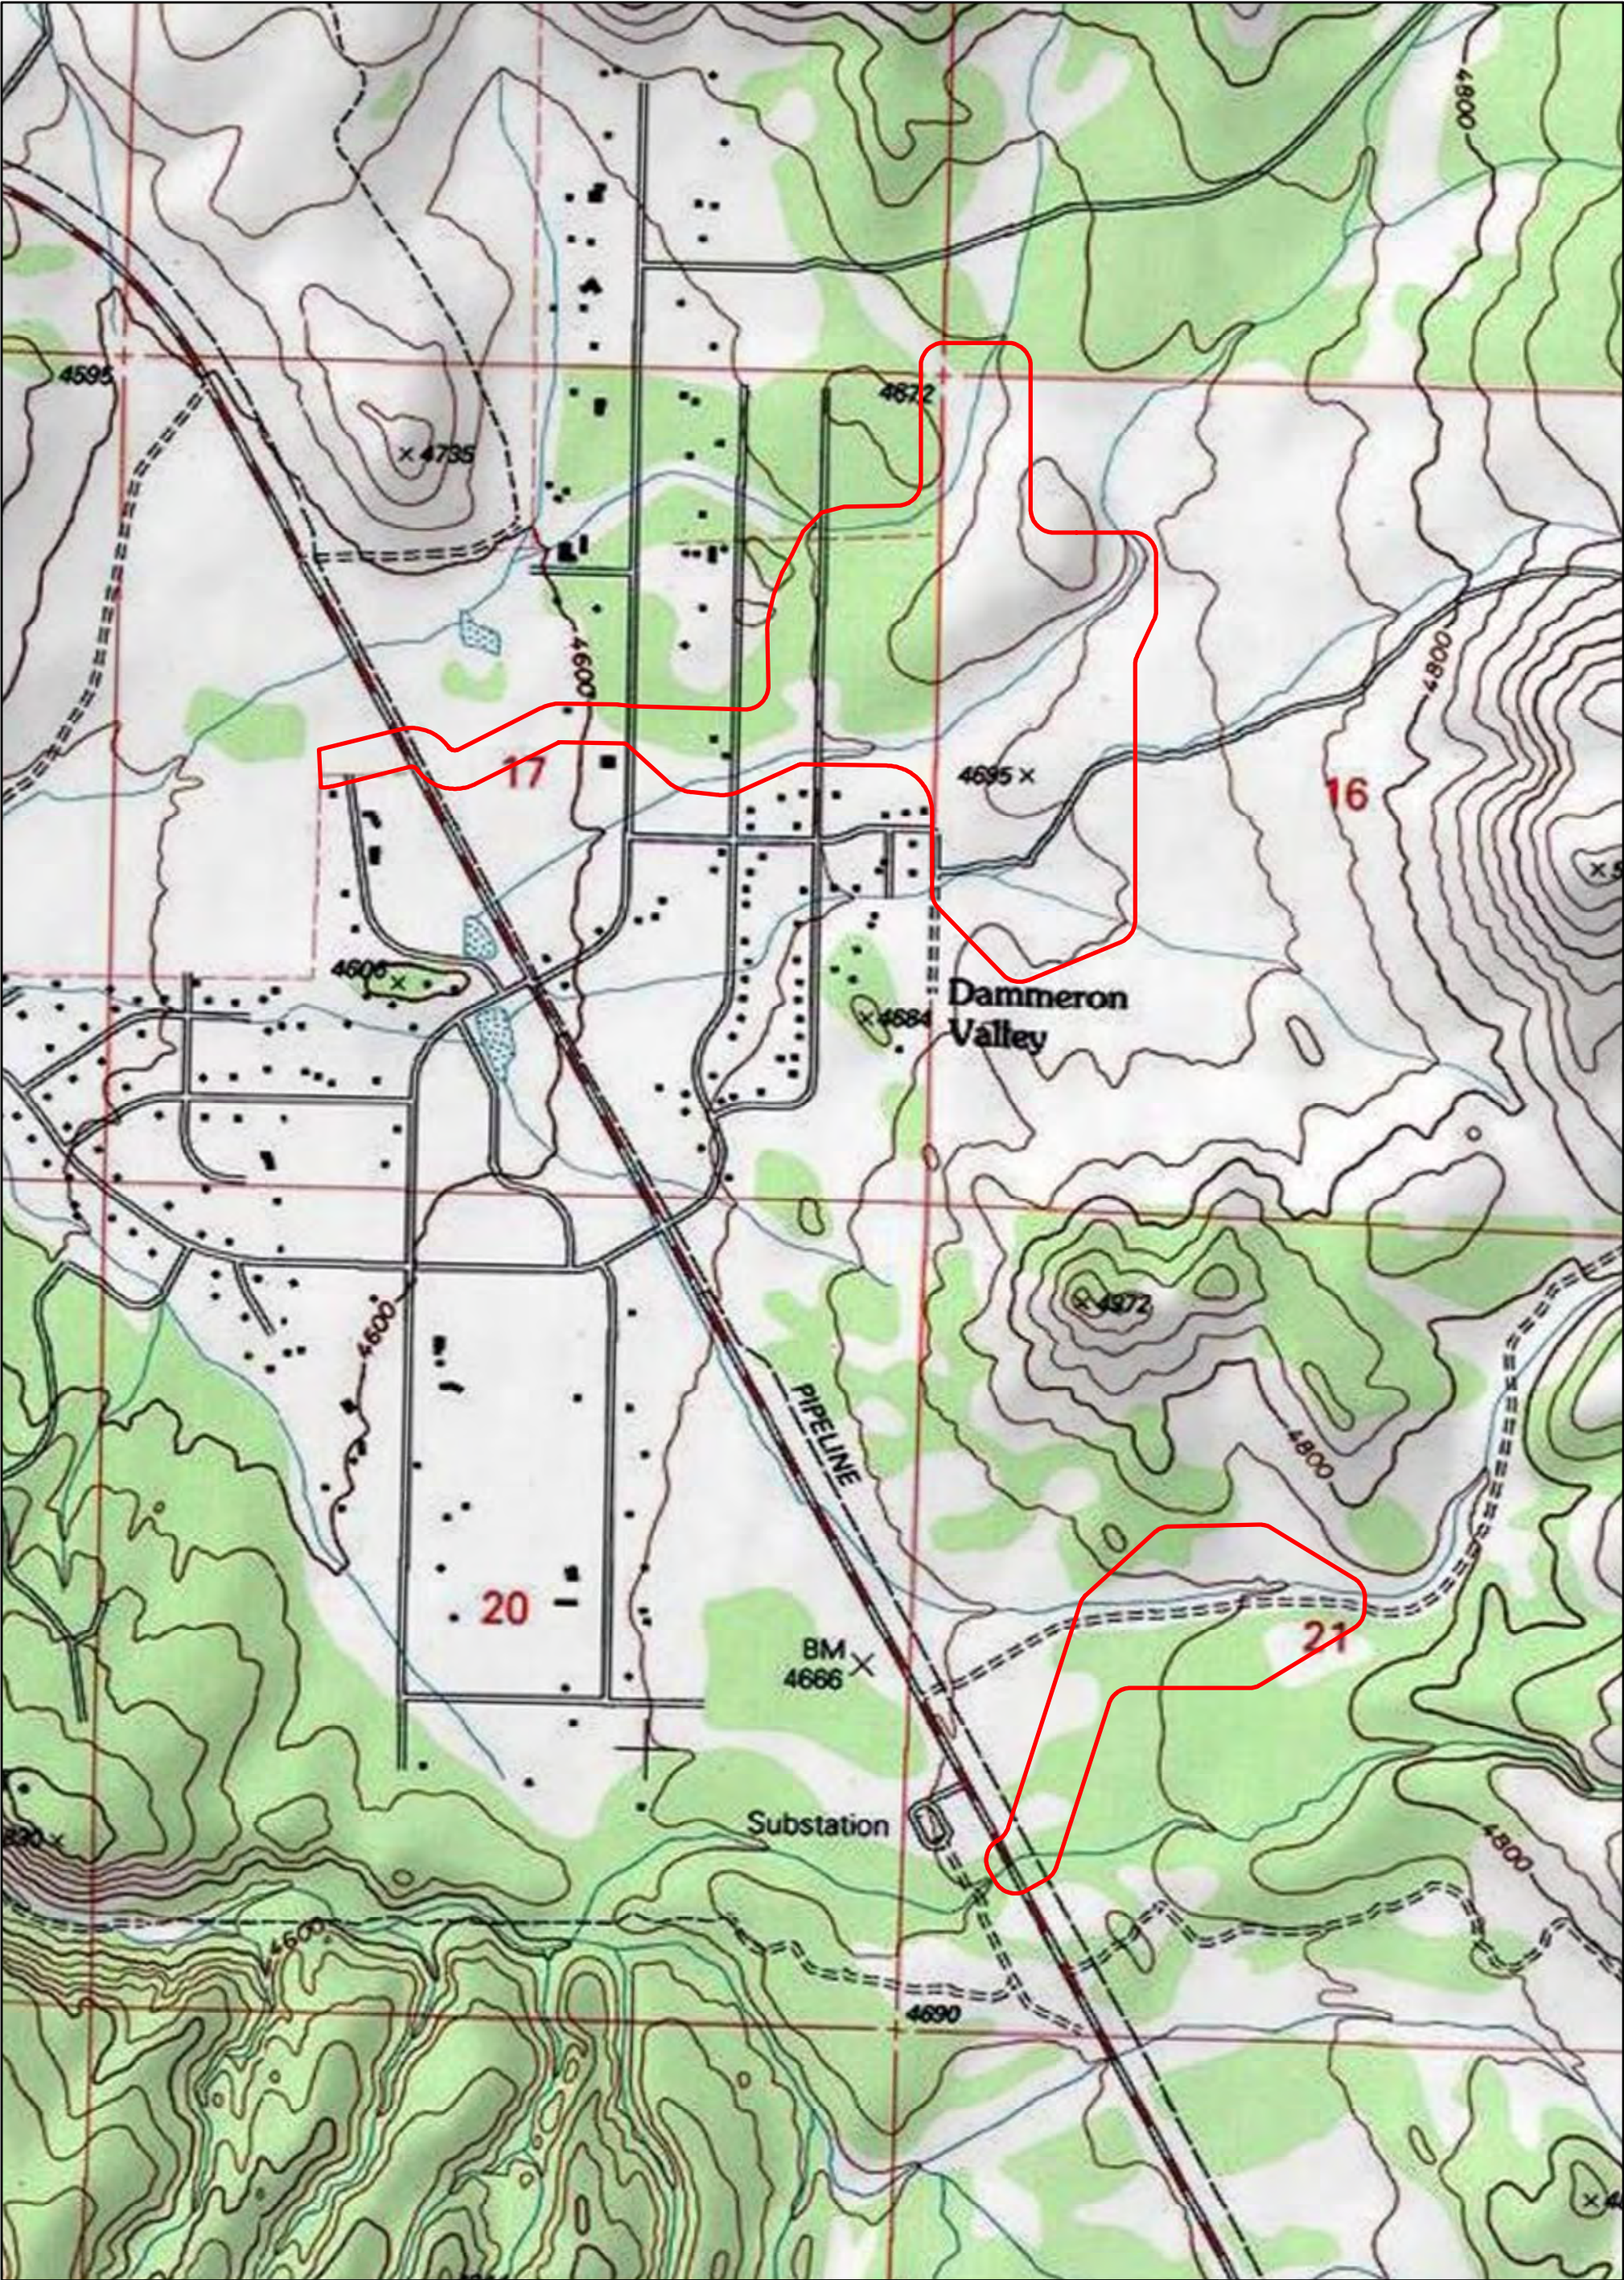

Santa Clara Watershed EA SPK 2021-00134		Drawn By: C Melisi Date: 10/8/2021		USGS 7.5' Quad Map (Veyo, Utah) (Dammeron Valley Review Area)		Legend Review Area	
No.	Revision	Date	By	Appr.	0750150030004500 Feet Transcon environmental Planners & Scientists		

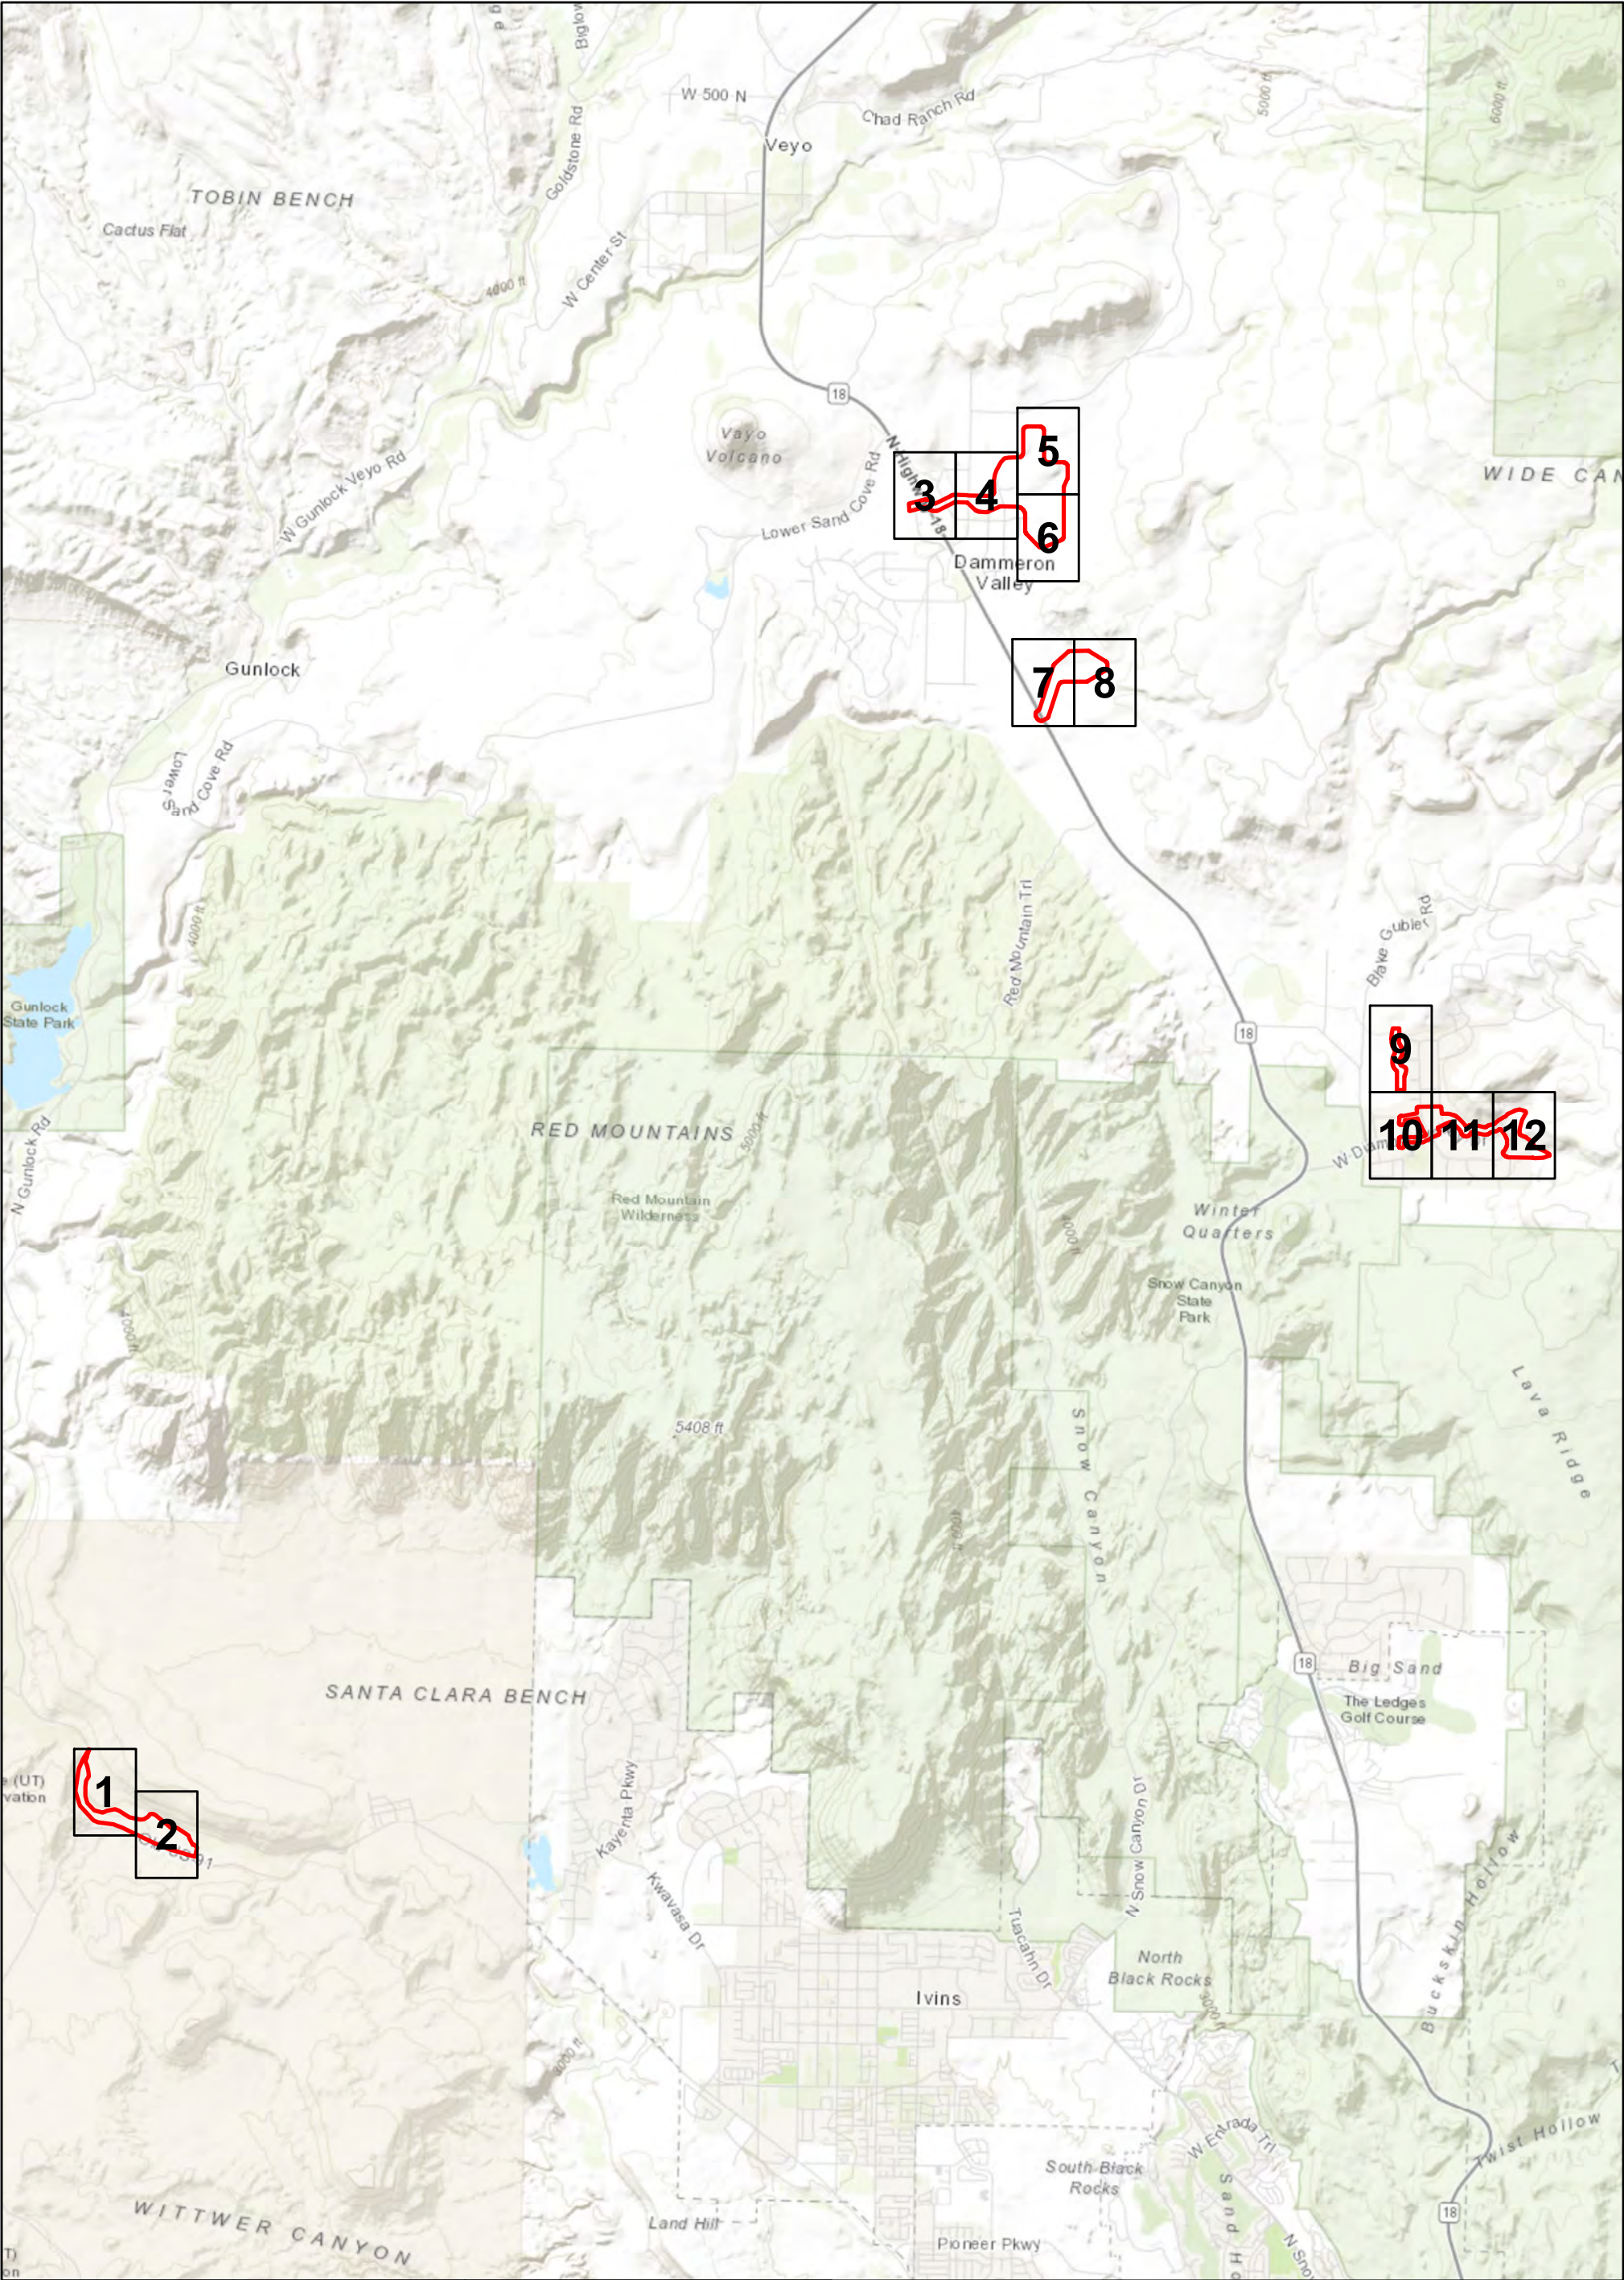

Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 10/8/2021

Aquatic Resources Detail Map
(Index)

No.

Revision

Date

By

Appr.

0

0.5

1

2

Miles

Transcon
environmental


Planners &
Scientists

Legend

Review Area

Sheet

ID	Lat	Long	Feet	Ac
Santa Clara River	37.189801	-113.768182	7339	N/A
Potential Wetland 1	37.289830	-113.658971	N/A	0.27
Ditch 1	37.184544	-113.764285	585	0.07
Ditch 2	37.181528	-113.755406	378	0.03
Wash 1	37.256417	-113.616200	6568	0.37
Wash 2	37.252145	-113.604987	1666	0.65
Wash 3	37.307989	-113.659420	939	0.3
Wash 4	37.306843	-113.658447	1942	0.09
Wash 5	37.310149	-113.664785	527	0.09
Wash 6	37.250350	-113.600470	2929	0.51
Wash 7	37.249609	-113.598584	1761	0.11
Wash 8	37.294549	-113.654708	1820	0.1
Wash 8a	37.252492	-113.609656	36	0

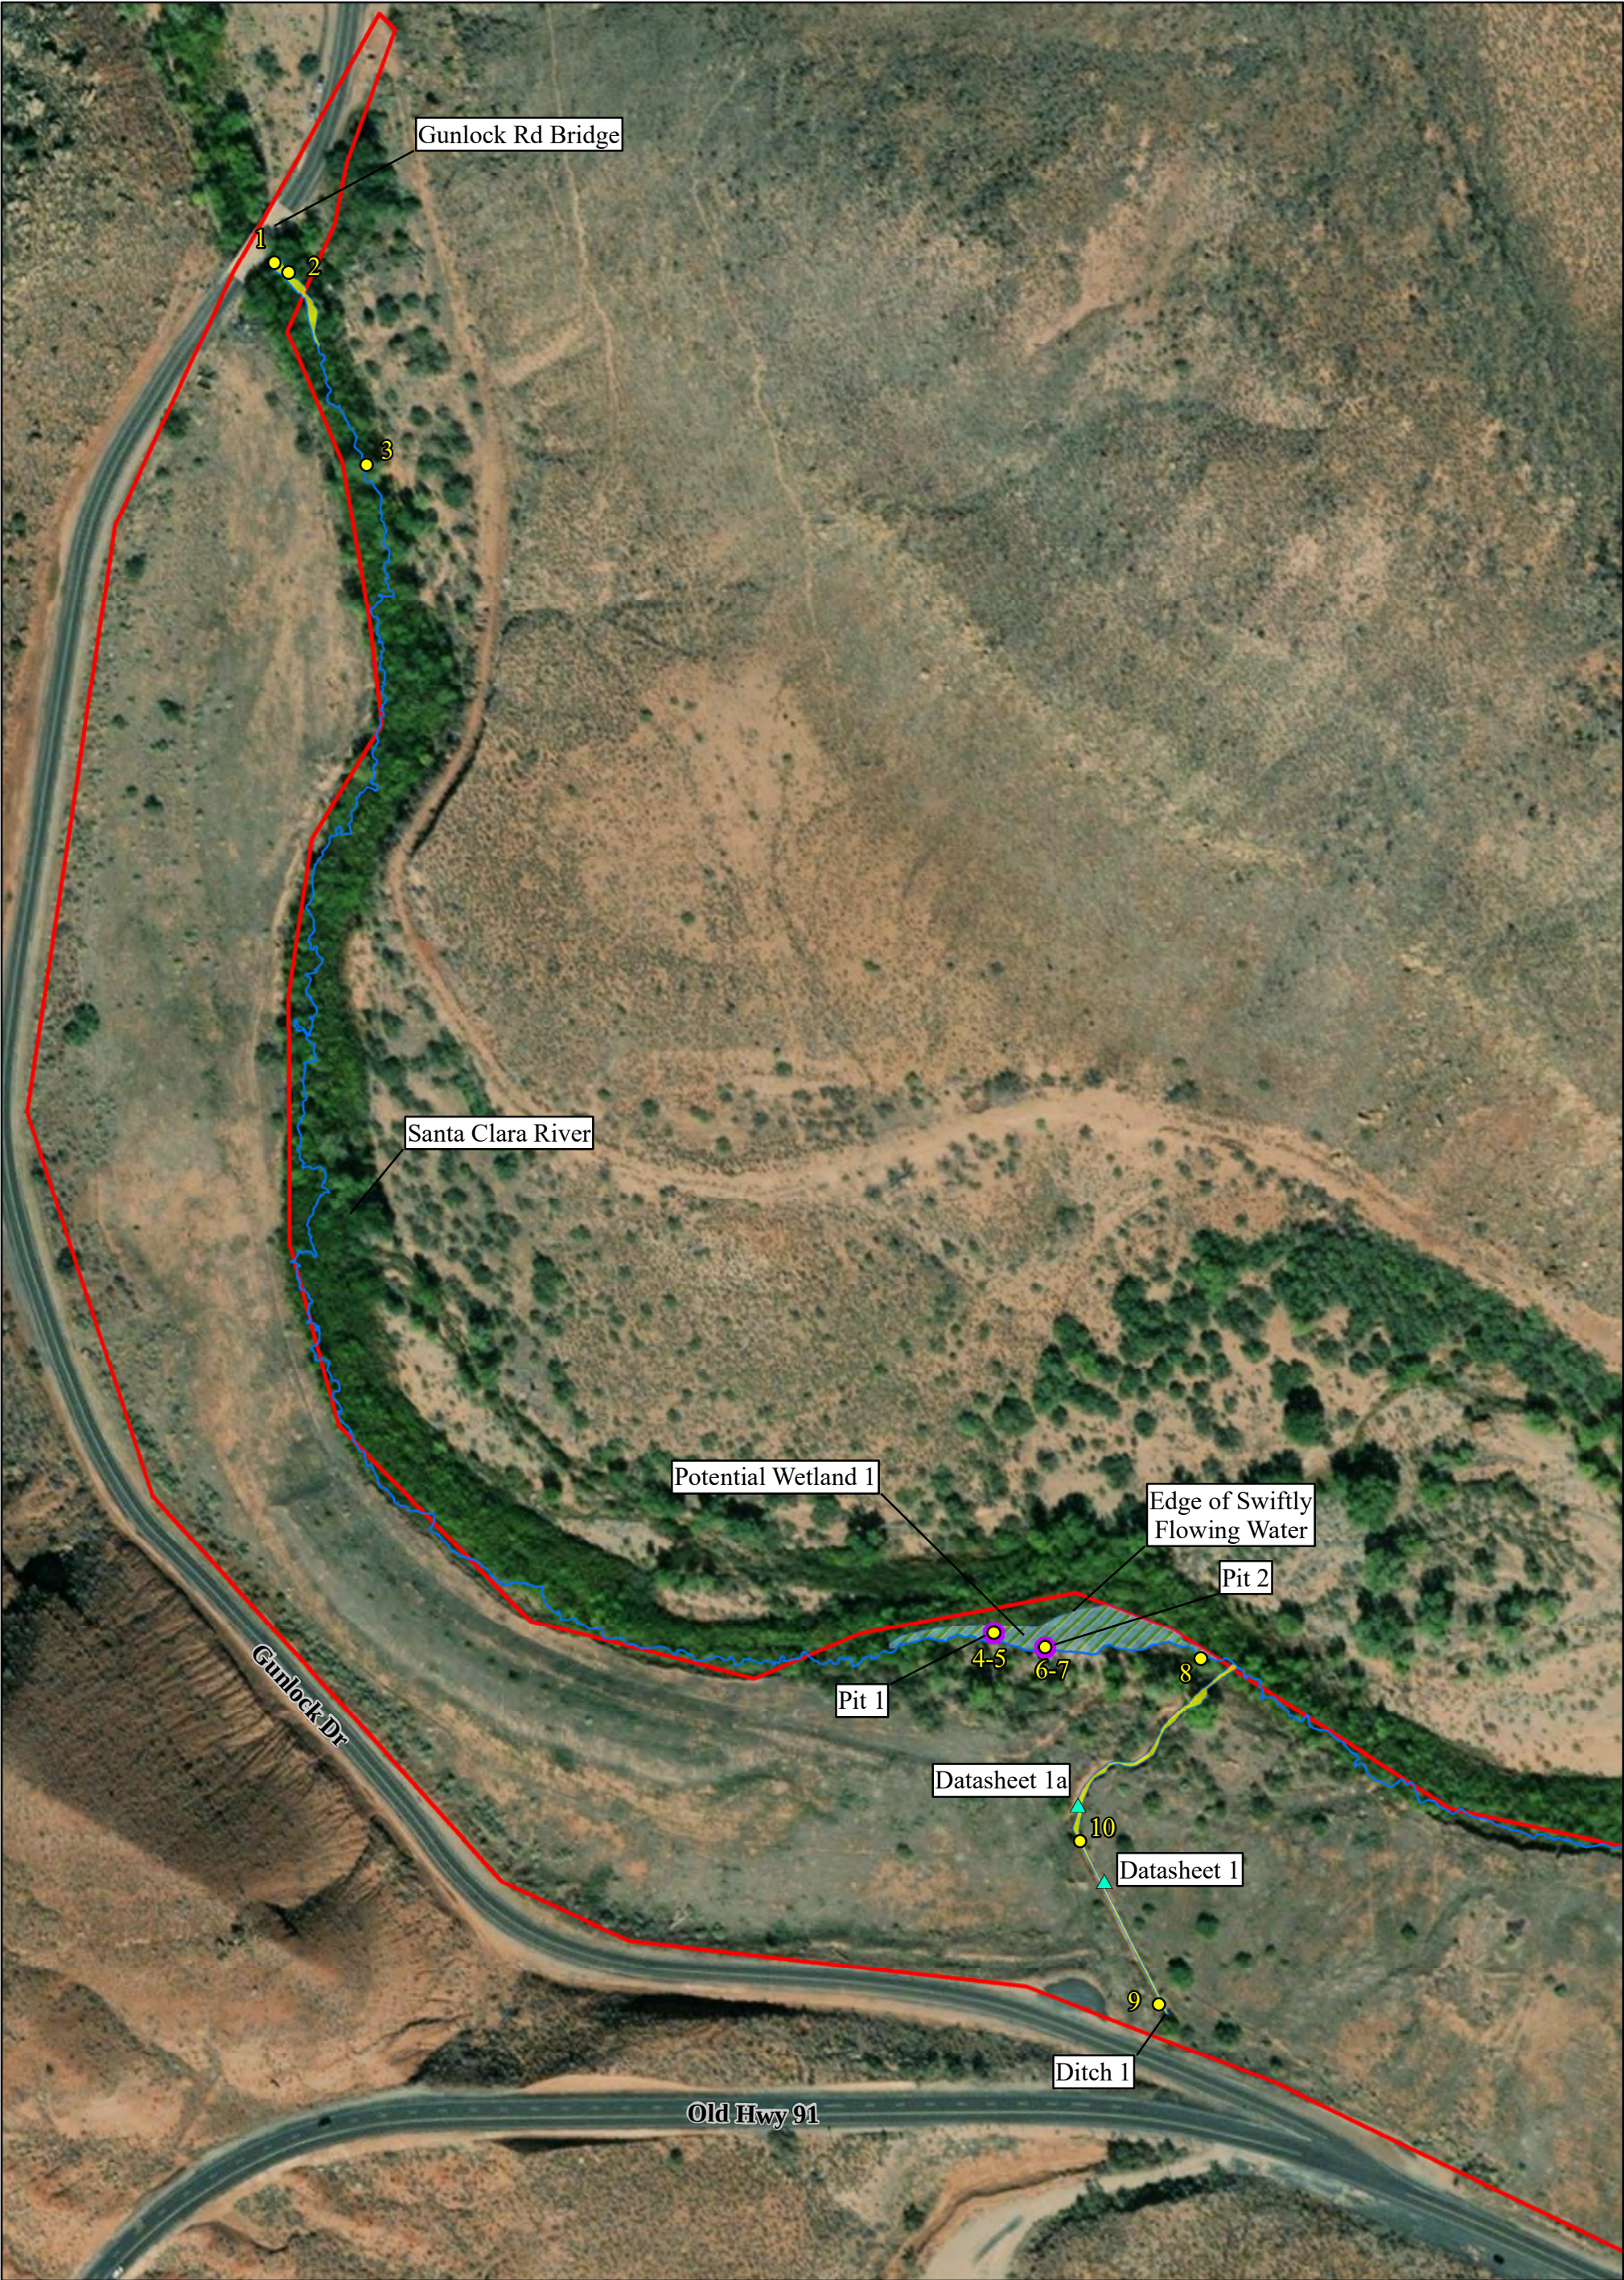

Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 6/7/2022

No.	Revision	Date	By	Appr.
1	Added pit locations to sheet 1. Correct lat/long of wetland 1.	6/7/2022	J. P. Smith	

Aquatic Resources Detail Map
(Sheet 1 of 12)

N

0200400

Feet

Transcon

environmental

Planners & Scientists

Legend

Review Area

Photo Location

OHWM Data Plot

Pit Location

Santa Clara River

Ordinary High Water Mark

Ordinary High Water Mark

Potential Wetland Limits

ID	Lat	Long	Feet	Ac
Santa Clara River	37.189801	-113.768182	7339	N/A
Potential Wetland 1	37.185060	-113.764722	N/A	0.27
Ditch 1	37.184544	-113.764285	585	0.07
Ditch 2	37.181528	-113.755406	378	0.03
Wash 1	37.256417	-113.616200	6568	0.37
Wash 2	37.252145	-113.604987	1666	0.65
Wash 3	37.307989	-113.659420	939	0.3
Wash 4	37.306843	-113.658447	1942	0.09
Wash 5	37.310149	-113.664785	527	0.09
Wash 6	37.250350	-113.600470	2929	0.51
Wash 7	37.249609	-113.598584	1761	0.11
Wash 8	37.294549	-113.654708	1820	0.1
Wash 8a	37.252492	-113.609656	36	0



Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 6/7/2022

Aquatic Resources Detail Map
(Sheet 2 of 12)

No.

Revision

Date

By

Appr.

1

Added pit locations to sheet 1. Correct lat/long of wetland 1.

6/7/2022

J. Pfadt

N

0

200

400

Feet

Transcon
environmental

Planners &
Scientists

Legend

Review Area

Photo Location

OHWM Data Plot

Santa Clara River

Ordinary High Water Mark

Ordinary High Water Mark

ID	Lat	Long	Feet	Ac
Santa Clara River	37.189801	-113.768182	7339	N/A
Potential Wetland 1	37.185060	-113.764722	N/A	0.27
Ditch 1	37.184544	-113.764285	585	0.07
Ditch 2	37.181528	-113.755406	378	0.03
Wash 1	37.256417	-113.616200	6568	0.37
Wash 2	37.252145	-113.604987	1666	0.65
Wash 3	37.307989	-113.659420	939	0.3
Wash 4	37.306843	-113.658447	1942	0.09
Wash 5	37.310149	-113.664785	527	0.09
Wash 6	37.250350	-113.600470	2929	0.51
Wash 7	37.249609	-113.598584	1761	0.11
Wash 8	37.294549	-113.654708	1820	0.1
Wash 8a	37.252492	-113.609656	36	0



Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 6/7/2022

Aquatic Resources Detail Map
(Sheet 3 of 12)

No.

Revision

Date

By

Appr.

1

Added pit locations to sheet 1. Correct lat/long of wetland 1.

6/7/2022

J. P. Smith

0

200

400

Feet

Transcon

environmental

Planners & Scientists

Legend


Review Area

Photo Location

OHWM Data Plot

Ordinary High Water Mark

ID	Lat	Long	Feet	Ac
Santa Clara River	37.189801	-113.768182	7339	N/A
Potential Wetland 1	37.185060	-113.764722	N/A	0.27
Ditch 1	37.184544	-113.764285	585	0.07
Ditch 2	37.181528	-113.755406	378	0.03
Wash 1	37.256417	-113.616200	6568	0.37
Wash 2	37.252145	-113.604987	1666	0.65
Wash 3	37.307989	-113.659420	939	0.3
Wash 4	37.306843	-113.658447	1942	0.09
Wash 5	37.310149	-113.664785	527	0.09
Wash 6	37.250350	-113.600470	2929	0.51
Wash 7	37.249609	-113.598584	1761	0.11
Wash 8	37.294549	-113.654708	1820	0.1
Wash 8a	37.252492	-113.609656	36	0

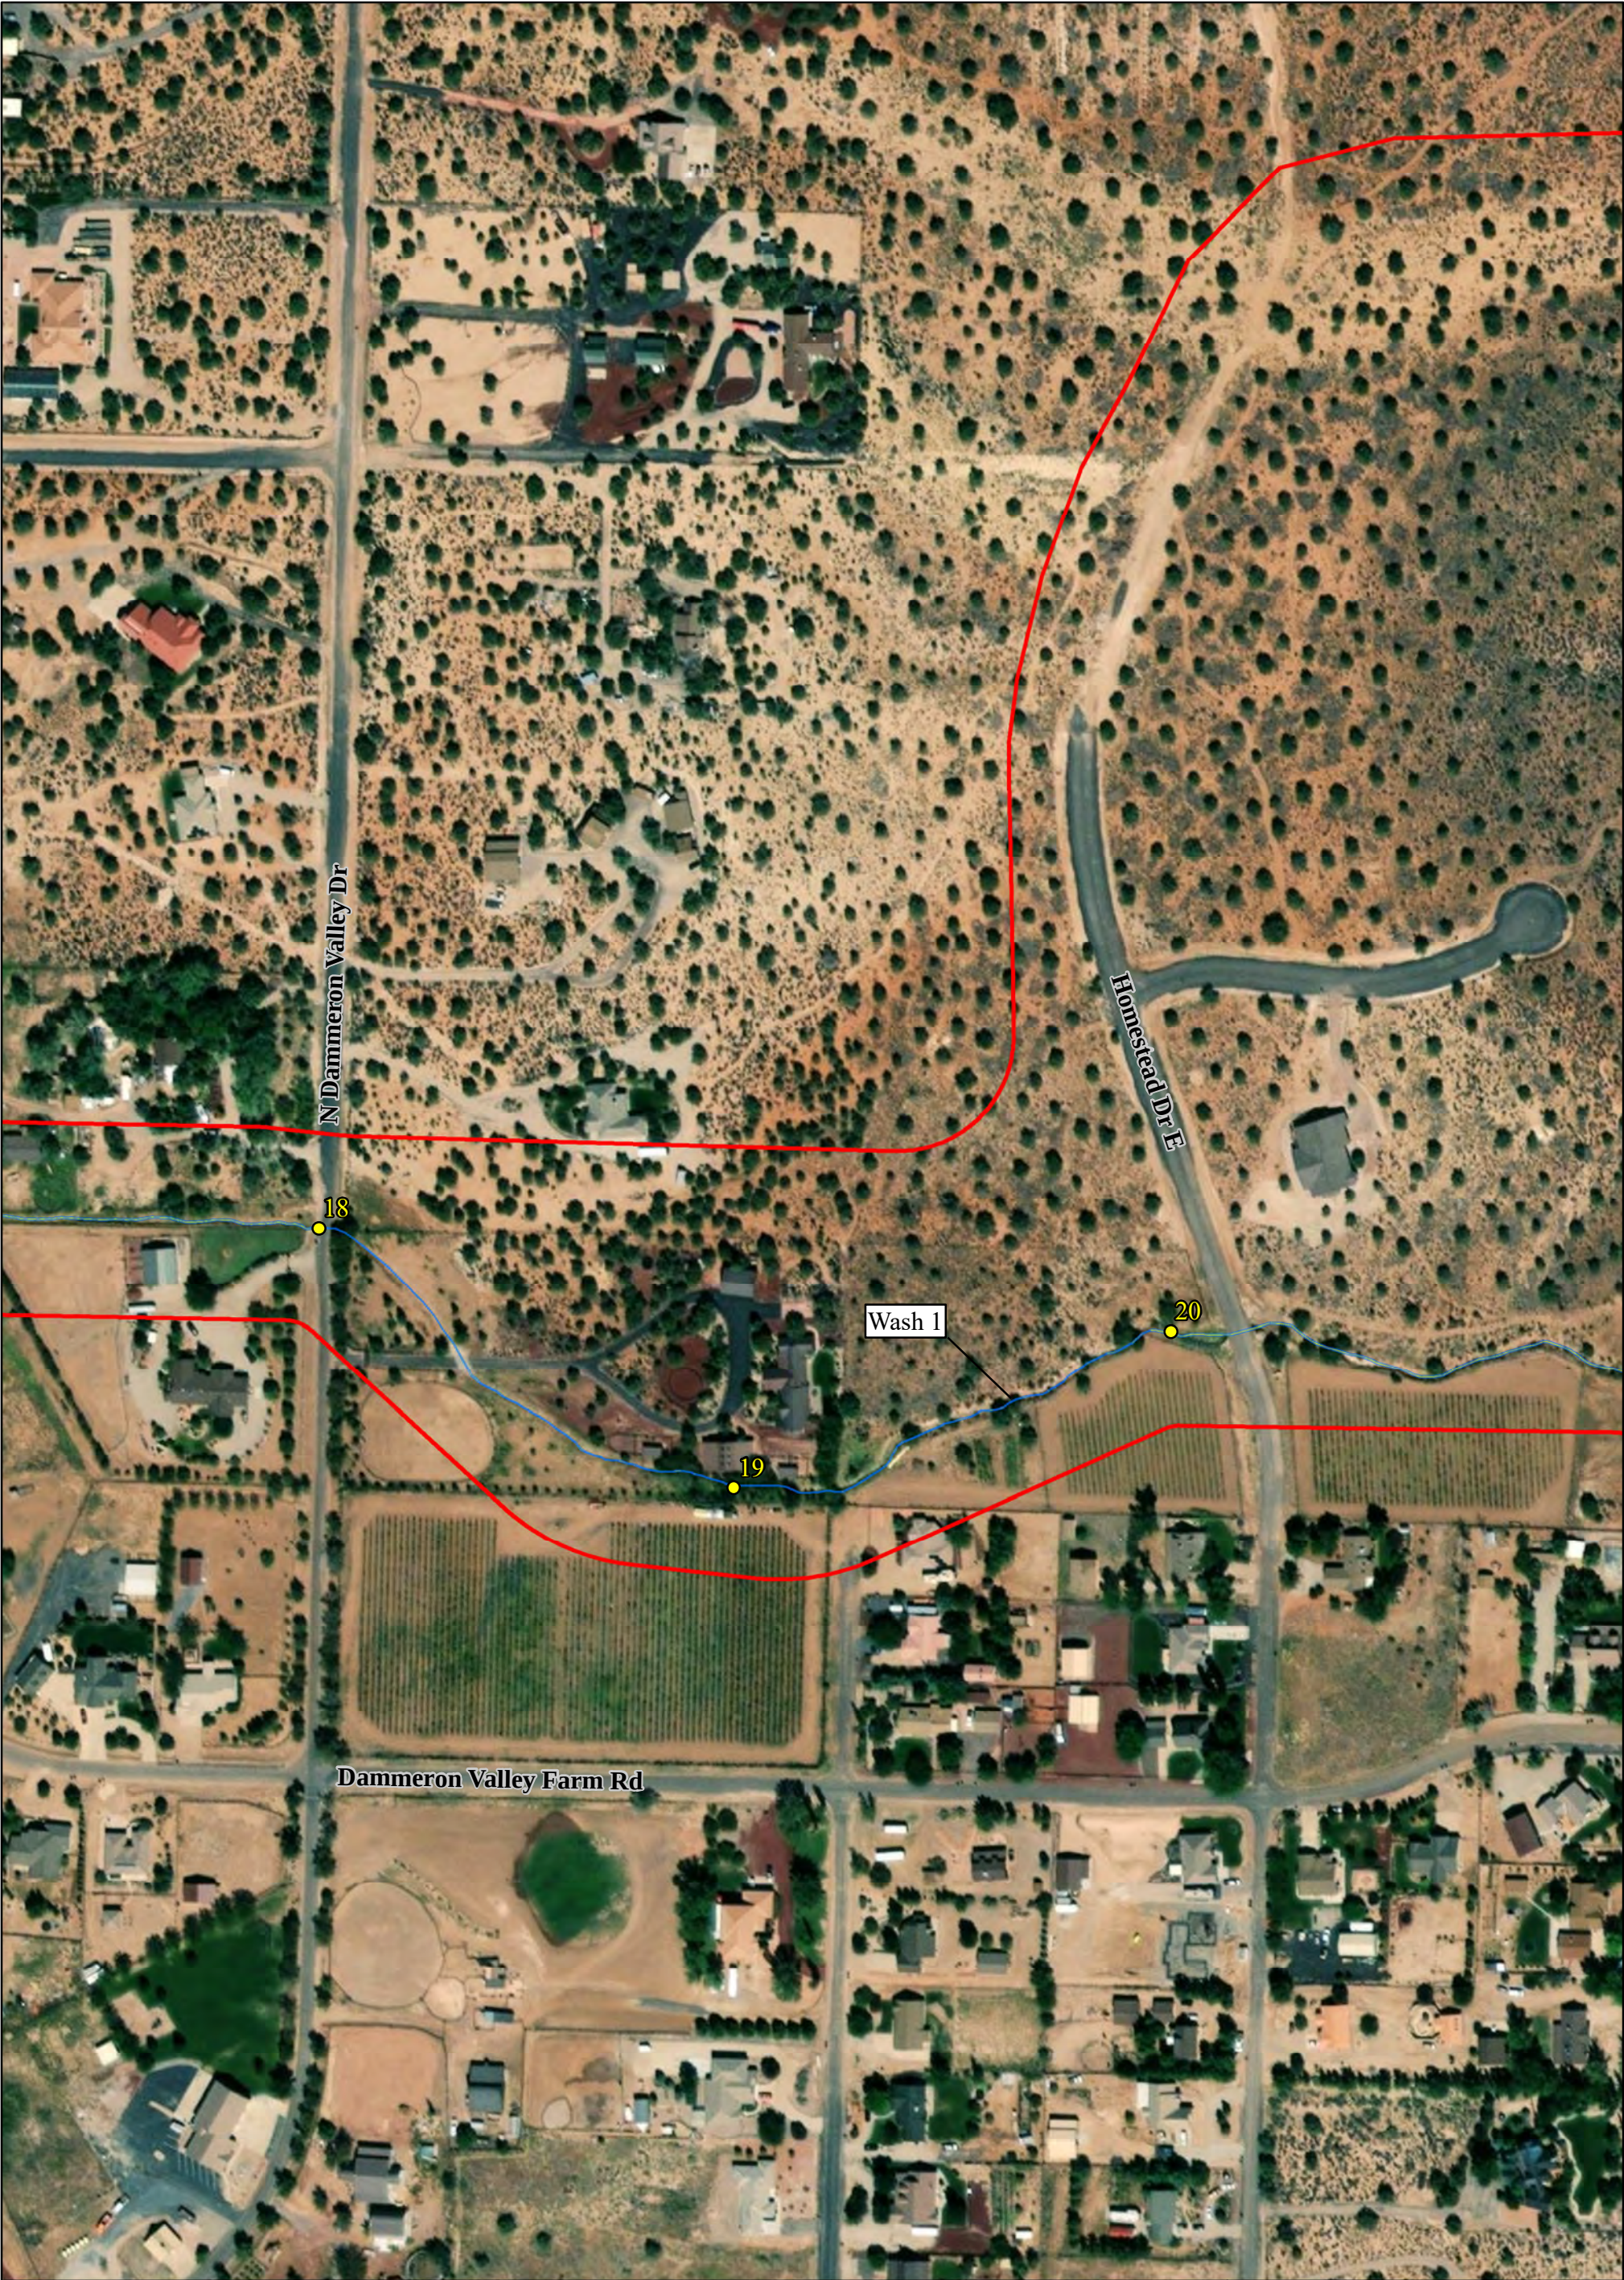

Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 6/7/2022

No.	Revision	Date	By	Appr.
1	Added pit locations to sheet 1. Correct lat/long of wetland 1.	6/7/2022	J. P. Smith	

Aquatic Resources Detail Map
(Sheet 4 of 12)

N

0200400

Feet

Transcon

environmental

Planners & Scientists

Legend


Review Area

Photo Location

OHWM Data Plot

Ordinary High Water Mark

ID	Lat	Long	Feet	Ac
Santa Clara River	37.189801	-113.768182	7339	N/A
Potential Wetland 1	37.185060	-113.764722	N/A	0.27
Ditch 1	37.184544	-113.764285	585	0.07
Ditch 2	37.181528	-113.755406	378	0.03
Wash 1	37.256417	-113.616200	6568	0.37
Wash 2	37.252145	-113.604987	1666	0.65
Wash 3	37.307989	-113.659420	939	0.3
Wash 4	37.306843	-113.658447	1942	0.09
Wash 5	37.310149	-113.664785	527	0.09
Wash 6	37.250350	-113.600470	2929	0.51
Wash 7	37.249609	-113.598584	1761	0.11
Wash 8	37.294549	-113.654708	1820	0.1
Wash 8a	37.252492	-113.609656	36	0

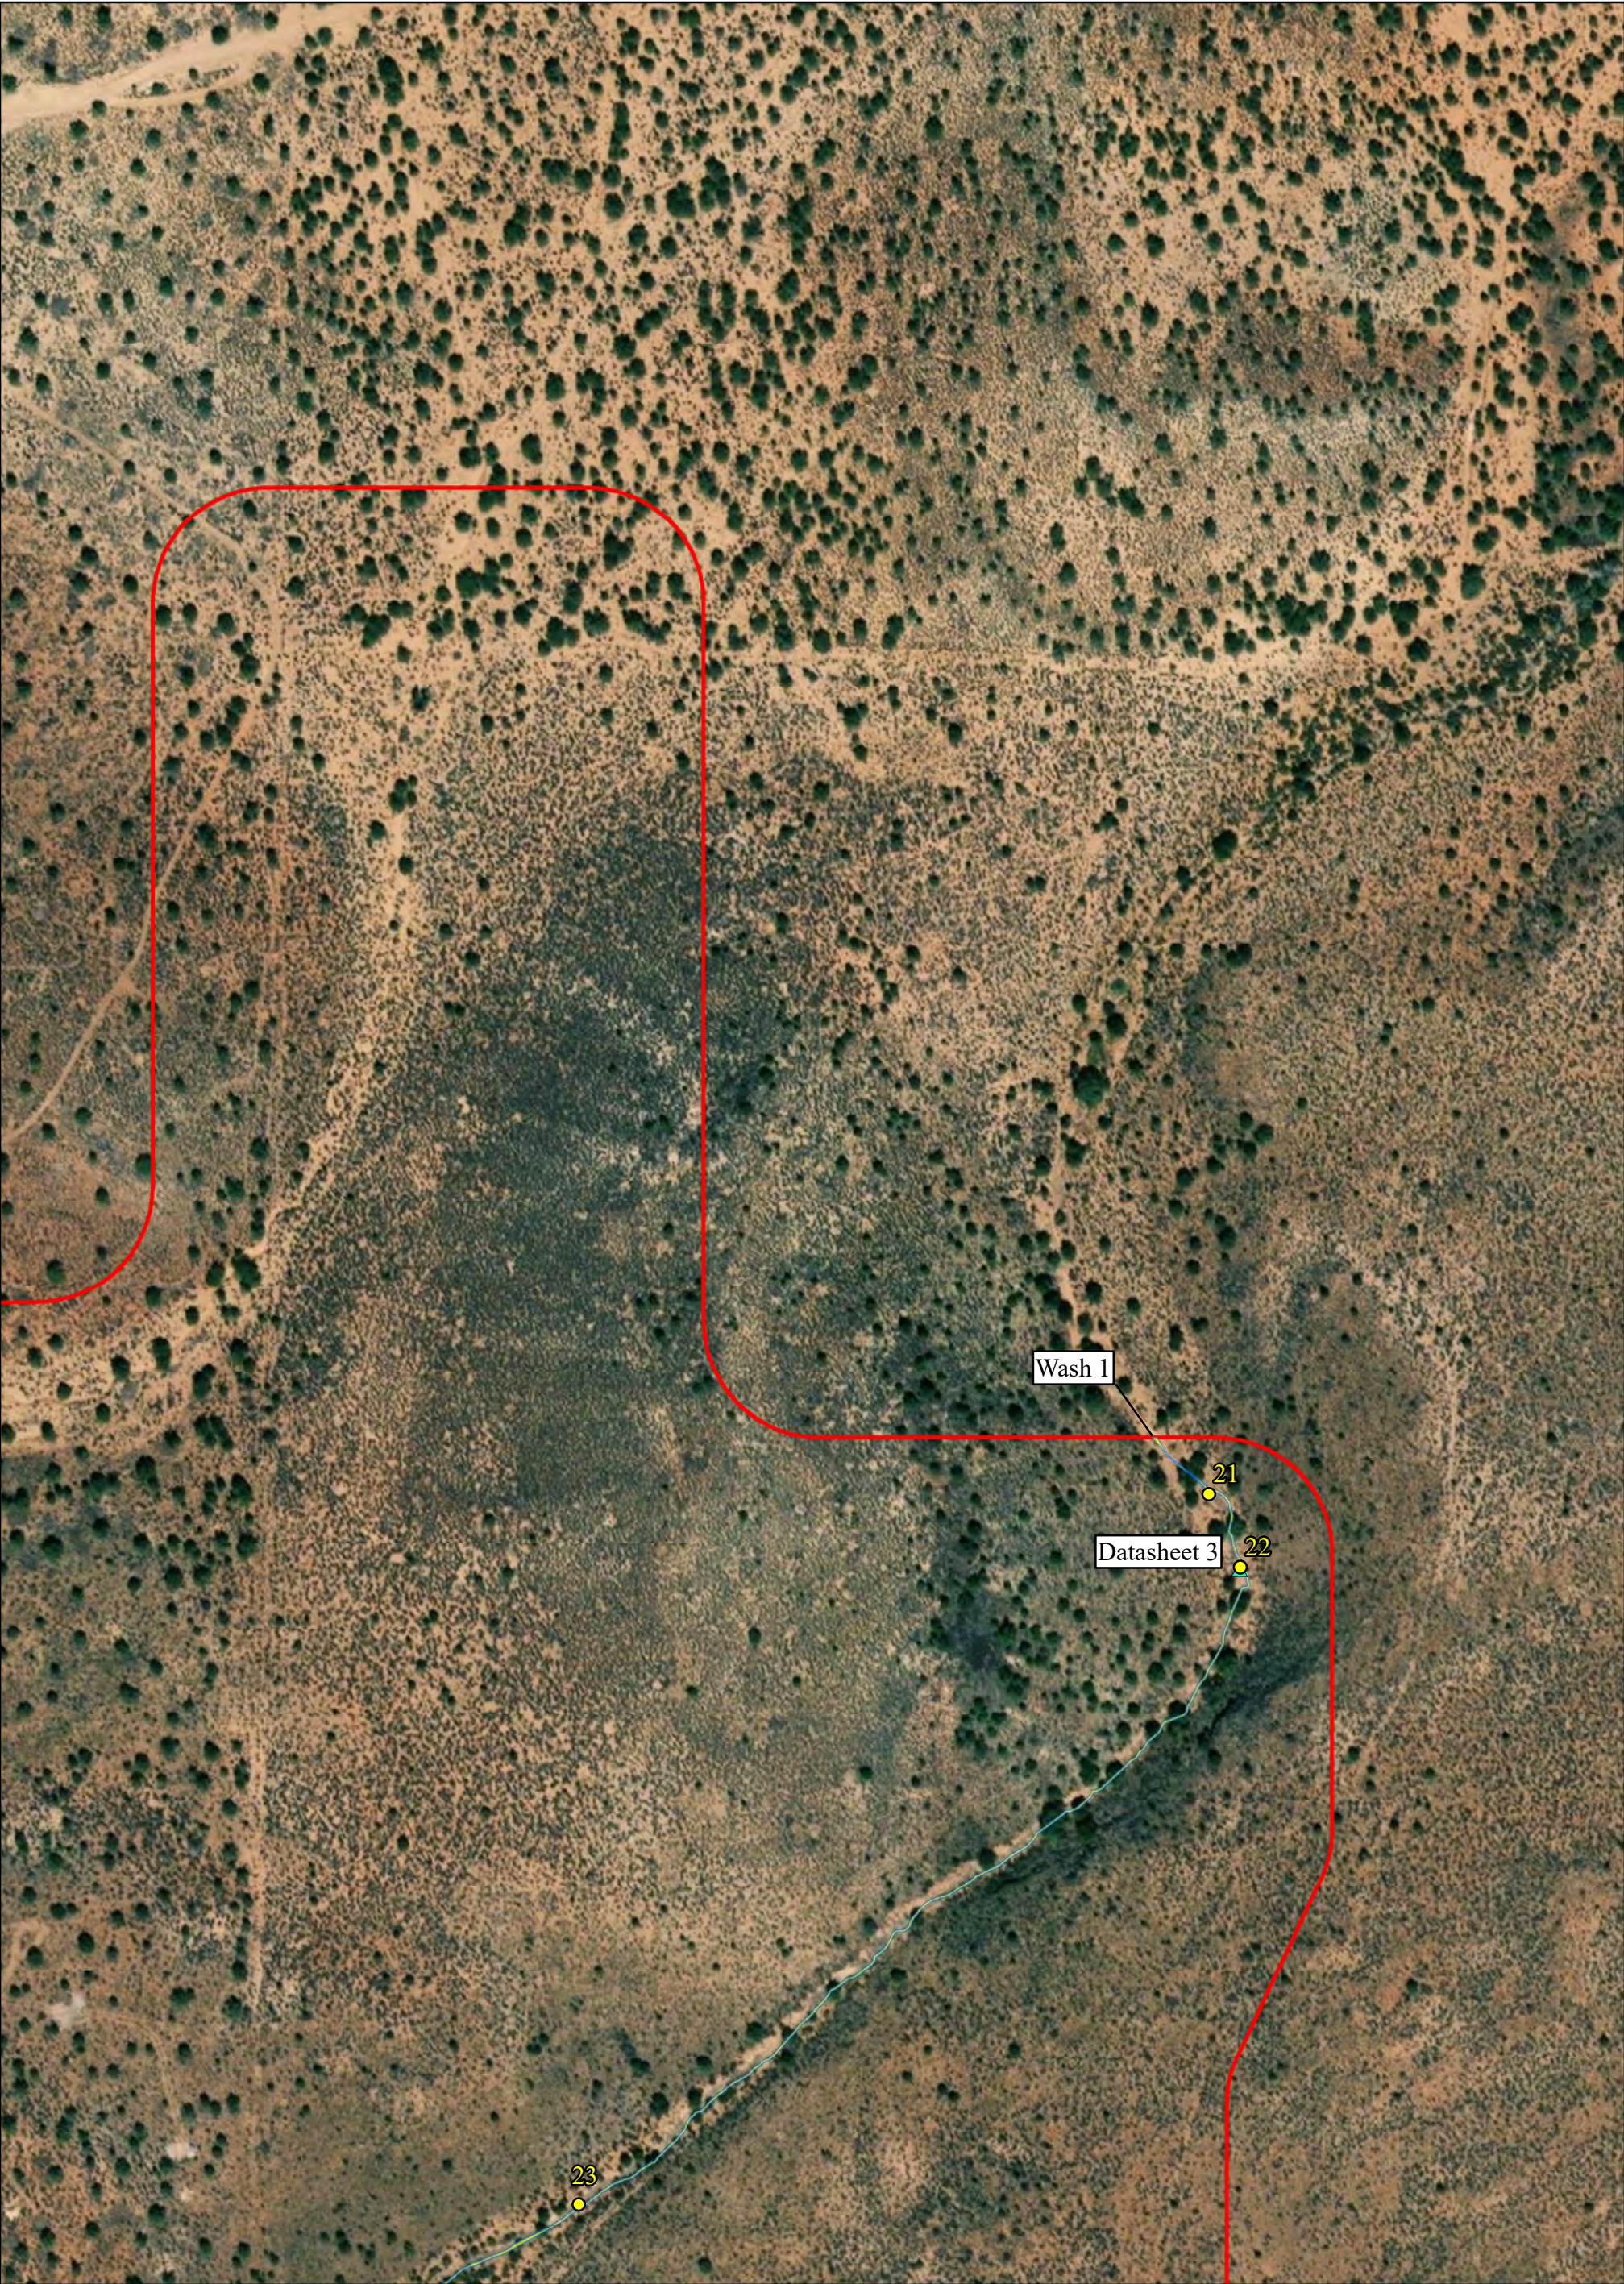

Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 6/7/2022

No.	Revision	Date	By	Appr.
1	Added pit locations to sheet 1. Correct lat/long of wetland 1.	6/7/2022	J. P. Smith	

Aquatic Resources Detail Map
(Sheet 5 of 12)

N

0200400

Feet

Transcon

environmental

Planners & Scientists

Legend


Review Area

Photo Location

OHWM Data Plot

Ordinary High Water Mark

ID	Lat	Long	Feet	Ac
Santa Clara River	37.189801	-113.768182	7339	N/A
Potential Wetland 1	37.185060	-113.764722	N/A	0.27
Ditch 1	37.184544	-113.764285	585	0.07
Ditch 2	37.181528	-113.755406	378	0.03
Wash 1	37.256417	-113.616200	6568	0.37
Wash 2	37.252145	-113.604987	1666	0.65
Wash 3	37.307989	-113.659420	939	0.3
Wash 4	37.306843	-113.658447	1942	0.09
Wash 5	37.310149	-113.664785	527	0.09
Wash 6	37.250350	-113.600470	2929	0.51
Wash 7	37.249609	-113.598584	1761	0.11
Wash 8	37.294549	-113.654708	1820	0.1
Wash 8a	37.252492	-113.609656	36	0

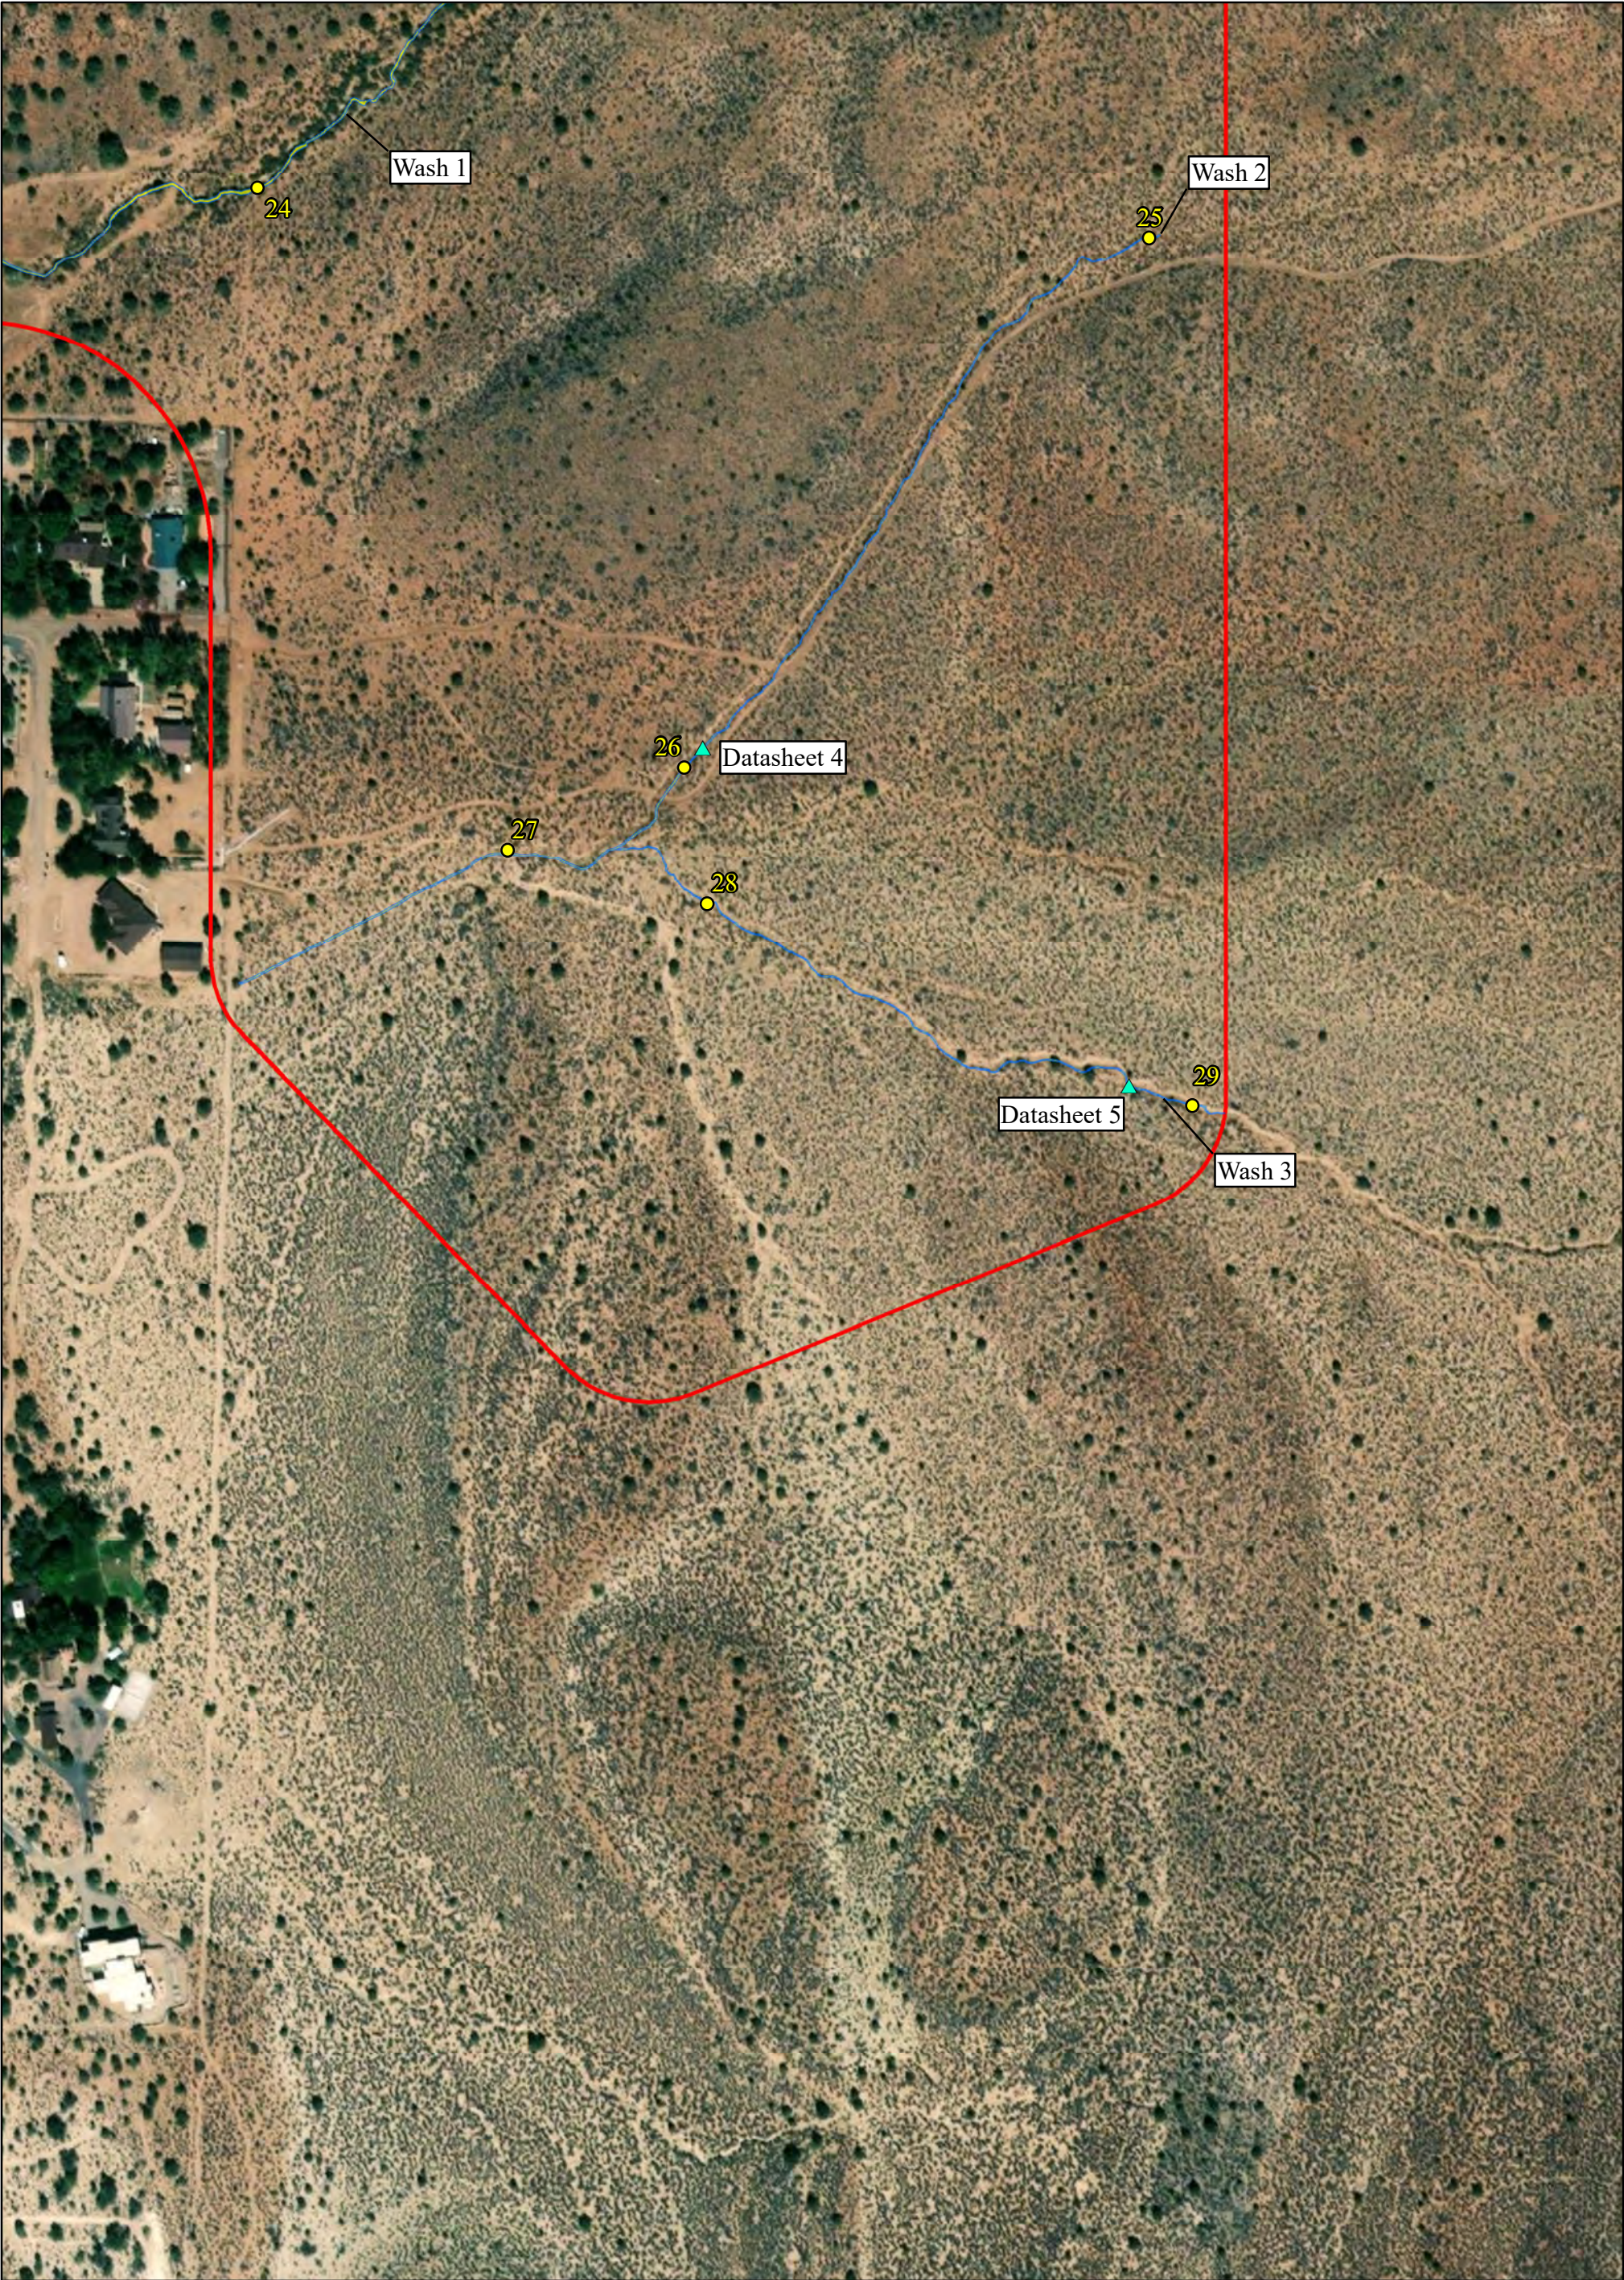

Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 6/7/2022

No.	Revision	Date	By	Appr.
1	Added pit locations to sheet 1. Correct lat/long of wetland 1.	6/7/2022	J. Pfaud	

Aquatic Resources Detail Map
(Sheet 6 of 12)

N

0200400

Feet

Transcon

environmental

Planners & Scientists

Legend


Review Area

Photo Location

OHWM Data Plot

Ordinary High Water Mark

ID	Lat	Long	Feet	Ac
Santa Clara River	37.189801	-113.768182	7339	N/A
Potential Wetland 1	37.185060	-113.764722	N/A	0.27
Ditch 1	37.184544	-113.764285	585	0.07
Ditch 2	37.181528	-113.755406	378	0.03
Wash 1	37.256417	-113.616200	6568	0.37
Wash 2	37.252145	-113.604987	1666	0.65
Wash 3	37.307989	-113.659420	939	0.3
Wash 4	37.306843	-113.658447	1942	0.09
Wash 5	37.310149	-113.664785	527	0.09
Wash 6	37.250350	-113.600470	2929	0.51
Wash 7	37.249609	-113.598584	1761	0.11
Wash 8	37.294549	-113.654708	1820	0.1
Wash 8a	37.252492	-113.609656	36	0

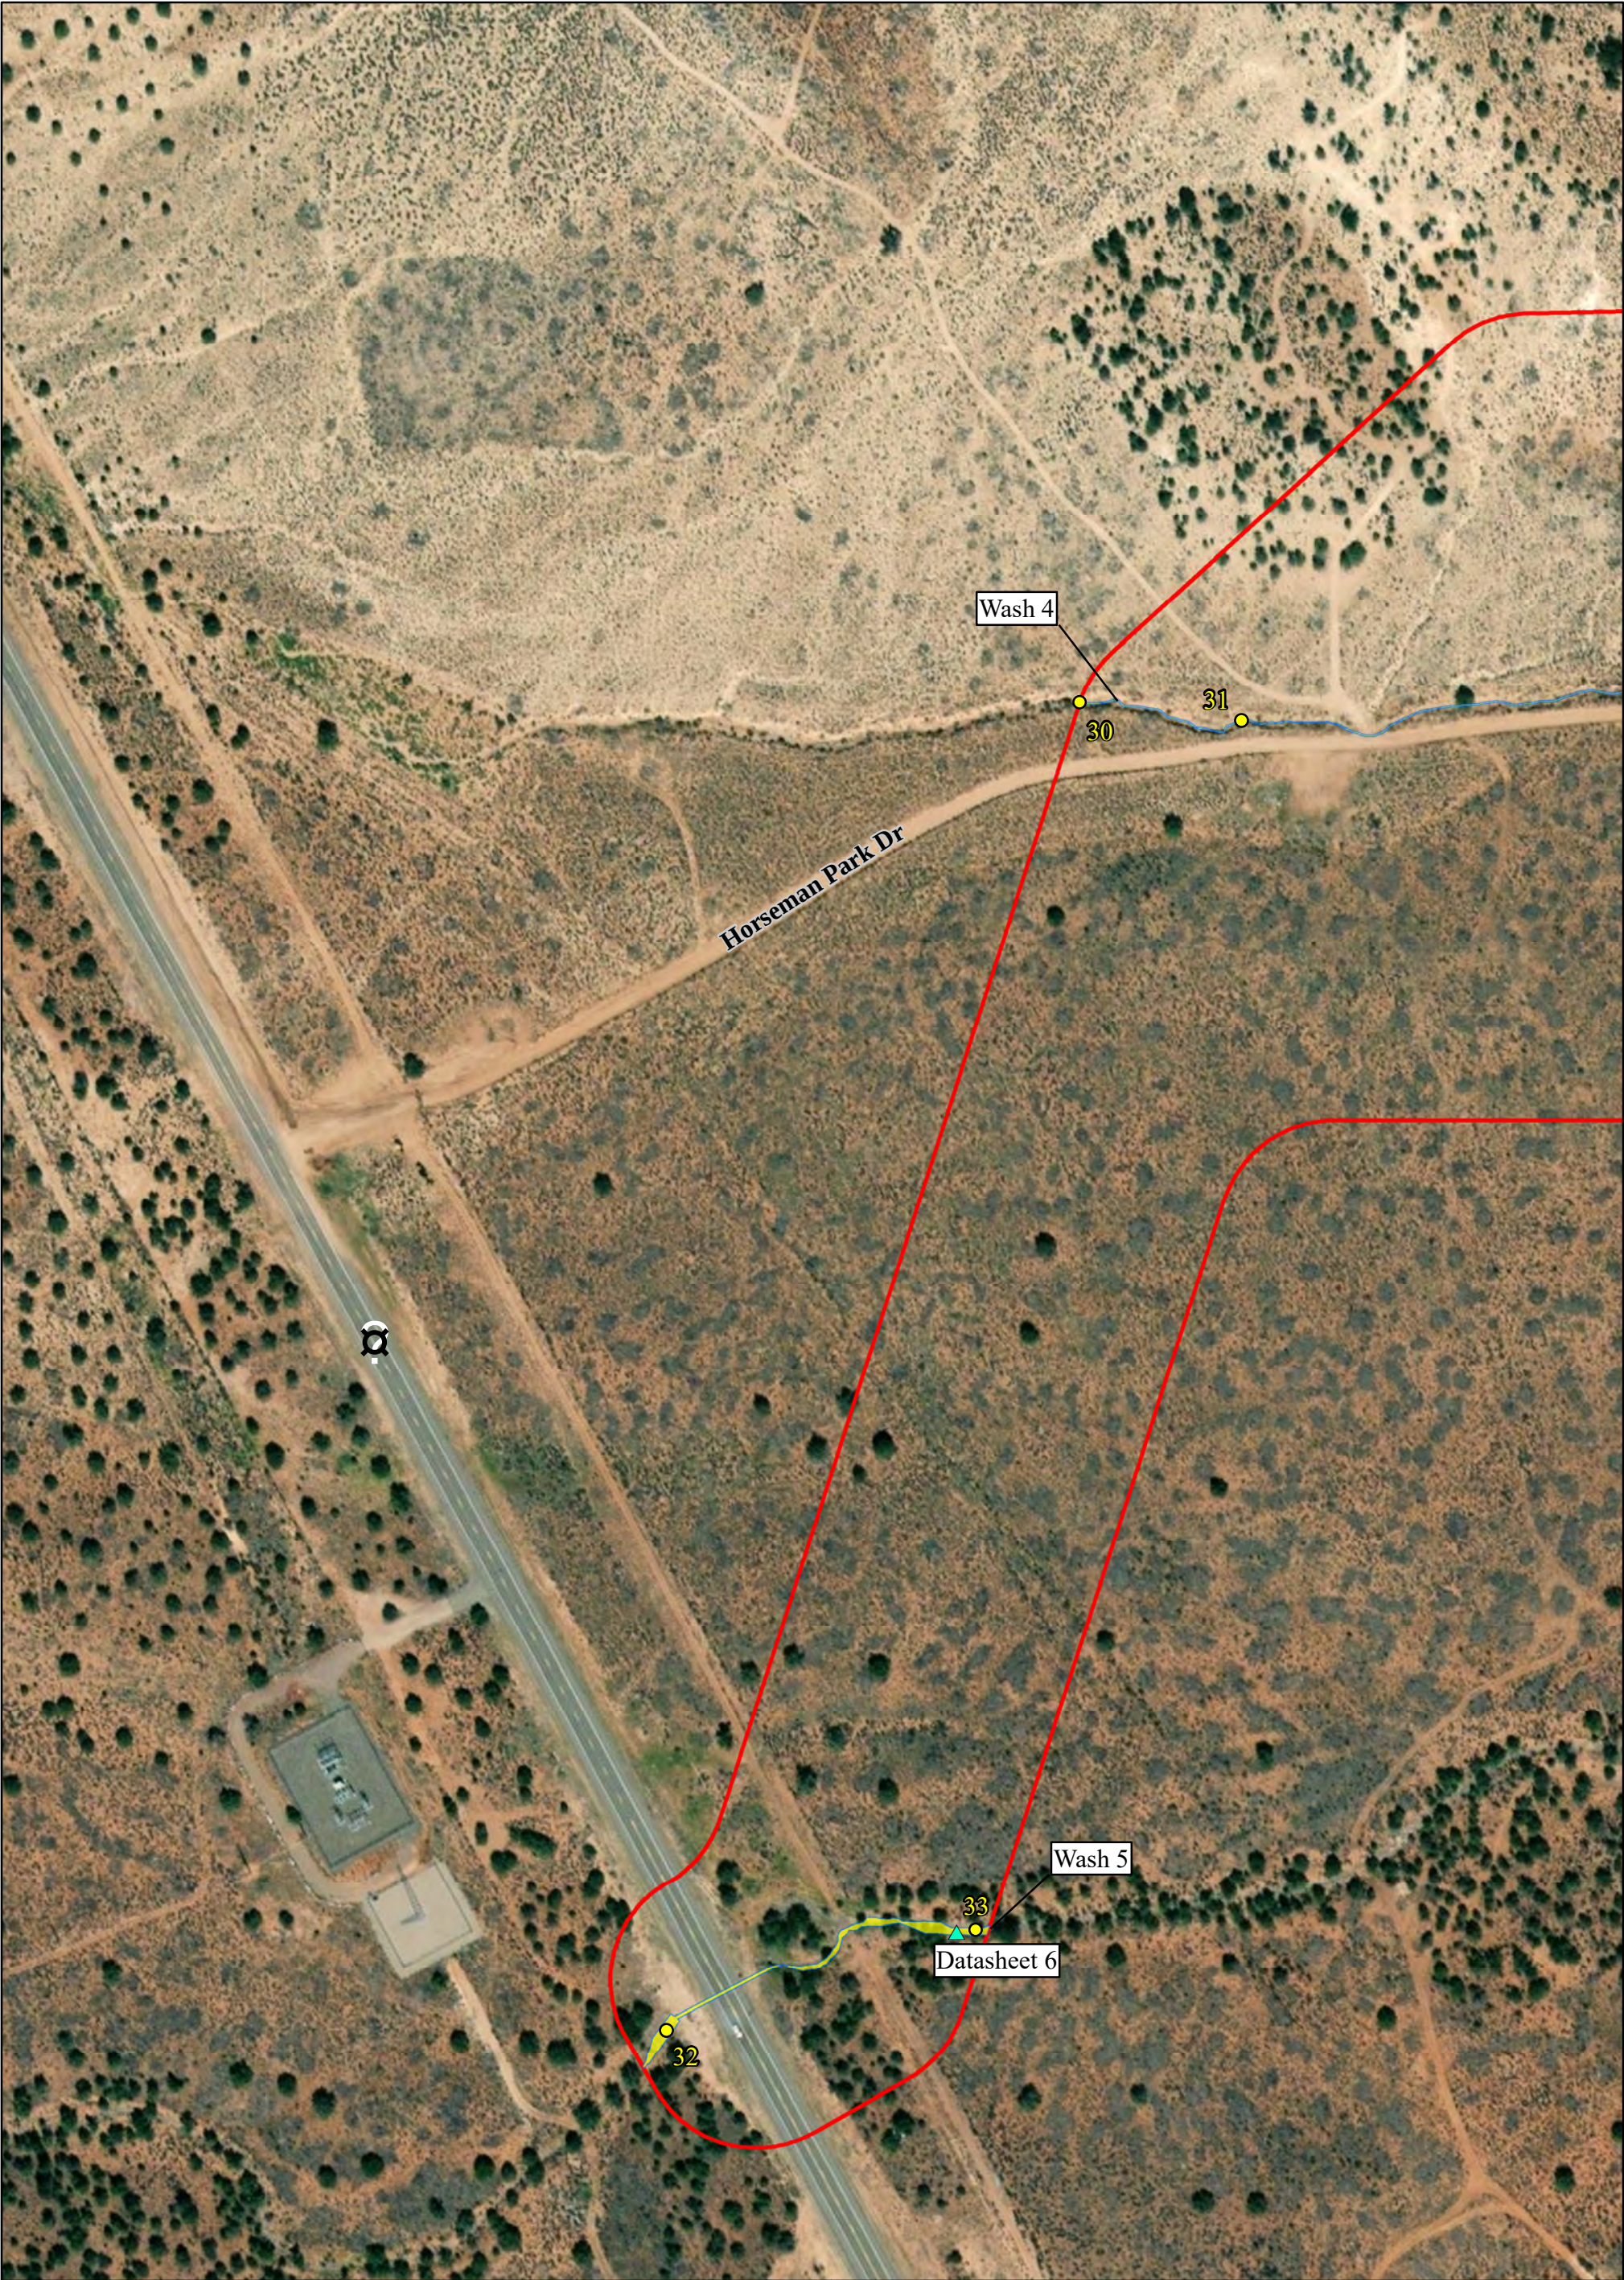

Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 6/7/2022

No.	Revision	Date	By	Appr.
1	Added pit locations to sheet 1. Correct lat/long of wetland 1.	6/7/2022	J. P. Smith	

Aquatic Resources Detail Map
(Sheet 7 of 12)

N

0200400

Feet

Transcon

environmental

Planners & Scientists

Legend

Review Area

Photo Location

OHWM Data Plot

Ordinary High Water Mark

ID	Lat	Long	Feet	Ac
Santa Clara River	37.189801	-113.768182	7339	N/A
Potential Wetland 1	37.185060	-113.764722	N/A	0.27
Ditch 1	37.184544	-113.764285	585	0.07
Ditch 2	37.181528	-113.755406	378	0.03
Wash 1	37.256417	-113.616200	6568	0.37
Wash 2	37.252145	-113.604987	1666	0.65
Wash 3	37.307989	-113.659420	939	0.3
Wash 4	37.306843	-113.658447	1942	0.09
Wash 5	37.310149	-113.664785	527	0.09
Wash 6	37.250350	-113.600470	2929	0.51
Wash 7	37.249609	-113.598584	1761	0.11
Wash 8	37.294549	-113.654708	1820	0.1
Wash 8a	37.252492	-113.609656	36	0



Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 6/7/2022

No.	Revision	Date	By	Appr.
1	Added pit locations to sheet 1. Correct lat/long of wetland 1.	6/7/2022	J. P. Smith	

Aquatic Resources Detail Map
(Sheet 8 of 12)

N

0

200

400

Feet

Transcon
environmental

Planners &
Scientists

Legend


Review Area

Photo Location

OHWM Data Plot

Ordinary High Water Mark

ID	Lat	Long	Feet	Ac
Santa Clara River	37.189801	-113.768182	7339	N/A
Potential Wetland 1	37.185060	-113.764722	N/A	0.27
Ditch 1	37.184544	-113.764285	585	0.07
Ditch 2	37.181528	-113.755406	378	0.03
Wash 1	37.256417	-113.616200	6568	0.37
Wash 2	37.252145	-113.604987	1666	0.65
Wash 3	37.307989	-113.659420	939	0.3
Wash 4	37.306843	-113.658447	1942	0.09
Wash 5	37.310149	-113.664785	527	0.09
Wash 6	37.250350	-113.600470	2929	0.51
Wash 7	37.249609	-113.598584	1761	0.11
Wash 8	37.294549	-113.654708	1820	0.1
Wash 8a	37.252492	-113.609656	36	0

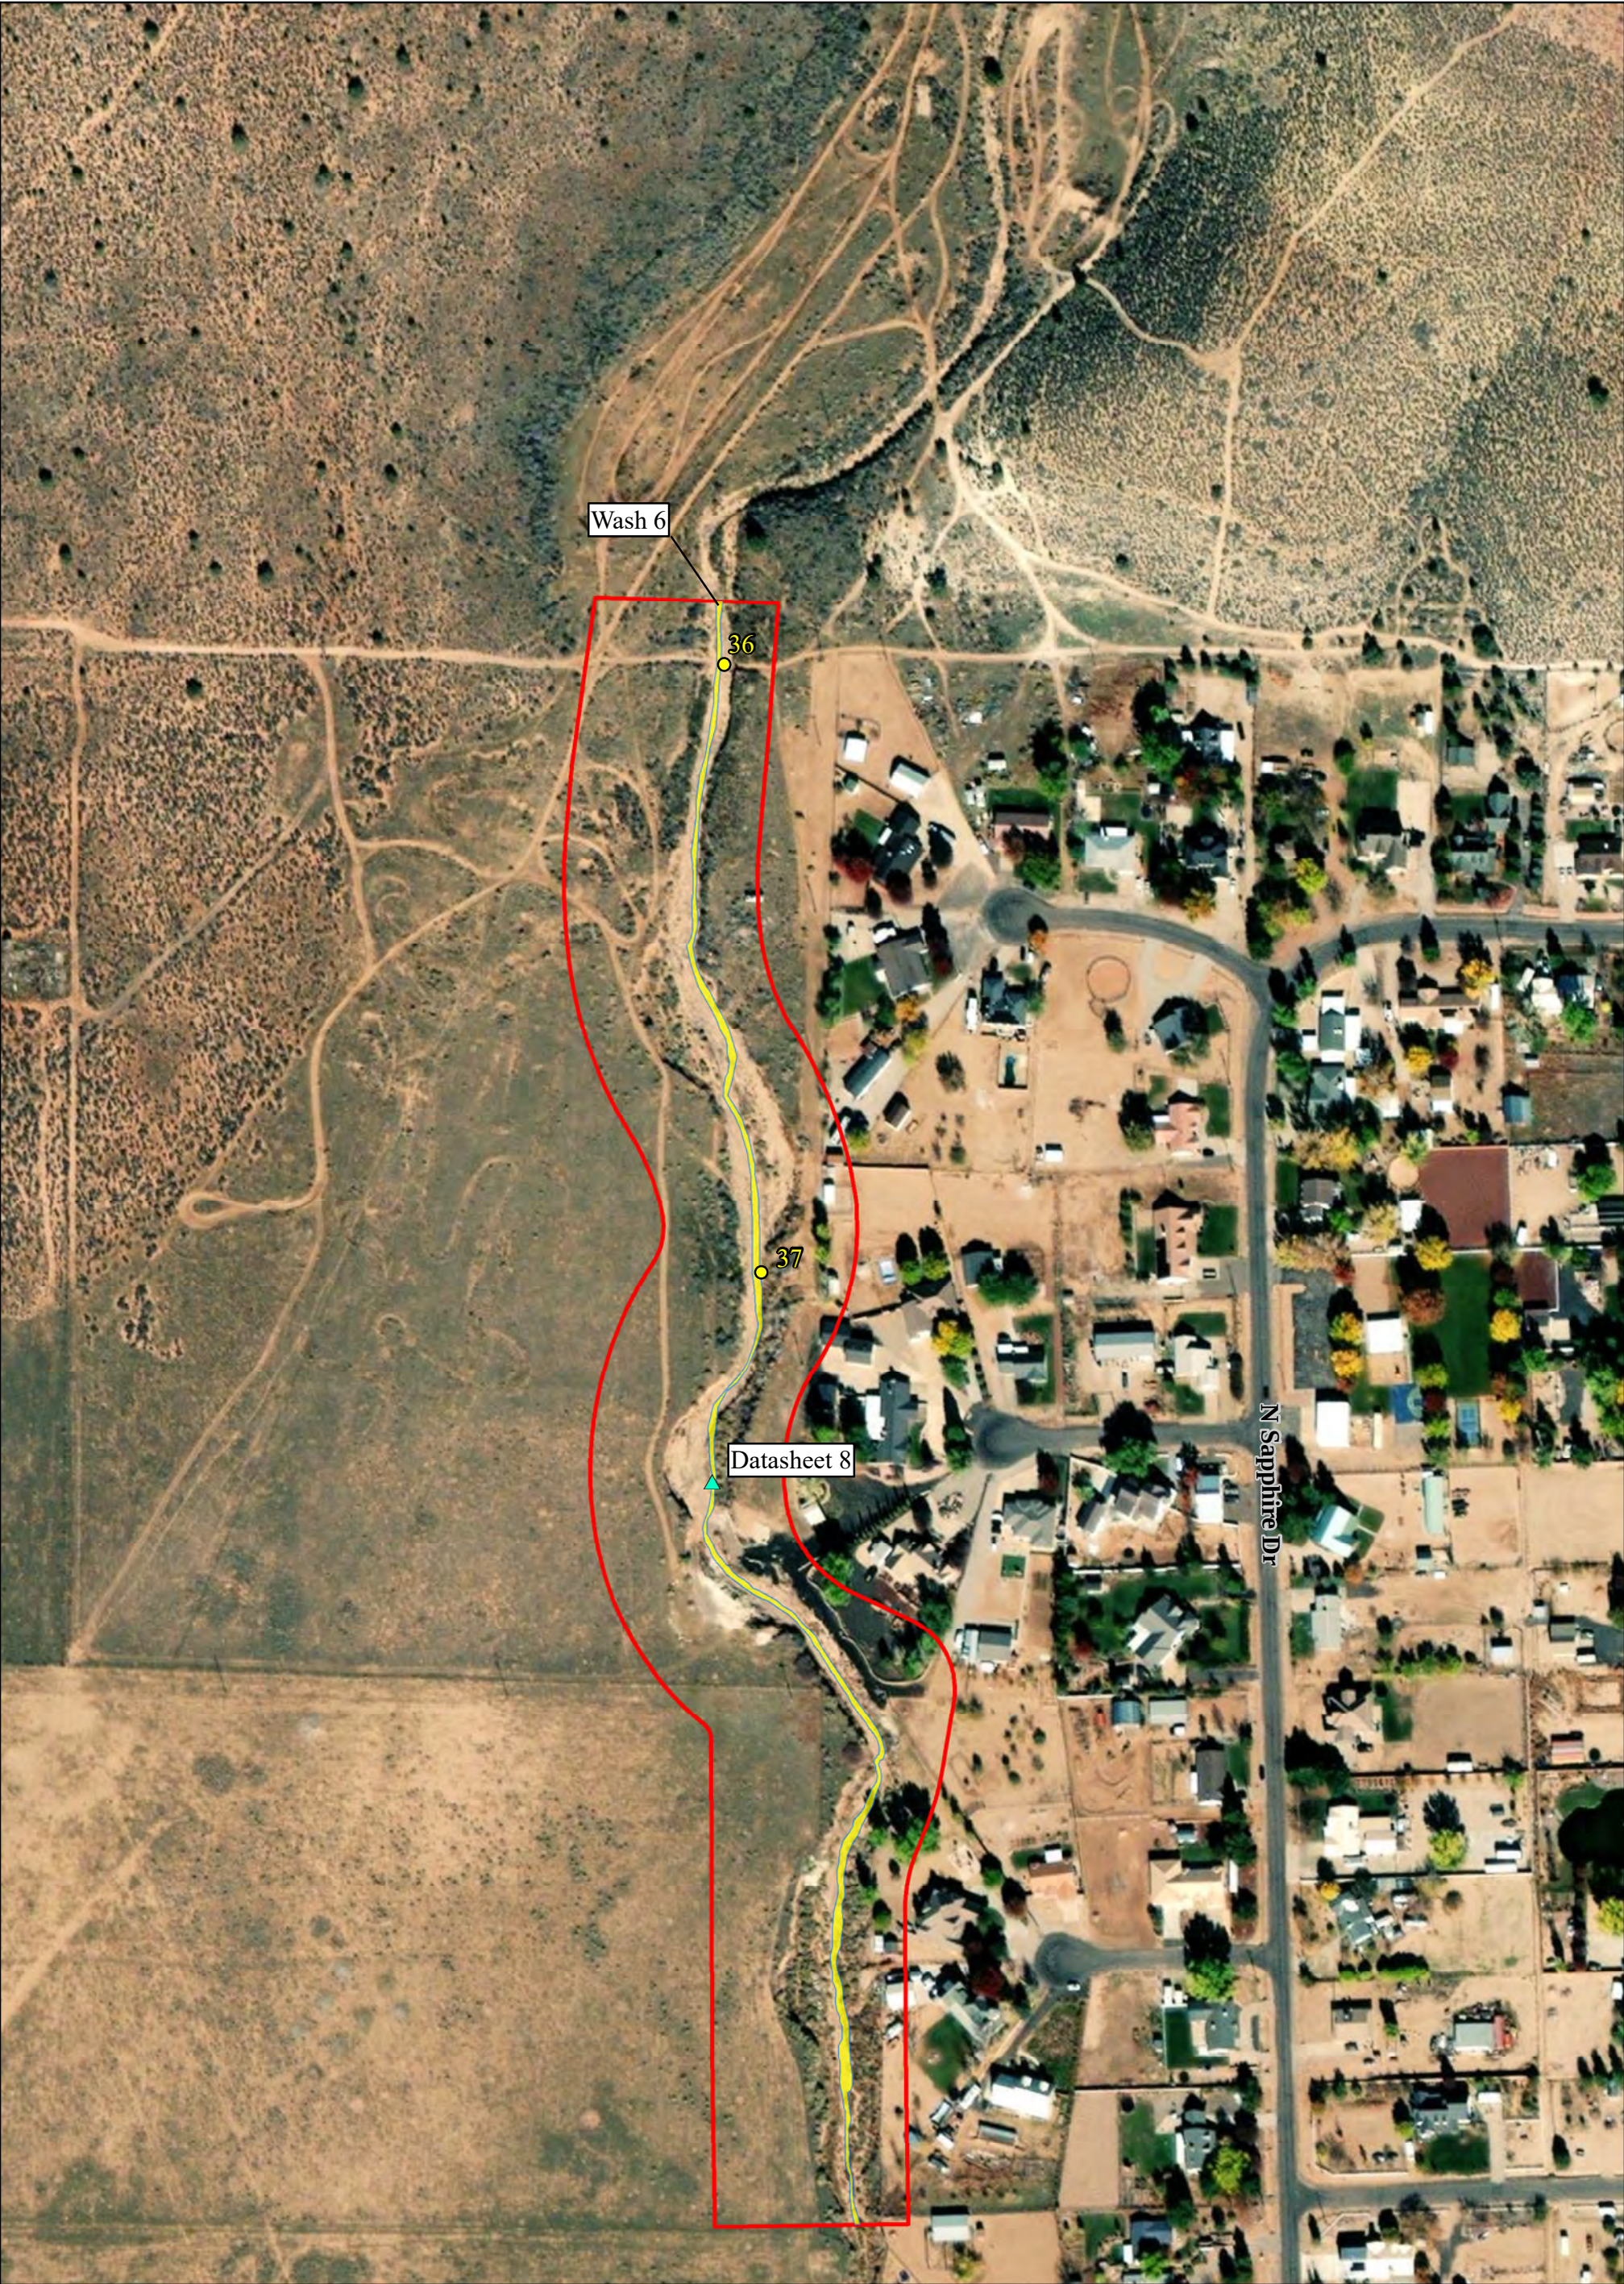

Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 6/7/2022

Aquatic Resources Detail Map
(Sheet 9 of 12)

No.

Revision

Date

By

Appr.

1

Added pit locations to sheet 1. Correct lat/long of wetland 1.

6/7/2022

J. P. Smith

0

200

400

Feet

Transcon

environmental

Planners & Scientists

Legend

Review Area

Photo Location

OHWM Data Plot

Ordinary High Water Mark

ID	Lat	Long	Feet	Ac
Santa Clara River	37.189801	-113.768182	7339	N/A
Potential Wetland 1	37.185060	-113.764722	N/A	0.27
Ditch 1	37.184544	-113.764285	585	0.07
Ditch 2	37.181528	-113.755406	378	0.03
Wash 1	37.256417	-113.616200	6568	0.37
Wash 2	37.252145	-113.604987	1666	0.65
Wash 3	37.307989	-113.659420	939	0.3
Wash 4	37.306843	-113.658447	1942	0.09
Wash 5	37.310149	-113.664785	527	0.09
Wash 6	37.250350	-113.600470	2929	0.51
Wash 7	37.249609	-113.598584	1761	0.11
Wash 8	37.294549	-113.654708	1820	0.1
Wash 8a	37.252492	-113.609656	36	0



Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 6/7/2022

Aquatic Resources Detail Map
(Sheet 10 of 12)

No.

Revision

Date

By

Appr.

1	Added pit locations to sheet 1. Correct lat/long of wetland 1.	6/7/2022	J. P. Smith	

0200400

Feet

Planners & Scientists

Legend

Review Area

Photo Location

OHWM Data Plot

Ordinary High Water Mark

ID	Lat	Long	Feet	Ac
Santa Clara River	37.189801	-113.768182	7339	N/A
Potential Wetland 1	37.185060	-113.764722	N/A	0.27
Ditch 1	37.184544	-113.764285	585	0.07
Ditch 2	37.181528	-113.755406	378	0.03
Wash 1	37.256417	-113.616200	6568	0.37
Wash 2	37.252145	-113.604987	1666	0.65
Wash 3	37.307989	-113.659420	939	0.3
Wash 4	37.306843	-113.658447	1942	0.09
Wash 5	37.310149	-113.664785	527	0.09
Wash 6	37.250350	-113.600470	2929	0.51
Wash 7	37.249609	-113.598584	1761	0.11
Wash 8	37.294549	-113.654708	1820	0.1
Wash 8a	37.252492	-113.609656	36	0



Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 6/7/2022

No.	Revision	Date	By	Appr.
1	Added pit locations to sheet 1. Correct lat/long of wetland 1.	6/7/2022	J. Plush	

Aquatic Resources Detail Map
(Sheet 11 of 12)

N

0

200

400

Feet

Transcon

environmental

Planners & Scientists

Legend

Review Area

Photo Location

OHWM Data Plot

Ordinary High Water Mark

ID	Lat	Long	Feet	Ac
Santa Clara River	37.189801	-113.768182	7339	N/A
Potential Wetland 1	37.185060	-113.764722	N/A	0.27
Ditch 1	37.184544	-113.764285	585	0.07
Ditch 2	37.181528	-113.755406	378	0.03
Wash 1	37.256417	-113.616200	6568	0.37
Wash 2	37.252145	-113.604987	1666	0.65
Wash 3	37.307989	-113.659420	939	0.3
Wash 4	37.306843	-113.658447	1942	0.09
Wash 5	37.310149	-113.664785	527	0.09
Wash 6	37.250350	-113.600470	2929	0.51
Wash 7	37.249609	-113.598584	1761	0.11
Wash 8	37.294549	-113.654708	1820	0.1
Wash 8a	37.252492	-113.609656	36	0



Santa Clara Watershed EA
SPK 2021-00134

Drawn By: C Melisi
Date: 6/7/2022

Aquatic Resources Detail Map
(Sheet 12 of 12)

No.

Revision

Date

By

Appr.

1	Added pit locations to sheet 1. Correct lat/long of wetland 1.	6/7/2022	J. Plafie	

N

0

200

400

Feet

Planners & Scientists

Legend

Review Area

Photo Location

OHWM Data Plot

Ordinary High Water Mark

ID	Lat	Long	Feet	Ac
Santa Clara River	37.189801	-113.768182	7339	N/A
Potential Wetland 1	37.185060	-113.764722	N/A	0.27
Ditch 1	37.184544	-113.764285	585	0.07
Ditch 2	37.181528	-113.755406	378	0.03
Wash 1	37.256417	-113.616200	6568	0.37
Wash 2	37.252145	-113.604987	1666	0.65
Wash 3	37.307989	-113.659420	939	0.3
Wash 4	37.306843	-113.658447	1942	0.09
Wash 5	37.310149	-113.664785	527	0.09
Wash 6	37.250350	-113.600470	2929	0.51
Wash 7	37.249609	-113.598584	1761	0.11
Wash 8	37.294549	-113.654708	1820	0.1
Wash 8a	37.252492	-113.609656	36	0

APPENDIX E-9B
AQUATIC RESOURCES

APPENDIX B

FIELD PHOTOGRAPHS

Photo No. 1



View of the Santa Clara River from under the Gunlock Rd bridge looking downstream (facing southeast)

Photo No. 2



View of the Santa Clara River looking upstream towards the Gunlock Rd bridge where the replacement pipe will be hung from (facing northwest)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 3



View of the Santa Clara River at the northern section of the Shivwits Review Area looking upstream. Note the OHWM and thick riparian vegetation (facing south)

Photo No. 4



View of the location of wetland dig 1

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 5



View of wetland dig 1

Photo No. 6



View of the location of wetland dig 2

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 7



View of wetland dig 2

Photo No. 8



Typical view of Potential Wetland 1

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 9



View of the improved section of Ditch 1 looking downstream (facing northwest)

Photo No. 10



View from the improved section of Ditch 1 looking downstream at the blowout (facing north)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 11



Typical view of the upland area adjacent to Santa Clara River (facing east)

Photo No. 12



View of the Santa Clara River near the eastern section of the Shivwits Review Area looking downstream. Note the OHWM and thick riparian vegetation (facing southeast)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 13



View of heavily eroding upland area adjacent to the Santa Clara River (facing east)

Photo No. 14



View of the improved section of Ditch 2 looking upstream (facing southwest)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 15



View of the improved section of Ditch 2 looking downstream where flows drop off the heavily eroded bank (facing northeast)

Photo No. 16



View of Ditch 2 looking upstream towards the heavily eroded bank. Note copious amounts of debris within the OHWM (facing southwest)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 17



View of Wash 1 looking downstream from N Canyon Trails Dr. Note the barely distinguishable OHWM due to vegetation growth (facing southwest)

Photo No. 18



View of Wash 1 looking downstream from N Dammeron Valley Dr (facing west)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 19



View of Wash 1 within the Vineyard looking downstream (facing west)

Photo No. 20



View of Wash 1 looking upstream towards the culvert crossing beneath Homestead Dr E (facing east)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 21



View of Wash 1 looking downstream where it enters the review area (facing southwest)

Photo No. 22



View of Wash 1 looking downstream (facing south)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 23



View of Wash 1 looking upstream (facing northeast)

Photo No. 24



View of Wash 1 looking upstream

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 25



View of Wash 2 headwaters looking downstream (facing southwest))

Photo No. 26



View of Wash 2 looking downstream (facing southwest)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 27



View of Wash 2 looking downstream where it begins to lose definition (facing west)

Photo No. 28



View of Wash 3 looking upstream. Note poorly defined OHWM (facing southeast)

Ground Photographs

Photo No. 29



View of Wash 3 looking downstream where it enters the review area (facing northwest)

Photo No. 30



View of Wash 4 looking upstream where it exits the review area (facing east)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 31



View of Wash 4 looking upstream (facing east)

Photo No. 32



View of Wash 5 looking downstream where it exits the review area (facing west)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 33



View of Wash 5 looking downstream where it enters the review area (facing west)

Photo No. 34



View of Wash 4 looking upstream (facing east)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 35



View of Wash 4 looking downstream where it enters the review area (facing west)

Photo No. 36



View of Wash 6 from the unpaved road crossing looking downstream near where it enters the review area (facing south)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 37



View of Wash 6 looking downstream (facing south)

Photo No. 38



View of Wash 6 looking upstream from W Jade Dr (facing north)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 39



View of Wash 6 looking downstream from W Jade Dr (facing south)

Photo No. 40



View of Wash 6 looking upstream from W Diamond Valley Rd (facing north)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 41



View of Wash 6 looking downstream from W Diamond Valley Rd (facing south)

Photo No. 42



View of the detention basin west of W Diamond Valley Rd (facing west)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 43



View of Wash 7 from the culvert under Diamond Valley Rd looking upstream towards its headwaters (facing east)

Photo No. 44



View of Wash 7 looking downstream. Note no OHWM and berm on left (facing west)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 45



View of Wash 7 looking downstream (facing west)

Photo No. 46



View of detention basin in northwestern corner of the southern section of the Dammeron Valley Review Area (facing southwest)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 47



View of Wash 7 looking downstream from its headwaters. Note poorly defined OHWM (facing southwest)

Photo No. 48



View of where Wash 8 drains into the detention basin at the northeast corner of the Diamond Valley Review Area (facing northwest)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 49



View of Wash 8 looking downstream (facing north)

Photo No. 50



View of Wash 8 looking downstream. Note the OHWM is a road (facing northwest)

Ground Photographs

Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

Photo No. 51



View of Wash 8 where it converges with the unpaved road and flows north following the road alignment (facing east)

Photo No. 52



View of Wash 8 looking downstream from where it enters the Diamond Valley Review Area (facing west)

Ground Photographs


Santa Clara Watershed Project
Field Photographs
Washington County, Utah

May 24-26 and
September 7-10, 2021

APPENDIX C


OHWM AND WETLAND DELINEATION DATASHEETS

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

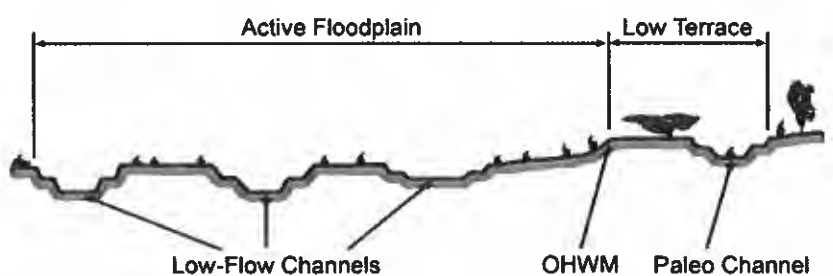Project: Santa Clara Watershed EA Project Number: Stream: Ditch 1 (reinforced area) Investigator(s): CMELIS	Date: 9/7/21 Town: Shivwits Photo begin file#: 9 Time: State: UT Photo end file#:
Y ☒ / N ☐ Do normal circumstances exist on the site? Y ☒ / N ☐ Is the site significantly disturbed?	Location Details: Projection: Datum: Coordinates: 37.184225, -113.764451
Potential anthropogenic influences on the channel system: It is a manmade channel lined w/ concrete and rocks	
Brief site description: Former ag field	
Checklist of resources (if available): ☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies ☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event	
Hydrogeomorphic Floodplain Units 	
Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM: 1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site. 2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units. 3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units. a) Record the floodplain unit and GPS position. b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit. c) Identify any indicators present at the location. 4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section. 5. Identify the OHWM and record the indicators. Record the OHWM position via: ☐ Mapping on aerial photograph ☐ Digitized on computer ☒ GPS ☐ Other:	

Project ID: Santa Clara Cross section ID: Ditch 1 (reinforced area) Date: 9/7 Time:

Cross section drawing:



OHW

GPS point: 37.184225, -113.764451

Indicators:

- | | |
|---|---|
| ☐ Change in average sediment texture | ☐ Break in bank slope |
| ☐ Change in vegetation species | ☒ Other: man made channel |
| ☐ Change in vegetation cover | ☐ Other: _____ |

Comments:

Concrete bottom and stone sides contain flows

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____% Tree: _____% Shrub: _____% Herb: _____%

Community successional stage:

- | | |
|---|--|
| ☐ NA | ☐ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☐ Drift and/or debris | ☐ Other: _____ |
| ☐ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments:

Project ID: South Clara Cross section ID: Ditch 1 reinforced Date: 9/7 Time: _____

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____ % Tree: _____ % Shrub: _____ % Herb: _____ %

Community successional stage:

- | | |
|---|--|
| ☐ NA | ☐ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☐ Drift and/or debris | ☐ Other: _____ |
| ☐ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments: _____

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____ % Tree: _____ % Shrub: _____ % Herb: _____ %

Community successional stage:


- | | |
|---|--|
| ☐ NA | ☐ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☐ Drift and/or debris | ☐ Other: _____ |
| ☐ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |


Comments: _____

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

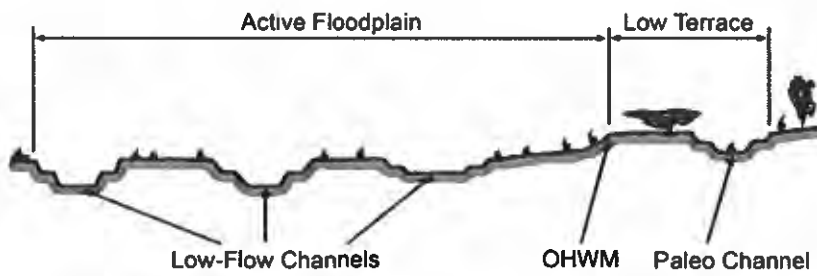Project: Santa Clara Watershed EA Project Number: Stream: Ditch 1 (after blowout) Investigator(s): Cmel's	Date: 9/7/2021 Town: Shilowitz Photo begin file#: 10 Time: State: UT Photo end file#:
Y ☒ / N ☐ Do normal circumstances exist on the site? Y ☒ / N ☐ Is the site significantly disturbed?	Location Details: Projection: Datum: Coordinates: 37.84493, -113.764555
Potential anthropogenic influences on the channel system: Concrete bottom & rock lined channel upstream	
Brief site description: This portion appears to be a blowout of where a manmade ditch was located historically.	
Checklist of resources (if available): ☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies ☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event	
Hydrogeomorphic Floodplain Units 	
Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM: 1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site. 2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units. 3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units. a) Record the floodplain unit and GPS position. b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit. c) Identify any indicators present at the location. 4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section. 5. Identify the OHWM and record the indicators. Record the OHWM position via: ☐ Mapping on aerial photograph ☐ Digitized on computer ☒ GPS ☐ Other:	

Project ID: Santa Clara Cross section ID: Ditch 1 (B0) Date: 9/7 Time:

Cross section drawing:



OHWM

GPS point: 37.187493, -113.764555

Indicators:

- | | |
|--|---|
| ☒ Change in average sediment texture | ☒ Break in bank slope |
| ☐ Change in vegetation species | ☐ Other: _____ |
| ☒ Change in vegetation cover | ☐ Other: _____ |

Comments:

Floodplain unit: ☒ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: 37.184493, -113.764558

Characteristics of the floodplain unit:

Average sediment texture: sandy, small pebbles

Total veg cover: 0 % Tree: % Shrub: % Herb: %

Community successional stage:

- | | |
|---|--|
| ☒ NA | ☐ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|--|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☐ Drift and/or debris | ☐ Other: _____ |
| ☒ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments:

Project ID: Santa Clara Cross section ID: Ditch 1 (30) Date: 9/7 Time:

Floodplain unit: ☐ Low-Flow Channel ☒ Active Floodplain ☐ Low Terrace

GPS point: 37.184493, -113.764555

Characteristics of the floodplain unit:

Average sediment texture: sandy

Total veg cover: 5 % Tree: 0 % Shrub: 0 % Herb: 5 %

Community successional stage:

- ☒ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☒ Mudcracks ☒ Soil development
☐ Ripples ☐ Surface relief
☒ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☒ Low Terrace

GPS point: 37.184493, -113.764555

Characteristics of the floodplain unit:

Average sediment texture: sandy

Total veg cover: 5 % Tree: 0 % Shrub: 0 % Herb: 5 %

Community successional stage:


- ☒ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☒ Mudcracks ☒ Soil development
☐ Ripples ☐ Surface relief
☒ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____


Comments:

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

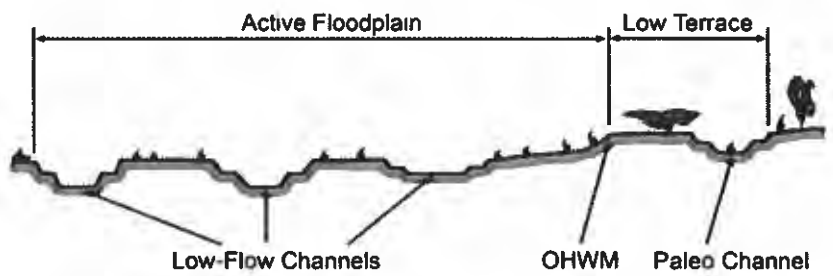Project: Santa Clara Watershed EA Project Number: Stream: Ditch 2 (reinforced area) Investigator(s): Cmelis		Date: 9/7/21 Town: Shivwits Photo begin file#: 14-15		Time: State: UT Photo end file#:	
Y ☒ / N ☐ Do normal circumstances exist on the site? Y ☒ / N ☐ Is the site significantly disturbed?		Location Details: Projection: Datum: Coordinates: 37.181398, -113.755454			
Potential anthropogenic influences on the channel system: It is a manmade channel with a concrete bottom and rock walls					
Brief site description: Former ag field					
Checklist of resources (if available): ☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies ☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event					
Hydrogeomorphic Floodplain Units 					
Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM: 1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site. 2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units. 3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units. a) Record the floodplain unit and GPS position. b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit. c) Identify any indicators present at the location. 4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section. 5. Identify the OHWM and record the indicators. Record the OHWM position via: ☐ Mapping on aerial photograph ☐ Digitized on computer ☒ GPS ☐ Other:					

Project ID: Santa Clara Cross section ID: Ditch 2 (Kentford) Date: 9/7 Time:

Cross section drawing:



OHWM

GPS point: 37.181398, -113.755454

Indicators:

- | | |
|---|--|
| ☐ Change in average sediment texture | ☐ Break in bank slope |
| ☐ Change in vegetation species | ☒ Other: <u>new made channel</u> |
| ☐ Change in vegetation cover | ☐ Other: _____ |

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____ % Tree: _____ % Shrub: _____ % Herb: _____ %

Community successional stage:

- | | |
|---|--|
| ☐ NA | ☒ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☐ Drift and/or debris | ☐ Other: _____ |
| ☐ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments:

Project ID: Santa Clara Cross section ID: Ditch 2 (reinforced) Date: 9/7 Time:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____ % Tree: _____ % Shrub: _____ % Herb: _____ %

Community successional stage:

- | | |
|---|--|
| ☐ NA | ☐ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☐ Drift and/or debris | ☐ Other: _____ |
| ☐ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____ % Tree: _____ % Shrub: _____ % Herb: _____ %

Community successional stage:

- | | |
|---|--|
| ☐ NA | ☐ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☐ Drift and/or debris | ☐ Other: _____ |
| ☐ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments:

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

Project: Santa Clara Watershed #4
 Project Number:
 Stream: Ditch 2 (after blowout)
 Investigator(s): Melis

Date: 7/7/21 Time:
 Town: Struwwits State: UT
 Photo begin file#: 15-16 Photo end file#:

Y ☒ / N ☐ Do normal circumstances exist on the site?

Location Details:

Y ☒ / N ☐ Is the site significantly disturbed?

Projection: Datum:
 Coordinates: 37.152005, -113.755232

Potential anthropogenic influences on the channel system:

This area is a blowout/erosion area downstream from a
 mounded ditch


Brief site description:

adjacent to me w/in riparian corridor

Checklist of resources (if available):

- ☒ Aerial photography
 Dates:
☐ Topographic maps
☐ Geologic maps
☐ Vegetation maps
☐ Soils maps
☐ Rainfall/precipitation maps
☐ Existing delineation(s) for site
☒ Global positioning system (GPS)
☐ Other studies
- ☐ Stream gage data
 Gage number:
 Period of record:
☐ History of recent effective discharges
☐ Results of flood frequency analysis
☐ Most recent shift-adjusted rating
☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event

Hydrogeomorphic Floodplain Units

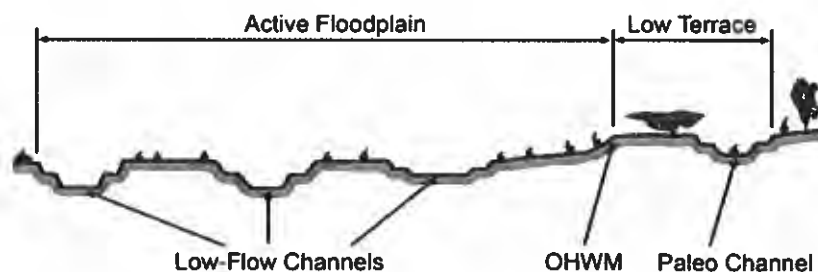

Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM:

1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site.
2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units.
3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units.
 - a) Record the floodplain unit and GPS position.
 - b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit.
 - c) Identify any indicators present at the location.
4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section.
5. Identify the OHWM and record the indicators. Record the OHWM position via:

- ☐ Mapping on aerial photograph ☒ GPS
☐ Digitized on computer ☐ Other:

Project ID: Santa Clara Cross section ID: Ditch 2 ^(B0) Date: 9/7 Time:

Cross section drawing:



OHWM

GPS point: 37.182008, -113.755232

Indicators:

- | | |
|---|--|
| ☐ Change in average sediment texture | ☐ Break in bank slope |
| ☐ Change in vegetation species | ☒ Other: <u>slightly lower elevation</u> |
| ☐ Change in vegetation cover | ☐ Other: _____ |

Comments:

Very poorly defined OHWM. Entire area below the ditch is filled w/ debris. Ground is not visible

Floodplain unit: ☐ Low-Flow Channel ☒ Active Floodplain ☐ Low Terrace

GPS point: 37.182008, -113.755232

Characteristics of the floodplain unit:

Average sediment texture: sandy

Total veg cover: 75 % Tree: 5 % Shrub: 10 % Herb: 60 %

Community successional stage:

- | | |
|---|---|
| ☐ NA | ☐ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☒ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☒ Drift and/or debris | ☐ Other: _____ |
| ☐ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments:

Project ID: Santa Clara Cross section ID: Ditch 2 (B0) Date: 9/7 Time: _____

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☒ Low Terrace

GPS point: 37.182008, -113.755232

Characteristics of the floodplain unit:

Average sediment texture: sandy

Total veg cover: 75 % Tree: 10 % Shrub: 5 % Herb: 60 %

Community successional stage:

- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☒ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☐ Soil development
☐ Ripples ☐ Surface relief
☒ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____ % Tree: _____ % Shrub: _____ % Herb: _____ %

Community successional stage:


- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☐ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____


Comments:

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

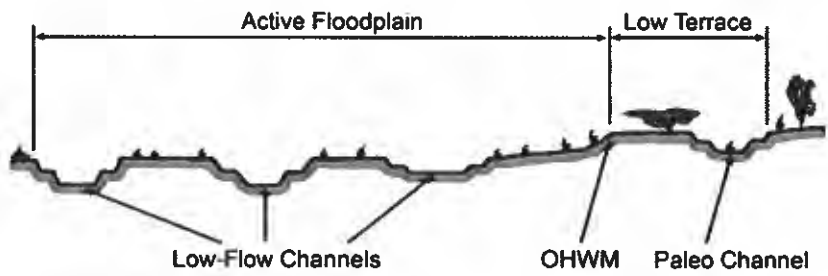Project: Santa Clara Watershed EA Project Number: Stream: Wash 1 Investigator(s): Cmelis		Date: 9/7/21 Town: Dameron Valley Photo begin file#: 17-24 Time: State: UT Photo end file#:					
Y ☒ / N ☐ Do normal circumstances exist on the site? Y ☒ / N ☐ Is the site significantly disturbed?		Location Details: Projection: Datum: Coordinates: 37.312967, -113.657158					
Potential anthropogenic influences on the channel system: No anthropogenic influences until it exits the upland area and enters Dameron Valley							
Brief site description: Sandy and rocky wash							
Checklist of resources (if available): <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top;"> ☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies </td> <td style="width: 50%; vertical-align: top;"> ☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event </td> </tr> </table>				☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies	☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event		
☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies	☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event						
Hydrogeomorphic Floodplain Units 							
Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM: 1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site. 2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units. 3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units. a) Record the floodplain unit and GPS position. b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit. c) Identify any indicators present at the location. 4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section. 5. Identify the OHWM and record the indicators. Record the OHWM position via: <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">☐ Mapping on aerial photograph</td> <td style="width: 50%;">☒ GPS</td> </tr> <tr> <td>☐ Digitized on computer</td> <td>☐ Other:</td> </tr> </table>				☐ Mapping on aerial photograph	☒ GPS	☐ Digitized on computer	☐ Other:
☐ Mapping on aerial photograph	☒ GPS						
☐ Digitized on computer	☐ Other:						

Project ID: Santa Clara Cross section ID: Wash 1 Date: 9/7 Time:

Cross section drawing:

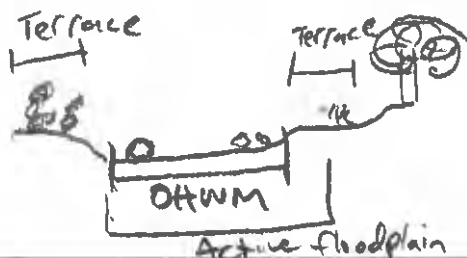

OHWM

GPS point: 37.312967, -113.657158

Indicators:

- | | |
|--|--|
| ☒ Change in average sediment texture | ☐ Break in bank slope |
| ☒ Change in vegetation species | ☐ Other: _____ |
| ☒ Change in vegetation cover | ☐ Other: _____ |

Comments:

Floodplain unit: ☐ Low-Flow Channel ☒ Active Floodplain ☐ Low Terrace

GPS point: 37.312967, -113.657158

Characteristics of the floodplain unit:

Average sediment texture: sandy, pebbles

Total veg cover: 10 % Tree: 0 % Shrub: 5 % Herb: 5 %

Community successional stage:

- | | |
|---|--|
| ☐ NA | ☒ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|--|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☒ Drift and/or debris | ☐ Other: _____ |
| ☒ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments:

Project ID: Santa Clara Cross section ID: Wash 1 Date: 9/7 Time: _____

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☒ Low Terrace

GPS point: 31.312967, -113.657158

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: 15 % Tree: 1 % Shrub: 10 % Herb: 4 %

Community successional stage:

- ☐ NA ☒ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☒ Soil development
☐ Ripples ☐ Surface relief
☒ Drift and/or debris ☐ Other: _____
☒ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments: _____

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____ % Tree: _____ % Shrub: _____ % Herb: _____ %

Community successional stage:


- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☐ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____


Comments: _____

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

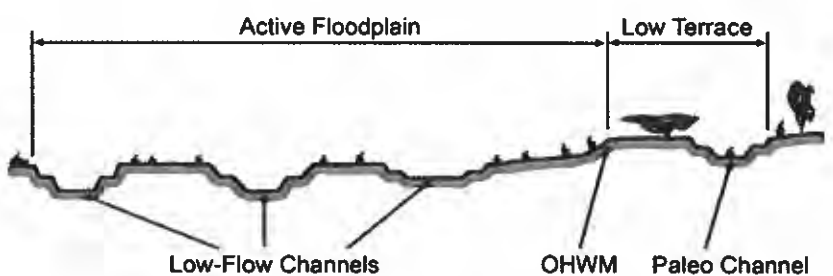Project: Santa Clara Watershed EA Project Number: Stream: Wash 2 Investigator(s): C Melis	Date: 9/10/21 Town: Dummeron Photo begin file#: 25-27 Time: State: UT Photo end file#:
Y ☒ / N ☐ Do normal circumstances exist on the site? Y ☐ / N ☒ Is the site significantly disturbed?	Location Details: Projection: Datum: Coordinates: 37.307723, -113.659403
Potential anthropogenic influences on the channel system: small areas that have been bermed closer to Dummeron valley	
Brief site description: upland sage brush	
Checklist of resources (if available): ☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies ☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event	
Hydrogeomorphic Floodplain Units 	
Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM: 1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site. 2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units. 3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units. a) Record the floodplain unit and GPS position. b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit. c) Identify any indicators present at the location. 4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section. 5. Identify the OHWM and record the indicators. Record the OHWM position via: ☐ Mapping on aerial photograph ☐ Digitized on computer ☒ GPS ☐ Other:	

Project ID: Santa Clara Cross section ID: Wash 2 Date: 9/10 Time:

Cross section drawing:



OHWM

GPS point: 37.307723, -113.659403

Indicators:

- | | |
|--|---|
| ☒ Change in average sediment texture | ☒ Break in bank slope |
| ☐ Change in vegetation species | ☐ Other: _____ |
| ☒ Change in vegetation cover | ☐ Other: _____ |

Comments:

very narrow OHWM

Floodplain unit: ☐ Low-Flow Channel ☒ Active Floodplain ☐ Low Terrace

GPS point: 37.307723, -113.659403

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: 2 % Tree: _____ % Shrub: .5 % Herb: 1.5 %

Community successional stage:

- | | |
|---|--|
| ☐ NA | ☒ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☒ Drift and/or debris | ☐ Other: _____ |
| ☐ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments:

Project ID: Santa Clara Cross section ID: Wash 2

Date: 9/10

Time:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☒ Low Terrace

GPS point: 37.307723 -113.659403

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: 50 % Tree: 5 % Shrub: 25 % Herb: 20 %

Community successional stage:

- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☒ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☐ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other: _____
☒ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____ % Tree: _____ % Shrub: _____ % Herb: _____ %

Community successional stage:


- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☐ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments:

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

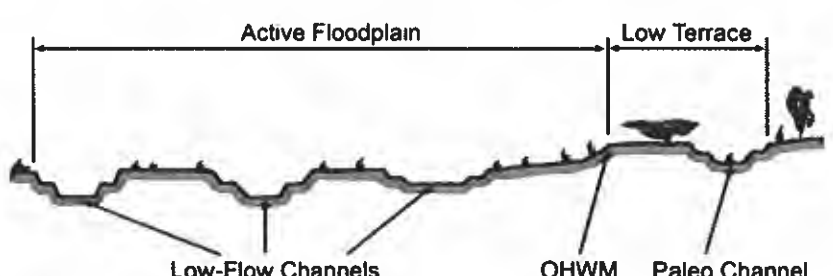Project: Santa Clara Watershed EA Project Number: Stream: Wash 3 Investigator(s): Caroline		Date: 9/10/21 Town: Pahrump Photo begin file#: Photo end file#: 28-29		Time: State: UT Photo end file#:					
Y ☒ / N ☐ Do normal circumstances exist on the site? Y ☐ / N ☒ Is the site significantly disturbed?		Location Details: Projection: Datum: Coordinates: 37.306561, -113.657466							
Potential anthropogenic influences on the channel system: none									
Brief site description: sagebrush upland									
Checklist of resources (if available): <table style="width: 100%; border: none;"> <tr> <td style="vertical-align: top; width: 50%;"> ☐ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☐ Global positioning system (GPS) ☐ Other studies </td> <td style="vertical-align: top; width: 50%;"> ☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event </td> </tr> </table>						☐ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☐ Global positioning system (GPS) ☐ Other studies	☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event		
☐ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☐ Global positioning system (GPS) ☐ Other studies	☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event								
Hydrogeomorphic Floodplain Units 									
Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM: 1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site. 2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units. 3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units. a) Record the floodplain unit and GPS position. b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit. c) Identify any indicators present at the location. 4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section. 5. Identify the OHWM and record the indicators. Record the OHWM position via: <table style="width: 100%; border: none; margin-top: 5px;"> <tr> <td>☐ Mapping on aerial photograph</td> <td>☐ GPS</td> </tr> <tr> <td>☐ Digitized on computer</td> <td>☐ Other:</td> </tr> </table>						☐ Mapping on aerial photograph	☐ GPS	☐ Digitized on computer	☐ Other:
☐ Mapping on aerial photograph	☐ GPS								
☐ Digitized on computer	☐ Other:								

Project ID: Santa Clara Cross section ID: Wash 3

Date: 9/10 Time:

Cross section drawing:



OHWM

GPS point: 37.306561, -113.657466

Indicators:

- ☒ Change in average sediment texture
☐ Change in vegetation species
☒ Change in vegetation cover

- ☐ Break in bank slope
☐ Other: _____
☐ Other: _____

Comments:

Very narrow OHWM

Floodplain unit: ☐ Low-Flow Channel ☒ Active Floodplain ☐ Low Terrace

GPS point: 37.306561, -113.657466

Characteristics of the floodplain unit:

Average sediment texture: sandy

Total veg cover: 1 % Tree: % Shrub: 1 % Herb: %

Community successional stage:

- ☐ NA ☒ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☐ Soil development
☐ Ripples ☐ Surface relief
☒ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments:

Project ID: Santa Clara Cross section ID: Wash 3 Date: 9/10 Time: _____

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☒ Low Terrace

GPS point: 37.306561, -113.657466

Characteristics of the floodplain unit:

Average sediment texture: fine

Total veg cover: 75 % Tree: 5 % Shrub: 35 % Herb: 35 %

Community successional stage:

- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☒ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☒ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____ % Tree: _____ % Shrub: _____ % Herb: _____ %

Community successional stage:


- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☐ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____


Comments:

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

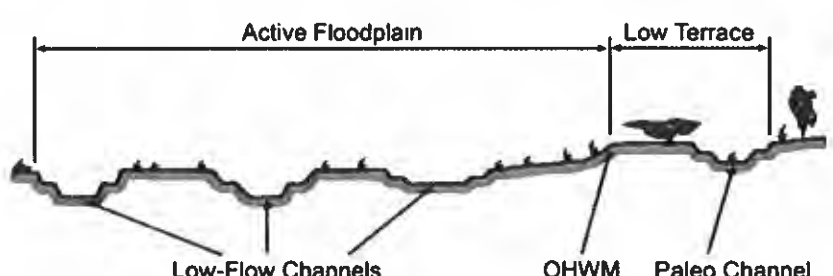Project: Santa Clara watershed EA Project Number: Stream: Wash 4 Investigator(s): Cmelik	Date: 9/10/21 Town: Dummeron Photo begin file#: 30-31 ; 34-35	Time: State: UT Photo end file#:
Y ☒ / N ☐ Do normal circumstances exist on the site? Y ☐ / N ☒ Is the site significantly disturbed?	Location Details: Projection: Datum: Coordinates: 37.294640, -113.653975	
Potential anthropogenic influences on the channel system: runoff from adjacent OHV roads and OHV road crossings		
Brief site description: sagebrush and juniper upland		
Checklist of resources (if available): ☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies ☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event		
Hydrogeomorphic Floodplain Units 		
Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM: 1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site. 2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units. 3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units. a) Record the floodplain unit and GPS position. b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit. c) Identify any indicators present at the location. 4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section. 5. Identify the OHWM and record the indicators. Record the OHWM position via: ☐ Mapping on aerial photograph ☐ Digitized on computer ☒ GPS ☐ Other:		

Project ID: Santa Clara Cross section ID: Woh 4 Date: 9/10 Time:

Cross section drawing:

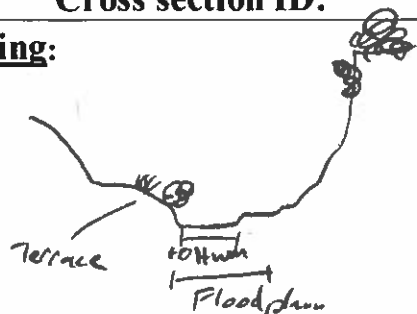

OHWM

GPS point: 37.294670, -113.653975

Indicators:

- | | |
|--|--|
| ☒ Change in average sediment texture | ☐ Break in bank slope |
| ☐ Change in vegetation species | ☐ Other: _____ |
| ☒ Change in vegetation cover | ☐ Other: _____ |

Comments:

Floodplain unit: ☐ Low-Flow Channel ☒ Active Floodplain ☐ Low Terrace

GPS point: 37.294670, -113.653975

Characteristics of the floodplain unit:

Average sediment texture: fine, pebbles

Total veg cover: 2 % Tree: _____ % Shrub: _____ % Herb: 2 %

Community successional stage:

- | | |
|---|--|
| ☐ NA | ☒ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|--|
| ☒ Mudcracks | ☒ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☒ Drift and/or debris | ☐ Other: _____ |
| ☐ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments:

Project ID: Santa Clara Cross section ID: Wash 4 Date: 9/10 Time: _____

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☒ Low Terrace

GPS point: 37.294670, -113.653975

Characteristics of the floodplain unit:

Average sediment texture: fine

Total veg cover: 20 % Tree: _____ % Shrub: 5 % Herb: 15 %

Community successional stage:

- | | |
|---|--|
| ☐ NA | ☒ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|--|
| ☒ Mudcracks | ☒ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☐ Drift and/or debris | ☐ Other: _____ |
| ☐ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____ % Tree: _____ % Shrub: _____ % Herb: _____ %

Community successional stage:


- | | |
|---|--|
| ☐ NA | ☐ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☐ Drift and/or debris | ☐ Other: _____ |
| ☐ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |


Comments:

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

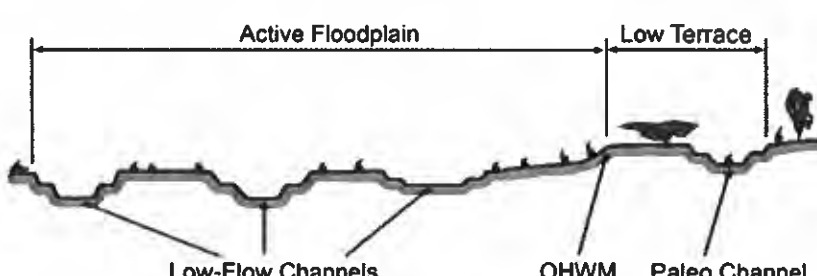Project: Santa Clara watershed EA Project Number: Stream: Wash 5 Investigator(s): C Melis		Date: 5/25/21 Town: Durmon Photo begin file#: Photo end file#: 32-33		Time: State: UT Photo end file#:	
Y ☒ / N ☐ Do normal circumstances exist on the site? Y ☐ / N ☒ Is the site significantly disturbed?		Location Details: Projection: Datum: Coordinates: 37.289926, -113.658327			
Potential anthropogenic influences on the channel system: culvert					
Brief site description: juniper uplands					
Checklist of resources (if available): ☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies ☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event					
Hydrogeomorphic Floodplain Units 					
Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM: 1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site. 2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units. 3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units. a) Record the floodplain unit and GPS position. b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit. c) Identify any indicators present at the location. 4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section. 5. Identify the OHWM and record the indicators. Record the OHWM position via: ☐ Mapping on aerial photograph ☐ Digitized on computer ☒ GPS ☐ Other:					

Project ID: Santa Clara Cross section ID: Wash 5 Date: 5/25 Time:

Cross section drawing:

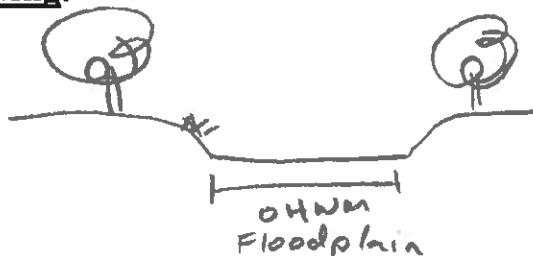

OHWM

GPS point: 37.289976 -113.658327

Indicators:

- | | |
|--|--|
| ☒ Change in average sediment texture | ☐ Break in bank slope |
| ☐ Change in vegetation species | ☐ Other: _____ |
| ☒ Change in vegetation cover | ☐ Other: _____ |

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☒ Low Terrace

GPS point: 37.289976 -113.658327

Characteristics of the floodplain unit:

Average sediment texture: sandy

Total veg cover: 75 % Tree: 5 % Shrub: 5 % Herb: 65 %

Community successional stage:

- | | |
|---|---|
| ☐ NA | ☐ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☒ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|--|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☐ Drift and/or debris | ☐ Other: _____ |
| ☒ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments:

Project ID: Santa Clara Cross section ID: Wash 5 Date: 5/25 Time:

Floodplain unit: ☒ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: 37.289976 -113.658327

Characteristics of the floodplain unit:

Average sediment texture: Sandy, pebble

Total veg cover: 0 % Tree: % Shrub: % Herb: %

Community successional stage:

- ☒ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- | | |
|---|--|
| ☐ Mudcracks | ☒ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☐ Drift and/or debris | ☒ Other: <u>slight sediment change</u> |
| ☐ Presence of bed and bank | ☐ Other: <u> </u> |
| ☐ Benches | ☐ Other: <u> </u> |

Comments:

Floodplain unit: ☐ Low-Flow Channel ☒ Active Floodplain ☐ Low Terrace

GPS point: 37.289976 -113.658327

Characteristics of the floodplain unit:

Average sediment texture: cobble & pebble

Total veg cover: 0 % Tree: % Shrub: % Herb: %

Community successional stage:


- ☒ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- | | |
|--|---|
| ☒ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☒ Drift and/or debris | ☐ Other: <u> </u> |
| ☒ Presence of bed and bank | ☐ Other: <u> </u> |
| ☐ Benches | ☐ Other: <u> </u> |

Comments:

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

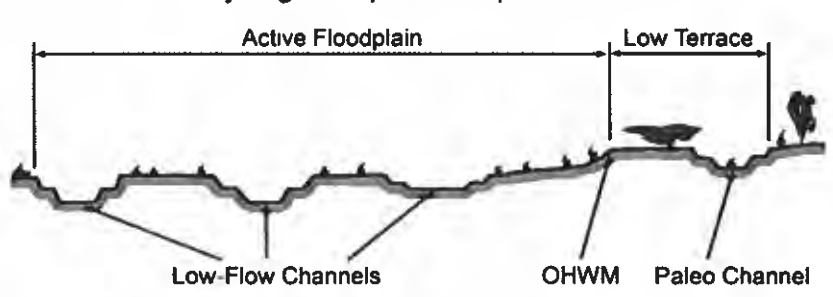Project: Santa Clara Watershed T2A Project Number: Stream: Wash 6 Investigator(s): amelis	Date: 9/9/21 Town: Dummeron Photo begin file#: Time: State: UT Photo end file#: 36-41
Y ☒ / N ☐ Do normal circumstances exist on the site? Y ☒ / N ☐ Is the site significantly disturbed?	Location Details: Projection: Datum: Coordinates: 37.258027, -113.616588
Potential anthropogenic influences on the channel system: Dumping, berming, bank reinforcement	
Brief site description: Residential & agricultural area	
Checklist of resources (if available): ☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies ☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event	
Hydrogeomorphic Floodplain Units 	
Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM: 1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site. 2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units. 3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units. a) Record the floodplain unit and GPS position. b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit. c) Identify any indicators present at the location. 4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section. 5. Identify the OHWM and record the indicators. Record the OHWM position via: ☐ Mapping on aerial photograph ☐ Digitized on computer ☒ GPS ☐ Other:	

Project ID: Santa Clara

Cross section ID: Wash 6

Date: 9/9

Time:

Cross section drawing:



OHWM

GPS point: 37.258027, -113.616588

Indicators:

- ☒ Change in average sediment texture
☐ Change in vegetation species
☒ Change in vegetation cover

- ☐ Break in bank slope
☐ Other: _____
☐ Other: _____

Comments:

cobble bottom

Floodplain unit:

☐ Low-Flow Channel

☒ Active Floodplain

☐ Low Terrace

GPS point: 37.258027, -113.616588

Characteristics of the floodplain unit:

Average sediment texture: sandy, small rocks

Total veg cover: 10 % Tree: _____ % Shrub: 5 % Herb: 5 %

Community successional stage:

- ☐ NA
☐ Early (herbaceous & seedlings)
☒ Mid (herbaceous, shrubs, saplings)
☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks
☐ Ripples
☒ Drift and/or debris
☒ Presence of bed and bank
☐ Benches
☐ Soil development
☐ Surface relief
☐ Other: _____
☐ Other: _____
☐ Other: _____

Comments:

Project ID: Santa Clara Cross section ID: Wash 6 Date: 9/9 Time:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☒ Low Terrace

GPS point: 37.258027, -113.616588

Characteristics of the floodplain unit:

Average sediment texture: sandy

Total veg cover: 80 % Tree: % Shrub: 10 % Herb: 70 %

Community successional stage:

- | | |
|--|--|
| ☐ NA | ☐ Mid (herbaceous, shrubs, saplings) |
| ☒ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☒ Drift and/or debris | ☐ Other: <u> </u> |
| ☐ Presence of bed and bank | ☐ Other: <u> </u> |
| ☒ Benches | ☐ Other: <u> </u> |

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point:

Characteristics of the floodplain unit:

Average sediment texture:

Total veg cover: % Tree: % Shrub: % Herb: %

Community successional stage:


- | | |
|---|--|
| ☐ NA | ☐ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|---|
| ☐ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☐ Drift and/or debris | ☐ Other: <u> </u> |
| ☐ Presence of bed and bank | ☐ Other: <u> </u> |
| ☐ Benches | ☐ Other: <u> </u> |


Comments:

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

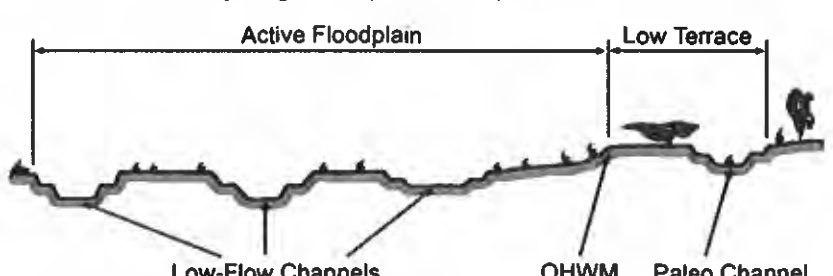Project: Santa Clara Watershed EA Project Number: Stream: Wash/Ditch Wash 7 Investigator(s): C. Melis		Date: 9/8/21 Town: Dummeron Valley Photo begin file#: Time: State: UT Photo end file#: 43-45; 47					
Y ☐ / N ☒ Do normal circumstances exist on the site? Y ☒ / N ☐ Is the site significantly disturbed?		Location Details: Projection: Datum: Coordinates: 37.252717, -113.603897					
Potential anthropogenic influences on the channel system: Berm on S side of ditch/wash. Discontinuous OHWM							
Brief site description: Very poorly defined draw. OHWM only visible sporadically heavily vegetated w/in channel							
Checklist of resources (if available): <table style="width: 100%; border: none;"> <tr> <td style="vertical-align: top; width: 50%;"> ☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies </td> <td style="vertical-align: top; width: 50%;"> ☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event </td> </tr> </table>				☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies	☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event		
☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies	☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event						
Hydrogeomorphic Floodplain Units 							
Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM: 1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site. 2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units. 3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units. a) Record the floodplain unit and GPS position. b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit. c) Identify any indicators present at the location. 4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section. 5. Identify the OHWM and record the indicators. Record the OHWM position via: <table style="width: 100%; border: none; margin-top: 5px;"> <tr> <td style="width: 50%;">☐ Mapping on aerial photograph</td> <td style="width: 50%;">☒ GPS</td> </tr> <tr> <td>☐ Digitized on computer</td> <td>☐ Other:</td> </tr> </table>				☐ Mapping on aerial photograph	☒ GPS	☐ Digitized on computer	☐ Other:
☐ Mapping on aerial photograph	☒ GPS						
☐ Digitized on computer	☐ Other:						

Project ID: Santa Clara Cross section ID: Wash 7 Date: 9/8 Time:

Cross section drawing:



OHWM

GPS point: 37.252717, -113.603897

Indicators:

- | | |
|---|---|
| ☐ Change in average sediment texture | ☒ Break in bank slope |
| ☐ Change in vegetation species | ☐ Other: _____ |
| ☐ Change in vegetation cover | ☐ Other: _____ |

Comments:

Very poorly defined

Floodplain unit: ☐ Low-Flow Channel ☒ Active Floodplain ☐ Low Terrace

GPS point: 37.252717, -113.603897

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: 60 % Tree: 0 % Shrub: 50 % Herb: 10 %

Community successional stage:

- | | |
|---|--|
| ☐ NA | ☒ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|---|
| ☒ Mudcracks | ☐ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☐ Drift and/or debris | ☐ Other: _____ |
| ☐ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments:

Very poorly defined

Project ID: Santa Clara Cross section ID: Wash 7 Date: 9/8 Time:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☒ Low Terrace

GPS point: 37.252717, -113.60897

Characteristics of the floodplain unit:

Average sediment texture: pebble and cobble

Total veg cover: 60 % Tree: % Shrub: 55 % Herb: 5 %

Community successional stage:

- ☐ NA ☒ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☒ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other:
☐ Presence of bed and bank ☐ Other:
☒ Benches ☐ Other:

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point:

Characteristics of the floodplain unit:

Average sediment texture:

Total veg cover: % Tree: % Shrub: % Herb: %

Community successional stage:


- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☐ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other:
☐ Presence of bed and bank ☐ Other:
☐ Benches ☐ Other:


Comments:

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

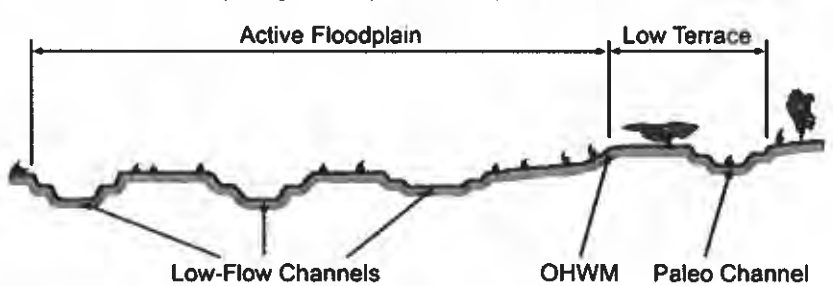Project: Santa Clara watershed E&I Project Number: Stream: Wash 8a Investigator(s): C. Melis		Date: 9/14/21 Town: Diamond Valley Photo begin file#:		Time: State: UT Photo end file#:	
Y ☒ / N ☐ Do normal circumstances exist on the site? Y ☐ / N ☒ Is the site significantly disturbed?		Location Details: Projection: Datum: Coordinates: 37.249622, -113.598596			
Potential anthropogenic influences on the channel system: runoff from adjacent OHV road					
Brief site description: juniper upland					
Checklist of resources (if available): ☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies ☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event					
Hydrogeomorphic Floodplain Units 					
Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM: 1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site. 2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units. 3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units. a) Record the floodplain unit and GPS position. b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit. c) Identify any indicators present at the location. 4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section. 5. Identify the OHWM and record the indicators. Record the OHWM position via: ☐ Mapping on aerial photograph ☐ Digitized on computer ☒ GPS ☐ Other:					

Project ID: Santa Clara Cross section ID: Wash 8a Date: 9/10 Time:

Cross section drawing:



OHWM

GPS point: 37.249622, -113.598596

Indicators:

- ☒ Change in average sediment texture
☐ Change in vegetation species
☒ Change in vegetation cover

- ☐ Break in bank slope
☐ Other: _____
☐ Other: _____

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☒ Low Terrace

GPS point: 37.249622, -113.598596

Characteristics of the floodplain unit:

Average sediment texture: rocky

Total veg cover: 75 % Tree: 2 % Shrub: 58 % Herb: 15 %

Community successional stage:

- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☒ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☒ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments:

Project ID: Santa Clara Cross section ID: Wash 8a Date: 9/10 Time:

Floodplain unit: ☐ Low-Flow Channel ☒ Active Floodplain ☐ Low Terrace

GPS point: 37.249622, -113.598596

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: 10 % Tree: _____ % Shrub: 8 % Herb: 2 %

Community successional stage:

- ☐ NA ☒ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☒ Soil development
☐ Ripples ☐ Surface relief
☒ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____ % Tree: _____ % Shrub: _____ % Herb: _____ %

Community successional stage:


- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☐ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____


Comments:

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

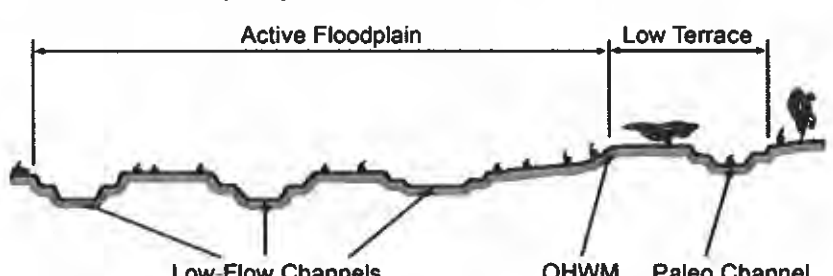Project: Santa Clara Watershed EA Project Number: Stream: Wash 8 Investigator(s): Cmelisi		Date: 9/10/21 Town: Diamond Valley Photo begin file#: 48-82 Time: State: UT Photo end file#: 51-82	
Y ☒ / N ☐ Do normal circumstances exist on the site? Y ☐ / N ☒ Is the site significantly disturbed?		Location Details: Projection: Datum: Coordinates: 37.249660, -113.598642	
Potential anthropogenic influences on the channel system: runoff from nearby OHW roads			
Brief site description: Juniper upland			
Checklist of resources (if available): ☒ Aerial photography Dates: ☐ Topographic maps ☐ Geologic maps ☐ Vegetation maps ☐ Soils maps ☐ Rainfall/precipitation maps ☐ Existing delineation(s) for site ☒ Global positioning system (GPS) ☐ Other studies ☐ Stream gage data Gage number: Period of record: ☐ History of recent effective discharges ☐ Results of flood frequency analysis ☐ Most recent shift-adjusted rating ☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event			
Hydrogeomorphic Floodplain Units 			
Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM: 1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site. 2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units. 3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units. a) Record the floodplain unit and GPS position. b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit. c) Identify any indicators present at the location. 4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section. 5. Identify the OHWM and record the indicators. Record the OHWM position via: ☐ Mapping on aerial photograph ☐ Digitized on computer ☒ GPS ☐ Other:			

Project ID: Santa Clara Cross section ID: Wash 8 Date: 9/10 Time:

Cross section drawing:

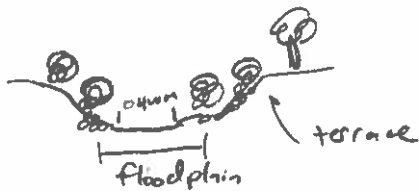

OHWM

GPS point: 37.249660, -113.598642

Indicators:

- | | |
|--|--|
| ☒ Change in average sediment texture | ☐ Break in bank slope |
| ☐ Change in vegetation species | ☐ Other: _____ |
| ☒ Change in vegetation cover | ☐ Other: _____ |

Comments:

Floodplain unit: ☐ Low-Flow Channel ☒ Active Floodplain ☐ Low Terrace

GPS point: 37.249660

Characteristics of the floodplain unit:

Average sediment texture: sandy & rocky

Total veg cover: 10 % Tree: _____ % Shrub: 5 % Herb: 5 %

Community successional stage:

- | | |
|---|--|
| ☐ NA | ☒ Mid (herbaceous, shrubs, saplings) |
| ☐ Early (herbaceous & seedlings) | ☐ Late (herbaceous, shrubs, mature trees) |

Indicators:

- | | |
|---|--|
| ☒ Mudcracks | ☒ Soil development |
| ☐ Ripples | ☐ Surface relief |
| ☒ Drift and/or debris | ☐ Other: _____ |
| ☐ Presence of bed and bank | ☐ Other: _____ |
| ☐ Benches | ☐ Other: _____ |

Comments:

Project ID: Santa Clara Cross section ID: Wash 8 Date: 9/10 Time:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☒ Low Terrace

GPS point: 37.249660, -113.598642

Characteristics of the floodplain unit:

Average sediment texture: rocky

Total veg cover: 28 % Tree: 3 % Shrub: 25 % Herb: 10 %

Community successional stage:

- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☒ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☒ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____ % Tree: _____ % Shrub: _____ % Herb: _____ %

Community successional stage:

- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☐ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments:

Arid West Ephemeral and Intermittent Streams OHWM Datasheet

Project: Santa Clara watershed EA		Date: 9/10/21		Time:	
Project Number:		Town: Diamond Valley		State:	
Stream: Wash 8		Photo begin file#:		Photo end file#:	
Investigator(s): cmelisi		Photo end file#: 48-51			

Y ☒ / N ☐ Do normal circumstances exist on the site?	Location Details:
Y ☒ / N ☐ Is the site significantly disturbed?	Projection:
	Datum:
	Coordinates: 37.250600, -113.600996

Potential anthropogenic influences on the channel system:
 Hiking trail & OHV road are w/in OHWM

Brief site description:
 Strip upland

Checklist of resources (if available):

☒ Aerial photography Dates:	☐ Stream gage data Gage number:
☐ Topographic maps	Period of record:
☐ Geologic maps	☐ History of recent effective discharges
☐ Vegetation maps	☐ Results of flood frequency analysis
☐ Soils maps	☐ Most recent shift-adjusted rating
☐ Rainfall/precipitation maps	☐ Gage heights for 2-, 5-, 10-, and 25-year events and the most recent event exceeding a 5-year event
☐ Existing delineation(s) for site	
☒ Global positioning system (GPS)	
☐ Other studies	

Hydrogeomorphic Floodplain Units

Low-Flow Channels
OHWM
Paleo Channel

Procedure for identifying and characterizing the floodplain units to assist in identifying the OHWM:

1. Walk the channel and floodplain within the study area to get an impression of the geomorphology and vegetation present at the site.
2. Select a representative cross section across the channel. Draw the cross section and label the floodplain units.
3. Determine a point on the cross section that is characteristic of one of the hydrogeomorphic floodplain units.
 - a) Record the floodplain unit and GPS position.
 - b) Describe the sediment texture (using the Wentworth class size) and the vegetation characteristics of the floodplain unit.
 - c) Identify any indicators present at the location.
4. Repeat for other points in different hydrogeomorphic floodplain units across the cross section.
5. Identify the OHWM and record the indicators. Record the OHWM position via:


☐ Mapping on aerial photograph	☒ GPS
☐ Digitized on computer	☐ Other:

Project ID: Santa Clara Cross section ID: Wash 8

Date: 9/10

Time:

Cross section drawing:

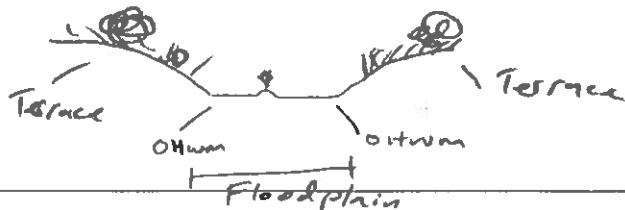

OHWM

GPS point: 37.250600, -113.600986

Indicators:

- ☐ Change in average sediment texture
☐ Change in vegetation species
☒ Change in vegetation cover

- ☒ Break in bank slope
☐ Other: _____
☐ Other: _____

Comments:

OHV road

Floodplain unit: ☐ Low-Flow Channel

☒ Active Floodplain

☐ Low Terrace

GPS point: 37.250600, -113.600996

Characteristics of the floodplain unit:

Average sediment texture: fine, gravel

Total veg cover: 5 % Tree: 0 % Shrub: 0 % Herb: 5 %

Community successional stage:

- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☒ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☒ Mudcracks ☐ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments:

OHV road

Project ID: Santa Clara Cross section ID: Wash 8 Date: 9/10 Time:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☒ Low Terrace

GPS point: 37.250600, -113.600796

Characteristics of the floodplain unit:

Average sediment texture: fine, gravel

Total veg cover: 80% Tree: 0% Shrub: 60% Herb: 20%

Community successional stage:

- ☐ NA ☒ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☒ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments:

Floodplain unit: ☐ Low-Flow Channel ☐ Active Floodplain ☐ Low Terrace

GPS point: _____

Characteristics of the floodplain unit:

Average sediment texture: _____

Total veg cover: _____% Tree: _____% Shrub: _____% Herb: _____%

Community successional stage:

- ☐ NA ☐ Mid (herbaceous, shrubs, saplings)
☐ Early (herbaceous & seedlings) ☐ Late (herbaceous, shrubs, mature trees)

Indicators:

- ☐ Mudcracks ☐ Soil development
☐ Ripples ☐ Surface relief
☐ Drift and/or debris ☐ Other: _____
☐ Presence of bed and bank ☐ Other: _____
☐ Benches ☐ Other: _____

Comments:

WETLAND DETERMINATION DATA FORM – Arid West Region

Project/Site: Santa Clara Watershed EA City/County: Shiwiwits, Washington Co Sampling Date: 9/10/21
 Applicant/Owner: NRCS State: UT Sampling Point: Pit 1
 Investigator(s): C Melisi Section, Township, Range: 28, 41 S, 17 W
 Landform (hillslope, terrace, etc.): Floodplain Local relief (concave, convex, none): none Slope (%): 0
 Subregion (LRR): D Lat: 37.185109 Long: -113.764952 Datum: _____
 Soil Map Unit Name: Fluvaquents & torrifluents, sandy NWI classification: Forest/shrub Riparian
 Are climatic / hydrologic conditions on the site typical for this time of year? Yes ☒ No _____ (If no, explain in Remarks.)
 Are Vegetation _____, Soil _____, or Hydrology _____ significantly disturbed? Are "Normal Circumstances" present? Yes ☒ No _____
 Are Vegetation _____, Soil _____, or Hydrology _____ naturally problematic? (If needed, explain any answers in Remarks.)

SUMMARY OF FINDINGS – Attach site map showing sampling point locations, transects, important features, etc.

Hydrophytic Vegetation Present?	Yes ☒	No _____	Is the Sampled Area within a Wetland? Yes ☒ No _____
Hydric Soil Present?	Yes ☒	No _____	
Wetland Hydrology Present?	Yes ☒	No _____	
Remarks: <u>Although the depth of the hydric soils is less than 20", many indicators of hydric soils and hydrophytic veg are present</u>			

VEGETATION – Use scientific names of plants.

Tree Stratum (Plot size: _____)	Absolute % Cover	Dominant Species?	Indicator Status	Dominance Test worksheet:	
1. <u>Salix spp.</u>	<u>10</u>	<u>YES</u>	<u>FACW</u>	Number of Dominant Species That Are OBL, FACW, or FAC:	<u>2</u> (A)
2. <u>Tameras spp.</u>	<u>3</u>	<u>NO</u>	<u>FAC</u>	Total Number of Dominant Species Across All Strata:	<u>3</u> (B)
3. _____	_____	_____	_____	Percent of Dominant Species That Are OBL, FACW, or FAC:	<u>100</u> (A/B)
4. _____	_____	_____	_____		
				Prevalence Index worksheet:	
				Total % Cover of:	Multiply by:
				OBL species <u>70</u>	x 1 = <u>70</u>
				FACW species <u>24</u>	x 2 = <u>48</u>
				FAC species <u>3</u>	x 3 = <u>9</u>
				FACU species _____	x 4 = _____
				UPL species _____	x 5 = _____
				Column Totals: <u>89</u> (A)	<u>127</u> (B)
				Prevalence Index = B/A = <u>1.41</u>	
Hydrophytic Vegetation Indicators:					
☒ Dominance Test is >50%					
☒ Prevalence Index is ≤3.0 ¹					
____ Morphological Adaptations ¹ (Provide supporting data in Remarks or on a separate sheet)					
____ Problematic Hydrophytic Vegetation ¹ (Explain)					
¹ Indicators of hydric soil and wetland hydrology must be present, unless disturbed or problematic.					
Hydrophytic Vegetation Present? Yes ☒ No _____					

Sapling/Shrub Stratum (Plot size: _____)	Absolute % Cover	Dominant Species?	Indicator Status
1. <u>Salix spp.</u>	<u>5</u>	<u>YES</u>	<u>FACW</u>
2. <u>Populus angustifolia spp.</u>	<u>1</u>	<u>NO</u>	<u>FACW</u>
3. _____	_____	_____	_____
4. _____	_____	_____	_____
5. _____	_____	_____	_____
<u>6</u> = Total Cover			

Herb Stratum (Plot size: _____)	Absolute % Cover	Dominant Species?	Indicator Status
1. <u>Tifla angustifolia spp.</u>	<u>70</u>	<u>YES</u>	<u>OBL</u>
2. <u>Phragmites australis</u>	<u>8</u>	<u>NO</u>	<u>FACW</u>
3. _____	_____	_____	_____
4. _____	_____	_____	_____
5. _____	_____	_____	_____
6. _____	_____	_____	_____
7. _____	_____	_____	_____
8. _____	_____	_____	_____
<u>78</u> = Total Cover			

Woody Vine Stratum (Plot size: _____)	Absolute % Cover	Dominant Species?	Indicator Status
1. _____	_____	_____	_____
2. _____	_____	_____	_____
_____ = Total Cover			

% Bare Ground in Herb Stratum 30 % Cover of Biotic Crust 0

Remarks:

SOIL

Sampling Point: _____

Profile Description: (Describe to the depth needed to document the indicator or confirm the absence of indicators.)

Depth (inches)	Matrix		Redox Features				Texture	Remarks
	Color (moist)	%	Color (moist)	%	Type ¹	Loc ²		
2 inch	7.5YR 3/4 DBR	100					Clayey	Dense / sticky
2 1/2 inch	7.5YR 2.5	100	2 1/2 inch 7.5YR 2.5	100	Sulfate Redox		loamy sand	30% organic matter / softer smell
12 inch	7.5YR 3	100					Sandy	

¹Type: C=Concentration, D=Depletion, RM=Reduced Matrix, CS=Covered or Coated Sand Grains²Location: PL=Pore Lining, M=Matrix

Hydric Soil Indicators: (Applicable to all LRRs, unless otherwise noted.)

- ☐ Histosol (A1)
☐ Histic Epipedon (A2)
☐ Black Histic (A3)
☒ Hydrogen Sulfide (A4)
☒ Stratified Layers (A5) (LRR C)
☐ 1 cm Muck (A9) (LRR D)
☐ Depleted Below Dark Surface (A11)
☐ Thick Dark Surface (A12)
☒ Sandy Mucky Mineral (S1)
☐ Sandy Gleyed Matrix (S4)

- ☐ Sandy Redox (S5)
☐ Stripped Matrix (S6)
☐ Loamy Mucky Mineral (F1)
☐ Loamy Gleyed Matrix (F2)
☐ Depleted Matrix (F3)
☐ Redox Dark Surface (F6)
☐ Depleted Dark Surface (F7)
☐ Redox Depressions (F8)
☐ Vernal Pools (F9)

Indicators for Problematic Hydric Soils³:

- ☐ 1 cm Muck (A9) (LRR C)
☐ 2 cm Muck (A10) (LRR B)
☐ Reduced Vertic (F18)
☐ Red Parent Material (TF2)
☐ Other (Explain in Remarks)

³Indicators of hydrophytic vegetation and wetland hydrology must be present, unless disturbed or problematic

Restrictive Layer (if present):

Type Clay/sand bedrock
 Depth (inches): 2 inch 12 inch

Hydric Soil Present? Yes _____ No _____

Remarks:

hydric soil indicators present but do not meet technical depth requirements

HYDROLOGY

Wetland Hydrology Indicators:

Primary Indicators (minimum of one required; check all that apply)

- ☒ Surface Water (A1)
☒ High Water Table (A2)
☒ Saturation (A3)
☐ Water Marks (B1) (Nonriverine)
☐ Sediment Deposits (B2) (Nonriverine)
☐ Drift Deposits (B3) (Nonriverine)
☐ Surface Soil Cracks (B6)
☐ Inundation Visible on Aerial Imagery (B7)
☐ Water-Stained Leaves (B9)

- ☐ Salt Crust (B11)
☐ Biotic Crust (B12)
☐ Aquatic Invertebrates (B13)
☒ Hydrogen Sulfide Odor (C1)
☐ Oxidized Rhizospheres along Living Roots (C3)
☐ Presence of Reduced Iron (C4)
☐ Recent Iron Reduction in Tilled Soils (C6)
☐ Thin Muck Surface (C7)
☐ Other (Explain in Remarks)

Secondary Indicators (2 or more required)

- ☒ Water Marks (B1) (Riverine)
☐ Sediment Deposits (B2) (Riverine)
☐ Drift Deposits (B3) (Riverine)
☒ Drainage Patterns (B10)
☐ Dry-Season Water Table (C2)
☒ Crayfish Burrows (C8)
☐ Saturation Visible on Aerial Imagery (C9)
☐ Shallow Aquitard (D3)
☐ FAC-Neutral Test (D5)

Field Observations:

Surface Water Present? Yes _____ No ☒
 Water Table Present? Yes ☒ No _____
 Saturation Present? Yes ☒ No _____
 (includes capillary fringe)

Depth (inches): _____
 Depth (inches): 3
 Depth (inches): 12

Wetland Hydrology Present? Yes _____ No _____

Describe Recorded Data (stream gauge, monitoring well, aerial photos, previous inspections), if available:

Remarks:

Dig was only 12 inch deep due to bed rock Problem hydro soil / soil materials (Restrictive layers); hydrology (1 inch standing water); vegetation (significantly different than upland)

WETLAND DETERMINATION DATA FORM – Arid West Region

Project/Site: Santa Clara Watershed EA City/County: Shivwits, Washington CO Sampling Date: 9/10/21
 Applicant/Owner: NRCS State: UT Sampling Point: Pit 2
 Investigator(s): C Melisi Section, Township, Range: 28, 41 S, 17 W
 Landform (hillslope, terrace, etc.): floodplain Local relief (concave, convex, none): none Slope (%): 0
 Subregion (LRR): D Lat: 37.185060 Long: -113.764722 Datum: _____
 Soil Map Unit Name: Fluvaguent s, terrifluvents, sandy NWI classification: Forested/shrub Riparian
 Are climatic / hydrologic conditions on the site typical for this time of year? Yes ☒ No _____ (If no, explain in Remarks.)
 Are Vegetation _____, Soil _____, or Hydrology _____ significantly disturbed? Are "Normal Circumstances" present? Yes ☒ No _____
 Are Vegetation _____, Soil _____, or Hydrology _____ naturally problematic? (If needed, explain any answers in Remarks.)

SUMMARY OF FINDINGS – Attach site map showing sampling point locations, transects, important features, etc.

Hydrophytic Vegetation Present? Yes ☒ No _____	Is the Sampled Area within a Wetland? Yes ☒ No _____
Hydric Soil Present? Yes ☒ No _____	
Wetland Hydrology Present? Yes ☒ No _____	
Remarks: <u>Although the depth of the hydric soil is less than 20", many indicators of hydric soil and hydrophytic veg are present</u>	

VEGETATION – Use scientific names of plants.

Tree Stratum (Plot size: _____)	Absolute % Cover	Dominant Species?	Indicator Status	Dominance Test worksheet:	
1. _____	_____	_____	_____	Number of Dominant Species That Are OBL, FACW, or FAC:	<u>2</u> (A)
2. _____	_____	_____	_____	Total Number of Dominant Species Across All Strata:	<u>2</u> (B)
3. _____	_____	_____	_____	Percent of Dominant Species That Are OBL, FACW, or FAC:	<u>100</u> (A/B)
4. _____	_____	_____	_____	Prevalence Index worksheet:	
_____ = Total Cover				Total % Cover of:	Multiply by:
Sapling/Shrub Stratum (Plot size: _____)				OBL species	<u>90</u> x 1 = <u>90</u>
1. <u>Salix spp.</u>	<u>3</u>	<u>YES</u>	<u>FACW</u>	FACW species	<u>8</u> x 2 = <u>16</u>
2. _____	_____	_____	_____	FAC species	_____ x 3 = _____
3. _____	_____	_____	_____	FACU species	_____ x 4 = _____
4. _____	_____	_____	_____	UPL species	_____ x 5 = _____
5. _____	_____	_____	_____	Column Totals:	<u>98</u> (A) <u>106</u> (B)
_____ = Total Cover				Prevalence Index = B/A = <u>1.08</u>	
Herb Stratum (Plot size: _____)				Hydrophytic Vegetation Indicators:	
1. <u>Typha angustifolia spp.</u>	<u>90</u>	<u>YES</u>	<u>OBL</u>	☒ Dominance Test is >50%	
2. <u>Phragmites spp.</u>	<u>9</u>	<u>NO</u>	<u>FACW</u>	☒ Prevalence Index is ≤3.0 ¹	
3. _____	_____	_____	_____	____ Morphological Adaptations ¹ (Provide supporting data in Remarks or on a separate sheet)	
4. _____	_____	_____	_____	____ Problematic Hydrophytic Vegetation ¹ (Explain)	
5. _____	_____	_____	_____		
6. _____	_____	_____	_____		
7. _____	_____	_____	_____		
8. _____	_____	_____	_____		
_____ = Total Cover				¹ Indicators of hydric soil and wetland hydrology must be present, unless disturbed or problematic	
Woody Vine Stratum (Plot size: _____)				Hydrophytic Vegetation Present? Yes ☒ No _____	
1. _____	_____	_____	_____		
2. _____	_____	_____	_____		
_____ = Total Cover					
% Bare Ground in Herb Stratum <u>5</u>	% Cover of Biotic Crust <u>0</u>				

Remarks:

SOIL

Sampling Point: _____

[illegible]

HYDROLOGY

Wetland Hydrology Indicators:		
Primary Indicators (minimum of one required; check all that apply)		Secondary Indicators (2 or more required)
☒ Surface Water (A1)	☐ Salt Crust (B11)	☒ Water Marks (B1) (Riverine)
☒ High Water Table (A2)	☐ Biotic Crust (B12)	☐ Sediment Deposits (B2) (Riverine)
☒ Saturation (A3)	☐ Aquatic Invertebrates (B13)	☐ Drift Deposits (B3) (Riverine)
☐ Water Marks (B1) (Nonriverine)	☒ Hydrogen Sulfide Odor (C1)	☒ Drainage Patterns (B10)
☐ Sediment Deposits (B2) (Nonriverine)	☐ Oxidized Rhizospheres along Living Roots (C3)	☐ Dry-Season Water Table (C2)
☐ Drift Deposits (B3) (Nonriverine)	☐ Presence of Reduced Iron (C4)	☒ Crayfish Burrows (C8)
☐ Surface Soil Cracks (B6)	☐ Recent Iron Reduction in Tilled Soils (C6)	☐ Saturation Visible on Aerial Imagery (C9)
☐ Inundation Visible on Aerial Imagery (B7)	☐ Thin Muck Surface (C7)	☐ Shallow Aquitard (D3)
☐ Water-Stained Leaves (B9)	☐ Other (Explain in Remarks)	☐ FAC-Neutral Test (D5)
Field Observations: Surface Water Present? Yes ☐ No ☒ Depth (inches): _____ Water Table Present? Yes ☒ No ☐ Depth (inches): <u>41</u> Saturation Present? Yes ☒ No ☐ Depth (inches): <u>6</u> (includes capillary fringe)		
Describe Recorded Data (stream gauge, monitoring well, aerial photos, previous inspections), if available:		Wetland Hydrology Present? Yes ☐ No ☐
Remarks: Dig was only 6 inch deep due to bed rock. Problem hydro soil / soil materials (Restricted layers); hydrology (saturated soil -); Vegetation (significantly different than upland)		

APPENDIX E-9C
AQUATIC RESOURCES

APPENDIX D

NRCS CUSTOM SOIL RESOURCE REPORT




United States
Department of
Agriculture

NRCS

Natural
Resources
Conservation
Service

A product of the National
Cooperative Soil Survey,
a joint effort of the United
States Department of
Agriculture and other
Federal agencies, State
agencies including the
Agricultural Experiment
Stations, and local
participants

Custom Soil Resource Report for **Washington County Area, Utah**

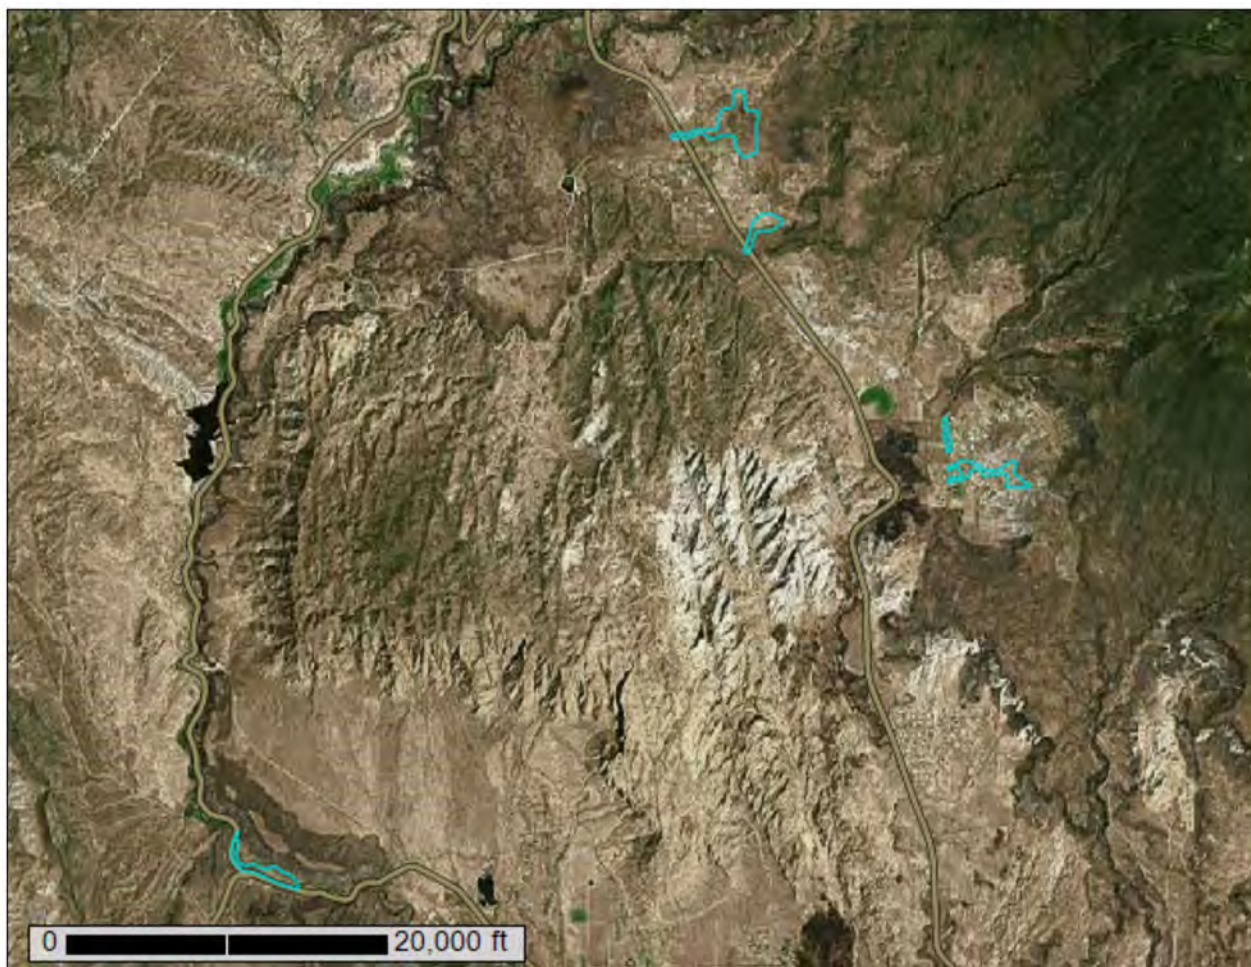

October 8, 2021

Preface

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (<http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/>) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (<https://offices.sc.egov.usda.gov/locator/app?agency=nrcs>) or your NRCS State Soil Scientist (http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2_053951).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

Contents

Preface.....	2
How Soil Surveys Are Made.....	5
Soil Map.....	8
Soil Map.....	9
Legend.....	10
Map Unit Legend.....	11
Map Unit Descriptions.....	11
Washington County Area, Utah.....	14
BB—Badland, very steep.....	14
EB—Eroded land-Shalet complex, warm.....	14
FA—Fluvaquents and torrifluvents, sandy.....	15
LeB—Leeds silty clay loam, 1 to 2 percent slopes.....	17
MAE—Magotsu-Pastura complex, 2 to 20 percent slopes.....	18
NaC—Naplene silt loam, 2 to 6 percent slopes.....	20
RaC—Redbank fine sandy loam, 1 to 5 percent slopes.....	22
SY—Stony colluvial land.....	23
VPD—Veyo-Pastura complex, 1 to 10 percent slopes.....	23
W—Water.....	25
YAF—Yaki very cobbly loam, 3 to 35 percent slopes.....	25
References.....	27

How Soil Surveys Are Made

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and


Custom Soil Resource Report

identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.

Soil Map

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.

Custom Soil Resource Report
Soil Map

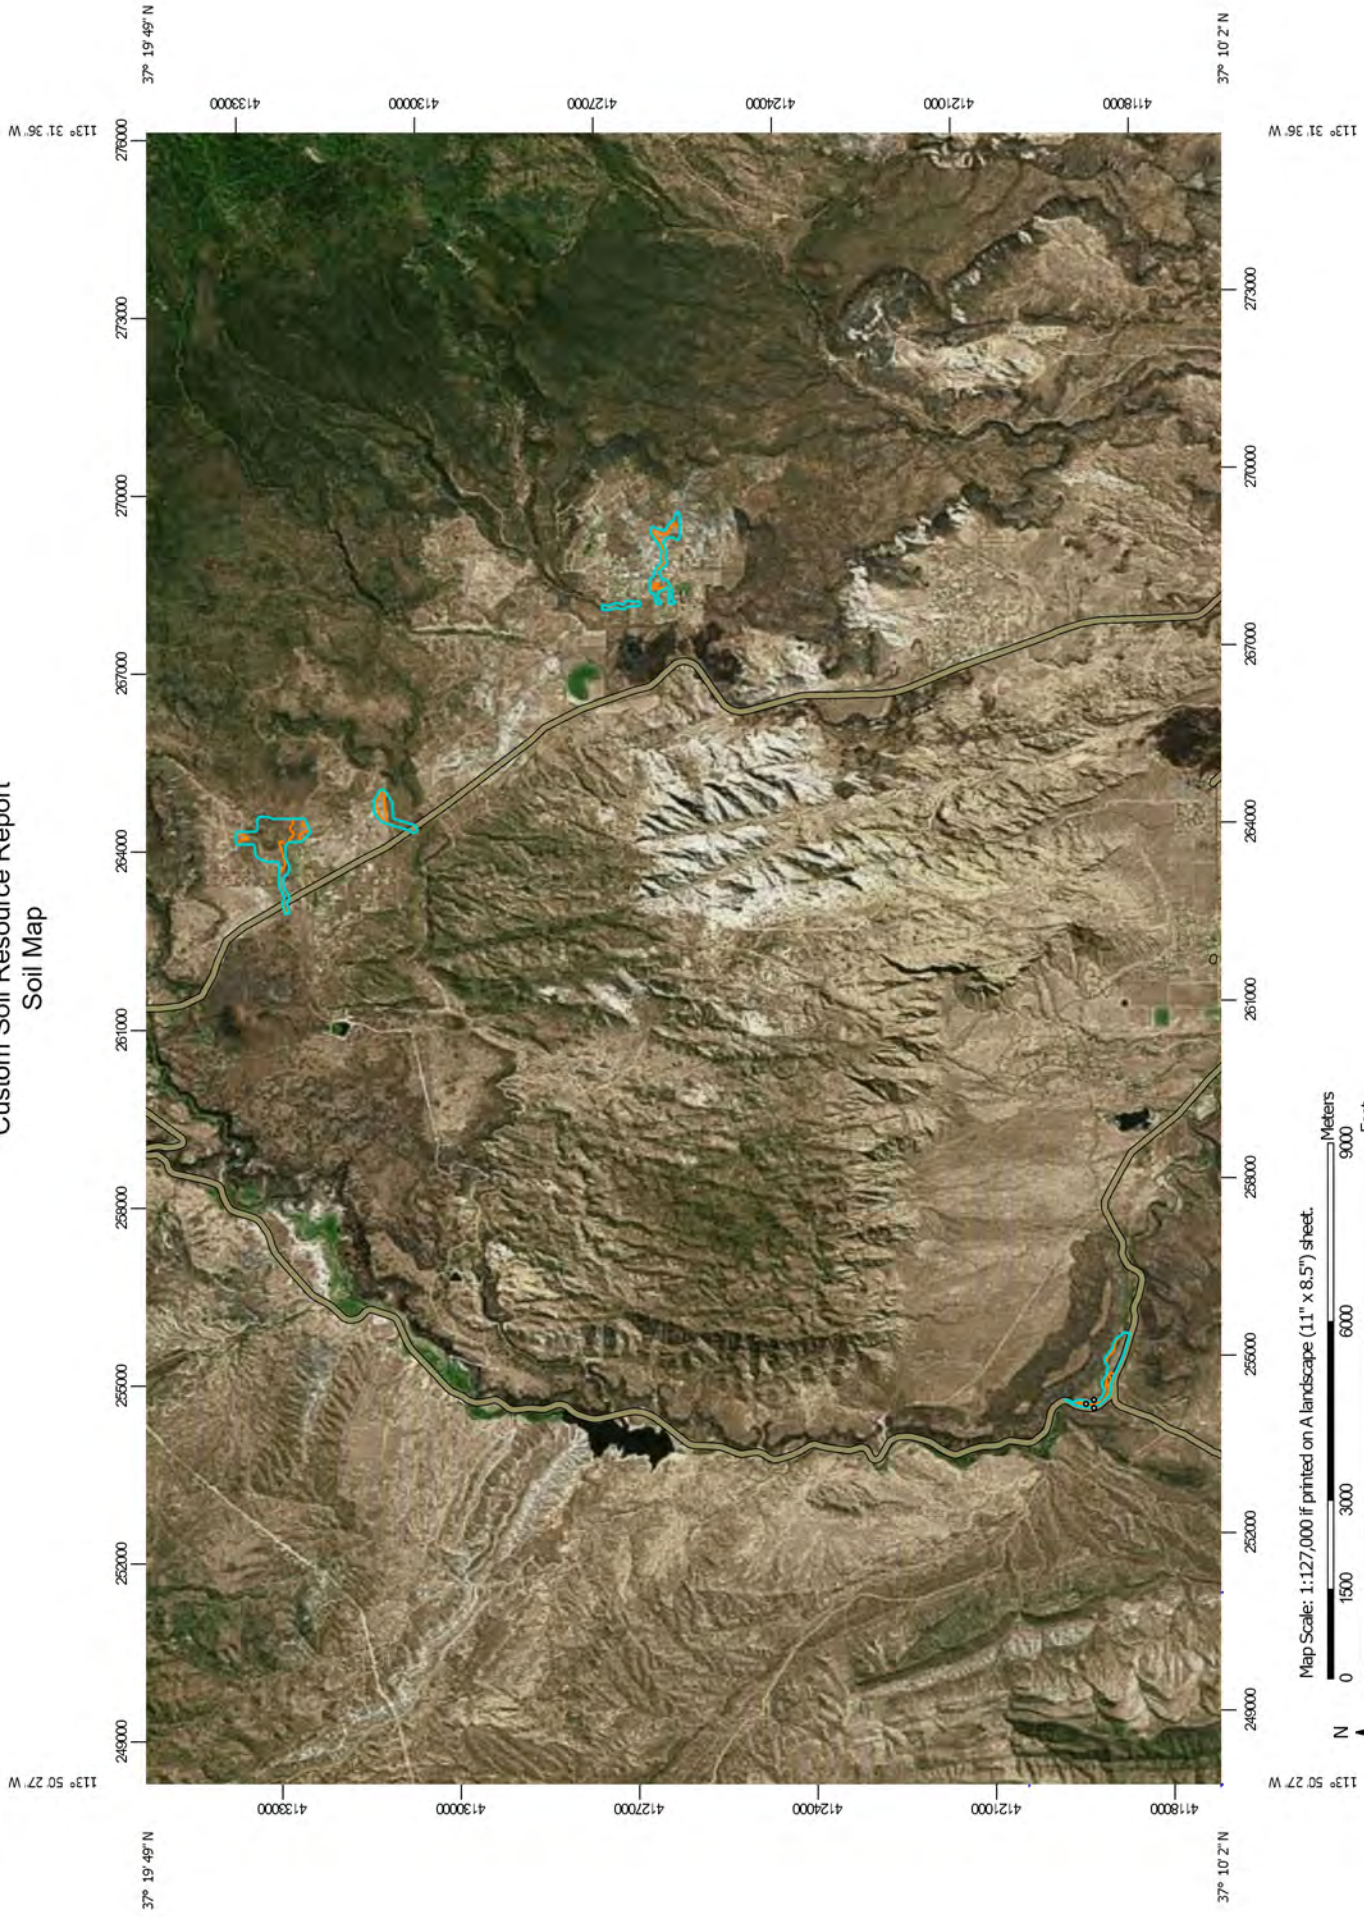

MAP LEGEND



MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
Web Soil Survey URL: <http://websoilsurvey.sc.egov.usda.gov>
Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Washington County Area, Utah
Survey Area Data: Version 15, Sep 7, 2021

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Mar 7, 2015—Aug 1, 2018

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
BB	Badland, very steep	6.5	1.8%
EB	Eroded land-Shalet complex, warm	3.6	1.0%
FA	Fluvaquents and torrifluvents, sandy	9.8	2.7%
LeB	Leeds silty clay loam, 1 to 2 percent slopes	43.7	12.2%
MAE	Magotsu-Pastura complex, 2 to 20 percent slopes	138.3	38.4%
NaC	Naplene silt loam, 2 to 6 percent slopes	100.2	27.8%
RaC	Redbank fine sandy loam, 1 to 5 percent slopes	24.8	6.9%
SY	Stony colluvial land	0.0	0.0%
VPD	Veyo-Pastura complex, 1 to 10 percent slopes	0.0	0.0%
W	Water	0.9	0.3%
YAF	Yaki very cobbly loam, 3 to 35 percent slopes	32.0	8.9%
Totals for Area of Interest		359.8	100.0%

Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties

and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Custom Soil Resource Report

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

Washington County Area, Utah

BB—Badland, very steep

Map Unit Composition

Badland: 100 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Badland

Setting

Landform: Hills, escarpments

Landform position (two-dimensional): Backslope

Landform position (three-dimensional): Side slope, free face

Down-slope shape: Convex

Across-slope shape: Convex

EB—Eroded land-Shalet complex, warm

Map Unit Setting

National map unit symbol: j8ds

Elevation: 3,600 to 5,550 feet

Mean annual precipitation: 10 to 13 inches

Mean annual air temperature: 52 to 56 degrees F

Frost-free period: 165 to 170 days

Farmland classification: Not prime farmland

Map Unit Composition

Eroded land: 78 percent

Shalet and similar soils: 20 percent

Minor components: 2 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Eroded Land

Setting

Landform: Erosion remnants

Parent material: Residuum weathered from shale

Description of Shalet

Setting

Landform: Swales

Down-slope shape: Concave

Across-slope shape: Concave

Parent material: Residuum weathered from shale

Typical profile

H1 - 0 to 4 inches: clay loam

H2 - 4 to 12 inches: clay loam

H3 - 12 to 16 inches: weathered bedrock

Properties and qualities

Slope: 2 to 20 percent
Depth to restrictive feature: 4 to 15 inches to paralithic bedrock
Drainage class: Well drained
Runoff class: High
Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately high (0.00 to 0.20 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 20 percent
Gypsum, maximum content: 10 percent
Maximum salinity: Nonsaline to slightly saline (0.0 to 4.0 mmhos/cm)
Sodium adsorption ratio, maximum: 5.0
Available water supply, 0 to 60 inches: Very low (about 2.1 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 7s
Hydrologic Soil Group: D
Ecological site: R030XY134UT - Desert Shallow Loam (Creosotebush)
Hydric soil rating: No

Minor Components

Badland

Percent of map unit: 2 percent

FA—Fluvaquents and torrifluvents, sandy

Map Unit Setting

National map unit symbol: j8dt
Elevation: 2,500 to 3,000 feet
Mean annual precipitation: 8 to 11 inches
Mean annual air temperature: 57 to 67 degrees F
Frost-free period: 190 to 205 days
Farmland classification: Not prime farmland

Map Unit Composition

Fluvaquents and similar soils: 55 percent
Torrifluvents and similar soils: 35 percent
Minor components: 10 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Fluvaquents

Setting

Landform: Swales
Landform position (three-dimensional): Talf

Custom Soil Resource Report

Down-slope shape: Concave

Across-slope shape: Concave

Parent material: Sandy alluvium derived from limestone, sandstone, and shale

Typical profile

H1 - 0 to 5 inches: fine sand

H2 - 5 to 60 inches: stratified fine sand to silt loam

Properties and qualities

Slope: 0 to 2 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Poorly drained

Runoff class: Negligible

Capacity of the most limiting layer to transmit water (Ksat): High to very high (6.00 to 20.00 in/hr)

Depth to water table: About 6 to 24 inches

Frequency of flooding: Frequent

Frequency of ponding: Rare

Calcium carbonate, maximum content: 20 percent

Maximum salinity: Nonsaline to slightly saline (0.0 to 4.0 mmhos/cm)

Sodium adsorption ratio, maximum: 10.0

Available water supply, 0 to 60 inches: Low (about 4.2 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 7w

Hydrologic Soil Group: A/D

Ecological site: R035XY011UT - Loamy Bottom (Basin Big Sagebrush)

Hydric soil rating: Yes

Description of Torrifluvents

Setting

Landform: Flood plains

Landform position (three-dimensional): Talf

Down-slope shape: Linear

Across-slope shape: Linear

Parent material: Alluvium derived from limestone, sandstone, and shale

Typical profile

H1 - 0 to 5 inches: loamy fine sand

H2 - 5 to 60 inches: stratified loamy fine sand to silt loam

Properties and qualities

Slope: 0 to 3 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Well drained

Runoff class: Very low

Capacity of the most limiting layer to transmit water (Ksat): High to very high (6.00 to 20.00 in/hr)

Depth to water table: About 42 to 72 inches

Frequency of flooding: FrequentNone

Frequency of ponding: None

Calcium carbonate, maximum content: 20 percent

Maximum salinity: Nonsaline to moderately saline (0.0 to 8.0 mmhos/cm)

Sodium adsorption ratio, maximum: 5.0

Available water supply, 0 to 60 inches: Low (about 4.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 7w

Hydrologic Soil Group: A

Ecological site: R035XY011UT - Loamy Bottom (Basin Big Sagebrush)

Other vegetative classification: Loamy Bottom (Basin Big Sagebrush)
(035XY011UT)

Hydric soil rating: No

Minor Components

Riverwash

Percent of map unit: 4 percent

Landform: Flood plains

Landform position (three-dimensional): Dip

Down-slope shape: Linear

Across-slope shape: Linear

Hydric soil rating: Yes

Tobler, silty clay loam

Percent of map unit: 3 percent

Tobler, fine sandy loam

Percent of map unit: 3 percent

LeB—Leeds silty clay loam, 1 to 2 percent slopes

Map Unit Setting

National map unit symbol: j8fk

Elevation: 2,550 to 3,300 feet

Mean annual precipitation: 8 to 11 inches

Mean annual air temperature: 57 to 67 degrees F

Frost-free period: 190 to 200 days

Farmland classification: Prime farmland if irrigated

Map Unit Composition

Leeds and similar soils: 85 percent

Minor components: 15 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Leeds

Setting

Landform: Flood plains

Landform position (three-dimensional): Talf

Down-slope shape: Linear

Across-slope shape: Linear

Parent material: Alluvium derived from limestone, sandstone, and shale

Typical profile

H1 - 0 to 8 inches: silty clay loam
H2 - 8 to 15 inches: silty clay loam
H3 - 15 to 23 inches: sandy loam
H4 - 23 to 60 inches: silt loam

Properties and qualities

Slope: 1 to 2 percent
Depth to restrictive feature: More than 80 inches
Drainage class: Well drained
Runoff class: Medium
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 20 percent
Maximum salinity: Nonsaline to slightly saline (0.0 to 4.0 mmhos/cm)
Sodium adsorption ratio, maximum: 5.0
Available water supply, 0 to 60 inches: High (about 10.1 inches)

Interpretive groups

Land capability classification (irrigated): 3s
Hydrologic Soil Group: C
Ecological site: R030XY110UT - Desert Loam (Creosotebush)
Hydric soil rating: No

Minor Components

Leeds

Percent of map unit: 4 percent

Hantz

Percent of map unit: 4 percent

St george

Percent of map unit: 4 percent

Tobler

Percent of map unit: 3 percent

MAE—Magotsu-Pastura complex, 2 to 20 percent slopes

Map Unit Setting

National map unit symbol: j8fm
Elevation: 3,800 to 6,300 feet
Mean annual precipitation: 10 to 13 inches
Mean annual air temperature: 46 to 57 degrees F
Frost-free period: 155 to 170 days
Farmland classification: Not prime farmland

Map Unit Composition

Magotsu and similar soils: 55 percent

Pastura and similar soils: 25 percent

Minor components: 20 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Magotsu

Setting

Landform: Lava flows

Down-slope shape: Linear

Across-slope shape: Linear

Parent material: Residuum weathered from basalt and some limestone and sandstone

Typical profile

H1 - 0 to 2 inches: very cobbly loam

H2 - 2 to 5 inches: gravelly clay loam

H3 - 5 to 14 inches: clay

H4 - 14 to 17 inches: gravelly clay loam

H5 - 17 to 21 inches: indurated

H6 - 21 to 25 inches: unweathered bedrock

Properties and qualities

Slope: 2 to 20 percent

Depth to restrictive feature: 10 to 20 inches to petrocalcic; 14 to 22 inches to lithic bedrock

Drainage class: Well drained

Runoff class: Very high

Capacity of the most limiting layer to transmit water (Ksat): Very low to low (0.00 to 0.01 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Calcium carbonate, maximum content: 30 percent

Available water supply, 0 to 60 inches: Very low (about 2.5 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 7s

Hydrologic Soil Group: D

Ecological site: R029XY220UT - Semidesert Shallow Hardpan (Blackbrush)

Hydric soil rating: No

Description of Pastura

Setting

Landform: Lava flows

Down-slope shape: Linear

Across-slope shape: Linear

Parent material: Eolian deposits derived from sandstone and shale over residuum weathered from basalt

Typical profile

H1 - 0 to 2 inches: gravelly loam

H2 - 2 to 8 inches: gravelly loam

Custom Soil Resource Report

H3 - 8 to 15 inches: gravelly loam
H4 - 15 to 18 inches: gravelly clay loam
H5 - 18 to 22 inches: indurated

Properties and qualities

Slope: 2 to 10 percent
Depth to restrictive feature: 10 to 20 inches to petrocalcic
Drainage class: Well drained
Runoff class: Medium
Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately high (0.00 to 0.60 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 60 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water supply, 0 to 60 inches: Very low (about 2.2 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 7s
Hydrologic Soil Group: D
Ecological site: R029XY220UT - Semidesert Shallow Hardpan (Blackbrush)
Hydric soil rating: No

Minor Components

Hardpan soils

Percent of map unit: 5 percent

Veyo

Percent of map unit: 5 percent

Pastura

Percent of map unit: 5 percent

Rock outcrop

Percent of map unit: 5 percent

NaC—Naplene silt loam, 2 to 6 percent slopes

Map Unit Setting

National map unit symbol: j8fz
Elevation: 3,600 to 5,300 feet
Mean annual precipitation: 14 to 15 inches
Mean annual air temperature: 44 to 52 degrees F
Frost-free period: 140 to 160 days
Farmland classification: Prime farmland if irrigated

Map Unit Composition

Naplene and similar soils: 75 percent

Custom Soil Resource Report

Minor components: 25 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Naplene

Setting

Landform: Valleys, alluvial fans

Landform position (three-dimensional): Talf

Down-slope shape: Linear

Across-slope shape: Concave

Parent material: Alluvium derived from igneous and sedimentary rock

Typical profile

H1 - 0 to 2 inches: silt loam

H2 - 2 to 7 inches: silt loam

H3 - 7 to 15 inches: silt loam

H4 - 15 to 22 inches: silty clay loam

H5 - 22 to 39 inches: silt loam

H6 - 39 to 60 inches: silt loam

Properties and qualities

Slope: 2 to 6 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Well drained

Runoff class: Low

Capacity of the most limiting layer to transmit water (Ksat): Moderately high (0.20 to 0.60 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Calcium carbonate, maximum content: 20 percent

Maximum salinity: Nonsaline to slightly saline (0.0 to 4.0 mmhos/cm)

Available water supply, 0 to 60 inches: High (about 10.8 inches)

Interpretive groups

Land capability classification (irrigated): 3e

Land capability classification (nonirrigated): 6e

Hydrologic Soil Group: C

Ecological site: R035XY306UT - Upland Loam (Basin Big Sagebrush)

Hydric soil rating: No

Minor Components

Schmutz

Percent of map unit: 5 percent

Redbank

Percent of map unit: 5 percent

Mespun

Percent of map unit: 5 percent

Chilton

Percent of map unit: 5 percent

Clovis

Percent of map unit: 5 percent

RaC—Redbank fine sandy loam, 1 to 5 percent slopes

Map Unit Setting

National map unit symbol: j8gm
Elevation: 3,300 to 5,500 feet
Mean annual precipitation: 12 to 14 inches
Mean annual air temperature: 54 to 57 degrees F
Frost-free period: 160 to 170 days
Farmland classification: Prime farmland if irrigated

Map Unit Composition

Redbank and similar soils: 85 percent
Minor components: 15 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Redbank

Setting

Landform: Valleys, alluvial fans
Landform position (three-dimensional): Talf
Down-slope shape: Linear
Across-slope shape: Concave, linear
Parent material: Alluvium derived from limestone, sandstone, and shale

Typical profile

H1 - 0 to 5 inches: fine sandy loam
H2 - 5 to 16 inches: fine sandy loam
H3 - 16 to 35 inches: fine sandy loam
H4 - 35 to 60 inches: loam

Properties and qualities

Slope: 1 to 5 percent
Depth to restrictive feature: More than 80 inches
Drainage class: Well drained
Runoff class: Low
Capacity of the most limiting layer to transmit water (Ksat): Moderately high to high
(0.60 to 2.00 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: Rare
Frequency of ponding: None
Calcium carbonate, maximum content: 30 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water supply, 0 to 60 inches: Moderate (about 8.4 inches)

Interpretive groups

Land capability classification (irrigated): 2e
Land capability classification (nonirrigated): 6e
Hydrologic Soil Group: B
Ecological site: R035XY306UT - Upland Loam (Basin Big Sagebrush)
Hydric soil rating: No

Minor Components

Palma

Percent of map unit: 5 percent

Palma

Percent of map unit: 5 percent

Clovis

Percent of map unit: 5 percent

SY—Stony colluvial land

Map Unit Composition

Stony colluvial land: 100 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

VPD—Veyo-Pastura complex, 1 to 10 percent slopes

Map Unit Setting

National map unit symbol: j8h6

Elevation: 3,800 to 5,000 feet

Mean annual precipitation: 10 to 12 inches

Mean annual air temperature: 45 to 57 degrees F

Frost-free period: 120 to 170 days

Farmland classification: Not prime farmland

Map Unit Composition

Veyo and similar soils: 50 percent

Pastura and similar soils: 40 percent

Minor components: 10 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Veyo

Setting

Landform: Alluvial fans

Down-slope shape: Concave

Across-slope shape: Convex

Parent material: Material weathered dominantly from basalt

Typical profile

H1 - 0 to 2 inches: cobbly sandy loam

H2 - 2 to 6 inches: very cobbly clay loam

H3 - 6 to 17 inches: very cobbly clay

H4 - 17 to 19 inches: very cobbly sandy clay loam

H5 - 19 to 23 inches: indurated

H6 - 23 to 27 inches: unweathered bedrock

Properties and qualities

Slope: 1 to 10 percent
Depth to restrictive feature: 15 to 20 inches to petrocalcic; 20 to 40 inches to lithic bedrock
Drainage class: Well drained
Runoff class: High
Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately high (0.00 to 0.20 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 25 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water supply, 0 to 60 inches: Very low (about 1.9 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 7s
Hydrologic Soil Group: D
Ecological site: R029XY220UT - Semidesert Shallow Hardpan (Blackbrush)
Hydric soil rating: No

Description of Pastura

Setting

Landform: Lava flows
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Eolian deposits derived from sandstone and shale over residuum weathered from basalt

Typical profile

H1 - 0 to 2 inches: gravelly loam
H2 - 2 to 8 inches: gravelly loam
H3 - 8 to 15 inches: gravelly loam
H4 - 15 to 18 inches: gravelly clay loam
H5 - 18 to 22 inches: indurated

Properties and qualities

Slope: 2 to 10 percent
Depth to restrictive feature: 10 to 20 inches to petrocalcic
Drainage class: Well drained
Runoff class: Medium
Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately high (0.00 to 0.60 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 60 percent
Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)
Available water supply, 0 to 60 inches: Very low (about 2.2 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 7s
Hydrologic Soil Group: D

Custom Soil Resource Report

Ecological site: R029XY220UT - Semidesert Shallow Hardpan (Blackbrush)

Hydric soil rating: No

Minor Components

Rock land

Percent of map unit: 5 percent

Collbran

Percent of map unit: 5 percent

W—Water

Map Unit Composition

Water: 100 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

YAF—Yaki very cobbly loam, 3 to 35 percent slopes

Map Unit Setting

National map unit symbol: j8hc

Elevation: 3,500 to 5,000 feet

Mean annual precipitation: 10 to 13 inches

Mean annual air temperature: 52 to 57 degrees F

Frost-free period: 160 to 170 days

Farmland classification: Not prime farmland

Map Unit Composition

Yaki and similar soils: 85 percent

Minor components: 15 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Yaki

Setting

Landform: Mountain slopes

Landform position (three-dimensional): Mountainflank

Down-slope shape: Convex

Across-slope shape: Convex

Parent material: Material weathered from limestone and shale

Typical profile

H1 - 0 to 2 inches: very cobbly loam

H2 - 2 to 8 inches: loam

H3 - 8 to 12 inches: very cobbly loam

H4 - 12 to 19 inches: very cobbly loam

H5 - 19 to 23 inches: unweathered bedrock

Custom Soil Resource Report

Properties and qualities

Slope: 3 to 35 percent

Depth to restrictive feature: 10 to 20 inches to lithic bedrock

Drainage class: Well drained

Runoff class: Medium

Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately high (0.00 to 0.60 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Calcium carbonate, maximum content: 60 percent

Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water supply, 0 to 60 inches: Very low (about 2.0 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 7s

Hydrologic Soil Group: D

Ecological site: R029XY220UT - Semidesert Shallow Hardpan (Blackbrush)

Hydric soil rating: No

Minor Components

Rock land

Percent of map unit: 7 percent

Naplene

Percent of map unit: 4 percent

Tobish

Percent of map unit: 4 percent

References

- American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.
- American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.
- Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.
- Federal Register. July 13, 1994. Changes in hydric soils of the United States.
- Federal Register. September 18, 2002. Hydric soils of the United States.
- Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.
- National Research Council. 1995. Wetlands: Characteristics and boundaries.
- Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262
- Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053577
- Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053580
- Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.
- United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.
- United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2_053374
- United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. <http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelprdb1043084>

Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf

APPENDIX E-10
PUBLIC INVOLVEMENT

SCOPING SUMMARY REPORT

Santa Clara Watershed Plan-Environmental Assessment Project

Prepared for:

U.S. Department of Agriculture

Natural Resources Conservation Service

Prepared by:

Transcon Environmental, Inc.

444 South Main Street, Suite A6

Cedar City, Utah 84720



May 2021

TABLE OF CONTENTS

Introduction and Background	1
Purpose of Scoping Process	1
Organizational Involvement.....	1
Scoping Activities.....	2
Scoping Material Circulated	2
Public Scoping	2
Agency Scoping	3
Tribal Outreach	3
Scoping Results.....	3
Media Coverage	3
Agency Responses	3
Tribal Responses.....	3
Comments Received	4

LIST OF TABLES

Table 1	Comments Received Per Category	4
---------	--------------------------------------	---

LIST OF APPENDICES

Appendix A	Project Fact Sheet
Appendix B	Newspaper Notice
Appendix C	<i>Spectrum</i> Postings Affidavit
Appendix D	Agency Contact List
Appendix E	Agency Comments Received
Appendix F	All Comments Received Summary Table

INTRODUCTION AND BACKGROUND

The U.S. Department of Agriculture's Natural Resources Conservation Service (NRCS), with assistance of Washington County, Utah, as the project sponsor, is considering proposed improvements within the Santa Clara Watershed. The improvements under consideration will address flood control and protection, agricultural demands, and public safety risks, while enhancing species habitat. The proposed improvements include the construction of stream diversions and detention basins within the Dammeron and Diamond valleys as well as other improvements within the Shivwits Band of Paiutes lands, including stream restoration, irrigation supply, and flood protection.

Cooperating agencies include the Bureau of Land Management and Utah State and Institutional Trust Lands Administration (SITLA). Transcon Environmental (Transcon) has been retained to prepare the project's technical studies and the National Environmental Policy Act (NEPA) document. This report summarizes efforts made to notify interested agencies, Tribes, organizations, and members of the public about the proposed project and to obtain input from those entities regarding issues to be addressed in the NEPA document. This outreach is meant to satisfy scoping requirements and to inform the federal process and decisions under NEPA. The scoping period commenced on January 13, 2021 and concluded on February 12, 2021.

Purpose of Scoping Process

Scoping is an integral part of the NEPA processes. It provides an early opportunity to determine the scope and significance of issues to be addressed in the analysis of the proposed action (40 CFR 1501.7). The objectives of scoping include:

- Identify significant issues related to the proposed project
- Identify social, environmental, and economic review and consultation requirements
- Define the environmental analysis process and technical studies necessary to adequately address the impacts of the proposed project
- Identify and notify interested and affected parties
- Provide information to agencies, Tribes, and the public regarding the proposed project

Public outreach will commence for a second time when the Draft NEPA document is prepared and ready for public review. This report summarizes scoping efforts that help define the scope of the analysis.

Organizational Involvement

Cooperating agencies are working together and contributing to jointly prepared deliverables for the project but are satisfying their regulatory requirements separately, including their decisions under NEPA and the permitting mechanism should they approve the project. As such, this scoping process and the subsequent technical studies and NEPA document have been designed to be comprehensive, support all agencies' decisions, and satisfy all regulatory requirements. All cooperating agencies and Tribes that have contributed to the project's scoping process are as follows:

- Utah State and Institutional Trust Lands Administration
- Office of the Governor, Public Lands Policy Coordinating Office
- Shivwits Band of Paiutes
- Bureau of Land Management St. George Field Office

SCOPING ACTIVITIES

Scoping Material Circulated

Scoping material circulated included the project fact sheet (**Appendix A**), pre-addressed comment form/letter, and newspaper notice. A single project fact sheet—containing project information, the online public meeting time and call-in info, and instructions for submitting formal scoping comments—was produced in order to ensure consistent messaging.

All mailings to the public, agencies, and Tribes included a project newsletter. Public mailings included a personalized letter and pre-addressed comment form. Agency and Tribes received a scoping letter from the NRCS. Project newsletters were posted at local post offices, and announcements with a brief project summary and online public meeting information placed in a local newspaper.

The Project team strived to get all scoping material circulated and published in a timely manner, so interested parties were notified and had at least one week to plan to attend the online public meeting. Comments were received during public meetings and through direct mail and email. The comment period remained open 16 days past the public meeting date.

Public Scoping

The public was notified of the project through multiple channels, each described in detail below, including project mailings sent to landowners and potentially interested members of the public, project newsletters posted at local post offices, notifications published in local newspapers, online public meetings using Zoom, and a project webpage containing project information and updates established by the NRCS.

Landowner Notification

The project sponsor assembled the landowner mailing list. County data was used to develop a list that included a physical parcel address and the landowner's mailing address. Landowner information was gathered for parcels who own parcels that are directly adjacent to or within the project area and downstream of the proposed detention basins in Diamond and Dammeron valleys.

The mailing list will be updated throughout the project to include those who provide scoping comments, otherwise express interest in the project, or request to be added to the mailing list. The updated mailing list will be referenced for future public outreach efforts.

A total of 106 mailings were sent to landowners in Diamond Valley. A total of 49 mailings were sent to landowners in Dammeron Valley. Mailings were sent on January 11, 2021, two days ahead of the opening of the scoping period. The mailing list of private landowners and copies of the individual scoping letters are not shared as part of this scoping report for privacy purposes. Each agency will receive a copy of the mailing list for their records, and it will be included as part of the project's Administrative Record.

Website

The NRCS maintains a public project webpage that includes basic project information, a project overview map, a copy of the fact sheet, and instructions for submitting comments. A recording of the public scoping meeting was posted to the webpage as well. The website can be accessed at: <https://www.nrcs.usda.gov/wps/portal/nrcs/detail/ut/programs/planning/wpfp/?cid=nrcseprd1726625>.

The webpage went live on January 15, 2021 and remains active. The scoping video was posted to the webpage on February 1, 2021. The webpage will be updated as new project material is prepared for public viewing.

Newspaper Notices

The project fact sheet was pared down to include a brief project summary and public meeting information and was posted the local *Spectrum* newspaper (**Appendix B**) on January 13, 2021 and January 20, 2021.

Online Public Meeting

One online public meeting was held via Zoom on January 27, 2021 from 6:30 to 7:30 p.m. The meeting included a brief presentation of project background, location, and information on the environmental review process followed by a question-and-answer period. Representatives from Transcon, Alpha Engineering, Washington County, and the NRCS attended the meeting. A total of 12 members of the public attended the meeting. Participants were encouraged to provide written comments regarding the project by email or mail and to ask any pertinent questions at the meeting.

Agency Scoping

On July 10, 2019, a total of 29 project fact sheets were sent to individuals at federal, state, and local agencies, as well as elected officials. The agency contact list is included as **Appendix D**.

Tribal Outreach

Tribes are being consulted under Section 106 of the National Historic Preservation Act. In an effort to ensure tribal entities were reached and informed about the project, the same Tribes contacted for consultation were also sent mailings under the NEPA process. On January 13, 2021, mailings were sent to individuals at 22 Tribes (**Appendix E**). To ensure consistent messaging, the same newsletter used for public scoping were attached to the letters. The tribal contact list is included as **Appendix F**.

SCOPING RESULTS

Newspaper Coverage

On Wednesday, January 13 and Wednesday, January 20, 2021, the *Spectrum*, a newspaper that services southern Utah, published the information advertising the online public meeting. A copy of the *Spectrum* posting affidavit can found in **Appendix C**.

Agency Responses

Two comment documents were received from federal, state, or local agencies or elected officials (**Appendix G**). One document was received via email and the other via mailed letter. These were organized into 12 individual comments. An additional comment was received from an agency representative during the public meeting. Comments were received from the Office of the Governor, Public Lands Policy Coordinating Office and SITLA.

Tribal Responses

Four tribal comment documents have been received: two from the Shivwits Band of Paiutes Band Council, one from the Navajo Nation Heritage and Historic Preservation Department, and the other from the Hopi Cultural Preservation Office. These were organized into six individual comments. All comments are included in **Appendix H**. Tribal consultation will be ongoing for the duration of the project.

Comments Received

All written and oral comments received—whether from agencies, Tribes, or the public—were collected and will be considered in the NEPA document.

Thirty-five individual comments were received from the public, agencies, and Tribes from a total of 11 comment documents. Twenty-five of the comments are considered substantive for the NEPA process. Comments that identified issues are grouped into four categories to aid in their interpretation and analysis. The specific issues identified will aid in the assessment impacts and analysis of resources in the Environmental Assessment. **Table 1** summarizes concerns raised per category.

Appendix I is a summary table of all comments received. The table includes verbatim comments received but does not include the original comment records. Comment records and scans will be provided to agencies for their records and will be included in the project's Administrative Record.

TABLE 1 COMMENTS RECEIVED PER CATEGORY				
Category	Commentor			Total Per Category
	Public	Agency	Tribe	
Alternatives	9	--	--	9
Biological Resources	--	11	--	11
Cultural Resources	--	--	5	5
General	8	1	1	10
TOTAL CONCERNS	17	12	6	35

APPENDIX A

PROJECT FACT SHEET

Santa Clara Watershed Plan-EA Project- Washington Co, Utah

Scoping Notice - Fact Sheet



Project Information

The United States Department of Agriculture Natural Resources Conservation Service (USDA-NRCS), with assistance of Washington County, Utah as the project sponsor, is considering proposed improvements within the Santa Clara Watershed. The proposed improvements include the construction of stream diversions and detention basins within the Dammeron and Diamond Valleys, as well as other improvements within the Shivwits Band of Paiutes lands including stream restoration, irrigation supply, and flood protection.

USDA-NRCS will hold a virtual public meeting to provide information about the proposed project and to collect written comments. Technical studies are scheduled to take place during spring 2021, with a Draft Plan-EA circulated to the public and agencies for review in fall 2021.

Purpose and Need

Improvements under consideration will address flood control and protection, agricultural demands, and public safety risks, while enhancing species habitat.

At this time, USDA-NRCS is requesting comments on the project to identify issues and resource concerns. Written comments are due within 30 days, postmarked by **February 12, 2021**.

Additional information can be found at the USDA-NRCS project website:
<https://www.nrcs.usda.gov/wps/portal/nrcs/main/ut/programs/planning/wpfp>

Public Meeting

The public is invited to attend, discuss, and submit a written comment during the public meeting. The meeting will begin with an initial presentation by the project team and NRCS, followed by an open-house style question and comment session. Interested parties can join the meeting online or call in via the following:

Virtual Meeting
Wednesday, January 27, 2021
6:30 P.M. – 7:30 P.M.

Zoom: <https://zoom.us/join>
Meeting ID: 999 8991 1069
Phone: (669) 900-6833

*For those who are unable to attend or view the meeting and would like to meet with the NRCS and/or Washington County to discuss the project, arrangements may be made upon request.



Photo of Shivwits Reservation Land


How to Submit a Comment

All comments should be submitted in writing and directed to Brian Parker:

Transcon Environmental
 1745 South Alma School
 Rd., Suite 220
 Phoenix, AZ 85210
 Phone: (480) 807-0095
bparker@transcon.com

Comments may be mailed or emailed to the above address or submitted during the public scoping meeting. Comments must be received or postmarked by **February 12, 2021**.




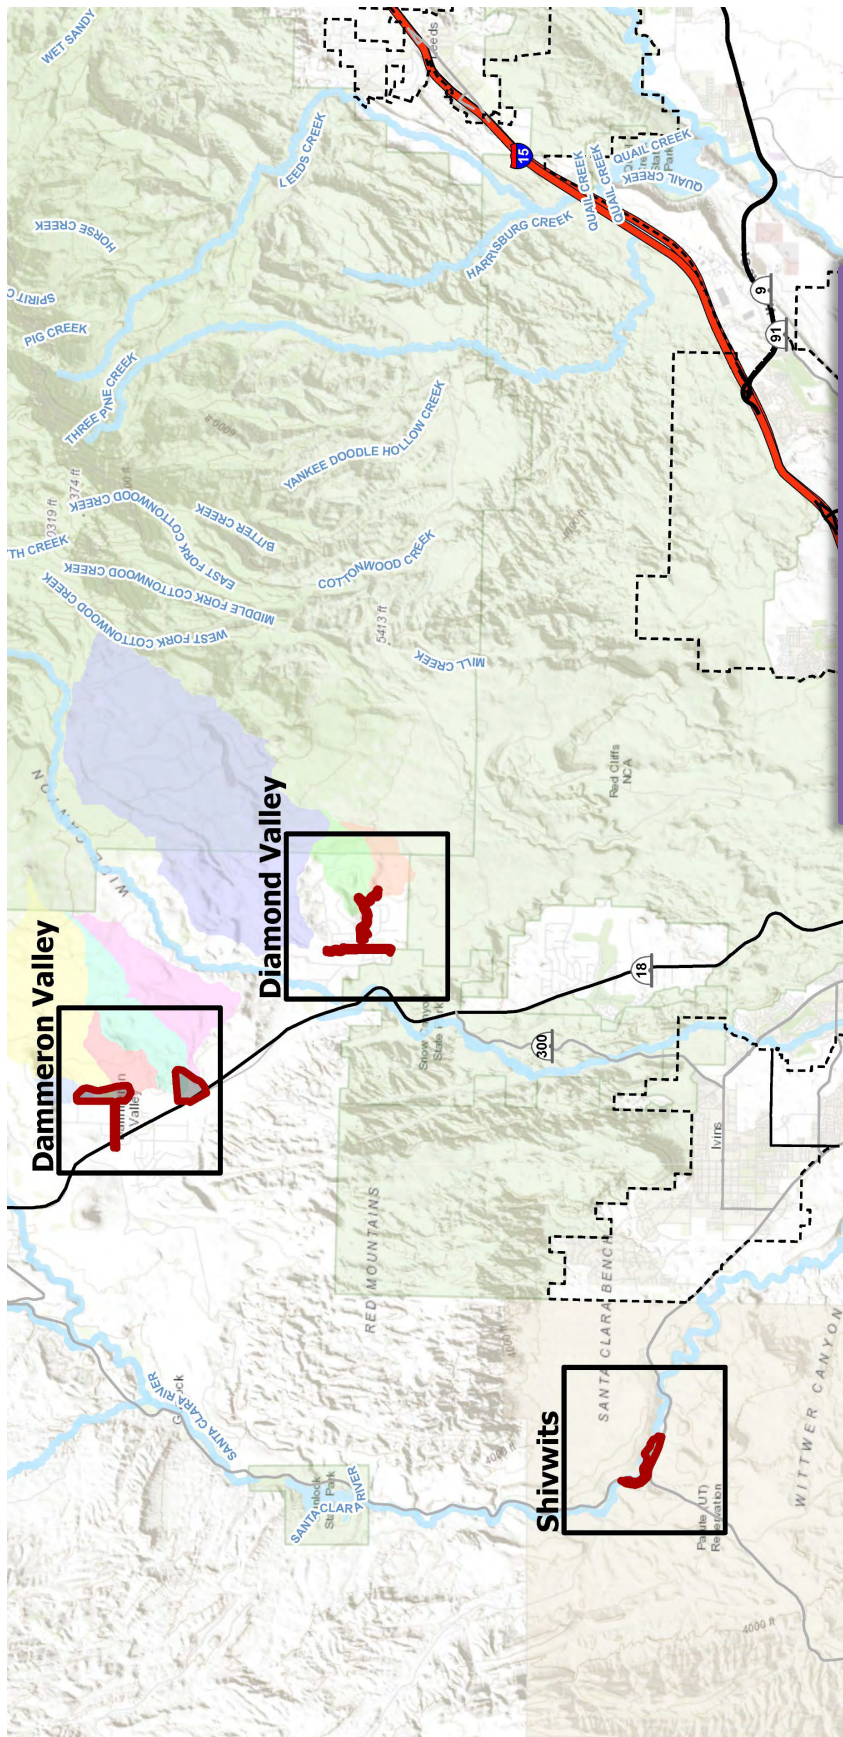

Project Area
(top)

Vicinity Map
(bottom right)

Photo of
Dammeron
Valley
(bottom left)

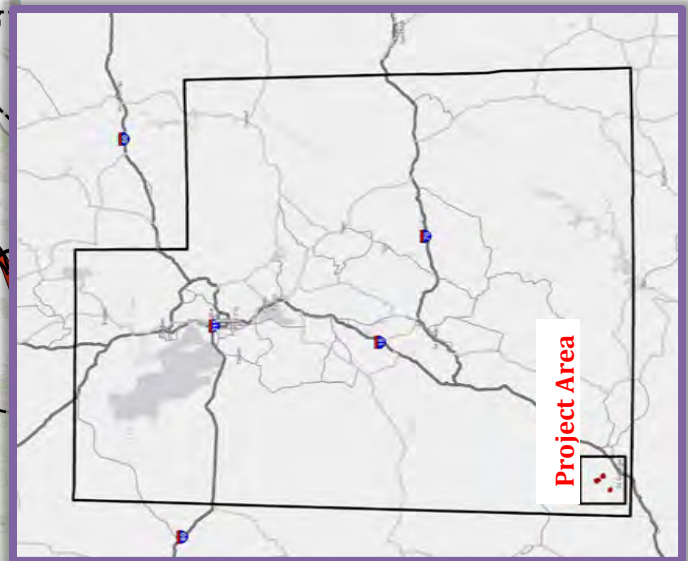

Utah State Office
**Natural
Resources
Conservation
Service**

nrcs.usda.gov/



APPENDIX B

NEWSPAPER NOTICE

**Proposed Santa Clara Watershed Project—Washington County, Utah
Public Scoping Meeting
Wednesday, January 27th,
2021; 6:30 to 7:30 P.M.**

The U.S. Department of Agriculture's Natural Resources Conservation Service (USDA--NRCS), with assistance of Washington County, Utah, as the project sponsor, is considering proposed improvements within the Santa Clara Watershed. The proposed improvements include the construction of stream diversions and detention basins within the Dammeron and Diamond valleys as well as other improvements within the Shivwits Band of Paiutes lands, including stream restoration, irrigation supply, and flood protection. Improvements under consideration will address flood control and protection, agricultural demands, and public safety risks, while enhancing species habitat.

At this time, USDA-NRCS is requesting comments on the project to identify issues and resource concerns. USDA--NRCS will hold a virtual public meeting to provide information about the proposed project and collect comments.

Join the virtual public scoping meeting:

The public is invited to attend, discuss, and submit a comment during the public meeting:

Wednesday, January 27, 2021

6:30 P.M. – 7:30 P.M.

Zoom: <https://zoom.us/join>

Meeting ID: 999 8991 1069

Phone: 669-900-6833

Send us your comments:

All comments should be directed to:

Brian Parker

Transcon Environmental

1745 South Alma School

Road, Suite 220

Phoenix, AZ 85210

Phone: 480-807-0095

bparker@transcon.com

Additional information can be found at the USDA-NRCS project website: <https://www.nrcs.usda.gov/wps/portal/nrcs/main/ut/programs/planning/wpfp>

Comments may be mailed or emailed to the above address or submitted during the public scoping meeting. Comments must be postmarked by February 12th, 2021.

Pub#4544744

Published Jan 13 & 20, 2021

The Spectrum

UPAXLP

APPENDIX C

SPECTRUM POSTINGS AFFIDAVIT

**PROOF OF
PUBLICATION**

**STATE OF WISCONSIN
COUNTY OF BROWN**


TRANSCOM ENVIRONMENTAL
116 4TH STREET

RAWLINS WY 82301

I, being duly sworn, deposes and says that I
am an employee of The Spectrum, a
newspaper of general circulation published daily
in Saint George, Washington County, State of
Utah, also distributed in Iron County and also
forwarded to Utahlegals.com, and that the
notice is a true copy of which is here to
attached, was published in said newspaper
dated:


01/13/2021, 01/20/2021

for a total of 2 insertion(s) and per
Utahlegals.com will remain on Utahlegals.com
for 30 days.



Legal Clerk

Subscribed and sworn before me this
20th of January 2021.



NOTARY PUBLIC RESIDING
AT STATE OF WISCONSIN
COUNTY OF BROWN

Notary Expires:

8-25-23

SHELLY HORA
Notary Public
State of Wisconsin

Ad#:0004544744

P O :

This is not an invoice

of Affidavits 1

APPENDIX D

AGENCY CONTACT LIST

Organization	Person of Contact	Street Address	City	State	Zip
Federal Agencies					
U.S. Army Corps of Engineers, Bountiful Office	Hollis Jencks, Regulatory Project Manager	533 West 2600 South, Suite 150	Bountiful	UT	84010
U.S. Army Corps of Engineers, NV/UT Regulatory Branch	Jason Gipson, Chief	533 West 2600 South, Suite 150	Bountiful	UT	84010
U.S. Fish and Wildlife Service	Yvette Converse, Utah Field Office Supervisor	2369 West Orton Circle, Suite 50	West Valley City	UT	84119
Bureau of Land Management, St. George Field Office	N/A	345 East Riverside Dr.	St. George	UT	84790
US - EPA	Dana Allen	1595 Wynkoop Street	Denver	CO	80202-1129
US Bureau of Reclamation	Regional Director	125 S State Street, Room 8100	Salt Lake City	UT	84138-1147
US Congressional Representative	Chris Stewart	253 W St. George Blvd, Ste 100	St. George	UT	84770
US Senator	Mitt Romney	125 S State Street, Ste 8402	Salt Lake City	UT	84138
US Senator	Mike Lee	285 W Tabernacle, Ste 200	St. George	UT	84770
State & Local Agencies					
Utah State Clearinghouse	Ken Mathews	Utah State Capitol Complex, Suite E210, P.O. Box 142210	Salt Lake City	UT	84114
Utah School and Institutional Trust Lands Administration (SITLA)	N/A	675 East 500 South, #500	Salt Lake City	UT	84102
Utah Division of Wildlife Resources	Main Office	1594 W. North Temple, Suite 2110, P.O. Box 146301	Salt Lake City	UT	84114
Utah Division of Wildlife Resources	Southern Region	1470 N. Airport Rd.	Cedar City	UT	84720
Utah Department of Environmental Quality	N/A	195 North 1950 West	Salt Lake City	UT	84114
Utah Department of Environmental Quality	Erica Gaddis (Director)	P.O. Box 144870	Salt Lake City	UT	84114-4870
Utah Department of Environmental Quality	Bill Damery	P.O. Box 144870	Salt Lake City	UT	84114-4870
Utah Division of Water Rights	Dam Safety	1594 W. North Temple, Suite 220, P.O. Box 146300	Salt Lake City	UT	84114
Utah Division of Water Rights	Southwestern Regional Office	646 North Main Street, P.O. Box 506	Cedar City	UT	84721
Mt. Carmel Irrigation Company	N/A	2651 S. State St. P.O. Box 5566	Mt. Carmel	UT	84755
Utah Department of Heritage and Arts	Chris Merritt	300 S Rio Grande St.	Salt Lake City	UT	84101-1182
Washington County Water Conservancy District	Corey Cram	533 Waterworks Dr.	St. George	UT	84770
Utah Department of Agriculture	Commissioner	P.O. Box 146500	Salt Lake City	UT	84114-6500
Utah Department of Environmental Health	Director	P.O. Box 142104	Salt Lake City	UT	84114-2104
Utah Department of Public Safety	Judy Watanabe	P.O. Box 141775	Salt Lake City	UT	84114-1775
Utah Natural Heritage Program	Sarah Lindsey	P.O. Box 146301	Salt Lake City	UT	84114
Utah Public Lands Policy Coordination Office	Sindy Smith	P.O.Box 14114-1107	Salt Lake City	UT	84114-1107
Utah Governor's Office	Governor Spencer J. Cox	P.O. Box 142220	Salt Lake City	UT	84114-2220
NGOs					
Utah Rivers Council	N/A	1055 East 2100 South, Suite 201	Salt Lake City	UT	84106
Sierra Club Utah Chapter	Chair	423 W 800 S, Ste A103	Salt Lake City	UT	84101

APPENDIX E

AGENCY COMMENTS RECEIVED



State of Utah

SPENCER J. COX
Governor

DEIDRE M. HENDERSON
Lieutenant Governor

Office of the Governor
Public Lands Policy Coordinating Office

REDGE B. JOHNSON
Executive Director

February 11, 2021

Submitted via email: bparker@transcon.com

Brian Parker
Transcon Environmental
1745 South Alma School Road, Suite 220
Phoenix, AZ 85210

Subject: **Santa Clara Watershed Draft Plan—EA**
RDCC Project No. 77725

Dear Mr. Parker:

The state of Utah (State) has reviewed the proposed improvements within the Santa Clara Watershed Plan. The State supports the proposed Santa Clara Watershed Draft Plan project located in Washington County. In collaboration with the Utah Division of Wildlife Resources (UDWR), the State provides the following scoping comments for your consideration.

Native Fish

The Santa Clara River contains the following native fish species: Virgin spinedace (*Lepidomeda mollispinis mollispinis*), desert sucker (*Catostomus clarkii*), and speckled dace (*Rhinichthys osculus*). The Virgin spinedace species are of particular concern in this area and are managed under a Conservation Agreement and Strategy which was implemented to avoid the need for listing under the Endangered Species Act. This species has been petitioned for listing as a T&E species. The U.S. Fish and Wildlife Service (FWS) is currently determining whether listing is warranted for the Virgin spinedace. Desert sucker are identified as a species of greatest conservation need because of their limited distribution.

Because of the importance of the Santa Clara River to native fish species, UDWR recommends, regarding any action developed for this project, to avoid unnecessary take of native fish, and minimize impacts to critical habitat. In addition, UDWR has the following recommendations to avoid and minimize impacts to these species:

Santa Clara Watershed Plan EA Project

February 11, 2021

Page 2

UDWR has a lease agreement for water with the Shivwits Band of Paiutes, to provide flows important for restoring the historic distribution of Virgin spinedace and retaining habitat connectivity. The information in the scoping notice does not provide enough detail to clarify whether the lease agreement could be impacted. UDWR would like to ensure that the lease agreement is not impacted.

Avoid crossing the river whenever possible. If it is necessary for equipment to cross or enter the river, do so only once at a pre-identified crossing point approved by UDWR. Channel diversions, crossings, and in-stream work will require fish clearances. Fish-clearance activities must be performed before any construction activities begin in order to minimize take of native fishes. Contact the UDWR's Washington County Field Office personnel, Melinda Bennion at 435-619-1229, at least three business days prior the start of any construction activities that will impact the channel. UDWR personnel will determine if fish clearances are necessary. At a minimum, fish-salvage efforts must occur prior to construction of any diversions and before such diversions are removed. Ongoing fish salvage may be required depending on the length of stream impacted and the duration of the impact. In addition, UDWR also requests authorization to visit the site during construction activities to ensure protection of native fish species and their habitat.

Construction activities that may result in any disturbance to the stream should not be completed during critical spawning months; UDWR recommends no construction activities occur from April 1 to July 31. Exceptions to this should be permitted only when specific conservation actions are formulated through direct consultation with UDWR Native Aquatics biologist Melinda Bennion (435-619-1229).

UDWR recommends that living native woody vegetation, especially willows and cottonwoods, not be disturbed. Any ground that is graded clean, or where salt-cedar (tamarisk) is to be removed, should be required to be re-vegetated with appropriate native woody species. Specifically, UDWR recommends that revegetation using coyote willow and black willow as well as cottonwoods be used at the point of the trail to prevent establishment of non-native plants and protect the trail during high flows.

Applicants for stream alteration permits in Utah are required to provide justification for using rock-wall structures (concrete, riprap, etc.) for stabilizing banks instead of less damaging methods such as bioengineering, large woody debris, root wads, and willow plantings. If the applicant must use rock walls, they are required to explain how their design "incorporates elements that are beneficial to aquatic organisms." UDWR recommends that the applicant justify the use of riprap and consider using bioengineering techniques where feasible.

For more information on the ecological impacts of various types of bank stabilization materials and a review of alternative bioengineering techniques please reference the following publications and the references therein:

http://www.restorationreview.com/downloads/Science_and_Tools_for_Stream_Projects_2011.pdf

https://www.engr.colostate.edu/~bbledsoe/CIVE413/Bioengineering_for_Streambank_Erosion_Control_report1.pdf

Any rock wall/riprap construction or repair work must include measures to prevent the creation of refuge areas for non-native fish (e.g., fabric barriers, jetting, grouting, etc.). The interstitial spaces in typical riprap and other armament structures provide refuge for non-native fish which undermines UDWR's native fish conservation and recovery efforts. Actions to recover endangered and sensitive native fish in the Virgin River and its tributaries are dependent on effective removal of non-native fish.

To avoid creating non-native fish refugia, improve riparian habitat, and increase bank stability, the UDWR recommends that willow plugs are planted within the rip-rap. This can be done effectively by using on site sediment slurry to fill the gaps of the rip-rap and planting willow therein. This practice will allow the roots of the willows to fortify the stability of the rock wall.

Applicants completing bank stabilizations are also required to provide a narrative of current and expected sediment movement, deposition patterns, and erosion conditions in the project area, upstream and downstream. The installation of rip-rap is an action that is proven to change a watercourse's sediment and deposition profile. The applicant must disclose the fact that the project may accelerate erosion to adjacent properties, if rip-rap is used.

Establish a bulldozer-length buffer zone, or maintain an elevation of two feet above the flowing river channel, for all work in the project area. This element is intended to keep all equipment out of the active flowing channel to avoid direct take of conservation fish species. This condition also precludes the need for additional extensive and ongoing fish salvage in the project area during activities.

During any cutting, filling and grading of slopes, machinery and associated sediment should not be allowed in the stream. Excavated material and construction debris may not be wasted in any stream channel or placed in flowing waters or adjacent wetlands; this will include material such as grease, oil, joint coating, or any other possible pollutants. Excess materials must be wasted at an upland site well away from any channel, and excavated material must be removed from stockpiled areas within 12 months of project completion. Fill materials should be free of fines, waste, pollutants, and noxious weeds /seeds. Machinery must be properly cleaned and fueled offsite prior to construction.

In 2009, UDWR completed a statewide management plan to address strategies that prevent the spread of aquatic invasive species (AIS) in Utah. In particular, the UDWR is putting forth an aggressive statewide effort to prevent the spread of the invasive quagga mussel (*Dreissena bugensis*), which is now a substantial threat to Utah's waterways. The Utah Aquatic Invasive Species Management Plan was created to identify threats and provide

Santa Clara Watershed Plan EA Project

February 11, 2021

Page 4

techniques to protect Utah's waterways from aquatic nuisance species (Utah AIS Management Plan). Special decontamination procedures are required by the UDWR.

The State appreciates the opportunity to provide comments on the proposed improvements under consideration. The State looks forward to working collaboratively with Natural Resources Conservation Service to continue to conserve Utah's water resources. Please call or email if you have further questions. Please call Melinda Bennion at UDWR's Washington County Field Office (435-619-1229) or Gary Bezzant at UDWR's Cedar City office (435-691-2357) if you have questions or concerns.

Sincerely,

A handwritten signature in black ink, appearing to read 'R. Johnson', with a long horizontal line extending to the right.

Redge B. Johnson
Executive Director



State of Utah
School and Institutional
Trust Lands Administration

David Ure
Director

375 East 500 South, Suite 300
Salt Lake City, Utah 84102-3473
801-538-5100 Fax 801-538-5322
dsitla@utah.gov

February 10, 2021

Emily Fife, State Conservationist
Natural Resources Conservation Service
Wallace F Bennett Federal Building
125 South State Street, Room 4010
Salt Lake City, Utah 84138-1100

RE: Santa Clara Watershed Plan-Environmental Assessment (Plan-EA)

Dear Ms. Fife:

In response to a letter dated February 1, 2021 requesting that the Utah School and Institutional Trust Lands Administration becomes a cooperating agency in the planning and development of the Santa Clara Watershed Plan, please be advised that we are happy to comply with that request.

On January 27, 2021, Staff attended the NRCS virtual scoping meeting to learn the details about the proposed project. Our agency has a vested interest in the lands in Dammeron and Diamond Valley; we look forward to working with you in this endeavor.

Aaron Langston (aaronlangston@utah.gov) in our Washington County office has been assigned to this task. Please reach out to him for further information.

Sincerely,

David Ure
Director
State of Utah School and Institutional Trust Lands Administration

APPENDIX F

ALL COMMENTS RECEIVED SUMMARY TABLE

CID	Doc ID	Received	Method	Type	Commenter	Organization	Location	Category	Comment	Substantive	Duplicate	Comment Response
1	1	2/11/2021	Email	Agency	Redge Johnson	Office of the Governor - PLPCO	Salt Lake City, UT	Biological Resources	The Santa Clara River contains the following native fish species: Virgin spinedace (Lepidomeda mollispinis mollispinis), desert sucker (Catostomus clarkii), and speckled dace (Rhinichthys osculus). The Virgin spinedace species are of particular concern in this area and are managed under a Conservation Agreement and Strategy which was implemented to avoid the need for listing under the Endangered Species Act. This species has been petitioned for listing as a T&E species. The U.S. Fish and Wildlife Service (FWS) is currently determining whether listing is warranted for the Virgin spinedace. Desert sucker are identified as a species of greatest conservation need because of their limited distribution. Because of the importance of the Santa Clara River to native fish species, UDWR recommends, regarding any action developed for this project, to avoid unnecessary take of native fish, and minimize impacts to critical habitat.	Yes	No	We anticipate no disturbance within the ordinary high water line in armoring the stream channel.
2	1	2/11/2021	Email	Agency	Redge Johnson	Office of the Governor - PLPCO	Salt Lake City, UT	Biological Resources	UDWR has a lease agreement for water with the Shivwits Band of Paiutes, to provide flows important for restoring the historic distribution of Virgin spinedace and retaining habitat connectivity. The information in the scoping notice does not provide enough detail to clarify whether the lease agreement could be impacted. UDWR would like to ensure that the lease agreement is not impacted.	Yes	No	We have no control over the lease agreement for water from the Shivwits Band of Paiutes. This project will not interfere with current commitments with the Shivwits.
3	1	2/11/2021	Email	Agency	Redge Johnson	Office of the Governor - PLPCO	Salt Lake City, UT	Biological Resources	Avoid crossing the river whenever possible. If it is necessary for equipment to cross or enter the river, do so only once at a pre-identified crossing point approved by UDWR. Channel diversions, crossings, and in-stream work will require fish clearances. Fish-clearance activities must be performed before any construction activities begin in order to minimize take of native fishes. Contact the UDWR's Washington County Field Office personnel, Melinda Bennion at 435-619-1229, at least three business days prior the start of any construction activities that will impact the channel. UDWR personnel will determine if fish clearances are necessary. At a minimum, fish-salvage efforts must occur prior to construction of any diversions and before such diversions are removed. Ongoing fish salvage may be required depending on the length of stream impacted and the duration of the impact. In addition, UDWR also requests authorization to visit the site during construction activities to ensure protection of native fish species and their habitat.	Yes	No	It is our understanding that all work will be performed on the South side of the river bank outside the ordinary high water and no crossing of the Santa Clara river channel will be necessary.
4	1	2/11/2021	Email	Agency	Redge Johnson	Office of the Governor - PLPCO	Salt Lake City, UT	Biological Resources	Construction activities that may result in any disturbance to the stream should not be completed during critical spawning months; UDWR recommends no construction activities occur from April 1 to July 31. Exceptions to this should be permitted only when specific conservation actions are formulated through direct consultation with UDWR Native Aquatics biologist Melinda Bennion (435-619-1229).	Yes	No	We do not anticipate disturbing areas within the ordinary high water line.
5	1	2/11/2021	Email	Agency	Redge Johnson	Office of the Governor - PLPCO	Salt Lake City, UT	Biological Resources	UDWR recommends that living native woody vegetation, especially willows and cottonwoods, not be disturbed. Any ground that is graded clean, or where salt-cedar (tamarisk) is to be removed, should be required to be re-vegetated with appropriate native woody species. Specifically, UDWR recommends that revegetation using coyote willow and black willow as well as cottonwoods be used at the point of the trail to prevent establishment of non-native plants and protect the trail during high flows.	Yes	No	We intend to avoid native woody vegetation.
6	1	2/11/2021	Email	Agency	Redge Johnson	Office of the Governor - PLPCO	Salt Lake City, UT	Biological Resources	Applicants for stream alteration permits in Utah are required to provide justification for using rock-wall structures (concrete, riprap, etc.) for stabilizing banks instead of less damaging methods such as bioengineering, large woody debris, root wads, and willow plantings. If the applicant must use rock walls, they are required to explain how their design "incorporates elements that are beneficial to aquatic organisms." UDWR recommends that the applicant justify the use of riprap and consider using bioengineering techniques where feasible. Any rock wall/riprap construction or repair work must include measures to prevent the creation of refuge areas for non-native fish (e.g., fabric barriers, jetting, grouting, etc.). The interstitial spaces in typical riprap and other armament structures provide refuge for non-native fish which undermines UDWR's native fish conservation and recovery efforts. Actions to recover endangered and sensitive native fish in the Virgin River and its tributaries are dependent on effective removal of non-native fish. For more information on the ecological impacts of various types of bank stabilization materials and a review of alternative bioengineering techniques please reference the following publications and the references therein: http://www.restorationreview.com/downloads/Science_and_Tools_for_Stream_Projects_2011.pdf https://www.engr.colostate.edu/~bbledsoe/CIVE413/Bioengineering_for_Streambank_Erosion_Control_report1.pdf	Yes	No	It is our understanding that we will be using buried riprap outside of the ordinary high water line which will allow for native vegetation to continue to promulgate.
7	1	2/11/2021	Email	Agency	Redge Johnson	Office of the Governor - PLPCO	Salt Lake City, UT	Biological Resources	To avoid creating non-native fish refugia, improve riparian habitat, and increase bank stability, the UDWR recommends that willow plugs are planted within the rip-rap. This can be done effectively by using on site sediment slurry to fill the gaps of the rip-rap and planting willow therein. This practice will allow the roots of the willows to fortify the stability of the rock wall	Yes	No	This strategy will be considered in the Plan-EA.
8	1	2/11/2021	Email	Agency	Redge Johnson	Office of the Governor - PLPCO	Salt Lake City, UT	Biological Resources	Applicants completing bank stabilizations are also required to provide a narrative of current and expected sediment movement, deposition patterns, and erosion conditions in the project area, upstream and downstream. The installation of rip-rap is an action that is proven to change a watercourse's sediment and deposition profile. The applicant must disclose the fact that the project may accelerate erosion to adjacent properties, if rip-rap is used.	Yes	No	Any effects of the use of rip-rap will be disclosed in the Plan-EA.
9	1	2/11/2021	Email	Agency	Redge Johnson	Office of the Governor - PLPCO	Salt Lake City, UT	Biological Resources	Establish a bulldozer-length buffer zone, or maintain an elevation of two feet above the flowing river channel, for all work in the project area. This element is intended to keep all equipment out of the active flowing channel to avoid direct take of conservation fish species. This condition also precludes the need for additional extensive and ongoing fish salvage in the project area during activities	Yes	No	The plan is to implement the project outside of the ordinary high water line.
10	1	2/11/2021	Email	Agency	Redge Johnson	Office of the Governor - PLPCO	Salt Lake City, UT	Biological Resources	During any cutting, filling and grading of slopes, machinery and associated sediment should not be allowed in the stream. Excavated material and construction debris may not be wasted in any stream channel or placed in flowing waters or adjacent wetlands; this will include material such as grease, oil, joint coating, or any other possible pollutants. Excess materials must be wasted at an upland site well away from any channel, and excavated material must be removed from stockpiled areas within 12 months of project completion. Fill materials should be free of fines, waste, pollutants, and noxious weeds /seeds. Machinery must be properly cleaned and fueled offsite prior to construction.	Yes	No	It is the intent to follow these guidelines
11	1	2/11/2021	Email	Agency	Redge Johnson	Office of the Governor - PLPCO	Salt Lake City, UT	Biological Resources	In 2009, UDWR completed a statewide management plan to address strategies that prevent the spread of aquatic invasive species (AIS) in Utah. In particular, the UDWR is putting forth an aggressive statewide effort to prevent the spread of the invasive quagga mussel (Dreissena bugensis), which is now a substantial threat to Utah's waterways. The Utah Aquatic Invasive Species Management Plan was created to identify threats and provide techniques to protect Utah's waterways from aquatic nuisance species (Utah AIS Management Plan). Special decontamination procedures are required by the UDWR.	Yes	No	We will follow the procedures outlined by the UDWR.
12	2	1/23/2021	Email	Public	Dean & Sherma Bergevin; Rick and Cindy Kirkpatrick		Diamond Valley, UT	Alternatives	Lots 134, 135, and 136 are bounded on the west side by state trust lands and the north-south wash identified on Google Maps as Rock Hollow Wash. Lot 134 is also bounded on the west side by private property. This wash is subject to periodic flooding which substantially widens and deepens the wash each time a flood occurs. Since we (the Bergevins) bought lot #135 in late 2008 the wash has doubled in width in our area, moving substantially closer to our property line. The wash crosses lot #134, resulting in significant loss of usable private property as the wash has widened. On the west side of lot #136 the wash has divided its channel and has substantially widened. It now encroaches to, or near, the property line for that lot. In the area of the wash behind these three lots, the wash runs through ground consisting primarily of fine dirt with occasional small layers or lenses of sand and gravel. The gradient of the wash across these three lots is also significant, resulting in fast moving water that easily erodes and collapses the soft banks of the wash. The fast moving water quickly washes away the dirt and rocks that are cut from the banks. After previous floods the current owners of lots 134 and 135 were told by various state and local officials that we were responsible for protecting our own lots, since no funding was available to help us. Since then we have spent a large number of labor hours trying to shore up the sides of the wash to protect our property. Rick Kirkpatrick (lot #134) estimates he has spent over 100 hours of time and labor on his personal tractor trying to prevent the wash from encroaching further into his usable property. Dean and Sherma Bergevin have spent over 20 hours of tractor time and many additional hours of hand labor building fences and berms to prevent the wash from encroaching on their land. We also had a large amount of help from Rick Kirkpatrick and Scott Warner, the previous owner of lot 136. Scott Warner and other previous owners of lot 136 also rented backhoes to create berms to protect their property. Those berms were largely washed away during the most recent floods. I have attached two pictures of the wash during the most recent heavy flood in March 2019. The first picture was taken at the height of the flood from a location approximately at the north end of lot 135, looking upstream at the water crossing behind lot 136. The second picture was taken of the same general area after the water had receded somewhat. As property owners heavily affected by flooding in Rock Hollow Wash, we request that any plan for managing the Santa Clara watershed include plans and funding to stop further eastward erosion of this wash behind our lots. Although these comments do not represent the interests of private lots and properties further south of us, we recognize that the wash is also heavily damaging private property in that area. The management plan should also include provisions for preventing flood damage by the water moving south past our lots.	Yes	No	The existing wash that runs behind Lots 126, 127, 134, 135, 136 and 143 have been included for analysis and will be designed to adequately handle large storm events and prevent further erosion.
13	3	1/20/2021	Email	Public	Cathy Jones		Diamond Valley, UT	General	Based upon the map included with your letter dated January 8, 2021, in which you solicited comments from residents concerning the plan, it is impossible to pinpoint the exact location or nature of your proposed improvements. I realize this is still in preliminary stages, however, I do not know if the red lines represent water flow pathways, or actual streets, which would directly affect any potential questions and comments. Can you clarify for me exactly what the red lines represent? Also, the letter does not indicate what KIND of project is being proposed. What is the actual "plan"? I look forward to hearing from one or both of you prior to the scheduled "zoom" meeting. I would like to be able to participate in the meeting, but it is hard to plan cogent comments or questions with so little information. Thank you for your anticipated response.	No	No	Information was provided in response to these questions and comments regarding content of scoping meeting.
14	4	2/12/2021	Email	Tribal	Carmen Clark, Chairperson	Shivwits Band of Paiutes Band Council	Washington Cou nty, UT	Cultural Resources	As a preliminary matter, the Band requests consultation with NRCS directly on this matter. Pursuant to Executive Order 13175 and the NRCS General Manual 410, the Shivwits Band request direct consultation with NRCS in relation to the Proposed Santa Clara Watershed Plan (Plan). The Band looks forward to meeting with NRCS representatives soon.	Yes	No	The NRCS is very aware of the importance Shivwits Band of Paiutes Water Rights Settlement Act and Public Law 106-263. We will ensure that project components do not adversely impact the Band's water rights or the lands that are held in trust by the US government and the aboriginal and ceded lands.
15	4	2/12/2021	Email	Tribal	Carmen Clark, Chairperson	Shivwits Band of Paiutes Band Council	Washington Cou nty, UT	Cultural Resources	The Shivwits Band has existed as a sovereign Band since time immemorial on the lands underlying this Project (Subject Lands). The Band is interested and impacted because the Subject Lands are, as you know, within the Band's aboriginal and ceded territory, as well as the Band's current Reservation land held in trust by the United States government. In addition, the Shivwits Band has water rights established by U.S. Congress in Public Law 106-263, the Shivwits Band of Paiutes Water Rights Settlement Act that are impacted by the Plan. We are concerned about the stream diversions and detention basins, and want to make sure that the stream restoration, irrigation supply and flood protection plans do not harm our water rights or the related lands.	Yes	No	The NRCS is very aware of the importance Shivwits Band of Paiutes Water Rights Settlement Act and Public Law 106-263. We will ensure that project components do not adversely impact the Band's water rights or the lands that are held in trust by the US government and the aboriginal and ceded lands.

16	4	2/12/2021	Email	Tribal	Carmen Clark, Chairperson	Shivwits Band of Paiutes Band Council	Washington Cou nty, UT	Cultural Resources	The Project Plan should not disregard or adversely impact the Band's cultural and traditional interests in the area. The Shivwits Band has culturally sensitive areas within the area impacted by the Plan, as well as historic sites. The Subject Lands are associated with the cultural practices, traditions, beliefs, and social institutions of the Band's traditional community. The Band wants to ensure that any of the proposed improvements affecting land which is part of the Band's aboriginal territory, ceded land, and current Reservation do not disturb Band graves, artifacts, ceremonial sites, historic properties and cultural resources.	Yes	No	As part of the EA, Transcon will be completing an intensive cultural resources inventory of the undertaking to identify all cultural resources sites within the APE. From working in the area, the NRCS is also already aware of historic sites in the project area. We also know of the high sensitivity of the Band sharing exact locations of certain site types and we want to work with the Band to make sure those sites can be avoided (i.e. graves, ceremonial sites). The NRCS wants to coordinate closely with the Band to identify all graves, ceremonial sites, historic properties, and cultural resources within the project area. It is NRCS' policy to avoid these sites whenever possible. If we cannot avoid them, then we will develop a Memorandum of Agreement and Treatment Plan to mitigation any adverse affects, and this would be in very close coordination with the Band. As a final note,for highly culturally sensitive sites such as graves, we do not need to include the exact location in the cultural resources report, and that general location only needs to be known in order for it to be avoided by construction activities. Similar situations ocured on the Shem Dam project. The NRCS looks forward to meeting with the Band to discuss timing of a meeting to identify cultural sensitive areas known by the Band within the project area.
17	5	1/28/2021	Email	Public	Norm Slauenwhite			Alternatives	I attended the meeting last night and have one concern. First, let me say that I am supportive of this project. My neighborhood will benefit from this. My house is on the east side of Dammeron Valley and is the one with the drainage gullies running both to the east and south side of my property. It is also one of the only houses in my area with a full basement and was flooded the worst. One of the things I love about this house is the view from my windows and backyard out to the desert and Pine Valley mountains. My concern and the point I would like to express is I don't want to lost that view. At one point last night the comment was made the detention pond could be built behind the high spot about 500 feet out behind the east property lines. I would support this if that is the case. I just don't want this built up to the east property lines. As we move forward with this project I would appreciate this concern being kept in mind. If I can be of any help in the decisions being made, please feel free to contact me.	Yes	No	The preliminary location of the dam structure was correctly stated in the meeting as about 500 feet from the property line. While the final embankment design and appurtenant construction may encroach into this 500-foot buffer, the dam cannot feasibly shift much closer than 500 feet to the property line.
18	6	1/29/2021	Email	Public	Steve Kamlowsky		Diamond Valley, UT	Alternatives	I live at 1424 W. Agate Ct. in Diamond Valley and my house backs up to a significant wash channel. This channel frequently floods during heavy rain events and has been eroding away my property line for years. Below are some pictures of the most recent storm (included in email). I lost about 3,000 square feet of my lot over the years due to erosion and I am requesting assistance in filling back in my lost property and armoring the slope to prevent further erosion. I am not the only property owner that backs up to this wash and all the other properties are experiencing similar erosion problems. A detention basin upstream would further help the erosion problems as sometimes the flood waters run 4 feet deep. As you can see in the pictures (see saved email) there are power poles dangerously close to the top edge and if left unchecked could one day fall into the wash.	Yes	No	While an upstream detention basin would be non-feasible, the existing wash that runs behind Lots 126, 127, 134, 135, 136 and 143 have been included for analysis and will be designed to adequately handle large storm events and prevent further erosion.
19	7	1/29/2021	Email	Tribal	Travis Duran	Shivwits Band of Paiutes Band Council	Washington Cou nty, UT	General	Shivwits land resource; I was trying to get the zoom information earlier, nobody was in our office today. I will save information and pass it to band council.	No	No	For subsequent Zoom meetings we will be sure to convey the meeting info more widely.
20	8	2/10/2021	Email	Tribal	Timothy Begay	Navajo Nation Heritage and Historic Preservation Department	Window Rock, AZ	Cultural Resources	The Navajo Nation Heritage and Historic Preservation Department's (NNHPD) Traditional Culture Program is (TCP) in receipt of your letter regarding USDA Natural Resources Conservation Service Santa Clara Watershed plan EA Project within Washington Cuntty, Utah. After reviewing your letter and cross referencing our Traditional Cultural Properties (TCP's) database, NNHPD-TCP has determined that there are No Navajo TCP's within the project area and you may proceed without further consultation for this project.	Yes	No	The NRCS thanks the NNHPD for their comment on the Santa Clara Watershed Plan EA and that there are no Navajo TCPs within the project area. In the even that historic properties are identified by the cultural resources survey, the NRCS is still planning to reach out to the NNHPD to confirm that there are no concerns regarding these properties, especially in the event that these properties may be adversely affected by the undertaking.
21	9	1/27/2021	Meeting Q&A	Public	Rick Dunford			Alternatives	I live at lot 8 Dammeron Valley farms. I understand the topographic constraints. However detention basins in our backyard will be problematic. What kind of buffer strip can be provided East of the Subdivision boundary.	Yes	No	The preliminary location of the dam structure was correctly stated in the meeting as about 500 feet from the property line. While the final embankment design and appurtenant construction may encroach into this 500-foot buffer, the dam cannot feasibly shift much closer than 500 feet to the property line.
22	9	1/28/2021	Meeting Q&A	Agency	Aaron Langston	SITLA		General	The School and Institutional Trust Lands Administration owns a lot of the subject land in Diamond Valley. Is it possible to see what type of permanent structures would be built on our property if this project were to move forward? Similarly, we own property in Dammeron Valley - not sure if any structures would be directly on our property there or not.	Yes	No	The SITLA property within the subject area appears to be SITLA 7233-TR. This project will not encroach onto this property with temporary or permanent measures. Preliminary design of permanent structures have been provided for reference.
23	9	1/29/2021	Meeting Q&A	Public	Austin Wheatley			General	Is BLM going to be a part of the project?	Yes	No	The NRCS will reach out to the BLM to participate in the project.
24	9	1/30/2021	Meeting Q&A	Public	James Scimenti			General	Will propertey owners be physically contacted before construction starts?	No	No	We plan to keep affected property owners informed along each step of the process. Any construction will be advertised in the local newspaper and on-line on the County Website. Negotiations with those property owners directly impacted will be needed to obtain any necessary easements.
25	9	1/31/2021	Meeting Q&A	Public	Dean Bergevin			General	Will all three project areas (Dammeron, Diamond, and Shivwits) be done on the same timeline?	No	No	Probably not. It may be more advataeous to stagger the construction to get better bids and meet any needed environmental constraints.
26	9	2/1/2021	Meeting Q&A	Public				Alternatives	Will there be any engineering design for the properties on the west side of Highway 18. Currently the water is diverted to the west side cutting our properties in half. Our fence is washed out as well as large amount if soil.	Yes	No	It is unclear which properties are referenced in this comment, but it appears to relate to properties along Carters Pond Road in Dammeron Valley. Engineering design will extend beyond all Dammeron Valley properties into the existing drainage corridor along Lower Sand Cove Road, which includes the properties along Carters Pond Road.
27	9	2/2/2021	Meeting Q&A	Public	Rick Dunford			Alternatives	Please during design try and obtain maximum separation between proposed basins and the east boundary of Dammeron Valley farms.	Yes	No	The preliminary location of the dam structure was correctly stated in the meeting as about 500 feet from the property line. While the final embankment design and appurtenant construction may encroach into this 500-foot buffer, the dam cannot feasibly shift much closer than 500 feet to the property line.
28	9	2/3/2021	Meeting Q&A	Public	Austin Wheatley			General	Is there any liquidated damages?	No	No	Liquidated damages are generally part of any construction contract to assure the project is completed in a timely manner. Reasonable liquidated damages are part of our Washington County standard contract for construction of public works projects.
29	9	2/4/2021	Meeting Q&A	Public	Dean Bergevin			General	As I understand the presentation, preliminary designs will not be available until fall of 2021. Is that correct?	No	No	We do not have a timeline for construction at this time.
30	9	2/5/2021	Meeting Q&A	Public	Anonymous			Alternatives	Follow up on East v west side of Dammeron. Mitigating water on the east side is great, what will the mitigation be on the west side. Currently the water is flowing through our west side property. We would like to know what will happen there.		No	It is unclear which properties are referenced in this comment, but it appears to relate to properties along Carters Pond Road in Dammeron Valley. Engineering design will extend beyond all Dammeron Valley properties into the existing drainage corridor along Lower Sand Cove Road, which includes the properties along Carters Pond Road.
31	9	2/6/2021	Meeting Q&A	Public	Austin Wheatley			General	When will bids need to be put in by?	No	No	We do not have a timeline for construction at this time.
32	9	2/7/2021	Meeting Q&A	Public	Rick Dunford			Alternatives	Are there any options that don't include detention basins East of Dammeron Valley on the BLM ?	Yes	No	Alternatives to eliminate the smaller detention basins and adequately channelize flows were analyzed but discovered to be nonfeasible due to topographical constraints. The Dammeron Valley Detention Basin 4 may potentially be eliminated and a new channel installed to convey flows into an existing drainage corridor to the south.
33	9	2/8/2021	Meeting Q&A	Public	Dean Bergevin			Alternatives	Given the amount of water from the recent snowfall, we expect there to be water in the wash on the west side of Diamond Valley sometime this spring. Is there any mitigation available before this project starts?	Yes	No	We are monitoring the snowpack. No mitigation is planned at this time.
34	10	2/10/2021	Mail	Agency	David Ure	SITLA		General	In response to a letter dated February 1, 2021 requesting that the Utah School and Institutional Trust Lands Administration becomes a cooperating agency in the planning and development of the Santa Clara Watershed Plan, please be advised that we are happy to comply with that request. On January 27, 2021, staff attended the NRCS virtual scoping meeting to learn the details about the proposed project. Our agency has a vested interest in the lands in Dammeron and Diamond Valleys; we look forward to working with you in this endeavor. Aaron Langston in our Washington County office has been assigned to this task. Please reach out to him for further information.	No	No	The NRCS will reach out to the provided SITLA point of contact throughout the project.
35	11	2/10/2021	Mail	Tribal	Stewart B. Koyiyumptewa	Hopi Cultural Preservation Office	Kykotsmovi, AZ	Cultural Resources	The Hopi Tribe claims cultural affiliation to prehistoric cultural groups in Utah. The Hopi Cultural Preservation Office supports the identification and avoidance of prehistoric archaeological sites and we consider the prehistoric archaeological sites of our ancestors to be "footprints" and Traditional Cultural Properties. The Hopi Cultural Preservation Office concurs that informed and valid NRCS decisions are best made when based upon scientifically derived data. We request consultation on any proposal in Utah with the potential to adversely affect prehistoric cultural resources. If the cultural resources report identifies prehistoric sites that may be adversely affected by project activities, We request ongoing consultation including being provided with copies of the cultural resources survey report and any proposed treatment plans for review and comment.	No	No	The NRCS will be in consultation with the Hopi Tribe throughout the development of the EA and will consult on any NRCS undertaking in Utah that has the potential to adversely affect cultural resources. We will be sending the Hopi Tribe a copy of the cultural resources survey report (hard and in electronic form) for review as part of the Section 106 consultation process and if cultural resources will be adversely affected, wenwill invite the Hopi to be part of the development of a Memorandum of Agreement and Archaeological Treatment Plan. This includes review and comment of drafts of the MOA and Treatment Plan. Throughout the development of the EA and initiation and continuation of the Section 106 process, the NRCS at all levels maintains an open communication and collaboration policy which welcomes emails and telephone calls from the Hopi Tribe, and this is in addition to official Government-to-Government consultation.

APPENDIX E-11

BLM ENVIRONMENTAL DOCUMENTS

**United States Department of the Interior
Bureau of Land Management**

**Categorical Exclusion Not Established By Statute
DOI-BLM-UT-C030-2021-0035-CX**

July 2021

**Diamond & Dammeron Valley Soil Testing
Land Use Permit**

Location:

(Diamond Valley)
Salt Lake Meridian, Utah
T. 41 S, R. 16 W.,
sec. 1, NE $\frac{1}{4}$ SW $\frac{1}{4}$.

(Dammeron Valley)
Salt Lake Meridian, Utah
T. 40 S, R. 16 W.,
sec. 16, W $\frac{1}{2}$.

Applicant/Address: Washington County
St. George, UT 84770

St. George Field Office
345 E. Riverside Drive
St. George, UT 84790
435-688-3200
435-688-3252



**CATEGORICAL EXCLUSION DOCUMENTATION FORMAT WHEN USING
CATEGORICAL EXCLUSIONS NOT ESTABLISHED BY STATUTE**

A. BACKGROUND

BLM Office: St. George Field Office

NEPA Number: DOI-BLM-UT-CO30-2021-0035-CX

Lease/Serial/Case File No: UTU-95649

Proposed Action Title/Type: Diamond & Dammeron Valley Soil Testing Land Use Permit

Location of Proposed Action: The location of the proposed action is near the communities of Diamond Valley and Dammeron Valley in the following described locations:

(Diamond Valley)
Salt Lake Meridian, Utah
T. 41 S, R. 16 W.,
sec. 1, NE $\frac{1}{4}$ SW $\frac{1}{4}$.

(Dammeron Valley)
Salt Lake Meridian, Utah
T. 40 S, R. 16 W.,
sec. 16, W $\frac{1}{2}$.

Description of Proposed Action: The BLM St. George Field Office is considering whether to approve a short term permit application for soil testing. Washington County has submitted an application to conduct geotechnical testing using test pits and drilling methods in the locations specified above and shown on the maps below. The testing is expected to take approximately 60 days and is needed to further refine analysis areas as part of the Santa Clara Watershed EA process being led by the NRCS (Natural Resources Conservation Service). The request is as follows:

1. Dammeron Valley

There are three proposed detention basin sites in Dammeron Valley. See the attached Dammeron Valley Test Hole Locations exhibit for the three sites and the locations for the borings and test pits. Boring and test pit locations would generally require access using wheeled and tracked equipment over undisturbed ground without prior clearing of existing vegetation. Exceptions to this include the access to DA1-1, which would run along an existing road that extends from Homestead Drive and then branches off with a new 12-foot-wide access requiring prior vegetation removal, and the access to DA3-1, which would be on an existing road that extends from Dammeron Valley Farms Drive. The disturbed area for each boring and test pit location is approximately 20 feet by 20 feet. Borings would be up to 8 inches in diameter and after testing would be backfilled with grout or bentonite. Test pits would be backfilled with excavated materials.

2. Diamond Valley

There are three existing detention basin sites in Diamond Valley. See the attached Diamond Valley Test Hole Locations exhibit for the three sites and the locations for the borings. Test pits would not be required at these sites. Boring locations would be accessed along existing roads using wheeled equipment. The disturbed area for each boring location is approximately 20 feet by 20 feet. Borings would be up to 8 inches in diameter and after testing would be backfilled with grout or bentonite.


After the geotechnical investigations have been completed or if the project is to be terminated or abandoned after the site has been disturbed, a joint inspection would be held with the


authorized officer(s) of the BLM prior to termination. The County would make all feasible efforts to restore the conditions to the original environment where any disturbance has taken place. This would include re-contouring the ground to existing conditions and re-seeding with an approved seed mix. The joint inspection would identify additional restoration measures that may be required in determining an acceptable and specific rehabilitation plan for the area.

A full POD can be found in the project folder at:

S:\SGFO\Programs\Lands & Realty\2920- Permits_Leases_Easements\Leases & Permits\Land Use Permits\Santa Clara Watershed Drilling&Test Pits_UTU-95649.

If the application is approved, the County would receive a 3-year Land Use Permit to conduct the testing in support of the Santa Clara EA process.

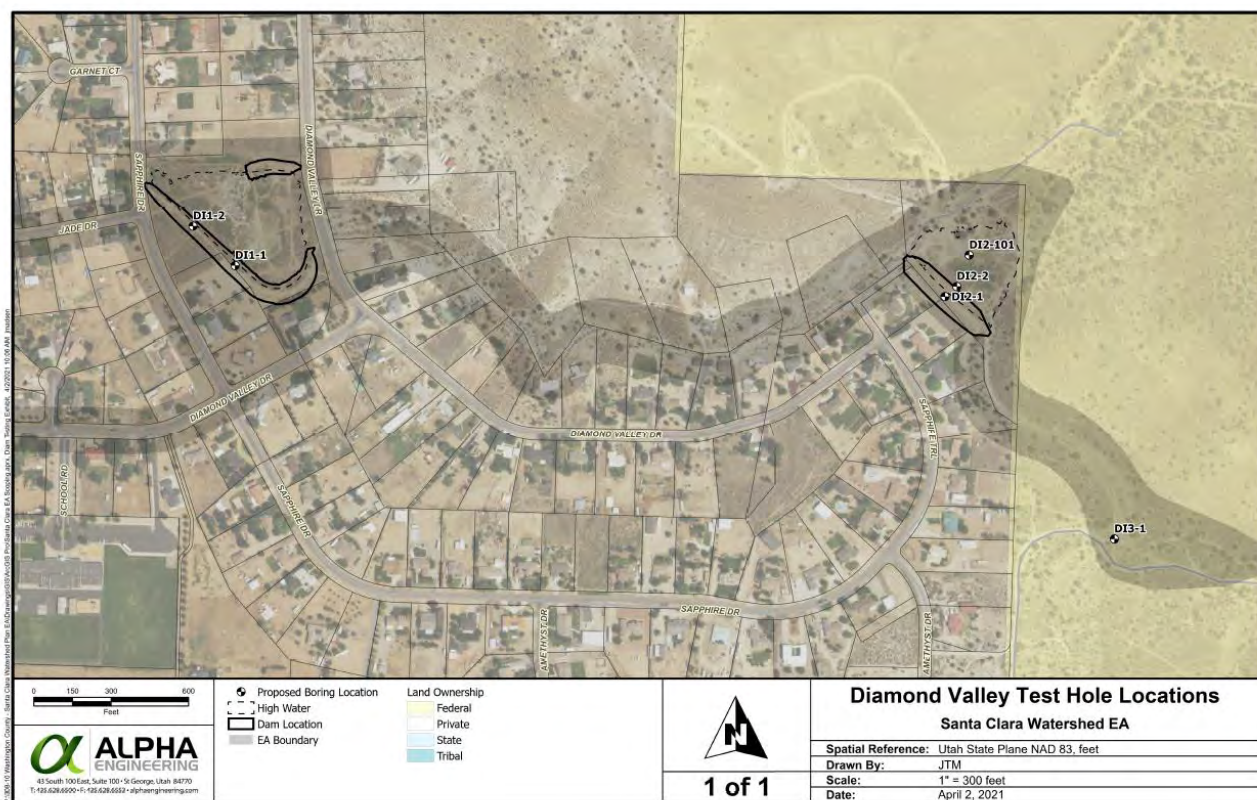

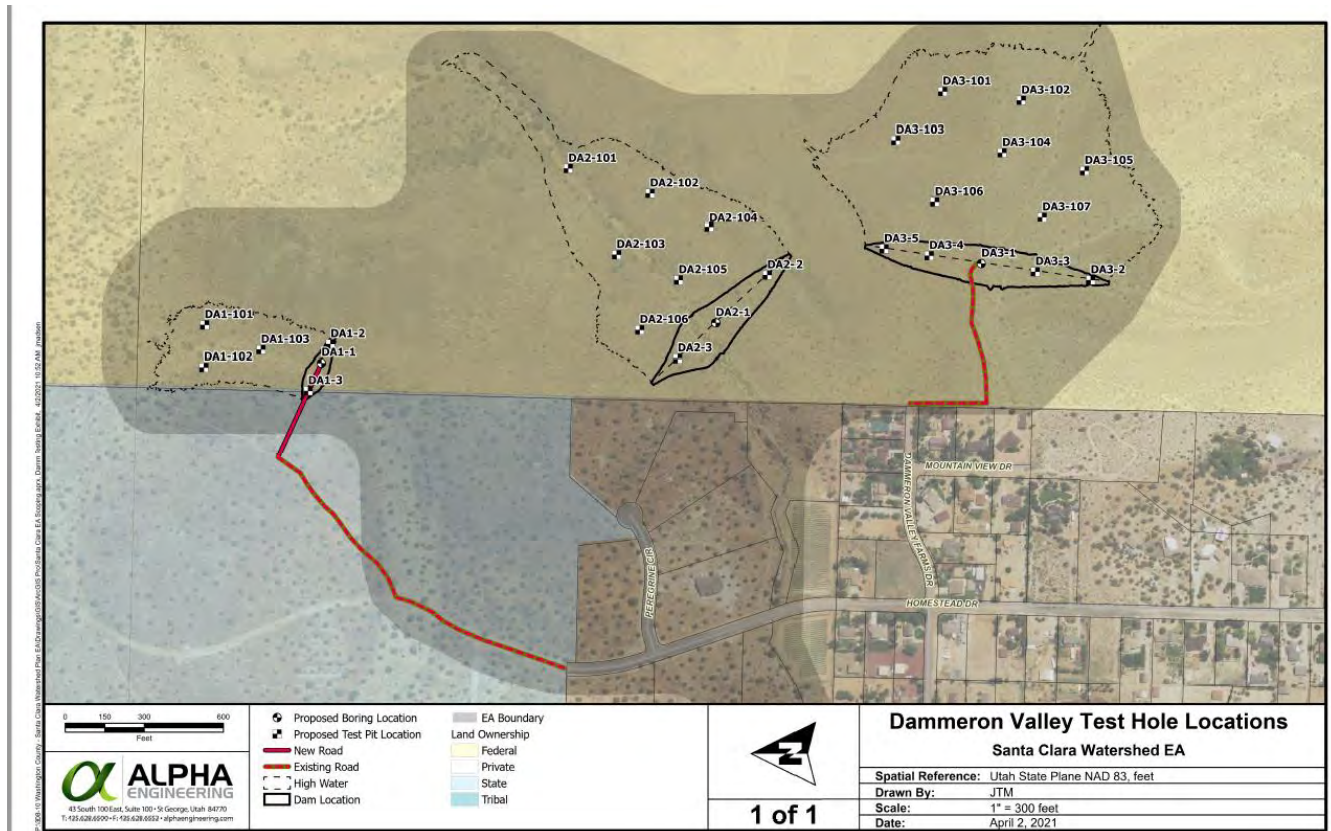

B. Land Use Plan Conformance

Land Use Plan Name: St. George Field Office Record of Decision and Resource Management Plan

Date Approved/Amended: March 1999/amended December 2016

The proposed action is in conformance with the LUP, even though it is not specifically provided for, because it is clearly consistent with the following LUP decision(s) (objectives, terms, and conditions):

LD-12 States: *"Applications for new rights-of-way, leases and permits on public land will be considered and analyzed on a case-by-case basis. Proposals will be reviewed for consistency with planning decisions and evaluated under requirements of the National Environmental Policy Act and other applicable laws for resource protection."*

C. Compliance with NEPA

The applicable Categorical Exclusion references in 516 DM 11.9, are:

E. (19) ... "Issuance of short term (3 years or less) rights-of-way or land use authorizations for such uses as storage sites, apiary sites, and construction sites where the proposal includes rehabilitation to restore the land to its natural or original condition."

This categorical exclusion is appropriate in this situation because there are no extraordinary circumstances potentially having effects that may significantly affect the environment. The proposed action has been reviewed, and none of the extraordinary circumstances described in 43 CFR Part 46.215 apply.

I considered:

- Public health or safety
- Natural resources and unique geographic characteristics such as historic or cultural resources; parks, recreation or refuge lands; wilderness areas; wild or scenic rivers; national natural landmarks; sole or principal drinking water aquifers; prime farmlands; wetlands; national monuments; migratory birds; and other ecologically significant or critical areas.
- Unresolved conflicts concerning alternative uses of available resources
- Unique or unknown environmental risks
- Precedent for future actions
- Relationship to other actions with individually insignificant but cumulatively significant environmental effects.
- Properties listed or eligible for listing on the National Register of Historic Places as determined by either the bureau or office.
- Species listed, or proposed to be listed, on the List of Endangered or Threatened Species or have significant impacts on designated Critical Habitat for these species.
- Federal, state, local or tribal law
- Low income or minority populations
- Access to and ceremonial use of Indian sacred sites on Federal lands by Indian religious practitioners and potential effect of the physical integrity of such sacred sites.
- Introduction, continued existence, or spread of noxious weeds or non-native invasive species known to occur in the area

And determined that none of the above “Extraordinary Circumstances” would be negatively affected by the Proposed Action.

D: Signature

Authorizing Official: _____ Date: _____
Keith Rigtrup
Field Office Manager

Contact Person

For additional information concerning this CX review, contact Shawna Dao at sdao@blm.gov.

Categorical Exclusion Review Record

Resource	Yes/No*	Assigned Specialist Signature	Date
Air Quality	No	R. Reese/J. Frost-Perkins	6/7/21
Areas of Critical Environmental Concern	No	S. Taylor	6/4/21
Cultural Resources	No	Amber Van Alfen	7/2/21
Environmental Justice	No	C. Goff	6/17/21
Farm Lands (prime or unique)	No	R. Reese/J. Frost-Perkins	6/7/21
Floodplains	No	R. Reese/J. Frost-Perkins	6/7/21
Geology	No	K. Voyles	6/22/21
Livestock Grazing	No	R. Reese/J. Frost-Perkins	6/7/21
Invasive Species/Noxious Weeds	No	R. Reese/J. Frost-Perkins	6/7/21
Migratory Birds	No	S. Taylor	6/4/21
Native American Religious Concerns	No	Amber Van Alfen	7/21/21
Threatened, Endangered, or Candidate Species	No	S. Taylor	6/4/21
Wastes (hazardous or solid)	No	C. Goff	6/17/21
Water Quality (drinking or ground)	No	R. Reese/J. Frost-Perkins	6/7/21
Wetlands / Riparian Zones	No	R. Reese/J. Frost-Perkins	6/7/21
Wild and Scenic Rivers	No	B. Wells	6/22/21
Wilderness	No	B. Wells	6/22/21
Lands and Realty	No	S. Dao	6/3//21

*Extraordinary Circumstances apply.

Environmental Coordinator: _____ Date: _____

Exceptions to Categorical Exclusion Documentation

The action has been reviewed to determine if any of the extraordinary circumstances (43 CFR 46.215) apply. The project would:

Extraordinary Circumstances		
1. Have significant impacts on public health or safety.		
Yes	No X	Rationale: The proposed action would not have significant impacts on public health and safety due to the small scale and temporary duration of the proposed soil testing.
2. Have significant impacts on such natural resources and unique geographic characteristics as historic or cultural resources; park, recreation or refuge lands; wilderness areas; wild or scenic rivers; national natural landmarks; sole or principal drinking water aquifers; prime farmlands; wetlands (Executive Order 11990); floodplains (Executive Order 11988); national monuments; migratory birds; and other ecologically significant or critical areas.		
Yes	No X	Rationale: No new or adverse impacts to sensitive resources are anticipated to occur. The testing locations have been surveyed and no significant impacts are anticipated for cultural resources. The other resources are not present in the proposed action area. To avoid impacts to nesting and breeding migratory birds, vegetation removal/crushing activities would occur outside of breeding season (February 1-August 31), OR pre-construction survey would need to be completed by a qualified biologist within 7-10 days before the work occurs. If an active nest is identified, a no-activity buffer (ranging from 100-feet to 1-mile, depending on species) will be established around the nest site and remain in place until the young have fledged and/or the nest becomes non-active.
3. Have highly controversial environmental effects or involve unresolved conflicts concerning alternative uses of available resources [NEPA section 102 (2) (E)].		
Yes	No X	Rationale: There are no known controversial environmental effects or unresolved resource conflicts related to this proposal.
4. Have highly uncertain and potentially significant environmental effects or involve unique or unknown environmental risks.		
Yes	No X	Rationale: There is nothing in the proposed action that would lead to significant, unknown, or unique environmental risks as the proposed action is a common permitted activity related to flood control studies.
5. Establish a precedent for future action or represent a decision in principal about future actions with potentially significant environmental effects.		
Yes	No X	Rationale: Authorization of the proposed action is standard practice and no significant environmental effects are likely to occur as a result. As specified, the applicant has submitted a reclamation plan for the sites.

Extraordinary Circumstances		
6. Have a direct relationship to other actions with individually insignificant but cumulatively significant environmental effects.		
Yes	No X	Rationale: The proposed action is related to the concurrent analysis of flood protection structures in the Santa Clara Watershed EA. These together are not expected to have cumulatively significant environmental effects due to the reclamation of test areas.
7. Have significant impacts on properties listed, or eligible for listing, on the National Register of Historic Places as determined by the bureau.		
Yes	No X	Rationale: NRCS (Natural Resources Conservation Service) is the lead agency conducting Section 106 procedures for the proposed undertaking. Class III inventory (U21TN0316) was completed for the entire project area identified in the Santa Clara Watershed EA. One eligible archeological site is within the project area. The property is a historic road. The segment within the project area lacks integrity and has been found to be not contributing. The NRCS and the BLM have consulted and have agreeance on a finding of “no adverse effect” for the geotechnical testing.
8. Have significant impacts on species listed, or proposed to be listed, on the List of Endangered or Threatened Species, or have significant impacts on designated Critical Habitat for these species.		
Yes	No X	Rationale: No threatened, endangered, or candidate species nor critical habitats would be impacted by the proposed action as the areas have been surveyed and cleared.
9. Violate a Federal law, or a State, local or tribal law or requirement imposed for the protection of the environment.		
Yes	No X	Rationale: The proposed project would not violate laws/ordinances such as the Migratory Bird Treaty Act, Fish and Wildlife Coordination Act, county ordinances, and state statutes.
10. Have a disproportionately high and adverse environmental consequences or effects on low income or minority populations (Executive Order 12898).		
Yes	No X	Rationale: The proposed action would not have a disproportionately high or adverse effect on low income or minority populations due to the temporary duration and reclamation plan.
11. Limit access to and ceremonial use of Indian sacred sites on Federal lands by Indian religious practitioners or significantly adversely affect the physical integrity of such sacred sites (Executive Order 13007).		
Yes	No X	Rationale: The proposed action would not limit access to, or ceremonial use of sacred sites, nor would it adversely impact the integrity of any known sites.

Extraordinary Circumstances		
12. Contribute to the introduction, continued existence, or spread of noxious weeds or non-native invasive species known to occur in the area or actions that may promote the introduction, growth, or expansion of the range of such species (Federal Noxious Weed Control Act and Executive Order 13112).		
Yes	No	Rationale: The possibility of distribution of noxious weeds would be reduced through a permit stipulation that permittee would be responsible for power washing all equipment prior to entering each site.
	X	

CATEGORICAL EXCLUSION NOT ESTABLISHED BY STATUTE DECISION DOCUMENT

Decision

It is my decision to implement the action described in Categorical Exclusion **DOI-BLM-UT-C030-2021-0035-CX**.

Decision Rationale

I have reviewed the attached Categorical Exclusion documentation, including plan conformance, NEPA compliance review, and extraordinary circumstances review, and have determined that the action involves no significant impact to the human environment and no further analysis is required.

Administrative Remedies

This decision may be appealed to the Interior Board of Land Appeals, Office of the Secretary, in accordance with the regulations contained in 43 CFR Part 4.

This decision shall take effect immediately upon the date it is signed by the Authorized Officer and shall remain in effect while any appeal is pending unless the Interior Board of Land Appeals (IBLA) issues a stay (43 CFR 2801.10(b)). Any appeal of this decision must follow the procedures set forth in 43 CFR Part 4. Within 30 days of the decision, a notice of appeal must be filed in the office of the Authorized Officer at St. George Field Office, 345 East Riverside Drive, St. George, UT 84790. If a statement of reasons for the appeal is not included with the notice, it must be filed with the Interior Board of Land Appeals, Office of Hearings and Appeals, U.S. Department of the Interior, 801 North Quincy St. Suite 300, Arlington, VA 22203 within 30 days after the notice of appeal is filed with the Authorized Officer.

If you wish to file a petition for stay pursuant to 43 CFR Part 4.21(b), the petition for stay should accompany your notice of appeal and shall show sufficient justification based on the following standards:

- (1) The relative harm to the parties if the stay is granted or denied,
- (2) The likelihood of the appellant's success on the merits,
- (3) The likelihood of irreparable harm to the appellant or resources if the stay is not granted, and
- (4) Whether the public interest favors granting the stay.

If a petition for stay is submitted with the notice of appeal, a copy of the notice of appeal and petition for stay must be served on each party named in the decision from which the appeal is taken, and with the IBLA at the same time it is filed with the Authorized Officer.

A copy of the notice of appeal, any statement of reasons and all pertinent documents must be served on each adverse party named in the decision from which the appeal is taken and on the Office of the Regional Solicitor, U.S. Department of the Interior, 6201 Federal Building, 125 South State Street, Salt Lake City, Utah 84138-1180, not later than 15 days after filing the document with the Authorized Officer and/or IBLA.

Authorizing Official

Authorized Officer

Date