

Fence

Woven Wire

Conservation Practice Job Sheet

RI- 382(b)



Definition

A constructed barrier to livestock, wildlife or people.

Purpose

This job sheet is provided as a component of a resource conservation plan. This practice may be applied to contain and control livestock and wildlife movement, facilitate a prescribed grazing system, protect sensitive areas from grazing livestock, and to eliminate access to unsafe areas.

Conditions where practice applies

This practice may be used on any area

where a fence is needed to control access, movement and containment of livestock and wildlife and where people safety and movement is of concern. This job sheet is provided as a component of a resource conservation plan. Conservation plan maps showing the approximate fence location, complementary conservation practices, grazing schedule, other relevant information, and additional specifications may be included.

General Criteria and Specifications

All fence construction shall comply with federal, state, and local fencing codes. **Practice Lifespan is 20 years.**

Fence line clearing

Fence lines will be cleared of brush and trees; gullies and steep banks may require grading. Clearing along stream banks will be held to a minimum and no vegetation may be removed within the buffer area, except as required for stream crossings.

Fencing materials shall be of a quality and durability that meets the intended management objectives. Construction shall be performed in a manner that meets the intended management objective. Wire and hardware will be new, galvanized material.

Line post

Maximum spacing between posts is 16.5 feet. All wooden line posts shall be set at least 30 inches into the ground.

Suitable line posts

3½" in diameter wooden posts of black locust, red cedar (mostly heartwood), redwood, and pressure treated pine or other wood of equal life and strength. Pressure treatment shall meet the requirements for ground contact.

Steel posts must be new and be painted or galvanized and weigh a minimum of 1.25 pounds per one foot of length. Post will be driven 18" inches in the ground or as specified by manufacturer. Every 50 feet or 4th post will be wooden.

The following steel posts are acceptable for line posts:

Style 1 – "T" Section 1- 3/8" x 1-3/8" x 1/8" thick

Style 2 – "U" Section 2" x 1-1/4" x 3/32"

Style 3 – "L" Section 2" x 2" x 1/4"

Lightweight stamped-steel posts are not allowed.

Brace post: Posts shall be set and maintained in a vertical position. All wooden brace posts are to be 5" minimum diameter and set 3 feet into the ground. Horizontal rail brace posts are to be 4" minimum diameter by 8 ft. long and be installed 8" – 12" below the top of the vertical brace post.

Corners and braces: Refer to drawings on pages 7-9 for fence brace configurations and spacing.

Single H Braces: Single H Brace corners and end braces may only be installed at the ends of straight fence spans of 165 feet or less.

Double H Braces: All corners, fence line ends and gate openings require Double H Brace assemblies, except that Single H Braces may be substituted in straight fence spans of 165 feet or less.

Double H Brace Pull Assemblies: Double H Brace pull assemblies are required in straight fence spans at a maximum spacing of 660 feet.

Brace wire shall be high tensile, galvanized steel, or 9 gauge soft wire.

Adjoining Fences: A fence adjoining an existing fence must terminate in a brace assembly as required above.

Corners: A bend in the fence tighter than 20 degrees is considered a corner and not a "straight" pull brace. (In an 8-foot long brace section, 20 degrees is approx. 3 feet off the straight line. Refer to drawings). The above H brace rules apply to corners considering each wire-pull direction from the corner post. Combination single and double H corners are permitted.

If hand set, all backfilled material shall be thoroughly tamped in 4" layers. Post holes shall be at least 6" larger than the diameter or side dimension of the posts. Synthetic posts are to be installed as specified by the manufacturer.

If concrete backfill is used, the concrete must be pre-mixed, and worked into place up to the ground surface. No stress shall be applied to posts set in concrete for at least 24 hours after the concrete has set.

Wire

Wire shall have a minimum Class 3 zinc coating and shall meet the requirements of ASTM A116 or Class I zinc coating with 0.27 ounces of zinc per ft² meeting the requirements of ASTM A116.

For Cattle, fencing shall be 1047 woven wire, which has 10 line wires, with stays (the vertical wires) on 9" spacing. Top and Bottom line wires shall be at least 10 gauge (medium weight) and the filler wires (the remainder of the fence wires) will be a minimum of 12½ gauge.

For Horses, use “square knot mesh” which has 2” horizontal by 4” vertical openings, or “V-mesh” (diamond mesh) style horse fencing with triangular openings 2” wide by 4” tall. The mesh must be fastened by wire wrapping with no sharp wire ends. Horse fences should be 47” to 50” high. Horizontal wires must be 12½ gauge steel, or 14 gauge high tensile. Vertical wires are to be at least 14 gauge steel.

For other Animals, a mesh and fence height that is appropriate to the species as recommended by the manufacturer.

High tensile woven wire 12½ gauge may be used for all animals as specified by manufacturer.

Welded mesh is prone to failure, and therefore is not recommended or allowed.

Fence top Deterrent

Barbed wire: At least one strand of barbed wire is to be placed no more than 6” above the woven wire. Additional strands may be added above the first at the same spacing. The barbed wire shall consist of 2 strands of wire with class 3 galvanized 4-point barbs spaced not more than 5” apart. Galvanized barbed wire shall be fabricated from 12½ gauge class 1 galvanized or high tensile class 3 barbed 15 ½ gauge galvanized strand wire or meeting the requirements of ASTM A121.

Barbed wire should not be electrified.

Electrified Wire: In lieu of barbed wire, the same number of 12½ gauge galvanized wires may be installed electrified on the spacing needed for barbed wire. The wire must be mounted and energized as required by the high tensile electric fence job sheet. Electric and barbed wire fence top deterrents may not be combined.

Wood Rail: A wood top rail may be installed no more than 6” above the woven wire to strengthen the fence in lieu of top wires, or a single electric wire with stand-off insulators may be included. The fencing may be stapled to the rail for added stiffness. With top rails, no post bracing assemblies are needed, but gate posts must be 5” in diameter and be set 3 feet in the ground.

Wire placement

Fencing and top deterrent (barb wire) should be installed according to Figure 3.

Stretching wire

Woven wire shall be stretched tight with no sags or waves in the material when viewed along the fence line. Wire at the end posts and corner posts shall be wrapped and attached to itself with 3 twists.

For barbed wire at the fence top, pull taut. A stretch of 100 feet (prior to attachment to posts) should sag no more than in the middle 4” in warm weather and not more than 2” in cold weather.

Attaching fencing to post

The fencing wire shall be placed on the livestock side of line posts and on the outside of corners and posts in bends and braces in bends.

Woven wire fencing shall be attached to post on alternate horizontal strands as a minimum. Each strand of barbed wire used shall be attached to each post using a 9-gauge galvanized 1½” staple driven diagonally with the grain of the wood and at a slight downward angle (except in dips). Staples shall be driven tight to the post.

Fasten fencing to steel line post with either two turns of 14 gauge galvanized steel wire or the post manufacturer’s special wire clips.

Wire shall be spliced with a figure-eight knot, or twisted with 8 wraps of each end about the other (western union splice), or by suitable splice sleeves applied with a tool designed for the purpose.

Other Considerations

Fences across gullies or streams require special braces and design. Breakaway fences or swinging water gaps allow debris and water to flow past the fence line without destroying the adjacent fence.

Any permanent fencing for grazing livestock should allow flexibility to facilitate implementation of the grazing plan and permit land management activities such as nutrient application, pest control, forage harvest, and other appropriate practices.

Follow all manufacturers' safety precautions for handling and installing fencing materials.

Locate fences to facilitate maintenance. Where applicable, clear right of ways should be established and maintained to facilitate fence construction and maintenance.

When possible, install fences across slopes to improve grazing distribution, rainfall infiltration, and reduce soil erosion.

Locate fences to facilitate livestock management, handling, watering, and feeding.

Consider placing permanent riparian stream fencing at the edge of the protected buffer or at least 2 times the active channel width from the top of the stream bank but never less than 10 feet. It is recommended that the stream fence have a maintenance gate installed. Woven wire fencing is not recommended for use in riparian areas due to flooding damage.

Approved alternative fence systems include "Common Sense Fence" or equivalent. Other fencing systems may be approved by an NRCS Resource Conservationist (RC), and installed to manufacturer's recommendation as approved by NRCS Resource Conservationist (RC).

Alternative fencing and bracing systems: Alternative fencing and bracing systems must be pre-approved by an NRCS Resource Conservationist (RC), and must be installed according to manufacturer's recommendations as approved by NRCS Resource Conservationist (RC).

Specifications 'K cf_g\ Yh

Site-specific requirements are listed on the specifications sheet. Additional provisions may be contained in the conservation plan or other acceptable form of documentation. Specifications are prepared in accordance with the NRCS Field Office Technical Guide. See Conservation Practice Standard *Fence* (382)

Client:	Farm #:
Field(s):	Tract #:
Planned By:	Location:
Date:	Length of Fence:
Landowner Objectives:	

Purpose (check all that apply)	
<input type="checkbox"/> Reduce erosion and improve water quality by controlling livestock access to streams, springs, wetlands, and ponds.	<input type="checkbox"/> Protect sensitive environmental areas and the flora from vehicular, pedestrian, or animal traffic use.
<input type="checkbox"/> Protect newly planted areas from disturbance until established.	<input type="checkbox"/> Protect the safety of people, livestock, and wildlife by limiting or denying access to hazardous areas.
<input type="checkbox"/> Facilitate handling, movement, and feeding of livestock in the pasture environment.	<input type="checkbox"/> Improve distribution and timing of livestock grazing.
<input type="checkbox"/> Other (specify)	

Type of Fence - Woven Wire
Fence Height: _____ inches Number of wire: _____ Wire spacing: _____ inches
Woven Wire Type: _____
Top Deterrent Type: _____

Posts		
Type Black Locust OR Eastern red cedar OR pressure treated pine or other preservative treated wood OR standard steel line posts w/4 th post being a wooden post	Size Line posts are wood 8 feet or longer 4" minimum diameter OR Standard steel line post 1 ³ / ₈ " x 1 ³ / ₈ " x 1 ¹ / ₈ " with anchor plate	Spacing Wood line posts spaced a maximum of 16½ feet apart set 2.5 feet deep minimum OR Steel line posts spaced a maximum of 16½ feet apart set to top of anchor plate or 18"

Braces	
Wooden Braces (8 feet minimum length) 4" diameter at small end	Brace Wire High Tensile, Galvanized Steel, 9 Gauge OR 12½ Gauge High Tensile, Galvanized, Double Wrapped

Operation and Maintenance

Inspections and maintenance are required to achieve the intended function, benefits, and life of the practice. The landowner/operator is responsible to establish and implement an inspection and maintenance program. Regular inspection of fences should be part of an ongoing maintenance program. Items to inspect and maintain during the 20-year design life of the practice include, but are not limited to, the following:

1. Inspection of fences after storm events is necessary to ensure the continued proper function of the fence. Promptly repair or replace damaged or broken fencing.
2. Retain and properly discard all broken fencing material and hardware to prevent ingestion by animals or injury to equipment, people, or animals.
3. Remove debris collected in the fencing.
4. Clear the brush from fence lines to reduce voltage loss. Vegetative control can be achieved by herbicides applied per the manufacturer's label.
5. Remove fallen limbs and maintain proper tension on the fence wires. Overhanging trees and limbs should be trimmed or removed as needed.
6. Maintain proper tension on the fence wires.
7. Follow your grazing plan, where appropriate.
8. All necessary precautions should be taken to ensure the safety of construction and maintenance crews.


Other:

For information regarding this practice contact:


_____ at _____.

The United States Department of Agriculture (USDA) prohibits discrimination in its programs on the basis of race, color, national origin, sex, religion, age, disability, political beliefs and marital or familial status. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication program information (Braille, large print, audiotape, etc.) should contact the USDA Office of Communications (202) 720-2791. To file a complaint of discrimination write USDA, Director, Office of Civil Rights, Room 326-W, Whitten Building, 14th and Independence Avenue, SW, Washington, DC 20250-9410 or call (202) 720-5964 (voice or TDD). USDA is an equal opportunity provider and employer.

STRAIGHT FENCES
ON FLAT LAND

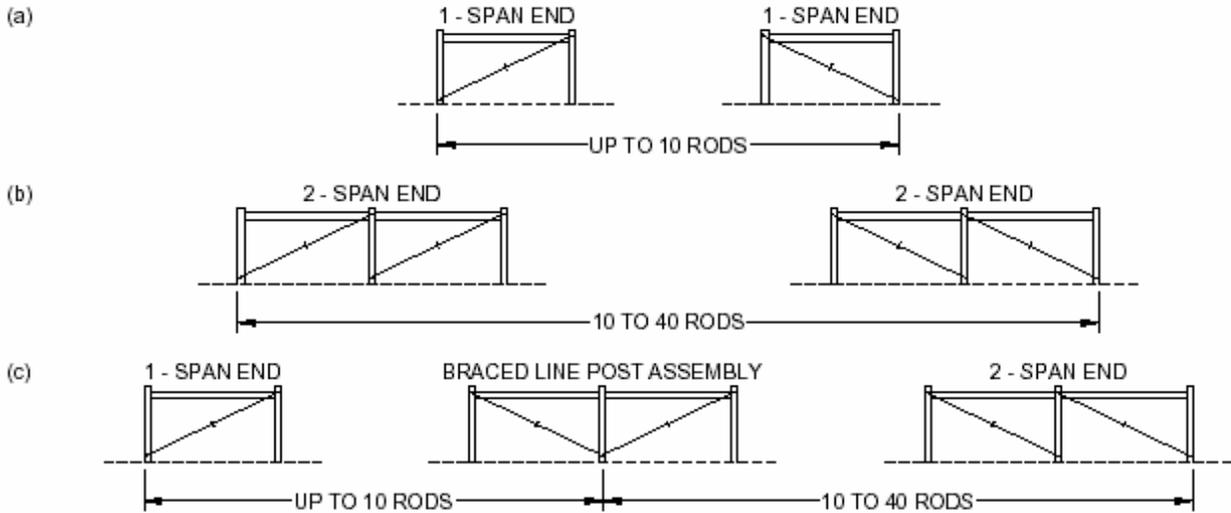

STRAIGHT FENCES
ON ROLLING LAND

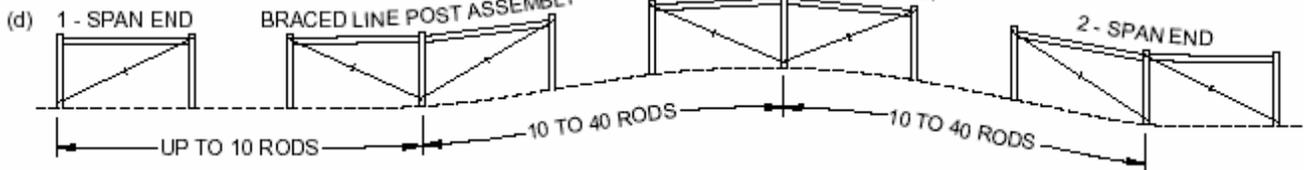


CURVED FENCES




Types of anchor-and brace assemblies and where to locate them: (a) For fence lengths of 10 rods (165 feet) or less, use single-span end construction. (b) For fence lengths of 10 to 40 rods (165 to 660 feet), use double span end construction. (c) For fences more than 40 rods (660 feet) long use a braced-line-post assembly to divide the fence lengths. (d) On rolling land, fence stretching is easier if braced line-post assemblies are located at the foot and top of each hill. (e) Contour fences, more than 20 rods (330 feet) long, should have a braced-line-post assembly installed to keep the stretches to 20 rods (330 feet) or less. Install in straight section at least one post span away from a curve. Do not install on a curve.

Note: One rod equals 16½ feet.

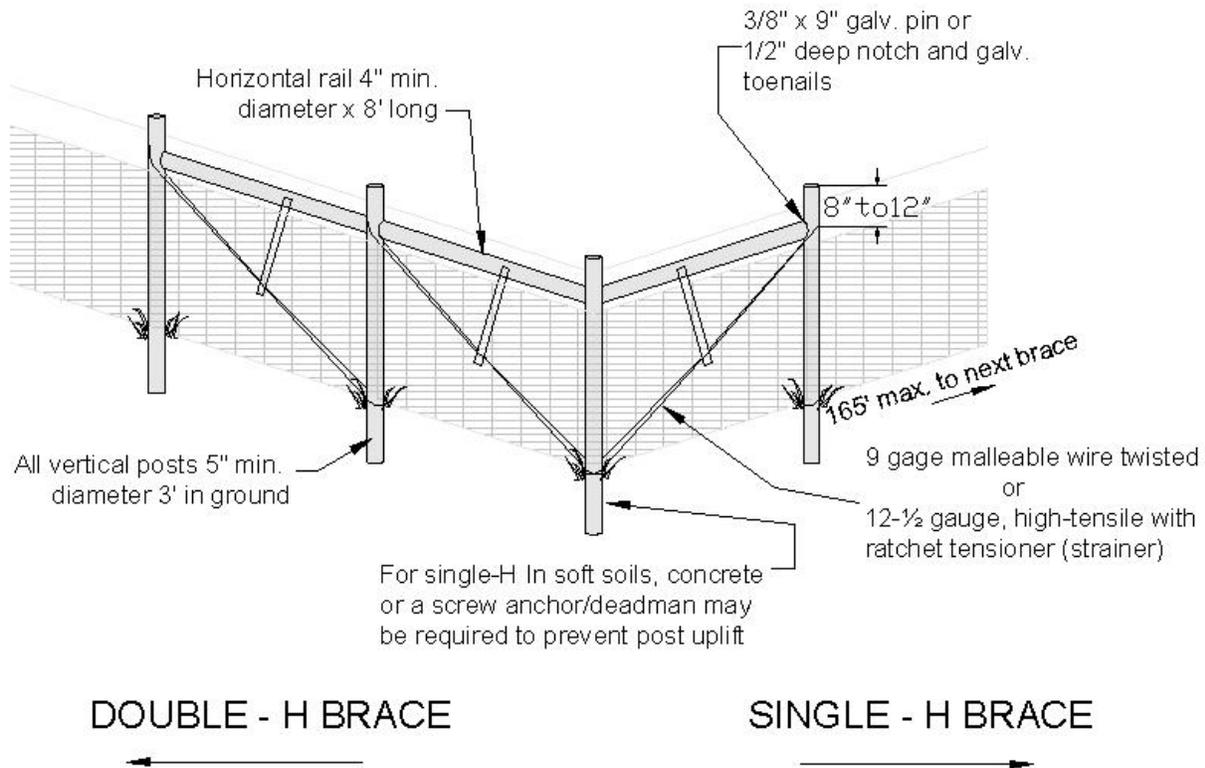

Typical Combination Corner Brace Assembly

Figure 1

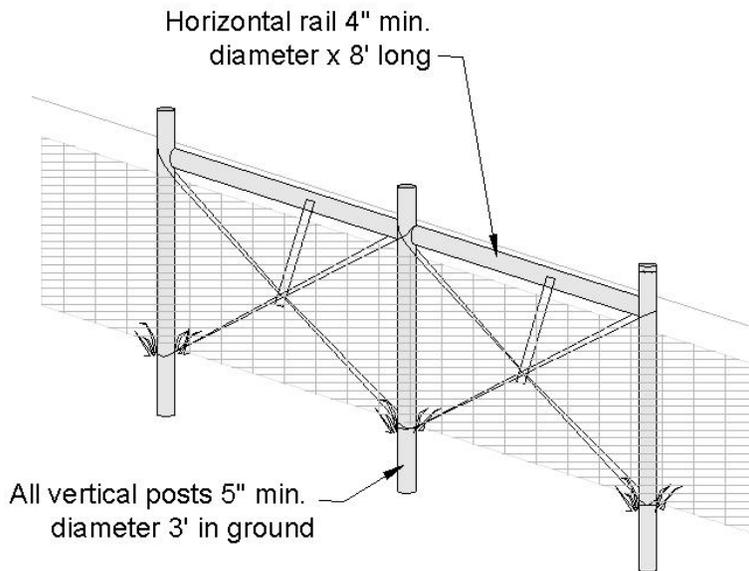

Double - H Brace Pull Assembly

Figure 2


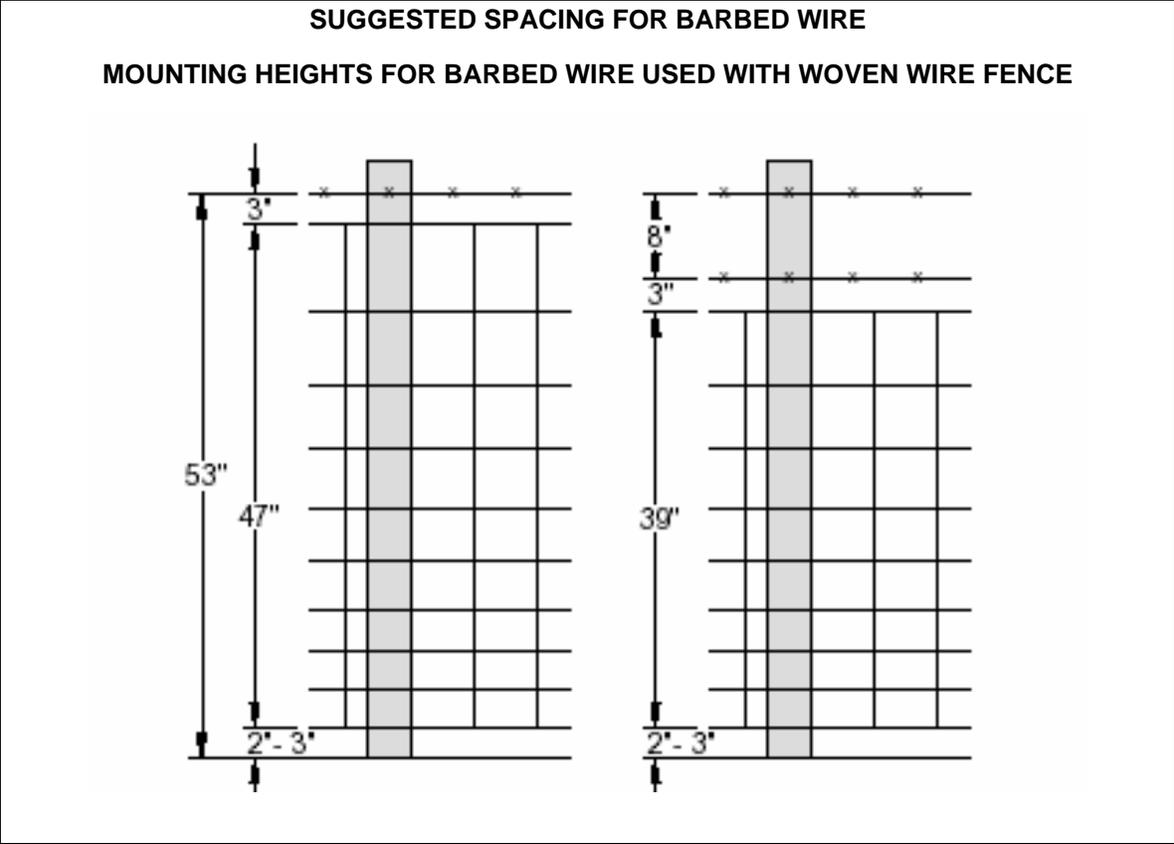


Figure 3

The first barbed wire above woven wire fence should be within 3" of top line wire. This reduces the possibility of animals getting their head between woven wire and barbed wire, and mashing down the fence.

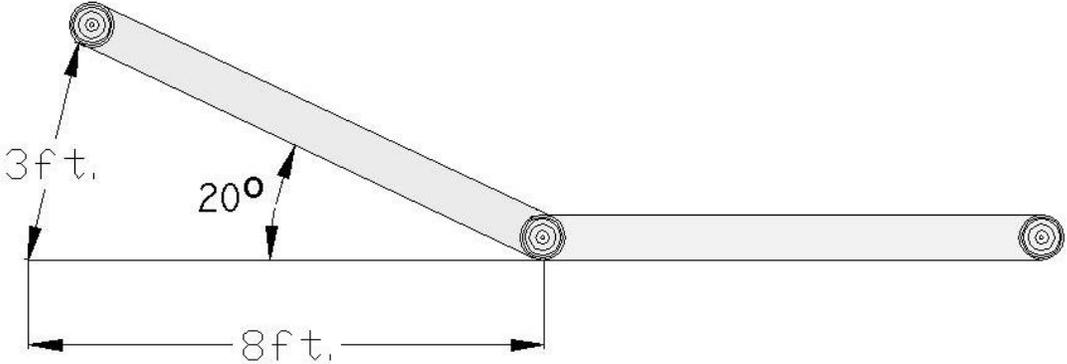

**Top View of Fence Brace Showing
Minimum Angle to be Considered a Corner**

Figure 4

RI NATURAL RESOURCES CONSERVATION SERVICE CONSERVATION PRACTICE STANDARD FENCE (382)

Table 1. Fence Selection Criteria

Fence design and construction must meet the minimum requirements for controlling specific animal types.

Animal type to control	Fence type	Purpose of Fence				Spacing Inches above ground level <small>ww fences start 2-3 " above the ground</small>
		Perimeter (boundary) prohibited areas	Access lanes & stream crossings	Interior subdivision	Stream exclusion	
		Minimum Criteria				Inches
Cattle	Barbed 3-wire	NO	NO	Meets	Meets	18, 30, 42
Cattle	Barbed 4-wire	NO	Meets	Exceeds	Exceeds	16 to 48 evenly spaced
Cattle	Barbed 5-wire	Meets	Exceeds	Exceeds	Exceeds	14 to 48 evenly spaced
Cattle	Non-Electric 4-wire high tensile smooth			Exceeds	Meets	12 to 42 evenly spaced
Cattle	Non-Electric 6-wire high tensile smooth	No	Meets	Exceeds	Exceeds	12 to 44 evenly spaced
Cattle	Non-Electric 8-wire high tensile smooth	Meets	Exceeds	Exceeds	Exceeds	12 to 44 evenly spaced
Cattle	Electric 1-wire high tensile smooth	NO	NO	Meets	NO	32
Cattle	Electric 2-wire high tensile smooth	NO	Meets	Exceeds	Meets	20, 32
Cattle	Electric 3-wire high tensile smooth	NO	Exceeds	Exceeds	Exceeds	18, 30, 42
Cattle	Electric 4-wire high tensile smooth	Meets	Exceeds	Exceeds	Exceeds	12 to 42 evenly spaced
Cattle	Electric 5-wire high tensile smooth	Exceeds	Exceeds	Exceeds	Exceeds	12 to 44 evenly spaced
Cattle	Electric 1-wire Polywire or Polytape (1hot wire)	NO	NO	Meets	NO	32
Cattle	Electric 2-wire Polywire or Polytape (2 hot wires)	NO	Meets	Exceeds	Meets	20, 32
Cattle	Woven wire plus one or more top wire	Exceeds	Exceeds	Exceeds	Exceeds	47 min, 6 max between top wires
Cattle	Wood or Composition boards (6" wide)	Exceeds	Exceeds	Exceeds	Exceeds	6, 6, 8, 10 between boards
Cattle	HT Woven wire plus one or more top wires	Exceeds	Exceeds	Exceeds	Exceeds	47 min, 6 max between top wires
Goats & sheep	Barbed 5-wire	NO	NO	Meets	Meets	6 to 32 evenly spaced
Goats & sheep	Barbed 6-wire	NO	Meets	Exceeds	Exceeds	6 to 36 evenly spaced
Goats & sheep	Barbed 8-wire	Meets	Exceeds	Exceeds	Exceeds	6 to 48 evenly spaced
Goats & sheep	Non-Electric 5-wire high tensile smooth	NO	NO	Meets	Meets	6 to 32 evenly spaced
Goats & sheep	Non-Electric 6-wire high tensile smooth	NO	Meets	Exceeds	Exceeds	6 to 36 evenly spaced
Goats & sheep	Non-Electric 7-wire high tensile smooth	Meets	Exceeds	Exceeds	Exceeds	6 to 42 evenly spaced
Goats & sheep	Electric 3-wire high tensile smooth	NO	NO	Meets	Meets	8, 18, 30
Goats & sheep	Electric 4-wire high tensile smooth	NO	Meets	Exceeds	Exceeds	6 to 36 evenly spaced
Goats & sheep	Electric 5-wire high tensile smooth	Meets	Exceeds	Exceeds	Exceeds	6 to 38 evenly spaced
Goats & sheep	Woven wire plus one or more top wire	Exceeds	Exceeds	Exceeds	Exceeds	32 min, 6" max between top wires
Goats & sheep	Wood or Composition boards (6" wide)	Exceeds	Exceeds	Exceeds	Exceeds	6, 6, 8, 10 between boards
Goats & sheep	HT Woven wire plus one or more top wires	Exceeds	Exceeds	Exceeds	Exceeds	35 min, 6" max between top wires

Animal type to control	Fence type	Purpose of Fence				Spacing Inches above ground level ww fences start 2-3 " above the ground
		Perimeter (boundary prohibited areas)	Access lanes & stream crossings	Interior subdivision	Stream exclusion	
		Minimum Criteria				Inches
Horses	Electric 2-wire high tensile smooth	NO	Meets	Meets	Meets	28, 38
Horses	Electric 3-wire high tensile smooth	NO	Exceeds	Exceeds	Exceeds	28, 38, 48
Horses	Electric 4-wire high tensile smooth	Meets	Exceeds	Exceeds	Exceeds	18 to 54 evenly spaced
Horses	Electric 5-wire high tensile smooth	Exceeds	Exceeds	Exceeds	Exceeds	18 to 54 evenly spaced
Horses	Electric 1-wire Polywire or Polytape	NO	NO	Meets	NO	34
Horses	Electric 2-wire Polywire or Polytape	NO	Meets	Meets	Meets	28, 48
Horses	Woven wire w/1 wire HT on top	Exceeds	Exceeds	Exceeds	Exceeds	48 + HT at 54
Horses	Mesh "No climb" 2"x4" spacing	Exceeds	Exceeds	Exceeds	Exceeds	48 + HT at 54"
Horses	Wood or Composition boards (6" wide)	Exceeds	Exceeds	Exceeds	Exceeds	18 min. 12 max. between boards
Hogs	Electric 2-wire high tensile smooth	NO	NO	Meets	Meets	8, 16
Hogs	Electric 3-wire high tensile smooth	NO	Meets	Exceeds	Exceeds	8, 16, 24
Hogs	Woven wire 32" w/ 1 wire barb or HT	Exceeds	Exceeds	Exceeds	Exceeds	32 + barb or HT at 38
Hogs	Woven wire 32" w/ 1 Ht electric inside	Meets	Meets	Meets	Meets	32 + 1 electric wire 8 off ground, 8 inside of fence.
Deer	Woven wire 96" tall w/2 strands of smooth wire	Meets	Meets	Meets	Meets	96" w/smooth wire at 9' and 10'
Buffalo	Electric 4-wire high tensile smooth	NO	NO	Meets	Meets	16 to 42 evenly spaced
Buffalo	Electric 5-wire high tensile smooth	NO	Meets	Exceeds	Exceeds	16 to 48 evenly spaced
Buffalo	Electric 6-wire high tensile smooth	Meets	Exceeds	Exceeds	Exceeds	12 to 52 evenly spaced
Chickens/turkey	Woven wire 2"x4" 1 wire HT or barb above	Exceeds	Exceeds	Exceeds	Exceeds	72
Emu and ostrich	Woven wire 6"x6" 1 wire HT or barb above	Exceeds	Exceeds	Exceeds	Exceeds	72
Chickens/turkey	HT Woven wire 2"x4" 1 wire HT or barb above	Exceeds	Exceeds	Exceeds	Exceeds	72
Emu and ostrich	HT Woven wire 6"x6" 1 wire HT or barb above	Exceeds	Exceeds	Exceeds	Exceeds	72
People	Chain link	Meets	Preferred option			60 with 1 barb above
People	Electric 5-wire	Meets				12 to 60 evenly spaced
People	Woven wire 47 inch plus 1 or 2 barbed wires or HT elec	Meets				47 min. HT or barb at 6 spacing to 48. HT may be electrified

Alternative fencing and bracing systems may be approved by the Resource Conservationist, i.e. *common sense fence, horseguard or equivalent.*

Practice Installation Guidelines

It shall be the responsibility of the landowner to obtain all necessary permits and/or rights, and to comply with all ordinances and laws pertaining to this installation.

Practice designs and specifications shall be reviewed by NRCS planner with the landowner prior to start of work for practice installation.

Contact the NRCS planner _____ at 401- _____ prior to installation. Keep NRCS planner updated throughout the installation process.

Contact the NRCS planner _____ at 401- _____ upon completion of practice.

Practice specifications and special requirements

Installation shall be in accordance with the following specifications and special requirements.
NO CHANGES ARE TO BE MADE IN THE DRAWINGS OR SPECIFICATIONS WITHOUT PRIOR APPROVAL OF THE NRCS.

1. Use Practice Specifications: **Fencing specifications worksheet
 Specification Guide Sheet for Fencing (382)**

The landowner/operator acknowledges that:

- A) He/she has received a copy of the practice specifications, and Operation and Maintenance plan, and that he/she has an understanding of the contents and the requirements.
- B) He/she has or will obtain all of the necessary permits prior to construction.
- C) No changes will be made in the installation of the job without prior concurrence of the NRCS technician.
- D) This practice has a lifespan of 20 years.
- E) Adherence to the Operation and Maintenance plan of the installed work is necessary for proper performance during the practice lifespan.
- F) NRCS planner shall be contacted prior to installation for a review of the practice installation and at completion for practice certification.

Accepted by :

Date:

Address :

Practice design approval

Lead Discipline for this practice: **Biological Conservation Sciences Division**

Job Classification:

_____ No design changes were made. _____ Design changes were approved and are included

Design approved by:

Date:

Practice certification

I have made an on-site inspection and have determined that the practice has been installed according to practice standard and specifications.

Certified by:

Date: