
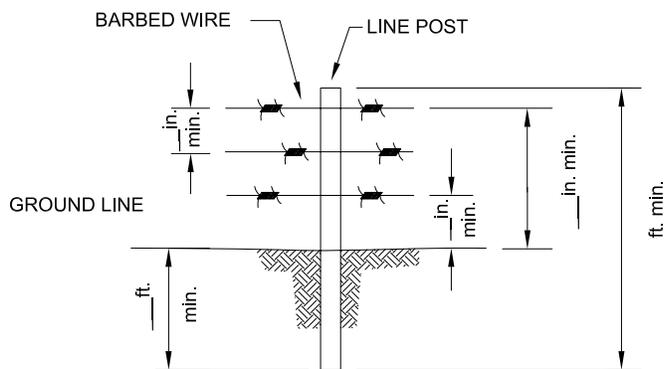


MARYLAND STANDARDS FOR AGRICULTURAL BMPS

DETAIL 382 - B1 - BARBED

BARBED WIRE FENCE

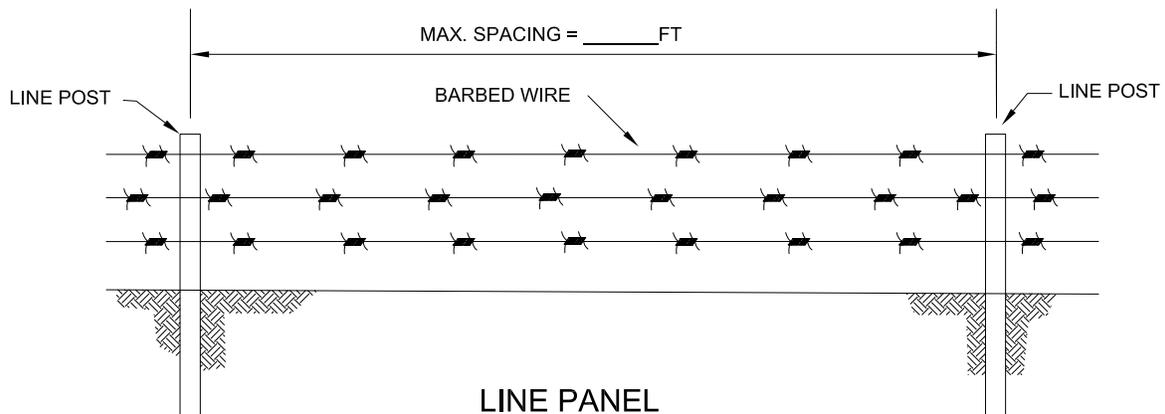

BARBED WIRE

ASTM CLASS 3 GALVANIZED, DOUBLE STRAND.

STANDARD WIRE MIN, 12 1/2 GAUGE.

HIGH-TENSILE WIRE MIN. 15 1/2 GAUGE.

NUMBER OF WIRES NEEDED: _____

SPACING AT: _____
INCHES ABOVE GROUND

BARBED WIRE DETAIL

LINE POSTS (WOODEN): MIN. 4 IN. DIAM. OR 4 IN. SQUARE.

LINE POSTS (STEEL): STUDDED OR PUNCHED T, U, OR Y SHAPED, WITH ANCHOR PLATES.
MIN. WEIGHT 1.3 LBS./FT. (EXCLUDING ANCHOR PLATE).

SPECIES AND TREATMENT FOR ALL WOOD: USE UNTREATED DURABLE POSTS OF SPECIES SUCH AS RED CEDAR, BLACK LOCUST OR OSAGE-ORANGE WITH BARK REMOVED, OR NON-DURABLE WOOD THAT IS PRESERVATIVE PRESSURE TREATED (0.40 LBS./CUBIC FOOT CCA, OR EQUIVALENT NON-CCA TREATMENT). DO NOT USE RED PINE.

SPECIAL INSTRUCTIONS

DRAWING NOT TO SCALE. STANDARDIZED DRAWING MUST BE ADAPTED TO THE SPECIFIC SITE.