
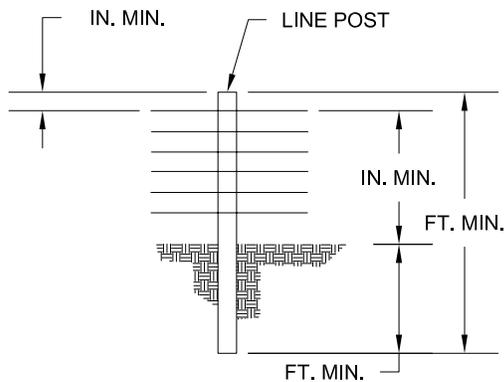


MARYLAND STANDARDS FOR AGRICULTURAL BMPS

DETAIL 382 - D1 - TENSILE

HIGH TENSILE SMOOTH WIRE FENCE - NON-ELECTRIC

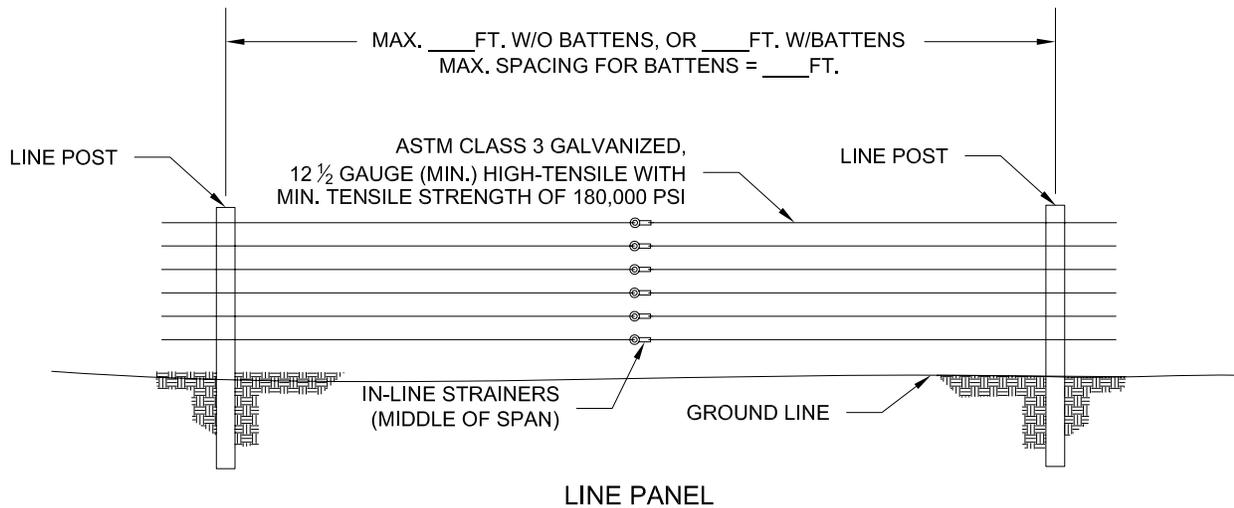

NUMBER OF WIRES NEEDED: _____
 SPACING AT _____
 INCHES ABOVE THE GROUND.

NON-ELECTRIC HIGH TENSILE DETAIL

LINE POST (WOODEN): MIN. 4 IN. DIAM. OR 4 IN. SQUARE

LINE POST (STEEL): STUDDED OR PUNCHED T, U, OR Y SHAPED, WITH ANCHOR PLATES.
 MIN. WEIGHT 1.3 LBS./FT. (EXCLUDING ANCHOR PLATE).

SPECIES AND TREATMENT FOR ALL WOOD: USE UNTREATED DURABLE POSTS OF SPECIES SUCH AS RED CEDAR, BLACK LOCUST OR OSAGE-ORANGE WITH BARK REMOVED, OR NON-DURABLE WOOD THAT IS PRESERVATIVE PRESSURE TREATED (0.40 LBS./CUBIC FOOT CCA, OR EQUIVALENT NON-CCA TREATMENT). DO NOT USE RED PINE.

SPECIAL INSTRUCTIONS

DRAWING NOT TO SCALE. STANDARDIZED DRAWING MUST BE ADAPTED TO SPECIFIC SITE.