

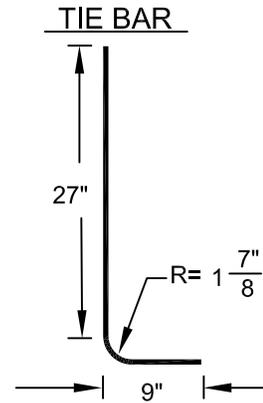


FOOTING DESIGN

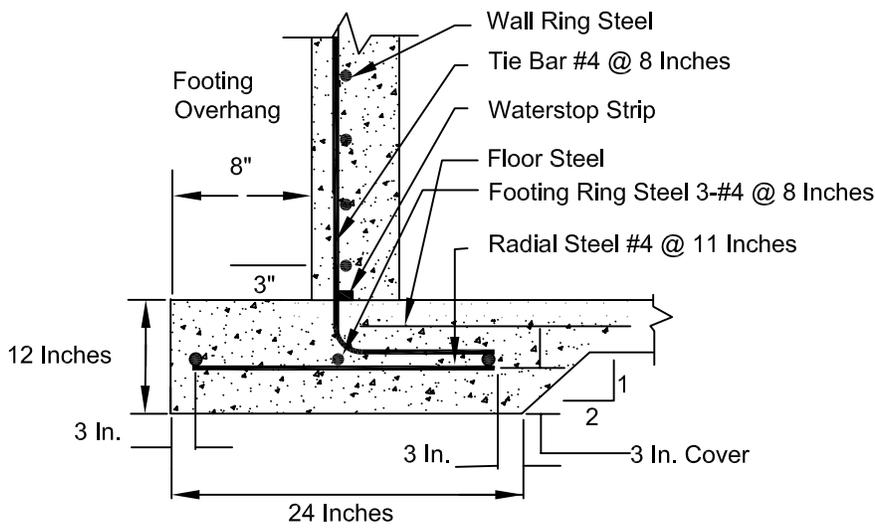

NOTE: Subsurface Drainage must be provided around the storage facility.

WALL DESIGN

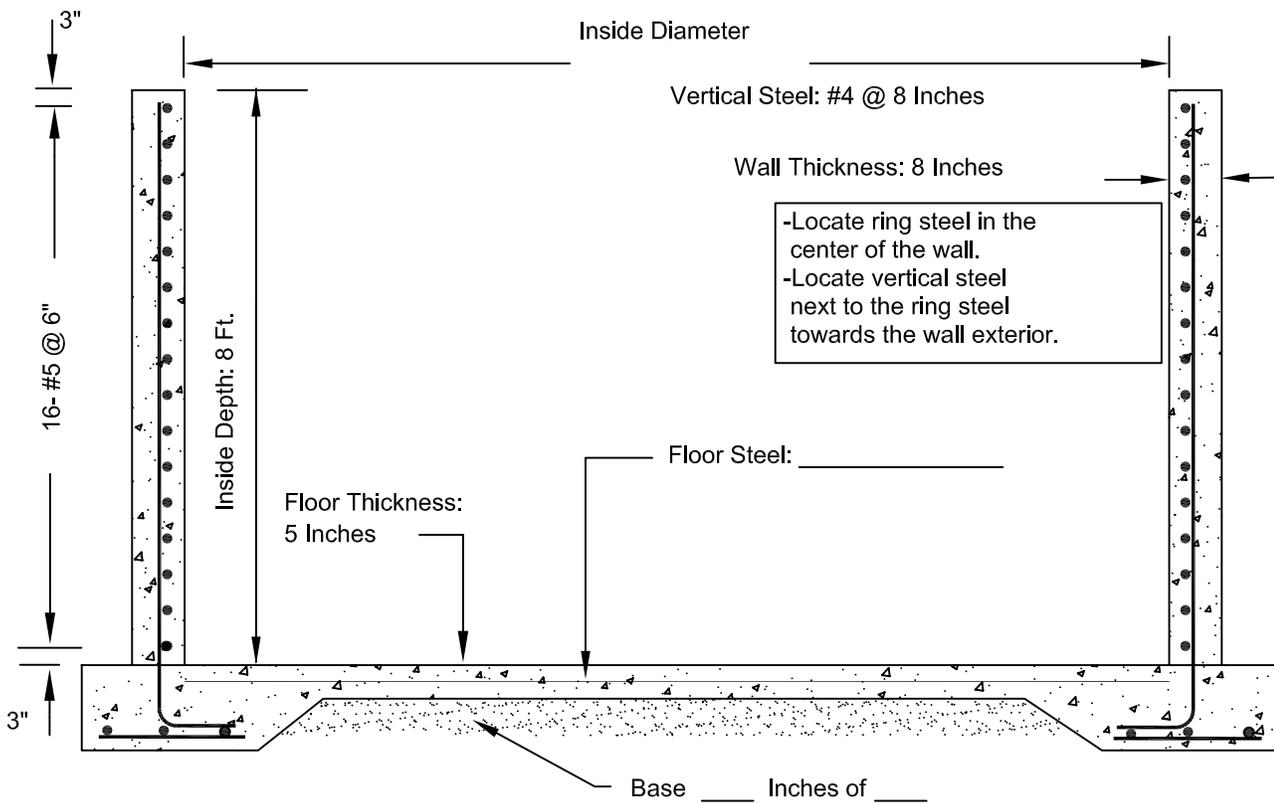

N.T.S.



CIRCULAR CONCRETE STORAGE FACILITY
FOR USE WITH NOTCHED WALL AND RAMP
8' DEEP 120' OR LESS IN DIAMETER

ISSUE DATE: 12/04
DRAWING NO. NCT-8-120