MARYLAND STANDARDS FOR AGRICULTURAL BMPS
DETAIL 382 - D2 - TENSILE

HIGH TENSILE SMOOTH WIRE FENCE - ELECTRIC

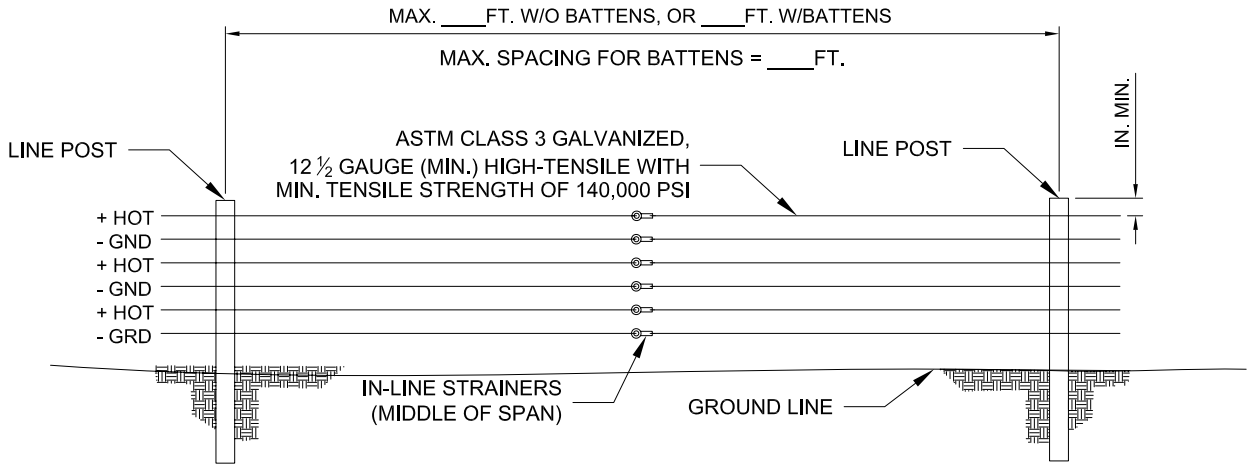

LINE PANEL

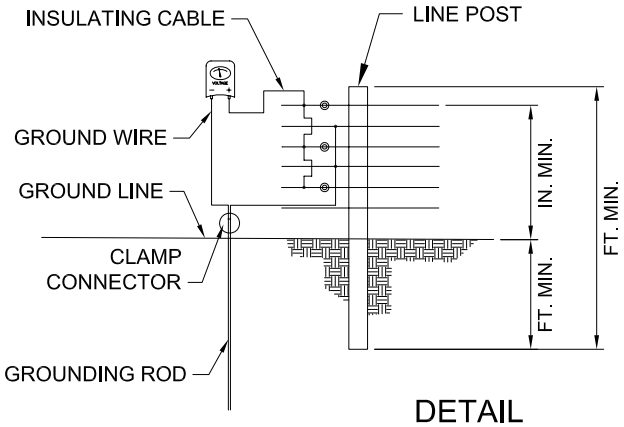

DETAIL

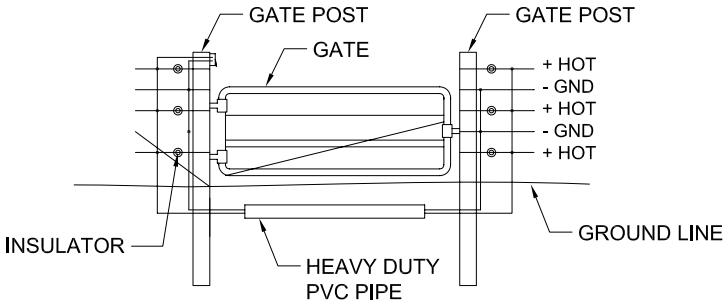

GATE DETAIL

FOLLOW ALL MANUFACTURE'S INSTRUCTIONS WHEN INSTALLING THE FENCE CHARGER (ENERGIZER) AND GROUNDING THE FENCE.

NUMBER OF WIRES NEEDED: _____ SPACING AT _____ INCHES ABOVE THE GROUND.

LINE POST (WOODEN): MIN. 4 IN. DIAM. OR 4 IN. SQUARE

LINE POST (STEEL): STUDDED OR PUNCHED T, U, OR Y SHAPED, WITH ANCHOR PLATES.
MIN. WEIGHT 1.3 LBS./FT. (EXCLUDING ANCHOR PLATE).

SPECIES AND TREATMENT FOR ALL WOOD: USE UNTREATED DURABLE POSTS OF SPECIES SUCH AS RED CEDAR, BLACK LOCUST OR OSAGE-ORANGE WITH BARK REMOVED, OR NON-DURABLE WOOD THAT IS PRESERVATIVE PRESSURE TREATED (0.40 LBS./CUBIC FOOT CCA, OR EQUIVALENT NON-CCA TRATMENT). DO NOT USE RED PINE.

SPECIAL INSTRUCTIONS

_____

_____

_____

DRAWING NOT TO SCALE. STANDARDIZED DRAWING MUST BE ADAPTED TO SPECIFIC SITE.