



NOTES:

1. All Posts shall be grade stamped No. 2 or better, preservative treated to 0.6 Pounds per Cubic Foot retention of Chromated Copper Arsenate (pcf CCA), Southern Yellow Pine (SYP). [All other lumber No. 2 or better, 0.4 pcf CCA, S.Y.P., and all Fasteners and Appurtenances shall be galvanized.]
2. If Alkaline Copper Quaternary (ACQ) preservative treatment is used, then retention rates shall be the same as for CCA, but all Metal Fasteners and Appurtenances shall be stainless steel or hot dipped galvanized.


This Side is the INSIDE
for Animal Waste Storage

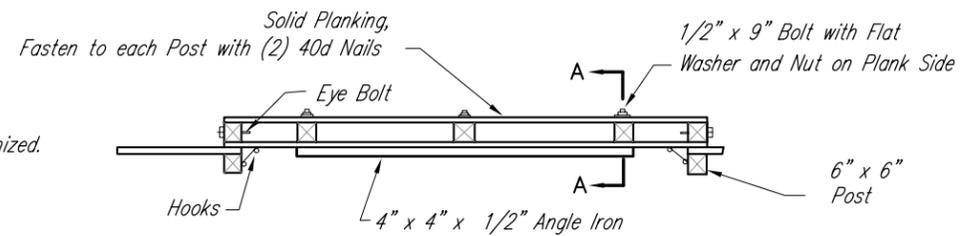


TOP VIEW



SECTION A-A

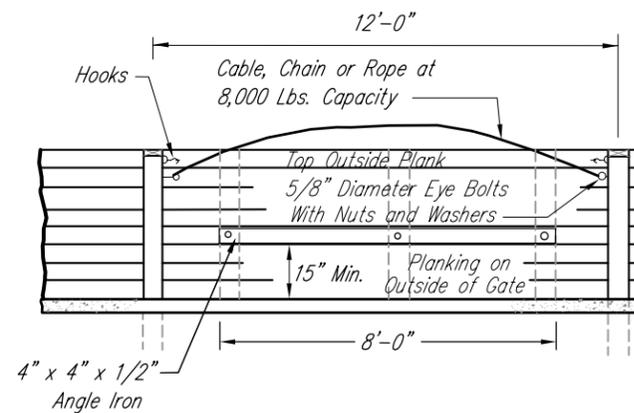

OUTSIDE VIEW



END VIEW

REMOVABLE GATE

Not to Scale