


STRAIGHT PANEL

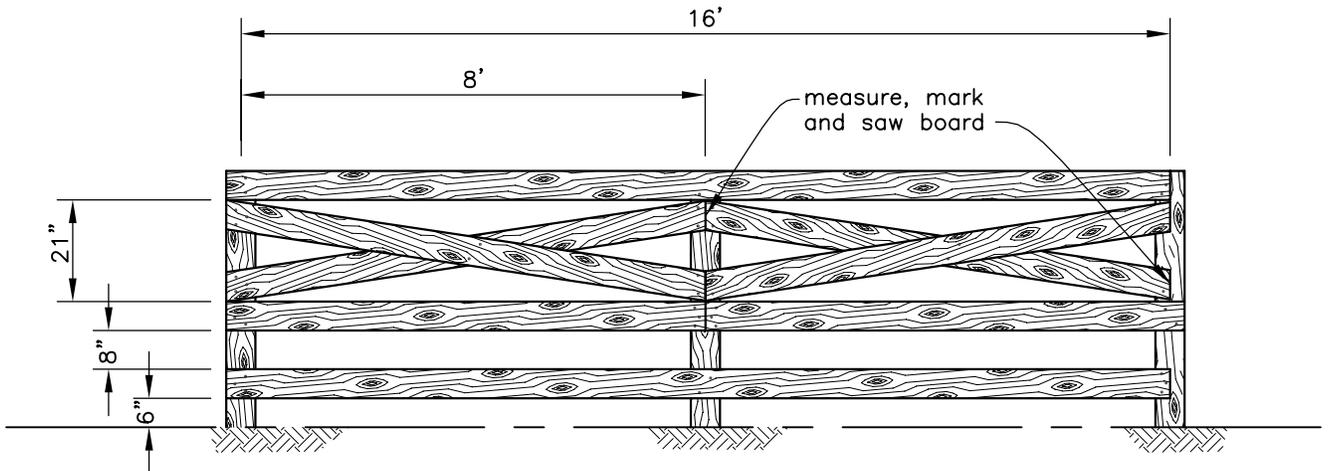

DIAMOND PANEL

1. Place 16 ft. board at top of first two spans for rough measurement and mark for sawing.
2. Saw ends of board. Apply wood preservative generously to freshly cut surfaces if using treated lumber.
3. Nail board to all three posts with at least two nails in each post (3 nails are better).
4. Measure second board from first post to center of second post. Space and nail board.
5. Measure, saw (apply preservative) and nail remaining boards in same manner.
6. For diamond panel: Place 4" board in position on fence and mark for sawing. Saw as marked. Nail boards in position.
7. For corrals or barn lots, 8 inch wide x 2 inch thick boards are required.

Drawing not to scale. Standardized drawing must be adapted to the specific site.

JOB CLASS	Date
CAD FILE NO. LSK-0280.DWG	Designed _____
SHEET OF	Drawn _____
	Checked _____
	Approved _____