


5000 GAL TANK SLAB ANCHOR DETAIL

Drawing not to scale

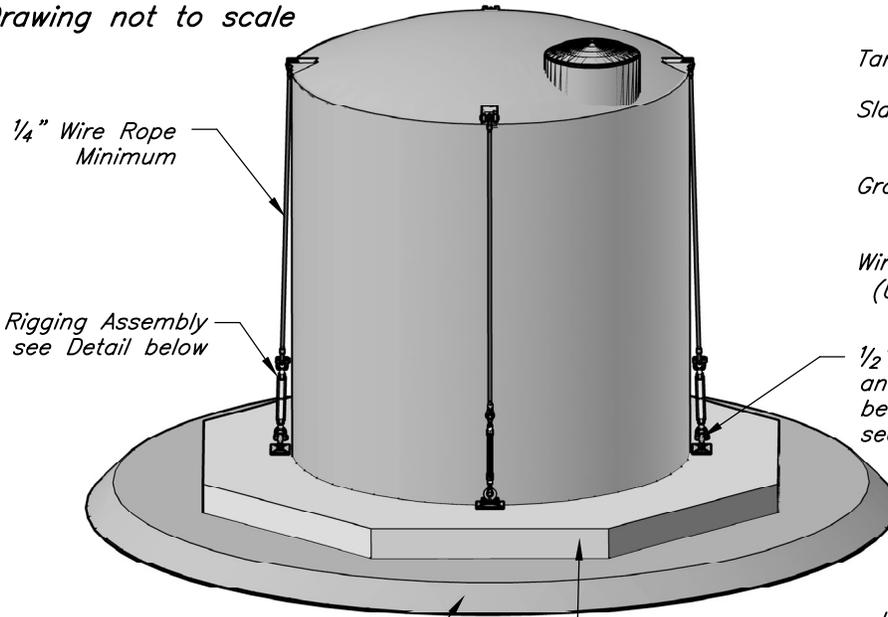

Tank Diameter: _____ Feet

Slab Diameter: _____ Inches
1.25 X Tank Diameter

Gravel Pad Diameter: _____ Feet
1.75 X Tank Diameter



Wire Rope Length: _____ Feet
(Use rope or twine to determine length)

6" thick gravel pad 1" minus.
extend 1.75 X tank diameter


8" thick reinforced 4000 psi concrete Slab
see CS-42 Concrete for Minor Structures
and MS-203 Concrete

#5 Grade 60 rebar
16" oc both ways

Install rebar in the upper half of slab
with a minimum 2" of concrete cover.

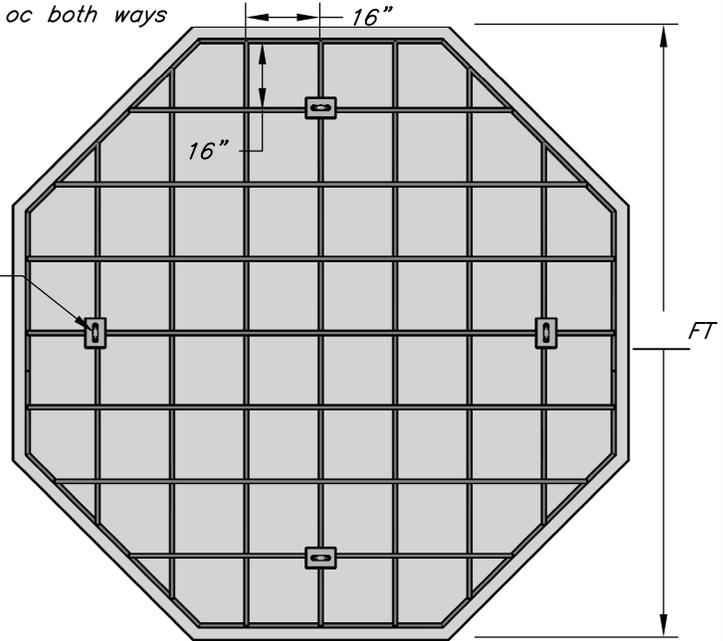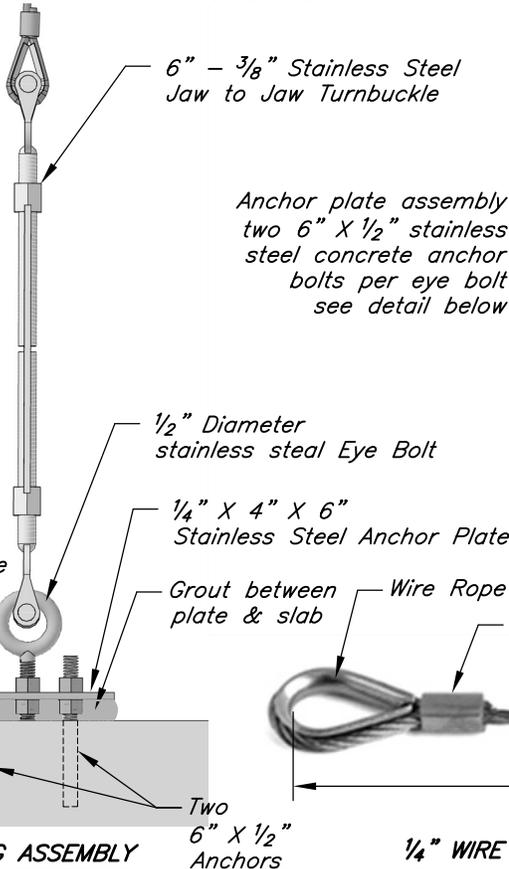

REBAR PLAN VIEW DETAIL

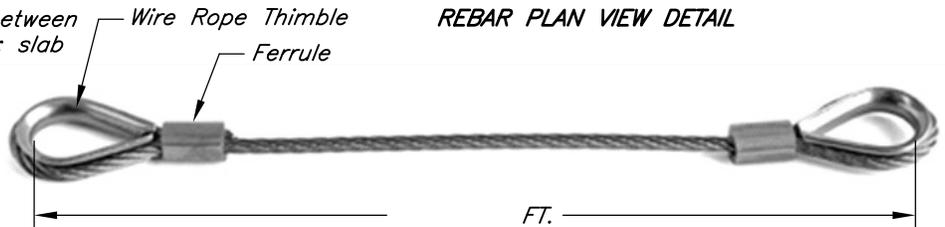

1/4" WIRE ROPE SLING WITH HARD THIMBLE EYES

		JOB CLASS	Date
		CAD FILE NO. LSK-0176.dwg	Designed _____
		SHEET OF	Drawn _____
			Checked _____
			Approved _____