



TURNOUT STRUCTURE

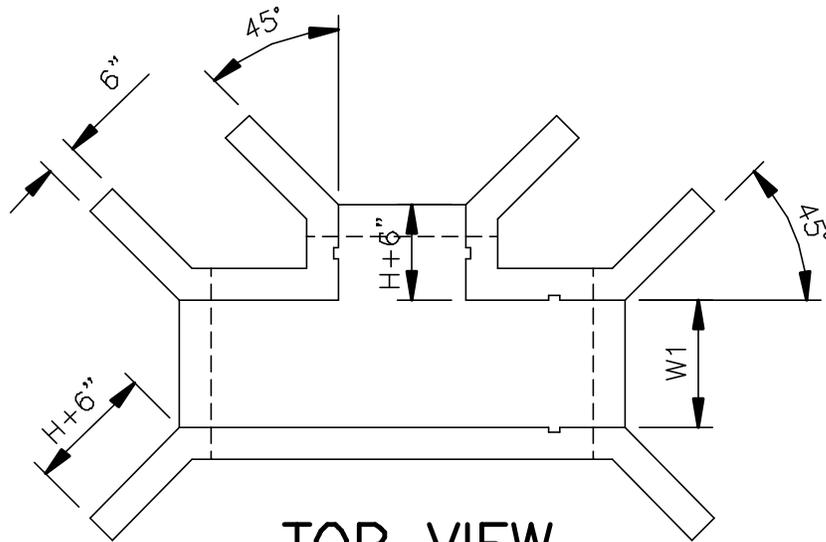

TOP VIEW

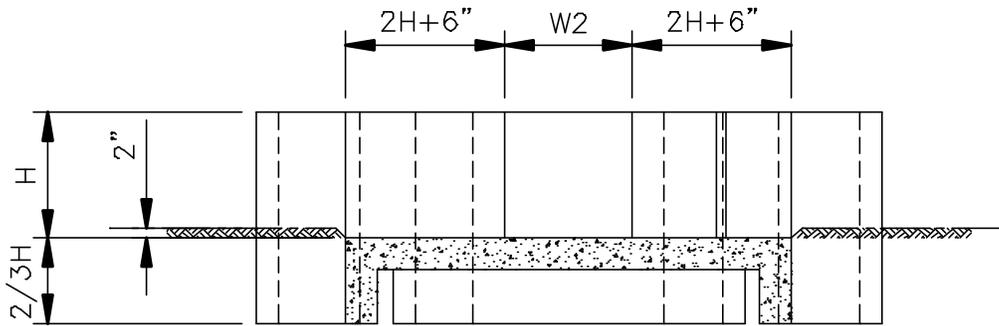

SECTION

DIMENSIONS

Capacity \_\_\_\_\_ (gpm)

Soil Classification \_\_\_\_\_

W1 = (24" max) \_\_\_\_\_ (ft)

W2 = (24" max) \_\_\_\_\_ (ft)

H = (18" max) \_\_\_\_\_ (ft)

REBAR \_\_\_\_\_

SPACING \_\_\_\_\_ c-c (in)

All walls and slabs shall have a minimum thickness of 6 inches.

NOTE:

This standard drawing requires supporting technical documentation prior to use and must be adapted to the specific site.

Drawing not to scale.

<b>U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE</b>	JOB CLASS _____	Date _____
	CAD FILE NO. GRV-0011.DWG	Designed _____
	SHEET OF _____	Drawn _____
		Checked _____
	Approved _____	