


FOREST ROAD DITCH OUTLET

NRCS Practice Standard 560 Access Road

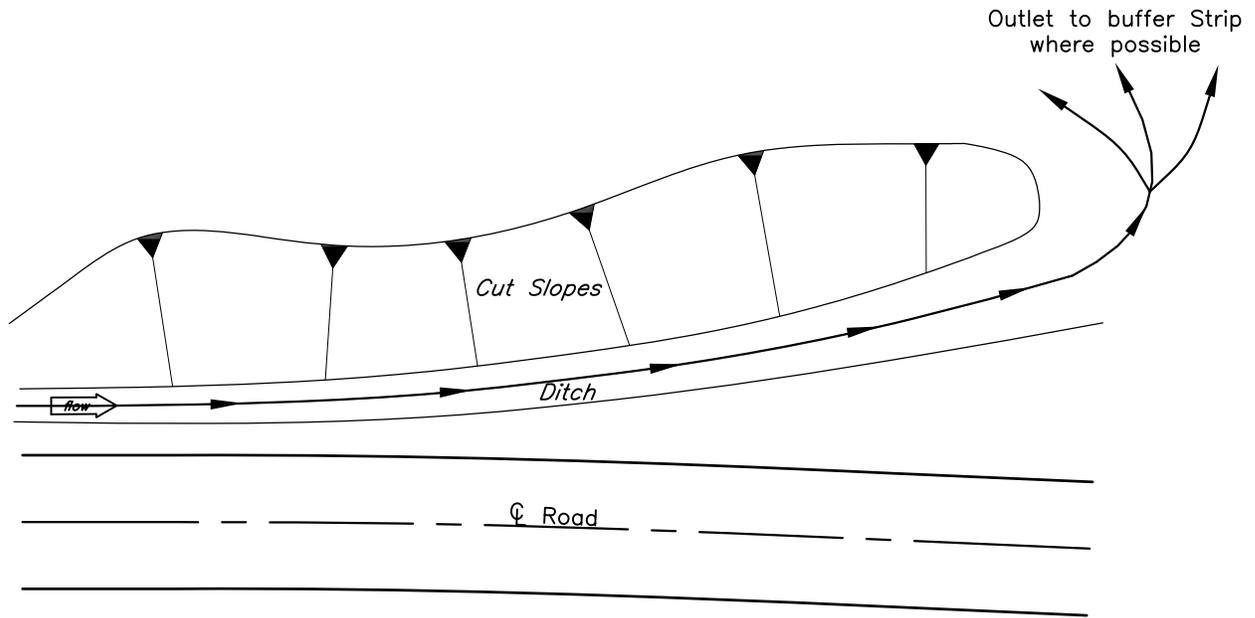

PLAN VIEW

Length _____ (ft) Spacing (maximum) _____ (ft) Slope (maximum) _____ (%)

NOTES:

- This standard drawing requires supporting technical documentation prior to use and must be adapted to the specific site.
- Locate Ditch Out off of road prism where terrain allows ditch water to be drained away from road on same side the ditch is on.
- Ditch Outs should not be used where water will drain toward fill or sidecast material, unstable slopes or directly into a stream or wetland.
- Slope and length of Ditch Out to be based on local conditions and site. Energy dissipater may be necessary if a stable outlet is not available.
- Disturbed areas and slopes shall be seeded and mulched to grass upon completion.

Seeding Species _____

Seeding Rate _____ Lbs. PLS/AC

Drawing Not To Scale

U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE	JOB CLASS _____	Date _____
	CAD FILE NO. FOR-0015.dwg	Designed _____
	SHEET _____ OF _____	Drawn _____
		Checked _____
		Approved _____