


TOP VIEW

CROSS SECTION VIEW

- NOTE:**
1. Headwall could also be concrete wings supplied with the tank.
 2. For additional details see Missouri Construction Specification 614, Watering Facility and 516, Pipeline.
 3. Pressure treated lumber is to be rated for ground contact.
 4. Pad may be constructed of concrete. Concrete pad shall have 5" thickness with 1/2" reinforcement steel on 18" center to center spacing in both directions. Concrete shall meet requirements of Construction Specification 750, Reinforced Concrete.

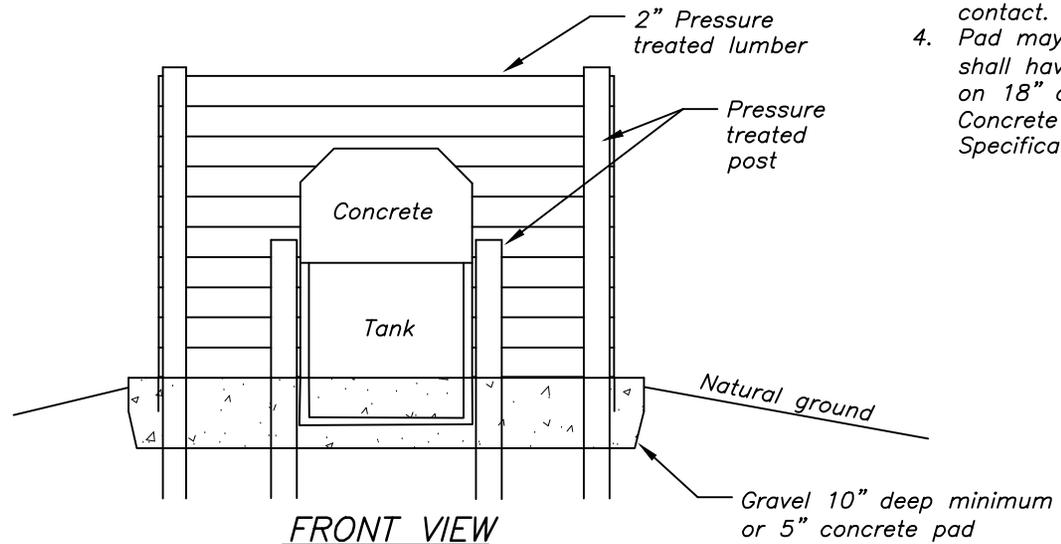

FRONT VIEW

Revised 10/14

Not to Scale

DRAFT
NOT FOR
CONSTRUCTION

United States Department of Agriculture NRCS Natural Resources Conservation Service	Date _____ Designed _____ Drawn _____ Checked _____ Approved _____
	CONCRETE LIVESTOCK TANK FREEZE PROOF INSTALLATION HEADWALL & PAD OPTIONAL DETAILS
File Name _____	Drawing Name 29-L-64
Sheet _____ of _____	