


CROSS SECTION VIEW

NOTE: Some models require an over flow pipe to be routed away from the tank site.

IMPORTANT:

Depicted are the basic principals of an insulated energy free waterer. Installation details are to be provided by the manufacturer and followed for the specific model to be utilized.

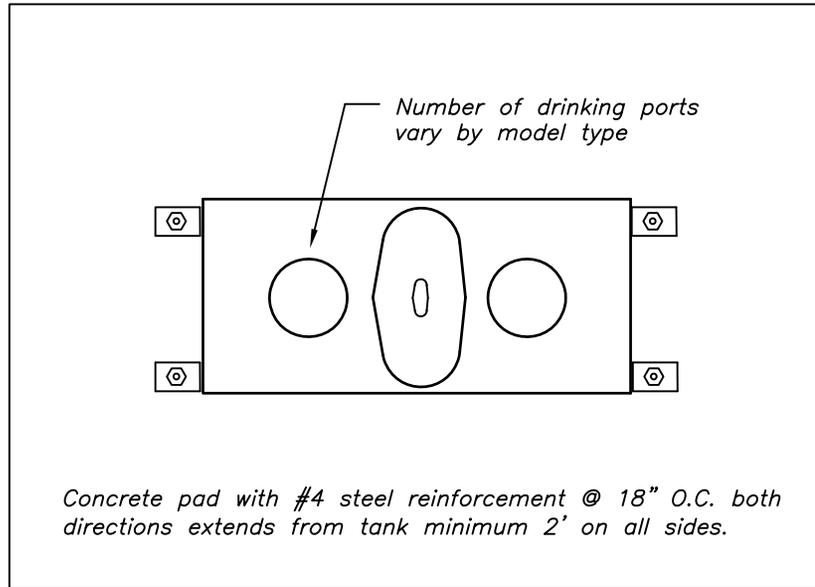

TOP VIEW

Concrete pad with #4 steel reinforcement @ 18" O.C. both directions extends from tank minimum 2' on all sides.

For additional details see Missouri Construction Specification 614, Watering Facility; 516, Pipeline and 750 Reinforced Concrete.

DRAFT
NOT FOR
CONSTRUCTION

Date _____

Designed _____

Drawn _____

Checked _____

Approved _____

BASIC INSTALLATION PRINCIPALS
INSULATED ENERGY FREE
AUTOMATIC LIVESTOCK WATERERS



File Name _____

Drawing Name
29-L-65

Sheet _____ of _____