


BILL OF MATERIALS


MARK	QUAN	DESCRIPTION	LENGTH
1	2	5" Diam Wood Post - Pressure Treated	7-0
2	1	5" Diam Wood Post - Pressure Treated	see table
3	3	2"x6" Wood Brace - Pressure Treated	
4	6	3/8" Bolt w/nut & washers (Galv or paint w/asphaltic materials)	
5	6	2"x6" Collar - Pressure Treated (optional for 3/8" bolts)	
		16d common Nails - Galv	
		Wire Staples - Galv	1 1/4"
L	3	FEEDLOT PANELS - MIN " HIGH	

NOTES:



1. Minimum height of panel to be 34" or as otherwise designated. If taller than 34" the length of Mark ① posts to be increased accordingly.
2. Besides stapling, the feedlot panels shall be fastened to posts or braces with loops of No. 9 galvanized wire securely twisted. Spacing of wire loops shall not exceed 2 feet.
3. Panels shall be 1/4" galvanized steel rods welded together to panel. Maximum spacing of rods shall be 6 inches vertical and 8 inches horizontal.
4. Four additional posts of adequate length shall be installed in center of span when L exceeds 8'. A post shall be installed on each side of pipe.

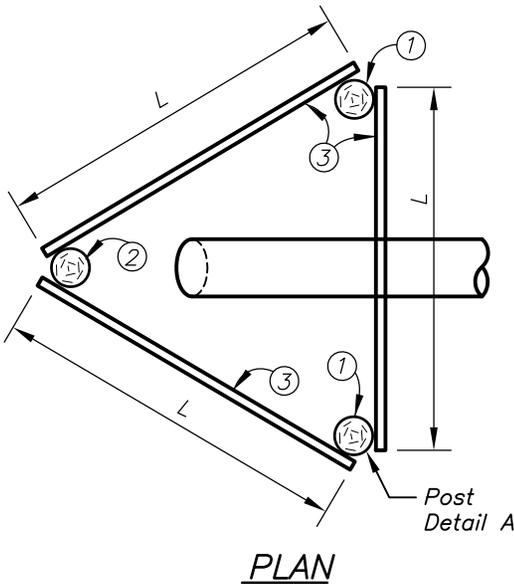

DIMENSIONS		
D	L	Mark 2 Length
6"-12"	6'	9-0
15"-18"	8'	9-0
21"-24"	12'	10-6
27"-37"	16'	12-0

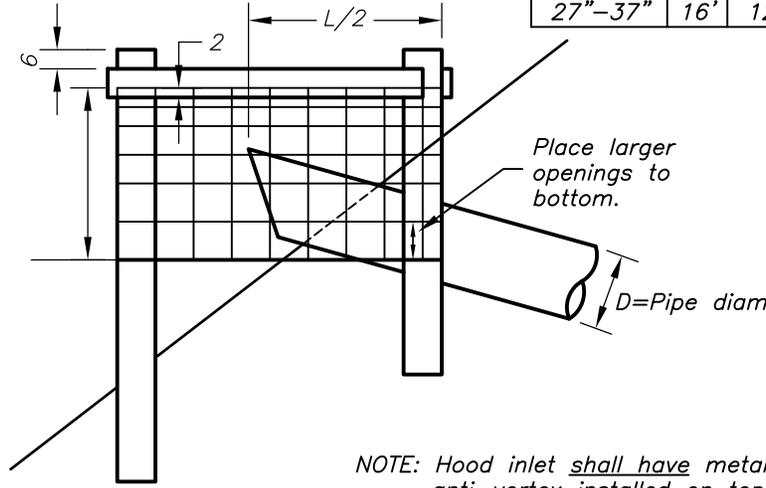

NOTE: Hood inlet shall have metal anti-vortex installed on top of inlet.

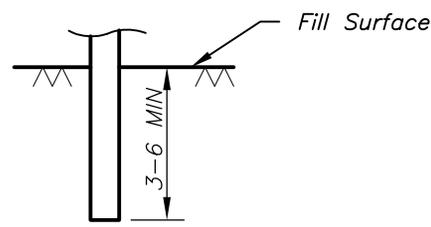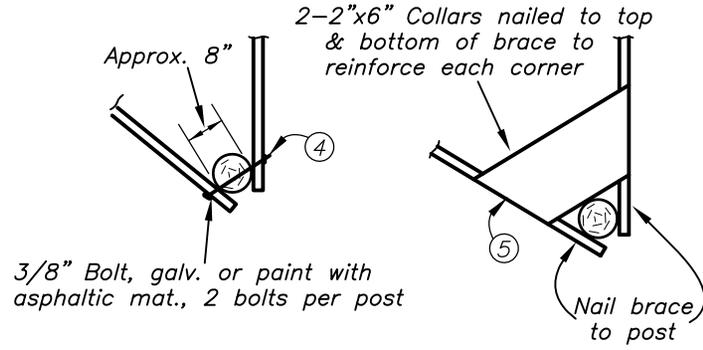

Date _____

Designed _____

Drawn _____

Checked _____

Approved _____

TRASH RACK DETAILS
CANOPY OR HOOD INLET SPILLWAY



DRAFT
NOT FOR CONSTRUCTION

File Name _____

Drawing Name
29-L-201B

Sheet _____ of _____