

SECTION A-A

TABLE OF QUANTITIES				
PIPE DIAM INCHES	SHEET SIZE	COLLAR LENGTH INCHES	NUMBER OF 1/2" BANDS	NUMBER OF 3/8" X 1" BOLTS
4" - 15"	4' x 4'	6"	2	6
18" - 24"	6' x 6'	8"	2	6

- NOTES:**
1. Pipe, collar, and seam coating can be either silicone caulking (recommended), tar or mastic.
 2. Apply silicone caulk, tar, or mastic to collar and lay pipe on collar. Apply silicone caulk, tar or mastic to top half of collar, set in place, line up and bolt halves together.
 3. Install metal bands on split halves of collar and tighten bolts and bands.
 4. Apply silicone caulk, tar or mastic on seams and as needed to insure a good seal so that completed installation is watertight.
 5. Backfill and hand tamp soil around completed installation.
 6. This anti-seep collar can be used on smooth plastic pipe, smooth steel pipe and corrugated plastic tubing.

_____ ANTI-SEEP COLLARS REQUIRED

DRAFT

NOT FOR
CONSTRUCTION

Date _____


Designed _____

Drawn _____

Checked _____

Approved _____

POLYETHYLENE ANTI-SEEP COLLAR FOR 4" TO 24" DIAM. PIPE

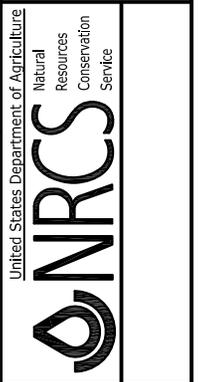

File Name _____

Drawing Name
29-L-225

Sheet _____ of _____