



END DETAIL
Extending into Water


- NOTES:
1. Posts shall be set 3'-8\" into concrete or driven 5'-6\" into ground.
 2. For further details, see fence detail sheet and construction specifications.
 3. All eyebolts, cable clamps, U-bolts, turnbuckle, washers and nuts shall be stainless steel.
 4. Springs shall be galvanized steel with a tensile strength of 250 lbs as is used with high tensile fencing.
 5. All shop welds, field weld and other non galvanized pipe surfaces shall be thoroughly cleaned and painted with at least one coat of galvanized paint.
 6. Earth anchor shall be 4\"x 54\" long minimum. Stainless steel cable fastened to anchor with 2 wraps of 1/4\" stainless steel cable and fastened to the end post with eyebolt.

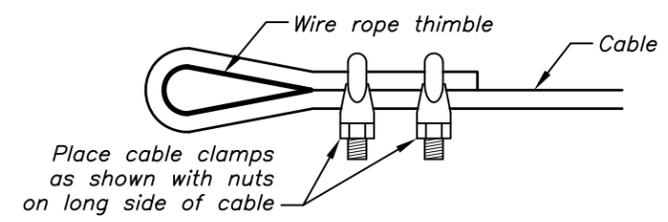


CABLE CLAMP
INSTALLATION DETAIL

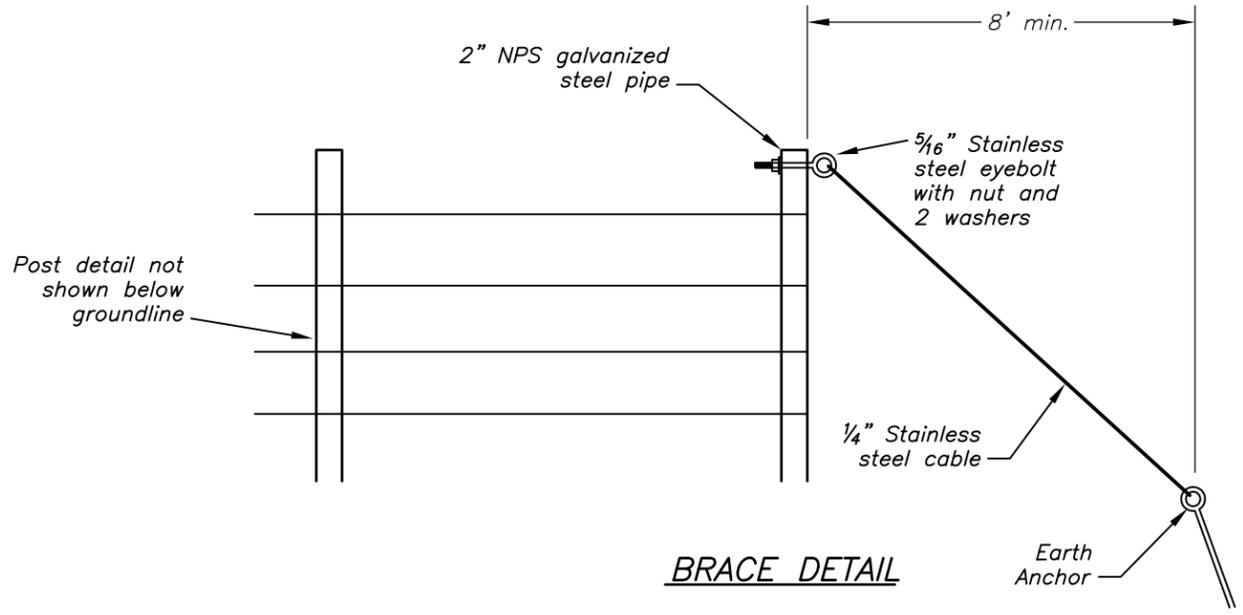

BRACE DETAIL

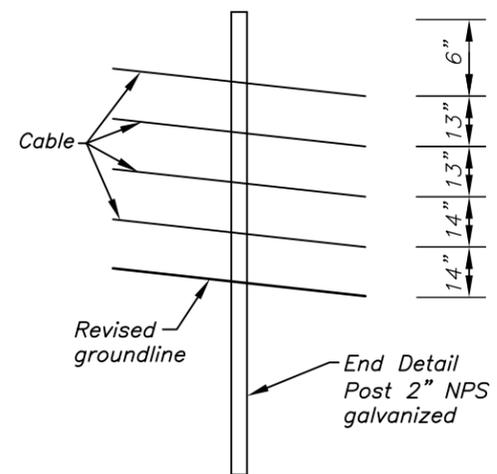

CABLE SPACING IN END DETAIL

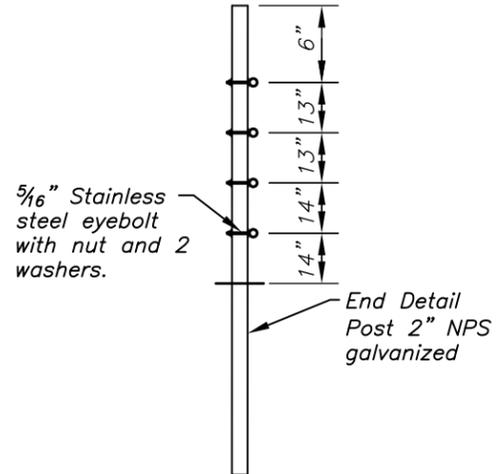

LINE POST IN END DETAIL

FENCE CABLE END DETAIL

Date	
Designed	
Drawn	
Checked	
Approved	



DRAFT
NOT FOR
CONSTRUCTION

File Name	
Drawing Name	29-N-508
Sheet	of