



PLAN VIEW

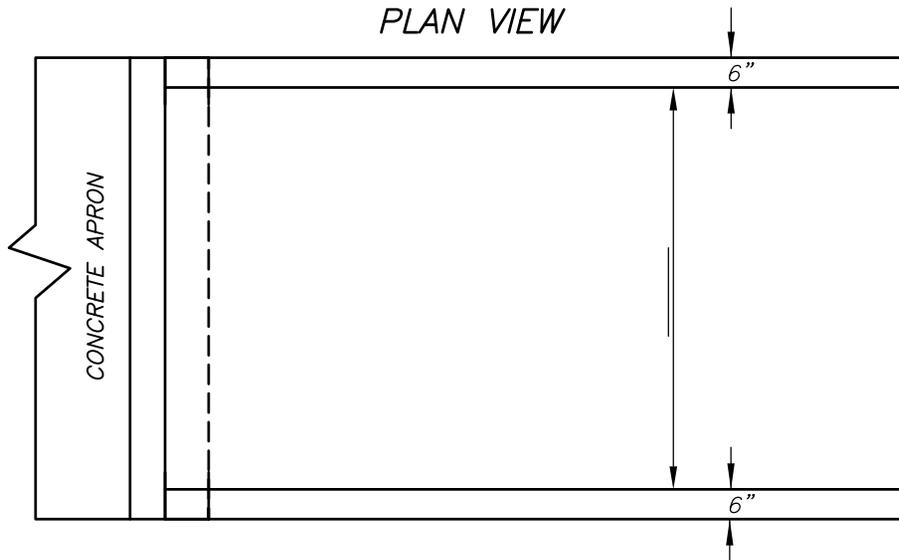


ISOMETRIC VIEW

NOT TO SCALE

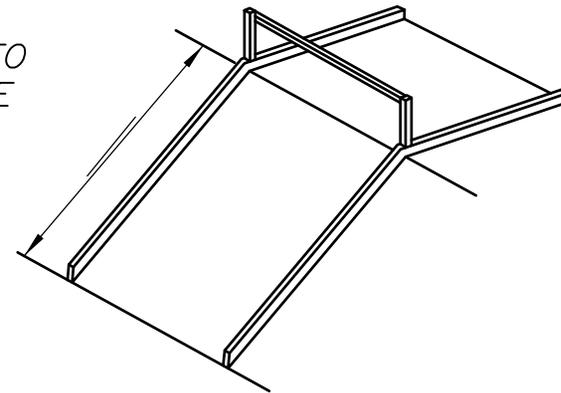

NOTES:

1. Concrete apron shall extend to planned or existing concrete. Apron shall have curbs and same reinforcing steel as ramp.
2. A safety barrier shall be constructed at the top of the loading chute to restrain loading equipment.
3. Chute surface shall have a smooth finish.
4. Steel bars to be located in center of floor slab or curb wall with minimum 2 inches of concrete cover.
5. For further details see Missouri Construction Specification 313-A.

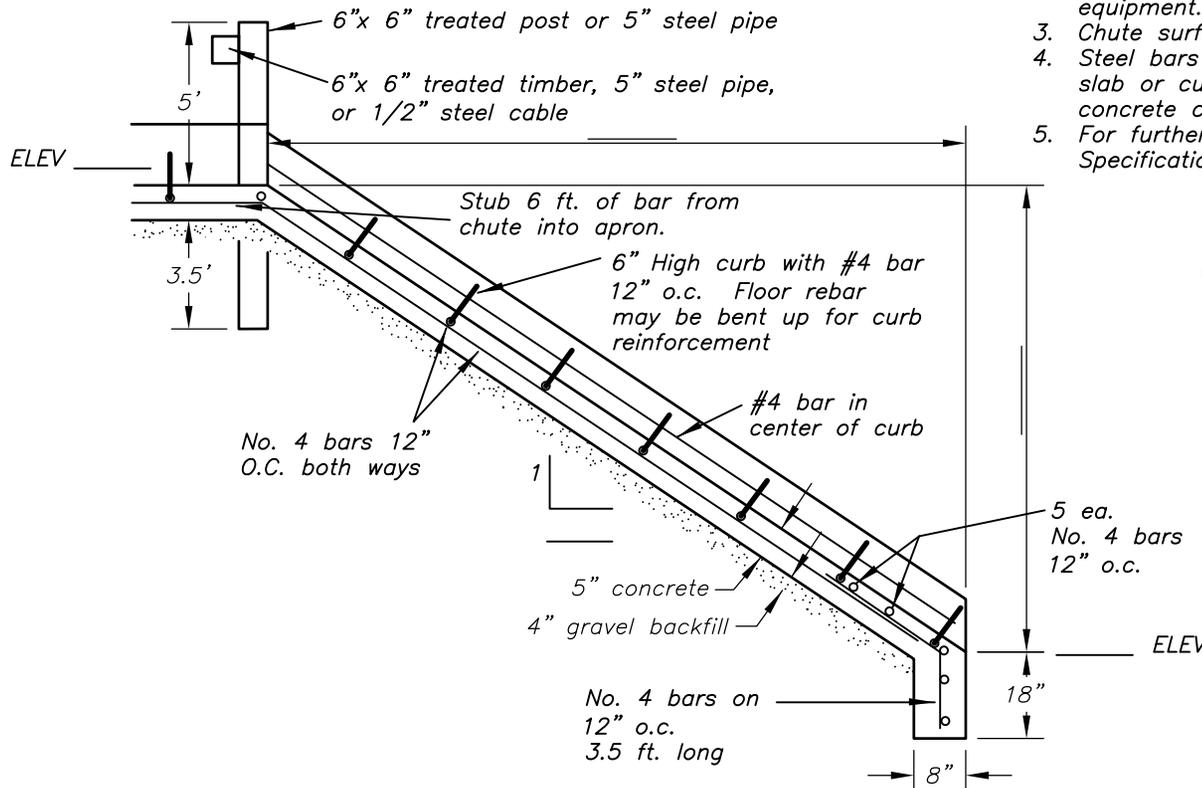

QUANTITIES

CONCRETE	_____	CYDS
NO. 4 BAR	_____	FT
GRAVEL	_____	CYDS

DRAFT  
NOT FOR  
CONSTRUCTION

Date	_____
Designed	_____
Drawn	_____
Checked	_____
Approved	_____

CONCRETE PUSHOFF RAMP



File Name  
Drawing Name  
**29-L-637**

Sheet of