


TYPICAL SECTION

- NOTES:
1. A minimum of 20 feet of non-perforated tile shall be installed adjacent to the water control structure, both upstream and downstream
 2. Couplings between the water control section and the non-perforated tile shall be water tight.
 3. Stop boards must provide water tight seals under a minimum of 1 ft. pressure head.
 4. Mark location of structure using post or manufactured marker flag for safety in the field.

Materials Schedule Water Control Structure			
No.	Width/Diameter (Inches)	H (Feet)	d (Inches)

Non Perforated ___CPT Or ___PVC Or ___CMP		
Diameter (Inches)	Upstream Length (Ft)	Downstream Length (Ft)

Couplers	
No.	Diameter (Inches)

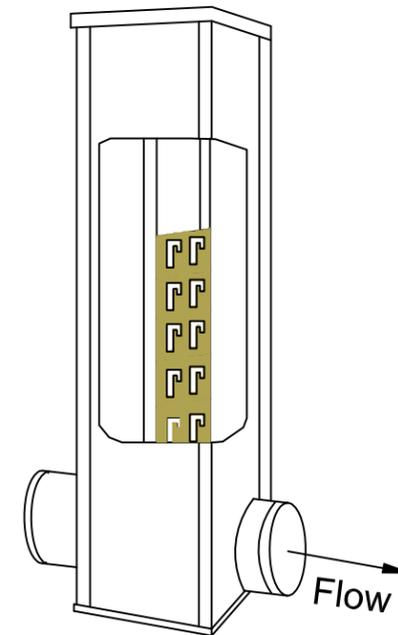

IN-LINE CONTROL STRUCTURE

Date _____
 Drawn M. QUINONES 7/13
 Designed _____
 Checked _____
 Approved _____

IN-LINE
 WATER CONTROL STRUCTURE
 2 COMPARTMENTS



File No.
 IL-ENG-130
 Drawing Set
 Page 1 of 1
 Sheet of

Landowner _____ Location _____