TABLE OF QUANTITIES

PIPE DIA. INCHES	"W" FEET	BUTYL SHEET SQ. FT.	STAINLESS STEEL STRAP	LUMBER BD. FT.
1 TO 6	2.5	4	1	4
6 TO 15	5	25	1	7

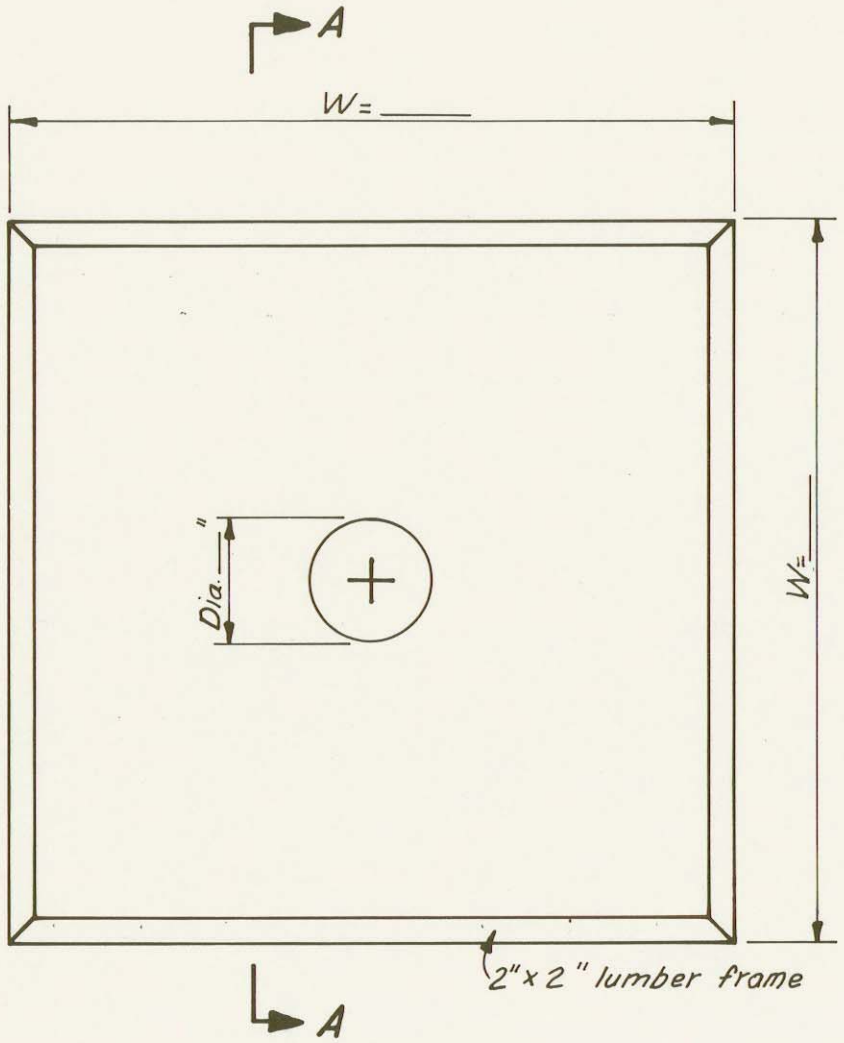

ELEVATION

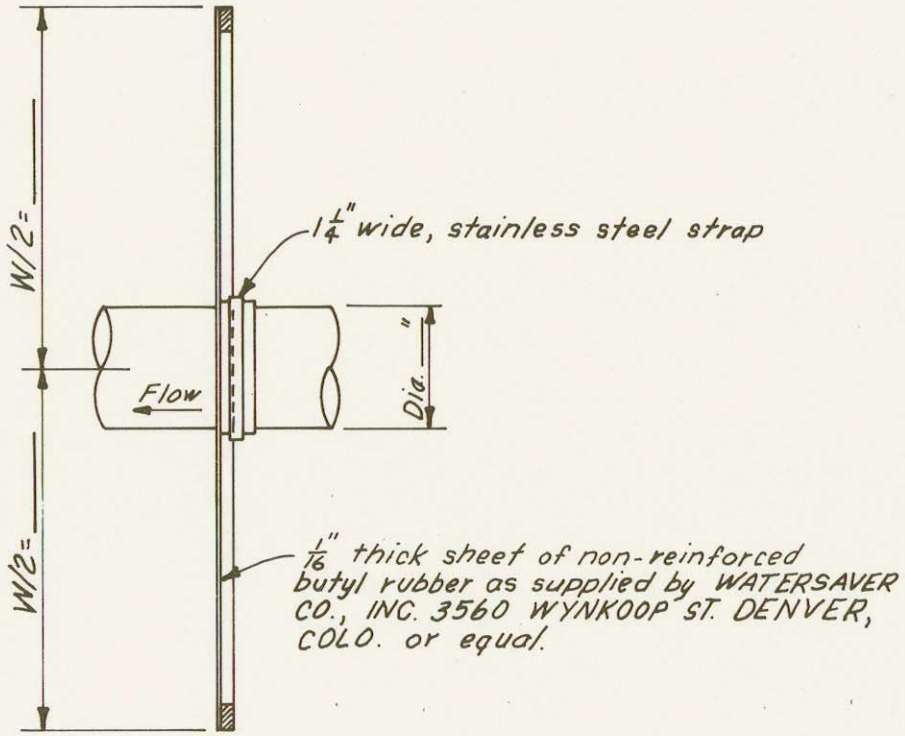

SECTION A-A

NOTES:

1. COAT PIPE AT COLLAR LOCATION WITH BUTYL RUBBER ROOF PATCH CEMENT SEALER OR OTHER BUTYL RUBBER SEALER. (DO NOT USE ASPHALT ROOF PATCH).
2. COMPLETED INSTALLATION MUST BE WATERTIGHT.
3. FORCE BUTYL RUBBER SHEET OVER UPSTREAM END OF PIPE AND OVER BUTYL ROOF SEALER.
4. INSTALL 1 1/4" WIDE STAINLESS STEEL STRAP. CLAMP AROUND PIPE OVER BUTYL RUBBER SHEET AND TIGHTEN UNTIL SEALER IS FORCED OUT.
5. STAPLE BUTYL RUBBER SHEET TO LUMBER FRAME.
6. FOR PIPE DIAMETERS OF 1" TO 6" CUT A HOLE (CENTERED) IN BUTYL RUBBER SHEET, APPROX. 1/2" DIAMETER, AND FOR PIPE DIAMETERS 6" TO 15" CUT HOLE 3" SMALLER THAN DIAMETER OF PIPE AND FORCE BUTYL RUBBER SHEET OVER UPSTREAM END OF PIPE AND OVER BUTYL ROOF SEALER.

JOB PLAN 3.5 (REVISED 11-76)

BUTYL RUBBER DIAPHRAGM FOR 1" DIA. TO 15" DIA. PIPE

OPERATOR: _____

CONSERVATION DISTRICT: _____

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE

	Date		
Designed		Approved by	
		Title	
Drawn			
		Title	
Traced		Sheet No	Drawing No.
Checked		of	

5, N-29, 073.3-50