

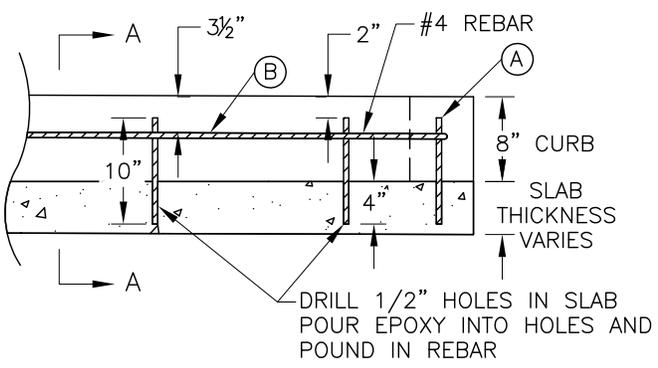


CONDITIONS OF USE


- BACKFILL = NONE
- NO MANURE STACKING OR PONDING OF WATER
- ONLY LIGHT SCRAPING ALLOWED

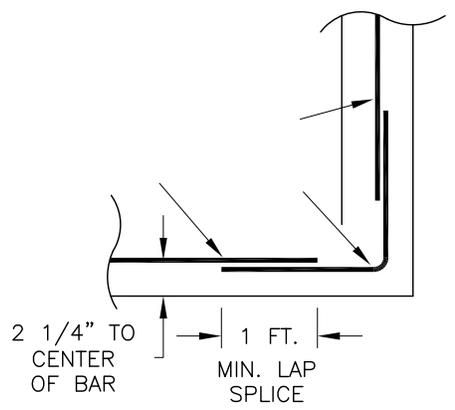

CORNER DETAIL (PLAN VIEW)



SIDE VIEW

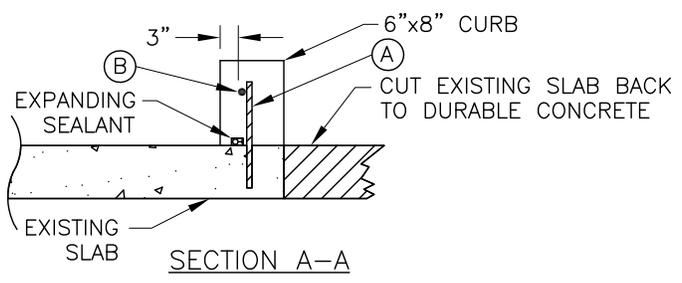

NOTES:

1. DIMENSIONS ARE TO THE REINFORCING BAR SURFACE UNLESS OTHERWISE NOTED.
2. THE EXISTING SLAB SURFACE MUST BE THOROUGHLY CLEANED WITH WATER. THE SURFACE OF EXISTING SLAB SHALL BE KEPT MOIST FOR AT LEAST 1 HOUR PRIOR TO PLACEMENT OF NEW CONCRETE.
3. GRADE 40 OR 60 BARS ARE PERMITTED.
4. STEEL QUANTITY DOES NOT INCLUDE SPLICE LENGTHS.

STEEL SCHEDULE

MARK	SIZE	QUAN	TYPE	R	S	LENGTH	TOTAL LENGTH
A	4		STR	---	---	10"	
B	4		STR	---	---		
L	4		2	2'-0"	2'-0"	4'-0"	
#4 BARS, TOTAL LENGTH							

LINEAL FT. OF WALL- _____ FT.

QUANTITIES	
CONCRETE (W.C.S.* 4) .0124 CU. YDS. PER LIN. FT.	CU. YD.
#4 REBAR 1.555 FT. PER LIN. FT.	FT.

*WI. CONSTRUCTION SPECIFICATION



8" CURB ON EXISTING SLAB

CLIENT: _____

COUNTY: _____

Date _____

Designed _____

Drawn _____

Checked _____

Approved _____

File Name
WI-922

Date
08/14

Sheet of _____