



MARYLAND STANDARDS FOR AGRICULTURAL BMPS
 DETAIL 382 - D3 - TENSILE

HIGH TENSILE SMOOTH WIRE FENCE BRACES

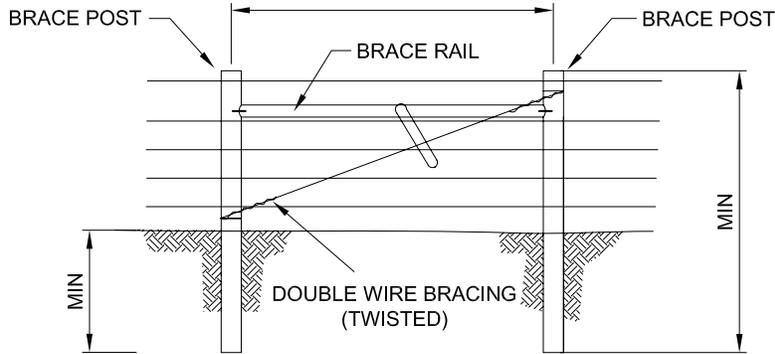

**SINGLE SPAN LINE BRACE ASSEMBLY
 (AT CORNERS, ENDS, OR GATES)**

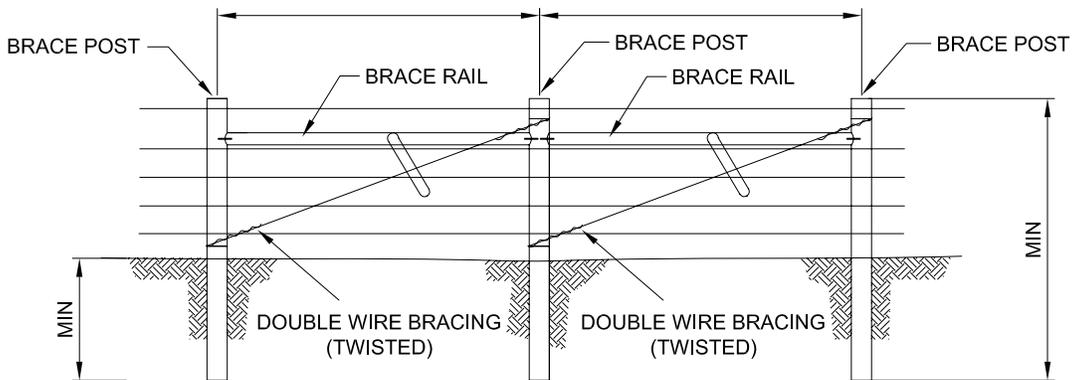

**DOUBLE SPAN LINE BRACE ASSEMBLY
 (AT CORNERS, ENDS, OR GATES)**

ALL CORNER, END, AND GATE POSTS: MIN. 6 IN. DIAM. OR 6 IN. SQUARE.

ALL BRACE POSTS: MIN. 5 IN. DIAM. OR 5 IN. SQUARE.

BRACE RAILS (STEEL): MIN. 2 IN. DIAM. BRACE RAILS (WOODEN): MIN. 3½ IN. DIAM. OR 4 IN. SQUARE.

SPECIES AND TREATMENT FOR ALL WOOD: USE UNTREATED DURABLE POSTS OF SPECIES SUCH AS RED CEDAR, BLACK LOCUST OR OSAGE-ORANGE WITH BARK REMOVED, OR NON-DURABLE WOOD THAT IS PRESERVATIVE PRESSURE TREATED (0.40 LBS./CUBIC FOOT CCA, OR EQUIVALENT NON-CCA TREATMENT). DO NOT USE RED PINE.

SPECIAL INSTRUCTIONS

DRAWING NOT TO SCALE. STANDARDIZED DRAWING MUST BE ADAPTED TO THE SPECIFIC SITE.