
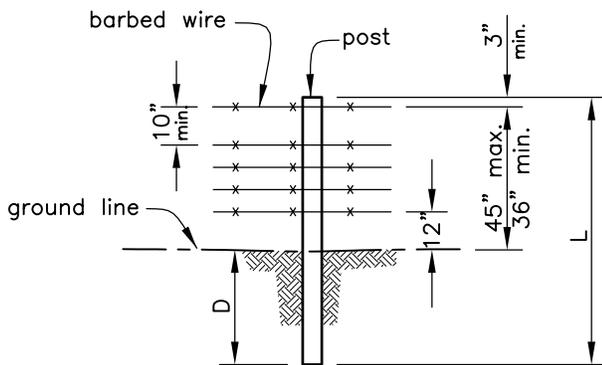


5 STRAND STANDARD POST AND WIRE FENCE

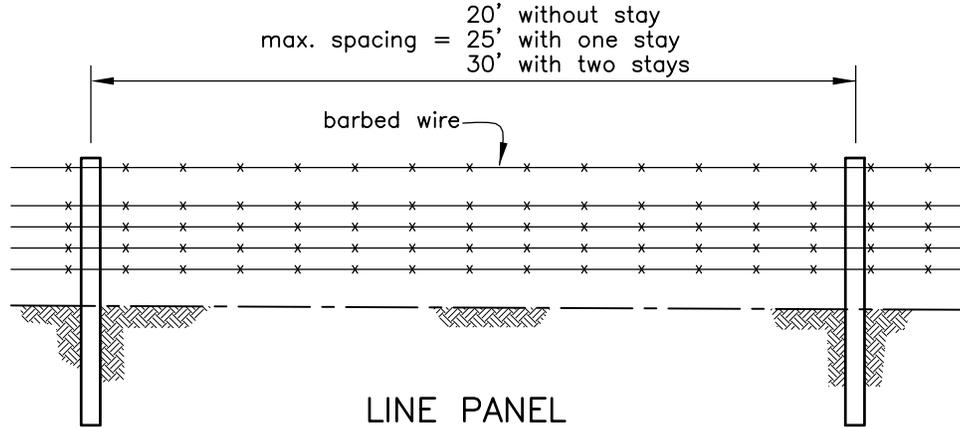

BARBED WIRE 12 1/2 gauge conventional or 15 1/2 gauge high-tension

2 twisted strands with 14 gauge or heavier two-point barbs on approx. 5 inch centers.

Class 1 (min. or equiv.) zinc-coating as per ASTM A-121.

BARBED WIRE DETAIL

LINE	Plastic:	L = 6 ft. min. D = 24 in. min. Dia. = 3-3/8 in. min.	Fiberglass:	L = 6 ft. min. D = 24 in. min. Dia. = 1-1/4 in. min.
	Wood:	L = 6 ft. min. D = 24 in. min. Dia. = 3 in. min.	Steel:	L = 5-1/2 ft. min. D = 18 in. min. Standard "T" or "U"; > 1.25 lbs/ft of length
CORNER OR GATE	Wood:	L = 7 ft. min. D = 3 ft. min. Dia. = 5 in. min.	Steel:	L = 7 ft. min. D = 3 ft. min. (set in conc.) Dia. = Round 2-3/8 in. O.D. or Angle iron 2-1/2 x 2-1/2 x 1/4 (in.)
	STAYS	Wood: 1-1/2 in. dia. min. of durable wood Fiberglass: Any manufactured for this purpose Wire: 9 1/2 gauge, zinc coated, twisted, manufactured for this purpose		

SPECIES for all wood: \_\_\_\_\_

SPECIAL INSTRUCTIONS

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Drawing not to scale. Standardized drawing must be adapted to the specific site.

<b>U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE</b>	JOB CLASS	Date
	CAD FILE NO. LSK-0011.DWG	Designed _____
	SHEET OF	Drawn _____
		Checked _____
	Approved _____	